

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333070-940

Luminaire Tested: **S124RDIW-S795D1340U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333070-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-10,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S124RDIW-S795D1340U940-4F0-1E-UDD-F1
Description: DEFINE 4 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 795 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7015.0 lumens
Efficiency: N/A
Efficacy: 114.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.09 / 1.24
Luminous Opening: Rectangular (W 0.33' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333070-940

CATALOG NUMBER: S124RDIW-S795D1340U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

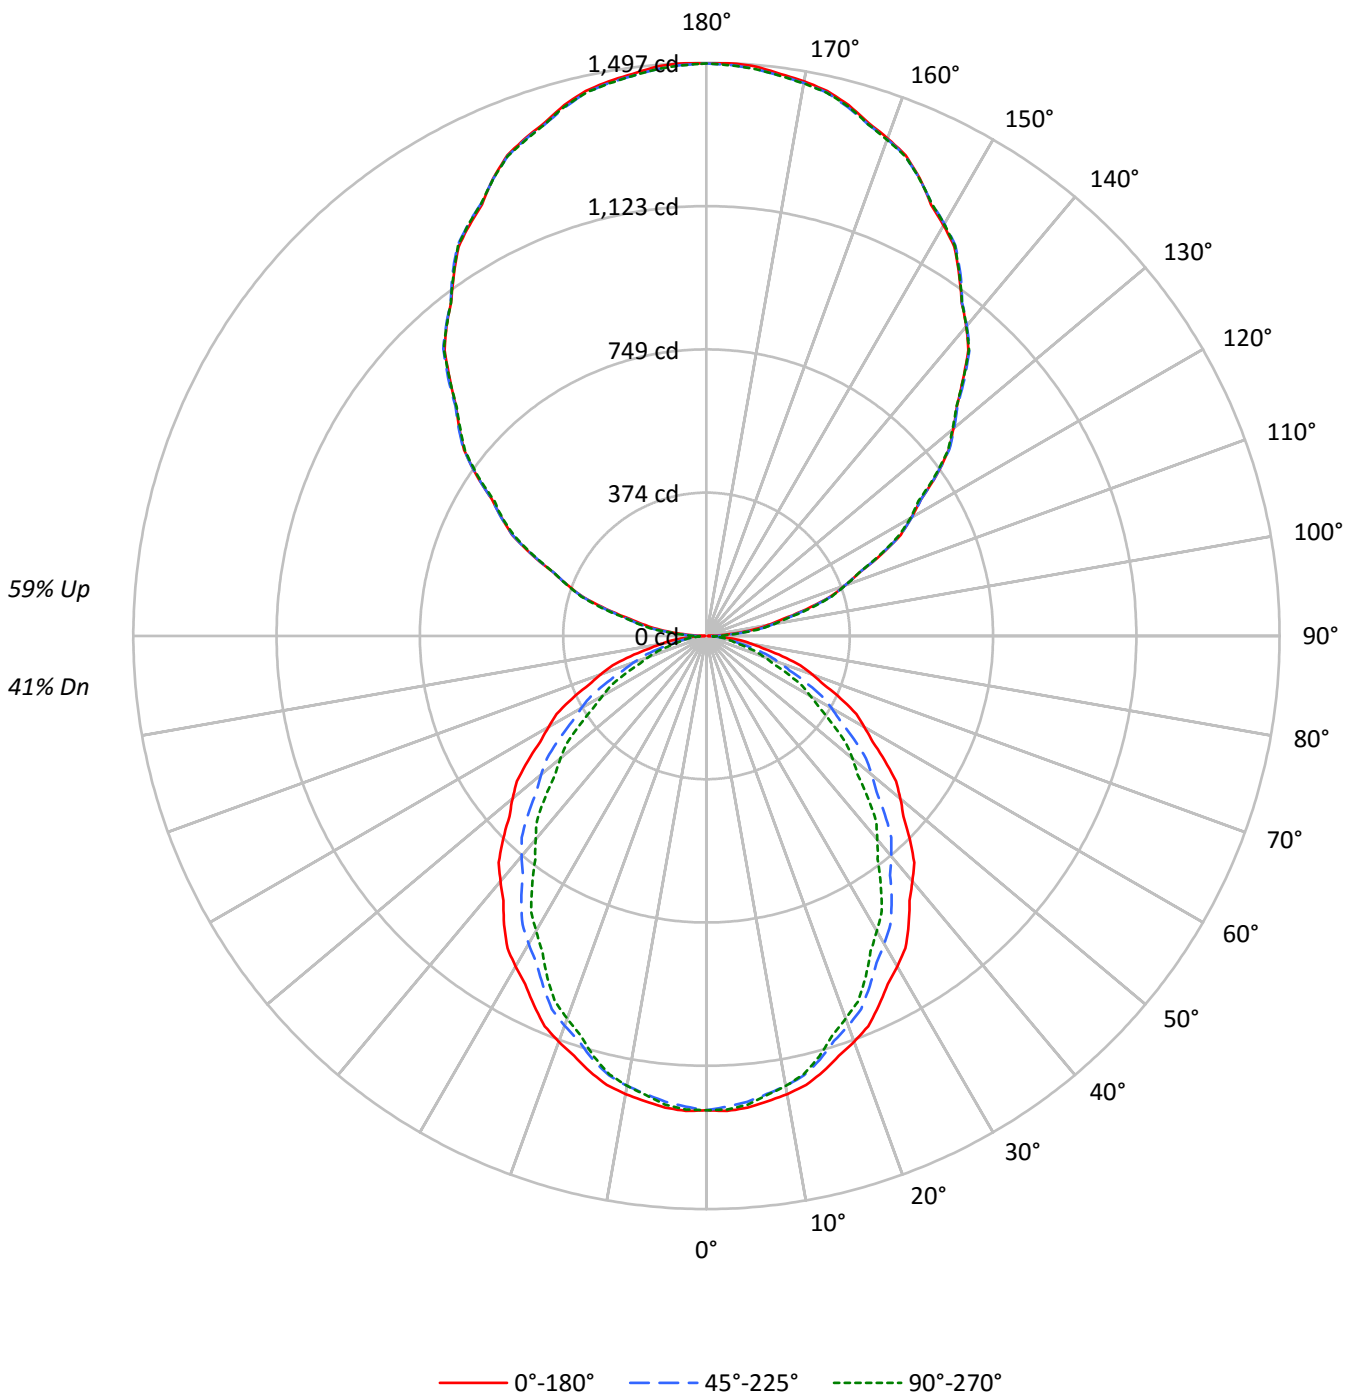



TEST NUMBER: P333070-940

CATALOG NUMBER: S124RDIW-S795D1340U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	48	48	48	41
1	96	92	88	85	87	84	81	78	69	67	65	55	54	52	42	42	41	35
2	88	80	74	69	80	73	68	64	61	57	54	49	46	44	38	36	35	30
3	80	71	64	58	73	65	59	54	54	49	45	43	40	37	34	31	30	25
4	73	63	55	49	66	58	51	46	48	43	39	39	35	32	30	28	26	22
5	67	56	48	42	61	51	44	39	43	38	34	35	31	28	27	25	22	19
6	62	50	42	37	56	46	39	34	38	33	29	31	27	25	25	22	20	17
7	57	45	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15
8	53	41	34	28	48	38	31	27	32	27	23	26	22	19	21	18	16	13
9	49	37	30	25	45	35	28	24	29	24	21	24	20	17	19	16	14	12
10	46	34	27	23	42	32	25	21	27	22	18	22	18	16	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10001	10001	10001
5°	10023	9900	9961
10°	9960	9781	9781
15°	9845	9576	9504
20°	9688	9306	9135
25°	9487	8989	8761
30°	9292	8655	8294
35°	9077	8310	7824
40°	8816	7917	7317
45°	8576	7526	6801
50°	8303	7076	6253
55°	8010	6608	5661
60°	7689	6095	5054
65°	7393	5454	4458
70°	6963	4747	3784
75°	6419	3936	3075
80°	5602	2999	2822
85°	4742	2723	2547



TEST NUMBER: P333070-940

CATALOG NUMBER: S124RDIW-S795D1340U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	116.4	1.7
10°-20°	324.5	4.6
20°-30°	468.6	6.7
30°-40°	531.1	7.6
40°-50°	512.9	7.3
50°-60°	426.5	6.1
60°-70°	294.5	4.2
70°-80°	149.3	2.1
80°-90°	42.8	0.6
90°-100°	98.6	1.4
100°-110°	292.2	4.2
110°-120°	495.9	7.1
120°-130°	653.9	9.3
130°-140°	734.3	10.5
140°-150°	721.6	10.3
150°-160°	606.9	8.7
160°-170°	403.8	5.8
170°-180°	141.4	2.0
0°-30°	909.4	13.0
0°-40°	1440.5	20.5
0°-60°	2379.9	33.9
0°-90°	2866.4	40.9
90°-120°	886.7	12.6
90°-150°	2996.4	42.7
90°-180°	4149.0	59.1
0°-180°	7015.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1239	1239	1239	1239	1239	
5°	1237	1233	1222	1230	1229	117
15°	1178	1169	1146	1144	1137	332
25°	1065	1047	1009	993	984	491
35°	921	890	843	812	794	575
45°	751	715	659	614	596	579
55°	569	530	470	422	402	509
65°	387	345	286	246	233	382
75°	206	170	126	105	99	217
85°	51	33	29	28	28	58
90°	4	16	25	32	35	7
95°	69	80	88	91	91	77
105°	270	271	275	279	282	286
115°	504	504	502	501	500	497
125°	734	734	733	731	728	654
135°	947	954	954	952	948	732
145°	1151	1155	1156	1155	1152	720
155°	1318	1318	1317	1321	1317	606
165°	1435	1432	1429	1436	1432	404
175°	1493	1487	1486	1493	1486	142
180°	1495	1495	1495	1495	1495	



TEST NUMBER: P333070-940

CATALOG NUMBER: S124RDIW-S795D1340U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8
2.5°	1241.8	1241.1	1240.4	1239.7	1239.0	1237.8	1235.9	1234.1	1232.3	1230.4	1232.3
5°	1236.8	1236.0	1235.1	1234.3	1233.4	1231.8	1229.2	1226.7	1224.1	1221.6	1223.8
7.5°	1225.7	1224.8	1223.9	1223.0	1222.1	1220.0	1216.7	1213.4	1210.1	1206.8	1208.2
10°	1215.0	1214.0	1212.9	1211.8	1210.8	1208.4	1204.6	1200.8	1197.0	1193.2	1194.0
12.5°	1201.3	1200.2	1198.9	1197.7	1196.5	1193.6	1189.2	1184.6	1180.2	1175.7	1176.3
15°	1178.0	1176.2	1174.2	1172.3	1170.5	1166.9	1161.5	1156.3	1151.0	1145.8	1145.3
17.5°	1149.8	1147.0	1144.2	1141.6	1138.8	1134.3	1127.9	1121.6	1115.3	1108.9	1107.8
20°	1127.7	1125.0	1122.3	1119.5	1116.8	1111.9	1104.7	1097.5	1090.3	1083.2	1081.5
22.5°	1103.5	1100.4	1097.3	1094.2	1091.2	1085.7	1078.1	1070.4	1062.7	1055.1	1052.6
25°	1065.1	1061.3	1057.6	1053.7	1050.0	1043.7	1035.1	1026.4	1017.8	1009.1	1005.6
27.5°	1024.9	1020.2	1015.4	1010.7	1005.8	998.9	989.6	980.4	971.2	962.0	957.5
30°	996.8	991.6	986.3	981.1	975.8	968.2	958.3	948.4	938.4	928.5	923.3
32.5°	967.2	961.4	955.4	949.4	943.5	935.4	925.1	914.9	904.6	894.4	888.3
35°	921.0	914.3	907.5	900.7	894.0	885.4	874.9	864.2	853.7	843.2	836.1
37.5°	871.5	864.5	857.6	850.6	843.6	834.4	822.7	811.0	799.3	787.6	779.6
40°	836.6	829.6	822.7	815.7	808.8	799.2	787.2	775.3	763.2	751.2	742.3
42.5°	803.2	795.9	788.6	781.3	774.0	764.1	751.6	739.0	726.6	714.0	705.0
45°	751.2	743.4	735.6	727.8	720.0	709.8	697.1	684.5	671.8	659.2	648.9
47.5°	697.5	689.5	681.4	673.3	665.3	654.7	641.6	628.4	615.3	602.1	591.4
50°	661.1	652.9	644.6	636.4	628.2	617.3	603.9	590.4	576.8	563.4	552.9
52.5°	623.9	615.9	607.8	599.8	591.7	580.8	566.9	553.1	539.3	525.5	514.8
55°	569.1	560.6	552.2	543.8	535.4	524.3	510.6	496.9	483.2	469.5	458.5
57.5°	514.9	506.0	497.3	488.6	479.7	468.6	455.1	441.7	428.2	414.6	403.6
60°	476.2	467.7	459.3	450.8	442.4	431.5	417.9	404.5	391.0	377.5	366.5
62.5°	441.2	432.5	423.7	414.9	406.2	394.8	381.0	367.2	353.4	339.6	329.4
65°	387.0	377.9	368.8	359.8	350.7	339.5	325.9	312.5	299.0	285.5	276.4
67.5°	330.6	322.0	313.3	304.6	295.9	285.3	272.8	260.3	247.7	235.2	227.4
70°	295.0	286.1	277.2	268.4	259.6	249.1	237.1	225.1	213.1	201.1	194.1
72.5°	257.1	249.1	241.0	233.0	225.0	215.3	204.0	192.6	181.3	170.0	164.0
75°	205.8	198.0	190.2	182.4	174.6	165.8	155.9	146.0	136.1	126.2	121.3
77.5°	153.8	147.2	140.6	134.0	127.3	120.0	112.1	104.1	96.0	88.0	85.2
80°	120.5	114.3	108.3	102.1	96.0	89.8	83.5	77.1	70.8	64.5	63.8
82.5°	91.7	86.1	80.4	74.8	69.2	64.6	61.0	57.3	53.7	50.1	49.6
85°	51.2	47.0	42.8	38.6	34.3	31.9	31.3	30.7	30.1	29.4	29.0
87.5°	18.1	17.4	16.6	15.8	15.0	14.7	15.0	15.2	15.4	15.7	15.9
90°	3.5	6.3	9.1	11.9	14.8	17.2	19.3	21.3	23.4	25.4	27.0
92.5°	24.8	28.0	31.2	34.4	37.7	40.0	41.5	42.9	44.3	45.8	46.7
95°	69.4	71.7	74.0	76.3	78.6	80.7	82.5	84.3	86.1	87.9	88.6
97.5°	121.2	123.1	124.9	126.7	128.6	130.5	132.7	134.8	136.9	139.0	139.9
100°	161.9	162.9	164.0	165.0	166.0	167.6	170.0	172.3	174.6	176.9	177.5
102.5°	204.5	204.9	205.3	205.7	206.1	207.3	209.5	211.6	213.7	215.8	216.5
105°	269.5	269.7	270.0	270.2	270.5	271.1	272.2	273.2	274.2	275.3	276.0
107.5°	337.7	338.0	338.3	338.6	338.9	339.1	339.3	339.5	339.7	339.7	340.5
110°	384.0	384.4	385.0	385.5	386.0	386.1	385.8	385.6	385.4	385.1	384.6



TEST NUMBER: P333070-940

CATALOG NUMBER: S124RDIW-S795D1340U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	432.0	432.1	432.2	432.4	432.5	432.3	431.9	431.3	430.9	430.4	430.3
115°	504.2	504.2	504.2	504.2	504.2	504.0	503.5	502.9	502.4	501.9	501.7
117.5°	572.2	572.4	572.7	572.8	573.0	572.9	572.6	572.2	571.9	571.5	570.6
120°	617.5	618.6	619.6	620.6	621.6	621.8	621.0	620.3	619.5	618.7	617.4
122.5°	664.7	665.1	665.6	665.9	666.4	666.4	666.0	665.7	665.3	664.9	664.1
125°	734.3	734.3	734.3	734.3	734.3	734.2	734.0	733.7	733.4	733.2	732.6
127.5°	797.5	798.3	799.1	799.8	800.6	800.8	800.3	800.0	799.5	799.1	798.6
130°	841.9	842.7	843.5	844.2	845.0	845.3	845.3	845.3	845.3	845.3	844.8
132.5°	887.3	887.8	888.3	888.9	889.5	889.7	889.5	889.2	889.0	888.9	888.3
135°	947.1	948.7	950.2	951.7	953.3	954.0	954.0	954.0	954.0	954.0	953.6
137.5°	1012.4	1013.1	1013.8	1014.5	1015.2	1015.8	1016.2	1016.6	1017.0	1017.4	1016.7
140°	1055.9	1056.3	1056.9	1057.4	1057.9	1058.1	1058.1	1058.1	1058.1	1058.1	1057.9
142.5°	1095.6	1096.1	1096.6	1097.2	1097.7	1097.8	1097.6	1097.4	1097.3	1097.0	1097.0
145°	1150.7	1151.7	1152.7	1153.8	1154.8	1155.4	1155.7	1155.9	1156.2	1156.5	1156.2
147.5°	1205.2	1206.5	1207.7	1209.0	1210.1	1210.7	1210.5	1210.3	1210.1	1209.9	1209.7
150°	1238.6	1239.6	1240.6	1241.6	1242.7	1243.1	1243.1	1243.1	1243.1	1243.1	1243.1
152.5°	1270.0	1270.6	1271.2	1271.8	1272.5	1272.9	1273.1	1273.3	1273.5	1273.7	1274.3
155°	1318.3	1318.3	1318.3	1318.3	1318.3	1318.2	1317.9	1317.7	1317.4	1317.2	1318.2
157.5°	1359.1	1358.6	1358.2	1357.6	1357.2	1356.9	1356.9	1356.8	1356.8	1356.7	1357.5
160°	1383.1	1382.9	1382.6	1382.3	1382.1	1381.8	1381.5	1381.3	1381.1	1380.8	1381.5
162.5°	1405.3	1404.6	1404.0	1403.3	1402.7	1402.2	1401.9	1401.7	1401.4	1401.1	1402.6
165°	1435.1	1434.4	1433.6	1432.8	1432.1	1431.5	1430.9	1430.4	1429.9	1429.3	1430.9
167.5°	1458.0	1457.0	1455.9	1454.8	1453.8	1453.2	1453.3	1453.3	1453.4	1453.4	1455.0
170°	1471.0	1469.7	1468.5	1467.1	1465.9	1465.3	1465.6	1465.9	1466.2	1466.3	1467.9
172.5°	1480.2	1479.2	1478.1	1477.0	1476.0	1475.4	1475.5	1475.5	1475.6	1475.6	1477.4
175°	1493.0	1491.7	1490.4	1489.2	1487.8	1487.0	1486.8	1486.6	1486.3	1486.0	1487.8
177.5°	1497.1	1496.1	1495.0	1494.1	1493.0	1492.5	1492.5	1492.5	1492.5	1492.5	1494.0
180°	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3



TEST NUMBER: P333070-940

CATALOG NUMBER: S124RDIW-S795D1340U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8	1238.8
2.5°	1234.1	1235.9	1237.8	1238.7	1238.5	1238.3	1238.1	1238.0
5°	1225.8	1228.0	1230.1	1230.9	1230.5	1230.1	1229.7	1229.2
7.5°	1209.5	1210.9	1212.3	1212.5	1211.9	1211.2	1210.6	1209.9
10°	1194.9	1195.7	1196.6	1196.6	1195.7	1194.9	1194.0	1193.2
12.5°	1176.8	1177.2	1177.8	1177.4	1176.3	1175.1	1173.8	1172.7
15°	1145.0	1144.5	1144.1	1143.2	1141.7	1140.1	1138.7	1137.2
17.5°	1106.6	1105.5	1104.2	1102.5	1100.3	1098.1	1095.8	1093.6
20°	1079.8	1078.1	1076.4	1074.2	1071.5	1068.7	1066.0	1063.3
22.5°	1050.1	1047.5	1045.0	1042.6	1040.4	1038.1	1035.9	1033.7
25°	1002.0	998.4	994.9	992.0	989.9	987.8	985.7	983.6
27.5°	953.1	948.7	944.2	940.5	937.5	934.4	931.4	928.4
30°	918.0	912.8	907.5	903.1	899.8	896.4	893.0	889.7
32.5°	882.2	876.1	870.0	865.3	862.1	858.9	855.7	852.5
35°	828.8	821.7	814.6	809.0	805.3	801.5	797.6	793.9
37.5°	771.6	763.6	755.5	749.7	745.9	742.1	738.3	734.5
40°	733.5	724.6	715.8	709.4	705.7	701.9	698.1	694.3
42.5°	696.0	687.0	678.0	671.5	667.4	663.5	659.6	655.6
45°	638.6	628.2	617.9	610.8	607.0	603.2	599.4	595.7
47.5°	580.7	570.0	559.3	551.8	547.7	543.5	539.3	535.1
50°	542.3	531.8	521.2	514.0	510.0	506.0	501.9	497.9
52.5°	504.1	493.4	482.6	475.2	471.0	466.8	462.7	458.5
55°	447.5	436.6	425.7	418.2	414.2	410.2	406.2	402.2
57.5°	392.4	381.3	370.1	363.1	360.1	357.0	354.0	351.0
60°	355.6	344.6	333.7	326.5	323.2	319.8	316.4	313.0
62.5°	319.3	309.2	299.1	292.7	290.0	287.3	284.5	281.9
65°	267.3	258.3	249.2	243.4	240.9	238.4	235.9	233.4
67.5°	219.6	211.9	204.0	198.8	196.0	193.1	190.4	187.6
70°	187.2	180.2	173.3	168.7	166.7	164.5	162.4	160.3
72.5°	158.1	152.1	146.2	142.2	140.4	138.4	136.4	134.5
75°	116.5	111.6	106.7	103.7	102.5	101.2	99.9	98.6
77.5°	82.4	79.5	76.7	75.1	74.7	74.4	74.0	73.6
80°	63.2	62.6	62.0	61.5	61.3	61.1	60.9	60.7
82.5°	49.1	48.7	48.2	47.9	47.7	47.4	47.3	47.1
85°	28.5	28.2	27.7	27.5	27.5	27.5	27.5	27.5
87.5°	16.0	16.1	16.2	16.5	16.8	17.0	17.3	17.6
90°	28.5	30.1	31.6	32.6	33.2	33.7	34.2	34.7
92.5°	47.6	48.6	49.5	50.1	50.4	50.7	51.0	51.4
95°	89.4	90.2	91.0	91.4	91.4	91.4	91.4	91.4
97.5°	140.9	141.8	142.7	143.2	143.2	143.2	143.2	143.2
100°	178.0	178.5	179.0	179.2	179.2	179.2	179.2	179.2
102.5°	217.2	217.9	218.6	219.1	219.4	219.5	219.7	220.0
105°	276.8	277.6	278.3	279.1	279.8	280.6	281.4	282.1
107.5°	341.2	341.9	342.7	343.0	343.0	342.9	342.9	342.8
110°	384.1	383.5	383.1	383.2	384.0	384.7	385.5	386.3



TEST NUMBER: P333070-940

CATALOG NUMBER: S124RDIW-S795D1340U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	430.3	430.2	430.0	430.1	430.2	430.3	430.5	430.7
115°	501.4	501.1	500.9	500.6	500.3	500.1	499.8	499.6
117.5°	569.8	568.9	568.0	567.3	566.8	566.3	565.8	565.3
120°	616.2	614.8	613.6	613.1	613.7	614.2	614.7	615.2
122.5°	663.2	662.4	661.5	660.6	659.6	658.7	657.8	656.8
125°	732.2	731.6	731.1	730.6	730.1	729.6	729.1	728.5
127.5°	798.1	797.5	797.0	796.6	796.2	795.8	795.3	795.0
130°	844.4	843.8	843.3	842.6	841.5	840.4	839.5	838.4
132.5°	887.8	887.3	886.8	886.4	885.9	885.5	885.1	884.7
135°	953.1	952.5	952.0	951.4	950.6	949.9	949.0	948.2
137.5°	1016.1	1015.5	1014.8	1014.5	1014.7	1014.9	1014.9	1015.1
140°	1057.7	1057.4	1057.1	1056.9	1056.6	1056.3	1056.1	1055.9
142.5°	1096.9	1096.9	1096.8	1096.7	1096.7	1096.6	1096.6	1096.5
145°	1155.9	1155.7	1155.4	1154.9	1154.1	1153.3	1152.6	1151.8
147.5°	1209.4	1209.2	1209.1	1208.8	1208.5	1208.3	1208.1	1207.8
150°	1243.1	1243.1	1243.1	1243.0	1242.8	1242.5	1242.2	1242.1
152.5°	1275.0	1275.6	1276.2	1276.1	1275.5	1274.8	1274.2	1273.5
155°	1319.3	1320.3	1321.3	1321.3	1320.3	1319.3	1318.2	1317.2
157.5°	1358.3	1359.1	1359.9	1359.8	1358.9	1358.0	1357.2	1356.3
160°	1382.3	1383.1	1383.8	1383.6	1382.3	1381.1	1379.7	1378.5
162.5°	1403.9	1405.3	1406.7	1406.8	1405.4	1404.2	1402.9	1401.6
165°	1432.4	1434.0	1435.6	1435.8	1434.8	1433.7	1432.7	1431.6
167.5°	1456.5	1458.0	1459.6	1459.6	1457.9	1456.3	1454.8	1453.2
170°	1469.5	1471.0	1472.6	1472.4	1470.6	1468.8	1467.0	1465.3
172.5°	1479.1	1480.9	1482.6	1482.6	1480.8	1479.0	1477.2	1475.4
175°	1489.6	1491.4	1493.3	1493.3	1491.4	1489.6	1487.8	1486.0
177.5°	1495.4	1496.8	1498.3	1498.2	1496.6	1494.9	1493.3	1491.6
180°	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3	1495.3

(END OF REPORT)