

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333477-927

Luminaire Tested: **S125DIW-S1270D1050U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333477-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1270D1050U927-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6942.9 lumens
Efficiency: N/A
Efficacy: 103.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 67.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333477-927

CATALOG NUMBER: S125DIW-S1270D1050U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

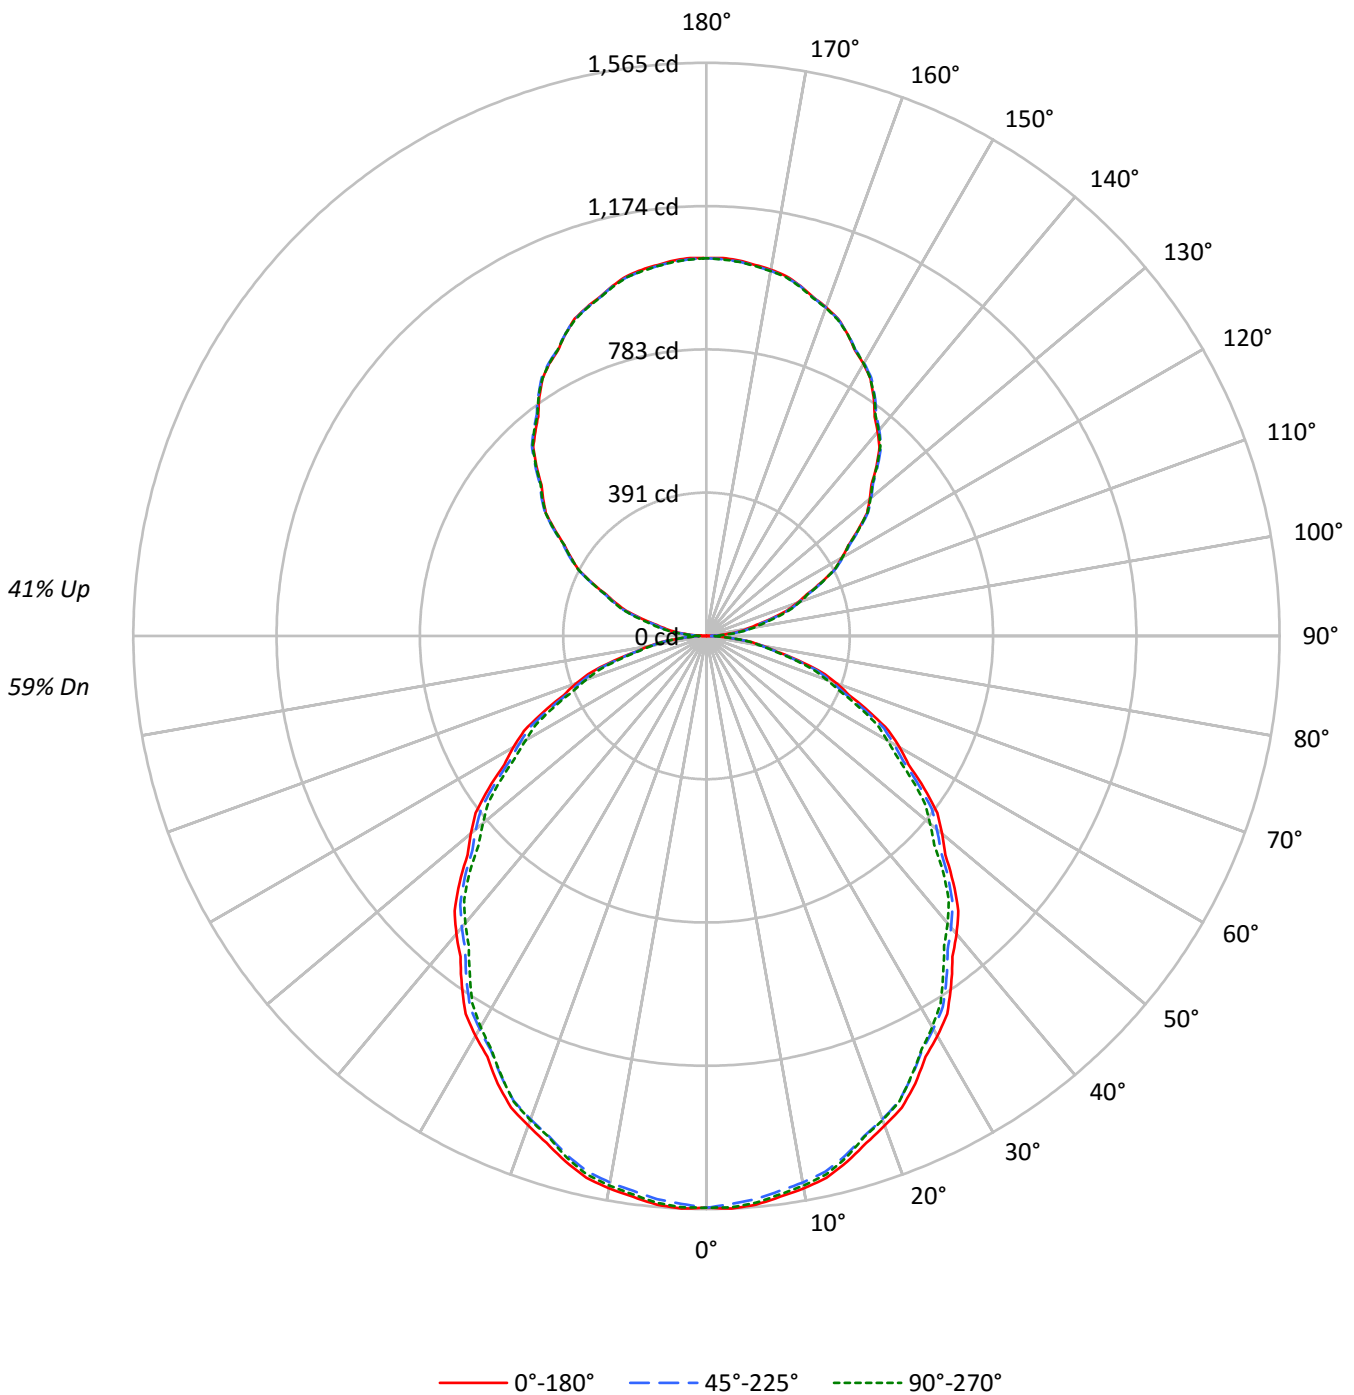



TEST NUMBER: P333477-927

CATALOG NUMBER: S125DIW-S1270D1050U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59
1	100	95	91	88	93	89	85	82	77	75	72	66	65	63	56	55	54	49
2	91	83	77	72	84	78	72	68	68	63	60	58	55	52	50	47	45	41
3	83	73	66	60	77	68	62	56	60	54	50	51	48	44	44	41	39	35
4	76	65	57	50	70	61	53	48	53	47	43	46	41	38	39	36	33	30
5	70	58	49	43	65	54	47	41	47	42	37	41	37	33	35	32	29	26
6	64	52	44	38	60	49	41	36	43	37	32	37	32	29	32	28	25	23
7	59	47	39	33	55	44	37	31	39	33	28	34	29	26	29	26	23	20
8	55	43	35	29	51	40	33	28	35	30	25	31	26	23	27	23	20	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	18	16
10	48	36	28	23	45	34	27	22	30	24	21	26	22	19	23	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10083	10083	10083
5°	10105	10009	10073
10°	10044	9938	9996
15°	9934	9819	9860
20°	9779	9652	9669
25°	9612	9453	9443
30°	9405	9238	9192
35°	9183	9008	8881
40°	8955	8757	8632
45°	8709	8528	8359
50°	8439	8252	8004
55°	8178	7942	7719
60°	7865	7626	7355
65°	7494	7248	7002
70°	7138	6811	6577
75°	6503	6288	6071
80°	5787	5694	5560
85°	5039	5128	4846



TEST NUMBER: P333477-927

CATALOG NUMBER: S125DIW-S1270D1050U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	147.2	2.1
10°-20°	415.8	6.0
20°-30°	613.9	8.8
30°-40°	716.4	10.3
40°-50°	719.5	10.4
50°-60°	631.6	9.1
60°-70°	470.6	6.8
70°-80°	269.1	3.9
80°-90°	80.5	1.2
90°-100°	69.1	1.0
100°-110°	204.0	2.9
110°-120°	345.5	5.0
120°-130°	454.7	6.5
130°-140°	509.6	7.3
140°-150°	499.4	7.2
150°-160°	419.5	6.0
160°-170°	278.8	4.0
170°-180°	97.6	1.4
0°-30°	1177.0	17.0
0°-40°	1893.4	27.3
0°-60°	3244.5	46.7
0°-90°	4064.7	58.5
90°-120°	618.6	8.9
90°-150°	2082.3	30.0
90°-180°	2878.0	41.5
0°-180°	6942.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1561	1561	1561	1561	1561	
5°	1559	1556	1544	1554	1554	148
15°	1486	1482	1468	1474	1475	419
25°	1349	1342	1326	1329	1325	620
35°	1165	1159	1142	1136	1126	728
45°	954	948	934	920	915	734
55°	726	722	705	694	686	648
65°	490	487	474	464	458	486
75°	261	258	252	248	243	278
85°	68	69	69	68	65	76
90°	1	7	13	17	19	7
95°	52	54	62	67	69	56
105°	183	187	192	196	199	195
115°	346	349	351	350	349	342
125°	505	509	510	509	508	452
135°	657	661	662	662	659	506
145°	795	799	801	801	799	497
155°	910	910	911	914	910	419
165°	990	988	989	992	987	279
175°	1029	1026	1026	1030	1025	98
180°	1031	1031	1031	1031	1031	



TEST NUMBER: P333477-927

CATALOG NUMBER: S125DIW-S1270D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1561.2	1561.2	1561.2	1561.2	1561.2	1561.2	1561.2	1561.2	1561.2	1561.2	1561.2
2.5°	1565.1	1564.5	1563.8	1563.1	1562.5	1561.1	1558.9	1556.6	1554.5	1552.3	1554.5
5°	1558.7	1558.1	1557.6	1557.0	1556.5	1554.9	1552.1	1549.4	1546.7	1543.9	1546.3
7.5°	1544.4	1543.8	1543.3	1542.7	1542.1	1540.4	1537.4	1534.4	1531.4	1528.4	1530.7
10°	1531.5	1531.0	1530.4	1529.9	1529.3	1527.6	1524.6	1521.5	1518.5	1515.4	1517.7
12.5°	1515.7	1514.7	1513.8	1512.8	1511.8	1509.9	1507.0	1504.3	1501.5	1498.7	1500.5
15°	1485.8	1485.0	1484.2	1483.4	1482.6	1480.6	1477.6	1474.6	1471.6	1468.5	1469.9
17.5°	1451.5	1450.3	1449.1	1447.9	1446.7	1444.5	1441.4	1438.2	1435.1	1431.9	1433.7
20°	1422.8	1422.3	1421.7	1421.2	1420.6	1418.6	1415.0	1411.4	1407.9	1404.3	1406.2
22.5°	1394.2	1393.2	1392.2	1391.2	1390.2	1388.1	1384.7	1381.4	1378.0	1374.7	1375.9
25°	1348.8	1347.3	1346.0	1344.7	1343.2	1340.8	1337.2	1333.6	1330.1	1326.5	1327.1
27.5°	1295.6	1294.8	1294.0	1293.2	1292.4	1290.1	1286.4	1282.7	1279.1	1275.3	1275.5
30°	1261.1	1260.2	1259.4	1258.5	1257.7	1255.3	1251.2	1247.1	1242.9	1238.8	1238.3
32.5°	1223.5	1222.3	1221.0	1219.7	1218.5	1216.0	1212.3	1208.6	1204.9	1201.3	1200.3
35°	1164.7	1163.6	1162.5	1161.4	1160.3	1157.9	1154.0	1150.2	1146.3	1142.5	1141.1
37.5°	1103.7	1102.3	1101.0	1099.5	1098.2	1095.7	1092.1	1088.5	1084.8	1081.2	1079.2
40°	1062.2	1060.8	1059.5	1058.0	1056.7	1054.1	1050.3	1046.4	1042.6	1038.7	1036.3
42.5°	1017.7	1016.6	1015.4	1014.2	1013.1	1010.6	1006.8	1002.9	999.1	995.2	993.0
45°	953.5	952.4	951.3	950.2	949.1	946.9	943.6	940.3	937.1	933.7	930.4
47.5°	884.3	884.4	884.5	884.5	884.6	882.6	878.7	874.7	870.8	866.8	863.5
50°	839.9	839.1	838.2	837.4	836.5	834.5	831.2	827.9	824.7	821.3	817.8
52.5°	794.4	793.8	793.2	792.6	792.0	790.0	786.4	782.9	779.4	775.9	772.8
55°	726.3	725.4	724.6	723.7	722.9	720.6	716.8	713.0	709.1	705.3	702.7
57.5°	654.3	653.9	653.5	653.1	652.6	650.8	647.5	644.3	641.0	637.8	634.6
60°	608.9	607.8	606.7	605.6	604.5	602.5	599.4	596.4	593.4	590.4	587.6
62.5°	561.5	560.6	559.8	558.8	557.9	556.3	553.7	551.0	548.5	545.9	543.0
65°	490.4	489.8	489.3	488.7	488.1	486.3	483.3	480.3	477.3	474.3	471.8
67.5°	421.4	420.3	419.1	418.0	416.8	415.1	412.9	410.6	408.4	406.1	404.0
70°	378.0	376.6	375.2	373.8	372.5	370.5	368.0	365.6	363.1	360.7	359.0
72.5°	330.5	329.5	328.7	327.7	326.8	325.5	323.9	322.3	320.8	319.2	317.3
75°	260.6	260.1	259.5	259.0	258.4	257.5	256.1	254.7	253.3	252.0	251.1
77.5°	196.1	195.9	195.7	195.5	195.3	194.8	194.0	193.2	192.4	191.7	191.2
80°	155.6	155.6	155.6	155.6	155.6	155.3	154.8	154.2	153.7	153.1	152.9
82.5°	120.0	119.6	119.1	118.7	118.3	118.0	117.9	117.8	117.7	117.6	117.1
85°	68.0	68.2	68.4	68.8	69.0	69.2	69.2	69.2	69.2	69.2	68.9
87.5°	26.9	27.1	27.4	27.7	28.0	28.1	28.2	28.2	28.2	28.3	28.4
90°	0.8	2.2	3.6	5.1	6.5	7.8	9.1	10.4	11.6	12.8	13.7
92.5°	19.4	20.4	21.4	22.4	23.4	24.7	26.2	27.7	29.3	30.8	32.0
95°	52.2	52.5	52.9	53.2	53.6	54.7	56.5	58.2	60.0	61.8	63.1
97.5°	86.7	86.8	87.0	87.1	87.3	88.6	91.0	93.5	95.9	98.4	99.6
100°	112.4	112.4	112.4	112.4	112.4	113.5	115.8	118.2	120.5	122.8	124.5
102.5°	140.0	140.7	141.4	142.1	142.8	143.8	145.0	146.2	147.3	148.5	150.3
105°	183.0	183.9	184.8	185.7	186.6	187.6	188.6	189.7	190.8	191.9	192.9
107.5°	230.5	231.4	232.3	233.2	234.1	235.0	235.8	236.6	237.4	238.2	238.8
110°	263.2	264.2	265.1	265.9	266.9	267.6	268.1	268.6	269.2	269.7	270.2



TEST NUMBER: P333477-927

CATALOG NUMBER: S125DIW-S1270D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	296.7	297.1	297.6	298.1	298.5	299.1	299.8	300.5	301.1	301.8	302.1
115°	345.9	346.7	347.4	348.1	348.8	349.4	349.7	350.1	350.4	350.8	350.6
117.5°	395.4	395.7	396.0	396.3	396.7	397.0	397.4	397.7	398.0	398.3	398.5
120°	426.2	427.1	428.0	428.9	429.8	430.3	430.5	430.7	430.9	431.0	431.0
122.5°	459.6	459.9	460.3	460.6	460.9	461.3	461.8	462.2	462.7	463.2	463.0
125°	504.9	506.0	507.0	508.1	509.1	509.8	510.0	510.2	510.3	510.5	510.2
127.5°	553.0	553.7	554.3	554.8	555.5	555.9	556.1	556.3	556.5	556.7	556.6
130°	581.9	582.8	583.8	584.6	585.5	586.1	586.5	586.8	587.2	587.6	587.4
132.5°	610.9	612.3	613.8	615.2	616.7	617.4	617.3	617.3	617.2	617.1	617.0
135°	656.6	657.7	658.7	659.8	660.9	661.5	661.7	661.9	662.0	662.2	662.2
137.5°	699.7	700.7	701.7	702.7	703.8	704.5	704.9	705.3	705.7	706.1	706.2
140°	727.2	728.1	729.0	729.9	730.8	731.5	732.1	732.6	733.1	733.6	734.0
142.5°	754.9	755.6	756.4	757.1	757.9	758.6	759.2	759.9	760.6	761.3	761.4
145°	795.4	796.1	796.9	797.6	798.3	798.9	799.5	800.0	800.6	801.1	801.1
147.5°	833.1	833.5	833.9	834.2	834.6	835.0	835.4	835.8	836.3	836.7	837.2
150°	858.1	857.9	857.7	857.5	857.4	857.6	858.3	859.0	859.8	860.5	860.5
152.5°	878.6	878.8	879.1	879.4	879.6	879.9	880.2	880.4	880.7	881.1	881.5
155°	910.2	910.2	910.2	910.2	910.2	910.3	910.5	910.7	910.9	911.1	911.8
157.5°	938.5	938.1	937.7	937.3	936.9	936.8	937.0	937.2	937.4	937.5	938.3
160°	955.2	954.7	954.1	953.6	953.1	952.9	953.1	953.2	953.4	953.6	954.3
162.5°	969.9	969.6	969.2	968.8	968.4	968.2	968.3	968.3	968.4	968.4	969.2
165°	989.8	989.4	989.0	988.6	988.2	988.2	988.4	988.6	988.7	988.9	989.6
167.5°	1006.4	1005.7	1005.0	1004.2	1003.5	1003.2	1003.2	1003.2	1003.2	1003.2	1004.2
170°	1015.4	1014.7	1014.0	1013.3	1012.6	1012.2	1012.2	1012.2	1012.2	1012.2	1013.3
172.5°	1021.8	1021.1	1020.4	1019.7	1019.0	1018.6	1018.6	1018.6	1018.6	1018.6	1019.7
175°	1029.0	1028.3	1027.6	1026.9	1026.2	1025.8	1025.8	1025.8	1025.8	1025.8	1026.9
177.5°	1032.8	1032.1	1031.6	1031.0	1030.5	1030.1	1029.9	1029.8	1029.7	1029.5	1030.4
180°	1031.4	1031.4	1031.4	1031.4	1031.4	1031.4	1031.4	1031.4	1031.4	1031.4	1031.4



TEST NUMBER: P333477-927

CATALOG NUMBER: S125DIW-S1270D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1561.2	1561.2	1561.2	1561.2	1561.2	1561.2	1561.2	1561.2
2.5°	1556.6	1558.9	1561.1	1562.0	1561.9	1561.6	1561.4	1561.2
5°	1548.8	1551.3	1553.8	1554.9	1554.6	1554.3	1554.0	1553.8
7.5°	1533.1	1535.6	1537.9	1539.1	1538.8	1538.5	1538.3	1537.9
10°	1519.9	1522.1	1524.2	1525.2	1525.0	1524.6	1524.4	1524.2
12.5°	1502.2	1504.0	1505.7	1506.6	1506.5	1506.4	1506.4	1506.3
15°	1471.3	1472.7	1474.0	1474.7	1474.7	1474.7	1474.7	1474.7
17.5°	1435.4	1437.1	1438.8	1438.9	1437.6	1436.2	1434.8	1433.5
20°	1408.2	1410.1	1412.0	1412.3	1410.9	1409.5	1408.2	1406.8
22.5°	1377.2	1378.5	1379.7	1379.9	1379.0	1378.0	1377.1	1376.2
25°	1327.6	1328.2	1328.7	1328.6	1327.8	1326.9	1326.1	1325.2
27.5°	1275.6	1275.7	1275.8	1275.4	1274.6	1273.8	1273.0	1272.2
30°	1237.7	1237.2	1236.6	1236.0	1235.1	1234.3	1233.4	1232.6
32.5°	1199.3	1198.3	1197.3	1196.0	1194.6	1193.1	1191.6	1190.2
35°	1139.7	1138.4	1137.0	1135.2	1133.0	1130.8	1128.6	1126.4
37.5°	1077.1	1075.1	1073.1	1071.4	1070.2	1068.9	1067.6	1066.4
40°	1033.8	1031.3	1028.8	1027.2	1026.4	1025.6	1024.7	1023.9
42.5°	990.8	988.5	986.3	984.5	983.3	982.0	980.7	979.5
45°	927.2	923.8	920.6	918.5	917.7	916.9	916.0	915.2
47.5°	860.1	856.7	853.4	850.8	848.8	846.9	845.0	843.1
50°	814.2	810.6	807.1	804.3	802.4	800.5	798.6	796.6
52.5°	769.6	766.5	763.3	760.7	758.6	756.5	754.3	752.2
55°	700.3	697.8	695.4	693.2	691.3	689.4	687.4	685.5
57.5°	631.4	628.3	625.1	623.0	621.9	620.9	619.8	618.8
60°	584.9	582.2	579.4	577.1	575.1	573.2	571.3	569.4
62.5°	540.0	537.0	534.1	531.9	530.4	528.9	527.4	525.9
65°	469.4	466.8	464.4	462.6	461.5	460.4	459.3	458.2
67.5°	402.0	399.8	397.8	396.4	395.7	395.1	394.4	393.7
70°	357.4	355.7	354.0	352.7	351.6	350.5	349.4	348.3
72.5°	315.4	313.5	311.7	310.2	309.1	308.0	306.9	305.8
75°	250.3	249.5	248.7	247.7	246.6	245.5	244.4	243.3
77.5°	190.7	190.2	189.7	189.1	188.3	187.5	186.8	186.0
80°	152.6	152.3	152.0	151.6	151.1	150.5	150.0	149.5
82.5°	116.6	116.1	115.6	115.3	115.2	115.1	114.9	114.9
85°	68.6	68.4	68.0	67.7	67.1	66.5	66.0	65.4
87.5°	28.6	28.8	29.0	28.9	28.6	28.2	27.9	27.6
90°	14.7	15.5	16.4	17.1	17.7	18.2	18.7	19.3
92.5°	33.2	34.4	35.6	36.3	36.7	37.1	37.5	37.9
95°	64.3	65.5	66.8	67.6	68.0	68.3	68.7	69.0
97.5°	100.8	102.0	103.1	103.8	104.0	104.3	104.5	104.6
100°	126.0	127.6	129.2	130.2	130.6	130.9	131.3	131.7
102.5°	152.0	153.8	155.5	156.6	157.1	157.6	158.1	158.6
105°	194.0	195.0	196.1	196.9	197.5	198.0	198.5	199.1
107.5°	239.3	239.9	240.3	240.7	240.6	240.6	240.5	240.5
110°	270.8	271.3	271.9	272.0	271.9	271.6	271.5	271.3



TEST NUMBER: P333477-927

CATALOG NUMBER: S125DIW-S1270D1050U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	302.3	302.5	302.8	302.8	302.5	302.1	301.8	301.5
115°	350.4	350.2	350.1	349.9	349.7	349.5	349.4	349.2
117.5°	398.5	398.7	398.9	398.5	397.8	397.1	396.4	395.7
120°	431.0	431.0	431.0	430.7	430.0	429.3	428.6	427.9
122.5°	462.9	462.7	462.6	462.2	461.7	461.1	460.5	459.9
125°	509.8	509.5	509.1	508.8	508.7	508.4	508.3	508.1
127.5°	556.3	556.2	556.0	555.8	555.4	555.1	554.7	554.4
130°	587.2	587.0	586.8	586.6	586.2	585.9	585.5	585.2
132.5°	616.7	616.6	616.4	616.1	615.5	615.1	614.6	614.0
135°	662.2	662.2	662.2	661.9	661.2	660.4	659.7	659.0
137.5°	706.5	706.7	706.9	706.5	705.7	704.8	703.9	703.0
140°	734.4	734.7	735.1	734.8	734.0	733.0	732.1	731.3
142.5°	761.7	761.9	762.2	761.8	760.9	760.0	759.1	758.2
145°	801.1	801.1	801.1	800.8	800.3	799.7	799.2	798.7
147.5°	837.6	838.0	838.4	838.0	836.9	835.6	834.4	833.2
150°	860.5	860.5	860.5	860.3	859.9	859.6	859.2	858.9
152.5°	881.9	882.3	882.7	882.6	882.0	881.4	880.7	880.0
155°	912.5	913.2	913.9	913.8	912.9	912.0	911.2	910.2
157.5°	939.0	939.7	940.4	940.2	939.0	937.8	936.6	935.5
160°	955.1	955.8	956.5	956.3	955.5	954.6	953.7	952.8
162.5°	970.1	970.9	971.8	971.7	970.7	969.6	968.6	967.6
165°	990.3	991.0	991.7	991.6	990.5	989.4	988.4	987.3
167.5°	1005.4	1006.4	1007.5	1007.5	1006.4	1005.3	1004.2	1003.1
170°	1014.3	1015.4	1016.4	1016.4	1015.1	1013.9	1012.6	1011.4
172.5°	1020.7	1021.8	1022.9	1022.9	1021.8	1020.6	1019.5	1018.4
175°	1027.9	1029.0	1030.2	1030.0	1028.8	1027.5	1026.3	1025.0
177.5°	1031.3	1032.1	1032.9	1032.8	1031.9	1030.9	1029.9	1028.9
180°	1031.4	1031.4	1031.4	1031.4	1031.4	1031.4	1031.4	1031.4

(END OF REPORT)