

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333345-927

Luminaire Tested: **S125DIW-S375D470U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333345-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S375D470U927-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 2492.7 lumens
Efficiency: N/A
Efficacy: 108.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 23
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333345-927

CATALOG NUMBER: S125DIW-S375D470U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

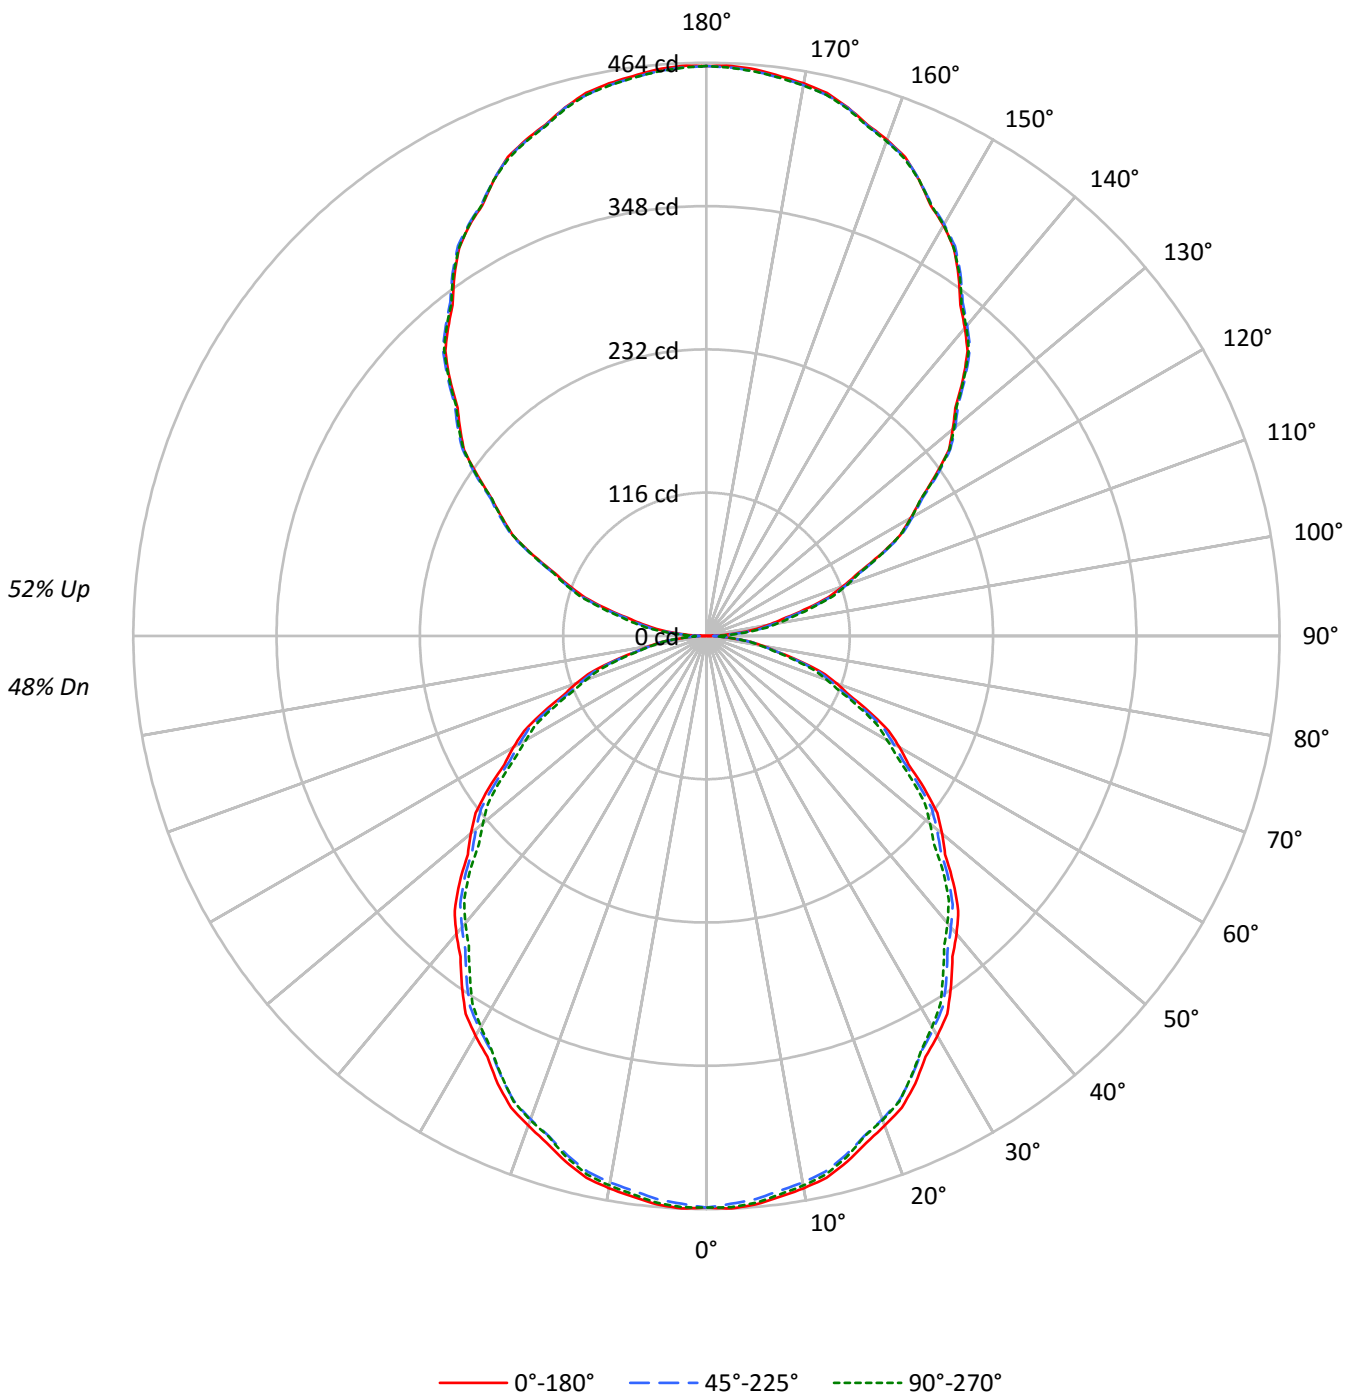



TEST NUMBER: P333345-927

CATALOG NUMBER: S125DIW-S375D470U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	55	55	55	48						48														
1	97	93	89	86	89	86	82	79	72	70	68	60	58	56	48	47	46	41						41														
2	89	81	75	70	81	75	70	65	63	59	56	52	50	47	42	40	39	34						34														
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33	29						29														
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	31	28	25						25														
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	25	21						21														
6	62	50	42	36	57	47	40	34	40	34	30	33	29	26	27	24	22	19						19														
7	58	45	38	32	53	42	35	30	36	30	26	30	26	23	25	22	19	17						17														
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15						15														
9	50	38	30	25	46	35	28	24	30	25	21	26	21	18	21	18	16	13						13														
10	47	35	27	23	43	32	26	21	28	23	19	24	19	17	20	16	14	12						12														

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2989	2989	2989
5°	2995	2967	2986
10°	2977	2946	2963
15°	2945	2910	2923
20°	2899	2861	2866
25°	2849	2802	2799
30°	2788	2738	2725
35°	2722	2670	2633
40°	2655	2596	2559
45°	2582	2528	2478
50°	2502	2446	2372
55°	2423	2354	2288
60°	2331	2260	2180
65°	2222	2149	2077
70°	2115	2019	1949
75°	1926	1864	1799
80°	1715	1689	1648
85°	1489	1519	1438



TEST NUMBER: P333345-927

CATALOG NUMBER: S125DIW-S375D470U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	43.6	1.8
10°-20°	123.3	4.9
20°-30°	182.0	7.3
30°-40°	212.4	8.5
40°-50°	213.3	8.6
50°-60°	187.2	7.5
60°-70°	139.5	5.6
70°-80°	79.8	3.2
80°-90°	24.2	1.0
90°-100°	30.9	1.2
100°-110°	91.2	3.7
110°-120°	154.6	6.2
120°-130°	203.4	8.2
130°-140°	227.9	9.1
140°-150°	223.4	9.0
150°-160°	187.6	7.5
160°-170°	124.7	5.0
170°-180°	43.6	1.8
0°-30°	348.9	14.0
0°-40°	561.2	22.5
0°-60°	961.7	38.6
0°-90°	1205.2	48.3
90°-120°	276.7	11.1
90°-150°	931.5	37.4
90°-180°	1287.0	51.6
0°-180°	2492.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	463	463	463	463	463	
5°	462	461	458	461	461	44
15°	440	439	435	437	437	124
25°	400	398	393	394	393	184
35°	345	344	339	337	334	216
45°	283	281	277	273	271	218
55°	215	214	209	206	203	192
65°	145	144	141	137	136	144
75°	77	76	75	74	72	82
85°	20	20	20	20	19	23
90°	0	3	6	8	9	2
95°	23	24	28	30	31	25
105°	82	84	86	88	89	87
115°	155	156	157	157	156	153
125°	226	228	228	228	227	202
135°	294	296	296	296	295	226
145°	356	357	358	358	357	222
155°	407	407	408	409	407	187
165°	443	442	442	444	442	125
175°	460	459	459	461	458	44
180°	461	461	461	461	461	



TEST NUMBER: P333345-927

CATALOG NUMBER: S125DIW-S375D470U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8
2.5°	463.9	463.7	463.6	463.3	463.2	462.7	462.1	461.4	460.8	460.1	460.8
5°	462.0	461.8	461.7	461.5	461.4	460.9	460.1	459.3	458.4	457.6	458.4
7.5°	457.8	457.6	457.5	457.3	457.2	456.6	455.7	454.8	453.9	453.0	453.8
10°	454.0	453.8	453.7	453.5	453.4	452.8	451.9	451.0	450.1	449.2	449.9
12.5°	449.3	449.0	448.7	448.5	448.1	447.6	446.7	445.9	445.0	444.3	444.7
15°	440.5	440.2	440.0	439.7	439.4	438.9	438.0	437.1	436.2	435.3	435.7
17.5°	430.2	429.9	429.5	429.2	428.8	428.2	427.2	426.4	425.4	424.5	425.0
20°	421.8	421.6	421.4	421.3	421.1	420.5	419.5	418.4	417.3	416.3	416.8
22.5°	413.3	413.0	412.6	412.4	412.1	411.5	410.4	409.5	408.4	407.5	407.9
25°	399.8	399.4	398.9	398.5	398.2	397.4	396.4	395.3	394.3	393.2	393.4
27.5°	384.0	383.8	383.6	383.3	383.1	382.4	381.4	380.2	379.1	378.0	378.1
30°	373.8	373.6	373.3	373.0	372.8	372.1	370.9	369.6	368.4	367.2	367.0
32.5°	362.7	362.3	361.9	361.6	361.2	360.4	359.3	358.2	357.2	356.1	355.8
35°	345.2	344.9	344.6	344.3	344.0	343.2	342.1	341.0	339.8	338.7	338.3
37.5°	327.2	326.8	326.4	325.9	325.5	324.8	323.7	322.7	321.5	320.5	319.9
40°	314.9	314.4	314.0	313.6	313.2	312.4	311.3	310.2	309.0	307.9	307.2
42.5°	301.7	301.3	301.0	300.6	300.3	299.6	298.4	297.3	296.1	295.0	294.4
45°	282.7	282.3	282.0	281.7	281.3	280.7	279.7	278.8	277.7	276.8	275.8
47.5°	262.1	262.1	262.1	262.2	262.2	261.7	260.5	259.3	258.1	256.9	256.0
50°	249.0	248.7	248.5	248.2	248.0	247.4	246.4	245.4	244.5	243.4	242.4
52.5°	235.5	235.3	235.1	235.0	234.8	234.2	233.1	232.1	231.0	230.0	229.1
55°	215.2	215.0	214.8	214.5	214.3	213.6	212.5	211.4	210.2	209.1	208.3
57.5°	194.0	193.8	193.7	193.6	193.5	192.9	191.9	191.0	190.0	189.1	188.1
60°	180.5	180.1	179.8	179.5	179.2	178.6	177.7	176.8	175.9	175.0	174.2
62.5°	166.4	166.2	165.9	165.6	165.4	164.9	164.1	163.3	162.6	161.8	161.0
65°	145.4	145.2	145.0	144.9	144.7	144.2	143.3	142.4	141.5	140.6	139.8
67.5°	124.9	124.6	124.2	123.9	123.6	123.0	122.4	121.7	121.0	120.4	119.8
70°	112.0	111.6	111.2	110.8	110.4	109.8	109.1	108.4	107.7	106.9	106.4
72.5°	98.0	97.7	97.4	97.1	96.9	96.5	96.0	95.5	95.1	94.6	94.0
75°	77.2	77.1	76.9	76.8	76.6	76.3	75.9	75.5	75.1	74.7	74.5
77.5°	58.1	58.1	58.0	57.9	57.9	57.8	57.5	57.3	57.0	56.8	56.6
80°	46.1	46.1	46.1	46.1	46.1	46.0	45.9	45.7	45.6	45.4	45.3
82.5°	35.6	35.5	35.3	35.2	35.1	35.0	34.9	34.9	34.9	34.9	34.7
85°	20.1	20.2	20.3	20.4	20.4	20.5	20.5	20.5	20.5	20.5	20.4
87.5°	8.0	8.1	8.2	8.4	8.5	8.6	8.6	8.6	8.7	8.8	8.9
90°	0.4	1.0	1.7	2.3	2.9	3.5	4.0	4.6	5.1	5.8	6.2
92.5°	8.7	9.1	9.6	10.1	10.5	11.0	11.7	12.4	13.1	13.8	14.3
95°	23.4	23.5	23.7	23.8	24.0	24.5	25.3	26.1	26.9	27.6	28.2
97.5°	38.7	38.8	38.9	39.0	39.1	39.6	40.7	41.8	42.9	44.0	44.5
100°	50.3	50.3	50.3	50.3	50.3	50.8	51.8	52.8	53.9	54.9	55.7
102.5°	62.6	62.9	63.3	63.6	63.9	64.3	64.9	65.4	65.9	66.4	67.2
105°	81.8	82.2	82.6	83.0	83.5	83.9	84.4	84.8	85.3	85.8	86.3
107.5°	103.1	103.5	103.9	104.3	104.7	105.1	105.4	105.8	106.2	106.5	106.8
110°	117.8	118.2	118.6	119.0	119.4	119.7	119.9	120.2	120.4	120.6	120.9



TEST NUMBER: P333345-927

CATALOG NUMBER: S125DIW-S375D470U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	132.7	132.9	133.1	133.3	133.6	133.8	134.1	134.4	134.7	135.0	135.1
115°	154.7	155.0	155.4	155.7	156.1	156.3	156.5	156.6	156.8	156.9	156.9
117.5°	176.9	177.0	177.1	177.3	177.4	177.6	177.8	177.8	178.0	178.2	178.2
120°	190.7	191.1	191.5	191.9	192.3	192.5	192.6	192.7	192.7	192.8	192.8
122.5°	205.6	205.7	205.9	206.0	206.1	206.4	206.5	206.8	207.0	207.2	207.1
125°	225.9	226.3	226.8	227.3	227.8	228.1	228.1	228.2	228.3	228.4	228.2
127.5°	247.4	247.6	248.0	248.2	248.5	248.7	248.7	248.8	248.9	249.1	249.0
130°	260.3	260.7	261.1	261.5	261.9	262.2	262.4	262.5	262.7	262.8	262.8
132.5°	273.2	273.9	274.6	275.2	275.8	276.2	276.2	276.1	276.1	276.0	275.9
135°	293.7	294.2	294.7	295.2	295.6	295.9	296.0	296.0	296.1	296.2	296.2
137.5°	312.9	313.4	313.9	314.3	314.8	315.1	315.3	315.4	315.6	315.8	315.9
140°	325.3	325.7	326.1	326.5	326.9	327.3	327.5	327.7	328.0	328.2	328.4
142.5°	337.6	337.9	338.3	338.7	339.0	339.3	339.6	339.9	340.2	340.6	340.6
145°	355.8	356.2	356.5	356.8	357.1	357.4	357.6	357.8	358.1	358.3	358.3
147.5°	372.6	372.8	373.0	373.1	373.4	373.5	373.7	373.9	374.1	374.3	374.5
150°	383.8	383.7	383.7	383.6	383.5	383.7	384.0	384.3	384.6	384.9	384.9
152.5°	393.0	393.2	393.2	393.3	393.5	393.6	393.7	393.9	394.0	394.1	394.3
155°	407.2	407.2	407.2	407.2	407.2	407.2	407.3	407.3	407.4	407.5	407.8
157.5°	419.8	419.6	419.5	419.3	419.1	419.1	419.1	419.2	419.3	419.4	419.7
160°	427.3	427.1	426.7	426.5	426.3	426.2	426.3	426.4	426.4	426.5	426.9
162.5°	433.9	433.7	433.6	433.3	433.2	433.1	433.1	433.1	433.2	433.2	433.6
165°	442.7	442.5	442.4	442.2	442.0	442.0	442.1	442.2	442.3	442.4	442.7
167.5°	450.2	449.9	449.6	449.2	448.9	448.8	448.8	448.8	448.8	448.8	449.2
170°	454.2	453.8	453.5	453.2	452.9	452.7	452.7	452.7	452.7	452.7	453.2
172.5°	457.1	456.8	456.5	456.1	455.8	455.7	455.7	455.7	455.7	455.7	456.1
175°	460.3	459.9	459.6	459.3	459.0	458.8	458.8	458.8	458.8	458.8	459.3
177.5°	461.9	461.7	461.4	461.2	460.9	460.7	460.7	460.7	460.6	460.5	460.9
180°	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4



TEST NUMBER: P333345-927

CATALOG NUMBER: S125DIW-S375D470U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	462.8	462.8	462.8	462.8	462.8	462.8	462.8	462.8
2.5°	461.4	462.1	462.7	463.0	463.0	462.9	462.9	462.8
5°	459.1	459.9	460.6	460.9	460.8	460.7	460.7	460.6
7.5°	454.5	455.2	455.9	456.2	456.1	456.1	456.0	455.9
10°	450.5	451.1	451.9	452.1	452.0	451.9	451.9	451.8
12.5°	445.3	445.8	446.3	446.6	446.6	446.6	446.6	446.5
15°	436.1	436.5	437.0	437.1	437.1	437.1	437.1	437.1
17.5°	425.5	426.0	426.5	426.5	426.1	425.7	425.3	424.9
20°	417.4	418.0	418.5	418.7	418.2	417.8	417.4	417.0
22.5°	408.2	408.6	409.0	409.0	408.8	408.4	408.2	407.9
25°	393.6	393.7	393.9	393.8	393.6	393.3	393.1	392.8
27.5°	378.1	378.1	378.2	378.1	377.8	377.6	377.3	377.1
30°	366.9	366.7	366.5	366.4	366.1	365.9	365.6	365.4
32.5°	355.5	355.2	354.9	354.6	354.1	353.6	353.2	352.8
35°	337.9	337.5	337.0	336.5	335.9	335.2	334.5	333.9
37.5°	319.3	318.7	318.1	317.6	317.2	316.9	316.5	316.1
40°	306.4	305.7	305.0	304.5	304.3	304.0	303.7	303.5
42.5°	293.7	293.0	292.3	291.8	291.4	291.0	290.7	290.3
45°	274.8	273.9	272.9	272.3	272.0	271.8	271.6	271.3
47.5°	254.9	254.0	252.9	252.2	251.6	251.0	250.5	249.9
50°	241.4	240.3	239.2	238.4	237.8	237.3	236.7	236.1
52.5°	228.1	227.2	226.2	225.5	224.9	224.3	223.6	223.0
55°	207.6	206.8	206.1	205.5	204.9	204.3	203.7	203.2
57.5°	187.2	186.2	185.3	184.7	184.3	184.0	183.7	183.4
60°	173.4	172.5	171.7	171.0	170.5	169.9	169.4	168.8
62.5°	160.1	159.1	158.3	157.6	157.2	156.8	156.3	155.9
65°	139.1	138.4	137.7	137.1	136.8	136.5	136.2	135.9
67.5°	119.1	118.5	117.9	117.5	117.3	117.1	116.9	116.7
70°	105.9	105.4	105.0	104.6	104.3	103.9	103.5	103.2
72.5°	93.5	92.9	92.4	92.0	91.7	91.3	90.9	90.6
75°	74.2	74.0	73.7	73.4	73.1	72.8	72.5	72.1
77.5°	56.6	56.4	56.2	56.1	55.8	55.6	55.4	55.1
80°	45.2	45.2	45.1	44.9	44.8	44.6	44.4	44.3
82.5°	34.5	34.4	34.3	34.1	34.1	34.1	34.1	34.1
85°	20.4	20.3	20.2	20.0	19.9	19.7	19.6	19.4
87.5°	9.0	9.0	9.1	9.1	9.0	9.0	8.9	8.7
90°	6.6	7.0	7.4	7.7	7.9	8.2	8.4	8.6
92.5°	14.8	15.4	15.9	16.2	16.4	16.6	16.8	17.0
95°	28.8	29.3	29.9	30.3	30.4	30.6	30.7	30.9
97.5°	45.1	45.6	46.1	46.4	46.5	46.7	46.7	46.8
100°	56.4	57.1	57.8	58.2	58.4	58.5	58.7	58.9
102.5°	68.0	68.8	69.6	70.0	70.3	70.5	70.7	71.0
105°	86.7	87.2	87.7	88.1	88.3	88.6	88.8	89.0
107.5°	107.0	107.3	107.5	107.7	107.7	107.6	107.6	107.6
110°	121.1	121.4	121.6	121.7	121.6	121.5	121.4	121.4



TEST NUMBER: P333345-927

CATALOG NUMBER: S125DIW-S375D470U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	135.2	135.3	135.5	135.5	135.3	135.1	135.0	134.8
115°	156.8	156.7	156.6	156.5	156.5	156.4	156.3	156.2
117.5°	178.3	178.3	178.4	178.3	178.0	177.7	177.3	177.0
120°	192.8	192.8	192.8	192.7	192.3	192.0	191.7	191.4
122.5°	207.1	207.0	206.9	206.8	206.5	206.3	206.0	205.7
125°	228.1	227.9	227.8	227.6	227.5	227.4	227.4	227.3
127.5°	248.9	248.8	248.7	248.6	248.4	248.3	248.1	248.0
130°	262.7	262.6	262.5	262.4	262.2	262.1	261.9	261.7
132.5°	275.8	275.8	275.7	275.6	275.4	275.1	274.9	274.6
135°	296.2	296.2	296.2	296.0	295.7	295.4	295.1	294.8
137.5°	316.0	316.1	316.2	316.1	315.7	315.3	314.8	314.4
140°	328.5	328.7	328.8	328.7	328.3	327.9	327.5	327.1
142.5°	340.7	340.8	340.9	340.7	340.3	339.9	339.5	339.1
145°	358.3	358.3	358.3	358.2	358.0	357.7	357.5	357.3
147.5°	374.6	374.9	375.0	374.9	374.3	373.8	373.2	372.7
150°	384.9	384.9	384.9	384.8	384.7	384.5	384.4	384.2
152.5°	394.5	394.7	394.8	394.8	394.5	394.3	394.0	393.6
155°	408.1	408.4	408.8	408.8	408.4	408.0	407.6	407.2
157.5°	420.0	420.3	420.6	420.6	420.0	419.5	419.0	418.4
160°	427.2	427.5	427.9	427.8	427.4	427.0	426.6	426.2
162.5°	434.0	434.3	434.7	434.7	434.2	433.7	433.2	432.8
165°	443.0	443.3	443.6	443.5	443.1	442.6	442.1	441.6
167.5°	449.7	450.2	450.7	450.7	450.1	449.6	449.2	448.7
170°	453.7	454.2	454.7	454.6	454.1	453.5	453.0	452.4
172.5°	456.6	457.1	457.6	457.6	457.0	456.5	456.1	455.6
175°	459.8	460.3	460.8	460.7	460.2	459.6	459.1	458.5
177.5°	461.3	461.7	462.1	462.0	461.6	461.1	460.7	460.3
180°	461.4	461.4	461.4	461.4	461.4	461.4	461.4	461.4

(END OF REPORT)