

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333347-927

Luminaire Tested: **S125DIW-S375D770U927-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333347-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S375D770U927-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3327.2 lumens
Efficiency: N/A
Efficacy: 109.4 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 30.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

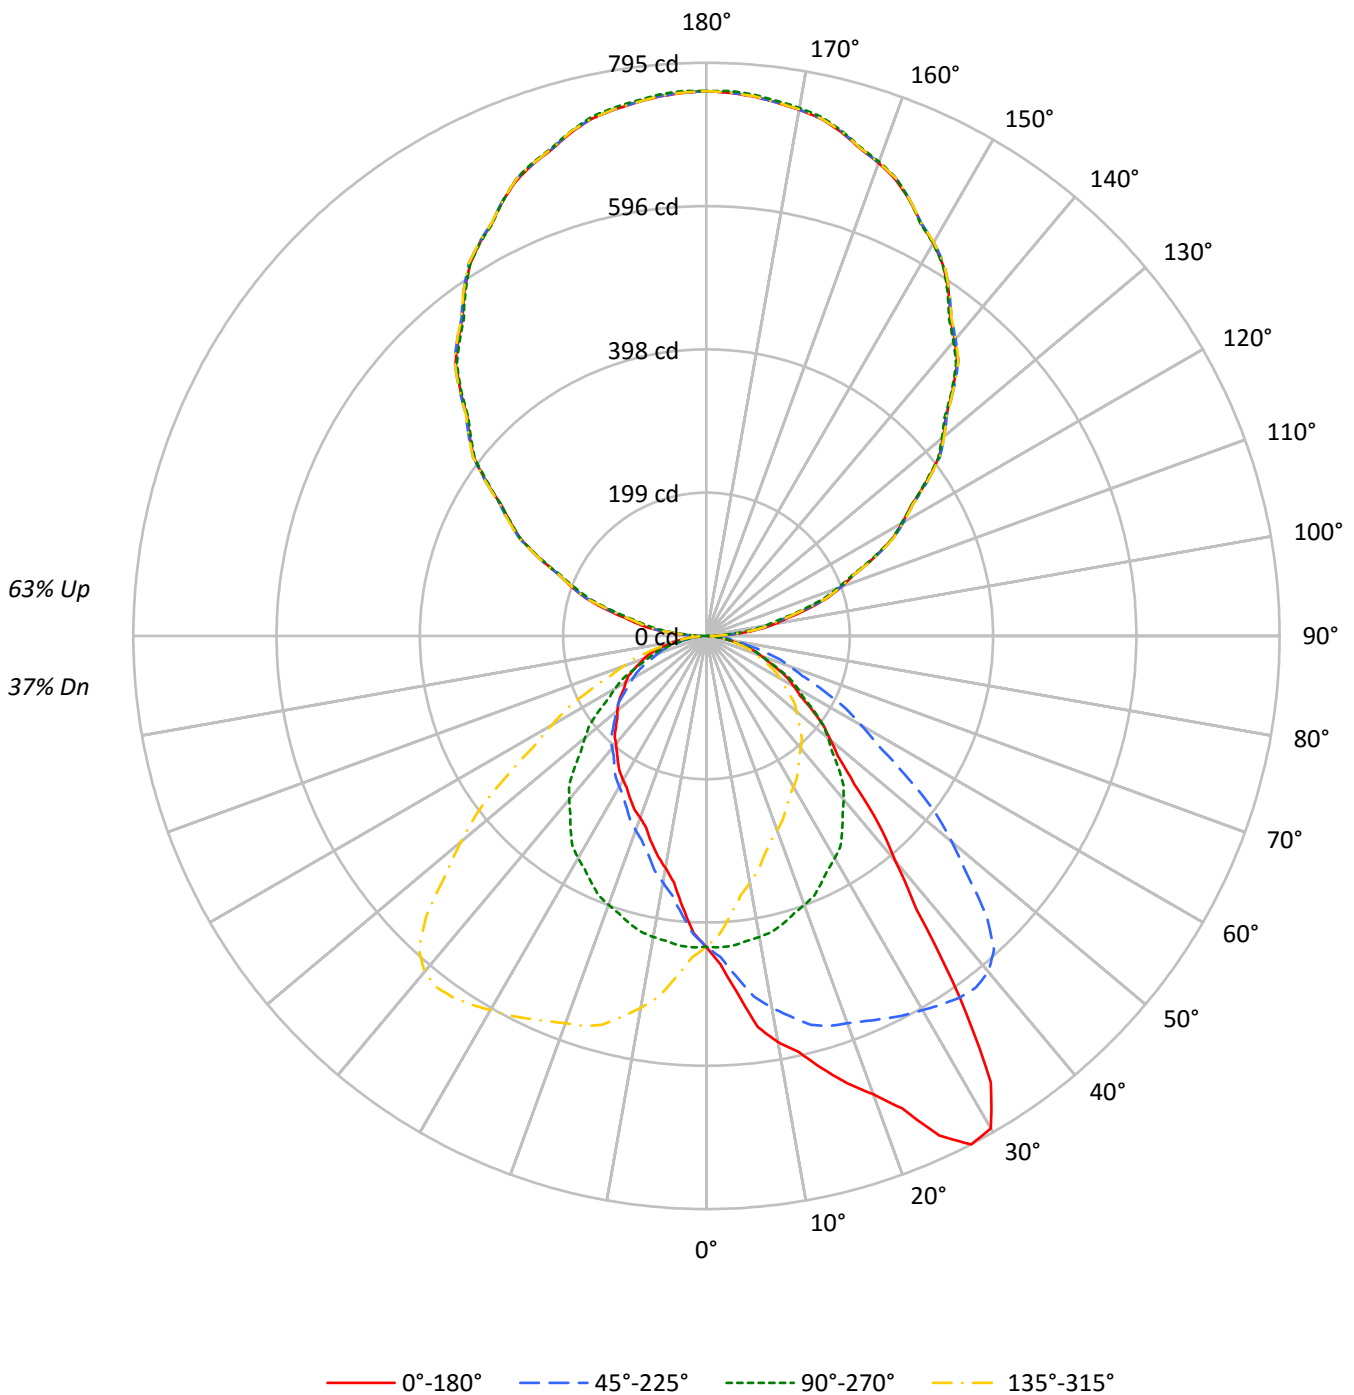



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	37
1	95	91	87	84	86	82	79	76	67	65	63	52	51	50	39	38	37	31
2	87	79	73	69	78	72	67	63	59	55	52	46	44	42	34	33	32	26
3	79	70	63	57	71	64	58	53	52	47	44	41	38	35	31	29	27	22
4	72	62	54	48	65	56	50	45	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20	17
6	61	49	41	36	55	45	38	33	37	32	28	29	26	23	22	20	18	15
7	56	44	37	31	51	41	34	29	33	28	25	27	23	20	20	18	16	13
8	52	40	33	28	47	37	30	26	30	25	22	24	21	18	19	16	14	12
9	49	37	29	24	44	34	27	23	28	23	19	22	19	16	17	15	13	11
10	45	33	26	22	41	31	25	20	26	21	17	21	17	14	16	13	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	2785	2785	2785	2785
5°	3225	2795	2447	2795
10°	3752	2781	2144	2781
15°	4153	2760	1978	2760
20°	4649	2728	1844	2728
25°	5447	2691	1779	2691
30°	5883	2655	1723	2655
35°	4837	2588	1686	2588
40°	3438	2494	1645	2494
45°	2641	2367	1621	2367
50°	2255	2210	1619	2210
55°	2008	2057	1633	2057
60°	1811	1888	1674	1888
65°	1673	1721	1718	1721
70°	1522	1545	1743	1545
75°	1342	1362	1727	1362
80°	1131	1112	1581	1112
85°	897	800	1275	800



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	41.5	1.2
10°-20°	123.6	3.7
20°-30°	200.7	6.0
30°-40°	244.8	7.4
40°-50°	222.7	6.7
50°-60°	177.4	5.3
60°-70°	123.6	3.7
70°-80°	65.9	2.0
80°-90°	18.3	0.5
90°-100°	50.6	1.5
100°-110°	149.5	4.5
110°-120°	253.2	7.6
120°-130°	333.2	10.0
130°-140°	373.3	11.2
140°-150°	365.9	11.0
150°-160°	307.3	9.2
160°-170°	204.3	6.1
170°-180°	71.5	2.1
0°-30°	365.9	11.0
0°-40°	610.7	18.4
0°-60°	1010.8	30.4
0°-90°	1218.6	36.6
90°-120°	453.2	13.6
90°-150°	1525.6	45.9
90°-180°	2109.0	63.4
0°-180°	3327.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	431	431	431	431	431	
5°	498	431	378	431	498	50
15°	621	413	296	413	621	178
25°	764	378	250	378	764	349
35°	614	328	214	328	614	375
45°	289	259	178	259	289	231
55°	178	183	145	183	178	161
65°	110	113	112	113	110	109
75°	54	55	69	55	54	58
85°	12	11	17	11	12	14
90°	14	1	14	1	14	9
95°	50	38	50	38	50	51
105°	146	134	146	134	146	155
115°	256	254	256	254	256	253
125°	372	370	372	370	372	332
135°	483	481	483	481	483	372
145°	585	583	585	583	585	365
155°	667	667	667	667	667	307
165°	723	725	723	725	723	204
175°	751	754	751	754	751	71
180°	756	756	756	756	756	



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3
2.5°	456.1	455.6	455.0	453.8	454.7	452.2	451.1	449.0	446.5	445.6	444.6
5°	497.5	498.4	499.4	495.5	495.9	493.3	487.4	482.7	478.9	473.9	470.4
7.5°	547.3	545.2	544.9	542.5	538.2	534.7	528.6	520.8	513.2	504.5	497.4
10°	572.2	572.4	570.8	567.8	563.2	559.9	551.9	544.2	534.9	523.9	516.0
12.5°	591.0	591.8	589.6	585.7	583.4	576.1	569.7	560.6	549.5	540.7	528.8
15°	621.2	619.2	617.8	612.8	609.0	601.3	591.3	581.7	569.7	558.5	547.3
17.5°	650.5	652.1	649.4	644.8	632.9	623.9	610.5	597.4	582.3	567.4	554.1
20°	676.5	678.0	673.8	665.9	651.6	642.7	625.0	608.1	590.7	571.5	556.8
22.5°	709.1	707.9	702.2	690.2	677.9	661.3	642.1	621.5	599.8	578.1	558.6
25°	764.4	756.7	753.2	738.4	722.2	697.8	671.5	641.4	614.3	585.6	560.7
27.5°	795.1	792.7	788.8	778.5	761.4	735.3	704.3	667.7	629.5	593.2	560.5
30°	788.9	789.3	789.6	786.4	775.4	755.8	724.8	685.6	640.1	599.3	561.6
32.5°	734.4	741.1	747.5	755.0	758.1	754.3	735.0	699.4	652.7	606.3	561.0
35°	613.5	615.6	636.3	656.8	684.6	706.2	720.6	704.9	665.6	612.3	560.3
37.5°	478.4	488.3	502.6	525.8	565.9	601.9	648.2	669.4	656.7	614.3	559.0
40°	407.8	417.0	426.4	450.0	483.8	527.4	579.9	624.7	635.2	608.1	554.6
42.5°	353.4	360.6	371.0	388.7	417.0	455.6	505.8	564.4	600.5	590.3	545.4
45°	289.2	293.8	301.8	315.9	336.4	366.6	410.9	475.0	530.8	549.3	523.6
47.5°	247.6	247.6	253.8	263.5	278.3	304.0	336.8	386.9	446.6	490.7	488.6
50°	224.4	223.5	228.5	236.9	248.6	265.6	296.9	337.0	394.3	444.3	458.2
52.5°	204.5	204.6	207.6	213.9	223.7	238.2	261.6	297.8	346.7	398.0	424.2
55°	178.3	177.5	181.0	185.2	192.4	201.9	218.7	246.4	286.1	336.6	370.7
57.5°	154.2	156.3	157.6	160.6	166.5	172.9	187.1	207.4	238.9	282.3	318.2
60°	140.2	142.2	143.3	146.2	151.0	156.5	167.5	183.9	210.5	247.9	283.5
62.5°	127.6	129.2	129.6	132.2	136.1	141.4	150.0	163.9	184.9	217.5	252.5
65°	109.5	109.5	110.2	113.0	114.8	119.5	126.1	136.2	153.0	178.5	208.3
67.5°	92.0	92.8	92.7	93.9	95.5	99.3	103.9	112.3	124.8	143.3	167.2
70°	80.6	81.3	81.1	82.0	83.8	86.2	90.1	97.9	106.9	122.8	143.3
72.5°	70.3	70.6	70.1	71.3	72.4	74.5	78.8	83.0	91.3	104.8	121.7
75°	53.8	54.2	54.6	55.3	56.4	57.5	59.7	63.8	69.4	79.5	90.2
77.5°	40.3	39.6	40.6	40.4	41.0	41.9	43.8	46.0	50.5	57.0	65.3
80°	30.4	30.6	30.6	30.7	31.7	32.2	33.8	35.5	39.0	43.7	49.6
82.5°	22.2	22.7	22.3	22.7	23.4	23.8	24.8	26.1	28.1	31.9	36.1
85°	12.1	11.2	11.6	11.9	11.9	12.1	12.8	13.4	14.5	15.9	17.6
87.5°	6.3	6.6	6.7	6.6	6.6	6.5	7.0	6.8	7.1	7.4	7.8
90°	14.1	13.7	13.3	12.9	12.5	12.0	11.4	10.7	10.1	9.4	8.5
92.5°	27.7	27.5	27.2	26.9	26.6	26.1	25.2	24.3	23.4	22.6	21.5
95°	50.5	50.3	50.1	49.8	49.5	49.0	48.0	47.1	46.2	45.3	44.0
97.5°	76.7	76.5	76.4	76.2	76.0	75.6	74.7	73.8	73.0	72.1	70.3
100°	96.4	96.2	95.9	95.7	95.4	94.7	93.5	92.3	91.2	90.0	88.2
102.5°	116.2	115.8	115.5	115.1	114.7	113.9	112.6	111.4	110.1	108.8	107.9
105°	145.8	145.4	145.0	144.7	144.3	143.7	142.9	142.1	141.3	140.5	139.7
107.5°	176.2	176.2	176.3	176.3	176.3	176.1	175.7	175.3	174.9	174.5	174.0
110°	198.8	198.9	199.0	199.2	199.3	199.2	198.8	198.4	198.0	197.6	197.2



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	220.9	221.1	221.3	221.6	221.8	221.8	221.7	221.5	221.3	221.1	220.6
115°	255.8	256.0	256.1	256.2	256.4	256.4	256.6	256.7	256.8	257.0	256.7
117.5°	289.9	290.4	291.0	291.5	292.0	292.2	292.1	292.0	291.9	291.8	291.6
120°	313.5	313.9	314.5	315.1	315.5	315.8	315.8	315.8	315.8	315.8	315.7
122.5°	337.0	337.4	337.8	338.2	338.7	338.9	339.0	339.1	339.2	339.3	339.0
125°	372.2	372.4	372.5	372.6	372.8	373.0	373.2	373.5	373.8	374.0	373.9
127.5°	406.2	406.4	406.6	406.9	407.2	407.3	407.5	407.7	407.7	407.9	407.7
130°	428.7	429.0	429.2	429.5	429.8	429.9	430.1	430.2	430.3	430.5	430.2
132.5°	449.9	450.3	450.6	451.0	451.3	451.6	451.7	451.9	452.0	452.1	452.2
135°	482.8	483.3	483.9	484.3	484.9	485.1	485.1	485.1	485.1	485.1	485.1
137.5°	515.0	515.7	516.3	517.0	517.6	517.9	517.8	517.6	517.5	517.3	517.0
140°	535.8	536.4	537.0	537.7	538.4	538.5	538.3	538.1	537.7	537.5	537.1
142.5°	555.5	556.1	556.8	557.5	558.1	558.3	558.2	558.0	557.9	557.7	557.2
145°	585.1	585.5	585.9	586.3	586.7	586.9	586.9	586.9	586.9	586.9	586.5
147.5°	610.5	611.3	612.2	613.1	613.9	614.3	613.9	613.6	613.3	613.0	612.7
150°	629.2	629.5	629.8	630.0	630.3	630.4	630.4	630.4	630.4	630.4	629.9
152.5°	644.8	645.2	645.7	646.2	646.7	646.7	646.4	646.1	645.8	645.5	645.2
155°	666.9	667.5	668.2	668.8	669.5	669.6	669.0	668.5	668.0	667.5	667.3
157.5°	685.3	686.2	687.1	687.9	688.8	689.0	688.4	687.9	687.4	686.9	686.7
160°	698.1	698.7	699.3	700.0	700.7	700.7	700.2	699.7	699.2	698.6	698.5
162.5°	708.8	709.6	710.3	711.1	711.9	711.9	711.3	710.7	710.1	709.5	709.4
165°	723.3	724.1	724.9	725.7	726.4	726.6	726.1	725.6	725.0	724.5	724.4
167.5°	734.8	735.7	736.5	737.3	738.1	738.1	737.4	736.6	735.8	735.0	735.0
170°	741.0	741.9	742.8	743.7	744.7	744.7	743.9	743.1	742.4	741.6	741.6
172.5°	746.2	746.9	747.7	748.6	749.4	749.4	748.6	747.8	747.0	746.2	746.2
175°	751.0	751.9	752.8	753.7	754.6	754.7	753.9	753.1	752.3	751.5	751.5
177.5°	753.8	754.6	755.3	756.0	756.7	756.8	756.1	755.5	754.9	754.2	754.4
180°	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3
2.5°	443.7	442.7	441.5	439.4	437.0	435.6	433.6	432.3	429.7	427.5	425.1
5°	466.2	461.4	457.1	451.4	445.2	441.2	436.4	431.1	425.6	419.9	413.7
7.5°	489.6	481.1	472.0	462.2	452.5	443.6	435.1	426.9	419.1	409.7	401.8
10°	505.2	494.6	483.2	469.9	456.9	445.5	434.0	424.0	413.7	402.7	393.0
12.5°	520.9	506.8	490.7	476.0	460.4	446.7	433.2	420.3	407.4	395.2	383.9
15°	532.0	519.5	504.7	483.8	466.2	447.3	429.4	412.8	397.2	383.7	369.4
17.5°	539.2	523.2	507.2	487.3	464.2	443.1	422.8	403.7	386.2	369.0	355.3
20°	540.5	524.0	507.4	487.8	464.2	440.1	419.7	396.9	378.0	360.2	343.4
22.5°	540.1	521.4	503.3	483.2	460.1	437.8	413.3	390.0	369.5	352.0	334.5
25°	536.0	516.0	493.3	473.0	450.3	426.7	401.8	377.6	356.8	336.8	319.4
27.5°	532.5	506.7	480.9	457.2	435.3	413.7	389.8	365.1	342.0	321.8	305.4
30°	528.3	499.9	471.0	446.2	423.7	402.7	380.2	356.0	331.8	312.1	294.5
32.5°	524.5	491.4	460.9	434.0	410.1	389.7	368.9	345.9	322.2	302.1	284.6
35°	517.1	478.9	443.9	413.5	388.1	367.0	349.6	328.2	306.4	287.0	270.2
37.5°	507.8	462.4	424.8	393.0	365.1	342.9	326.8	310.3	289.4	270.7	255.5
40°	500.4	450.7	410.9	378.3	349.4	326.4	311.3	295.8	278.5	261.0	244.9
42.5°	491.2	440.1	396.9	361.8	333.2	310.7	294.9	281.8	266.4	250.2	235.3
45°	474.3	421.0	374.1	336.4	307.5	285.3	269.1	259.2	247.6	232.3	219.7
47.5°	449.3	398.1	349.6	310.7	280.8	260.3	245.0	235.5	227.4	216.0	204.5
50°	427.2	381.0	331.8	293.3	263.4	242.7	228.6	220.0	213.1	204.3	194.6
52.5°	402.5	359.4	314.4	276.2	246.7	226.3	212.5	204.9	199.2	192.9	183.3
55°	363.1	326.5	284.8	248.6	221.3	201.4	189.3	182.7	177.9	173.2	167.3
57.5°	319.9	291.2	254.3	221.1	196.0	177.8	166.6	160.2	156.5	154.0	150.6
60°	289.4	264.9	233.1	202.8	178.3	162.2	151.2	146.2	143.1	141.2	138.6
62.5°	261.1	241.0	211.5	183.9	162.5	147.3	137.4	132.6	129.7	128.7	126.6
65°	219.5	203.9	179.6	156.7	138.4	125.4	117.2	112.6	110.7	109.6	109.8
67.5°	178.4	169.0	149.4	129.9	115.3	104.4	97.8	94.3	93.3	91.9	91.9
70°	153.4	146.2	129.8	112.7	99.7	91.3	85.5	81.8	80.9	80.2	80.0
72.5°	131.3	125.0	110.7	97.1	85.4	78.0	73.2	71.0	69.5	69.1	69.0
75°	98.6	95.2	83.8	73.0	65.0	59.9	56.6	54.6	53.5	53.2	53.5
77.5°	70.1	67.1	59.9	52.2	47.1	43.3	40.5	39.8	38.6	38.6	38.4
80°	52.7	50.7	46.1	40.1	35.9	32.6	31.1	29.9	29.5	28.9	29.5
82.5°	38.2	36.0	33.0	29.1	25.6	23.7	22.2	21.8	21.5	21.3	21.4
85°	18.9	19.0	17.2	14.3	12.8	11.7	10.8	10.8	10.6	10.5	10.6
87.5°	7.9	7.4	6.7	6.1	5.1	4.5	4.1	4.0	3.8	3.9	4.3
90°	7.6	6.7	5.8	4.8	3.7	2.7	1.7	0.6	1.7	2.7	3.7
92.5°	20.4	19.3	18.1	17.2	16.4	15.7	15.0	14.3	15.0	15.7	16.4
95°	42.7	41.4	40.1	39.3	39.0	38.7	38.5	38.3	38.5	38.7	39.0
97.5°	68.5	66.7	64.9	63.9	63.8	63.7	63.6	63.5	63.6	63.7	63.8
100°	86.6	84.8	83.2	82.3	82.3	82.3	82.3	82.3	82.3	82.3	82.3
102.5°	107.1	106.2	105.4	104.6	104.1	103.6	103.1	102.6	103.1	103.6	104.1
105°	138.9	138.2	137.4	136.7	136.0	135.4	134.8	134.1	134.8	135.4	136.0
107.5°	173.3	172.8	172.1	171.5	170.9	170.2	169.5	168.9	169.5	170.2	170.9
110°	196.8	196.4	196.0	195.5	194.9	194.2	193.5	192.9	193.5	194.2	194.9



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	220.1	219.6	219.1	218.7	218.4	218.0	217.7	217.4	217.7	218.0	218.4
115°	256.4	256.2	256.0	255.6	255.0	254.5	254.0	253.5	254.0	254.5	255.0
117.5°	291.4	291.1	290.9	290.7	290.4	290.2	289.9	289.7	289.9	290.2	290.4
120°	315.5	315.4	315.3	314.9	314.3	313.5	312.9	312.3	312.9	313.5	314.3
122.5°	338.7	338.3	337.9	337.7	337.5	337.2	337.0	336.8	337.0	337.2	337.5
125°	373.8	373.6	373.5	373.0	372.2	371.5	370.7	369.9	370.7	371.5	372.2
127.5°	407.6	407.4	407.3	406.9	406.5	406.1	405.6	405.2	405.6	406.1	406.5
130°	429.9	429.7	429.4	429.0	428.3	427.7	427.0	426.4	427.0	427.7	428.3
132.5°	452.2	452.3	452.3	451.8	450.8	449.6	448.6	447.5	448.6	449.6	450.8
135°	484.9	484.7	484.7	484.2	483.4	482.6	481.8	481.0	481.8	482.6	483.4
137.5°	516.7	516.4	516.1	515.6	514.8	514.0	513.3	512.5	513.3	514.0	514.8
140°	536.7	536.3	535.9	535.4	534.7	534.1	533.5	532.8	533.5	534.1	534.7
142.5°	556.7	556.3	555.7	555.2	554.7	554.1	553.6	553.0	553.6	554.1	554.7
145°	586.1	585.7	585.3	584.9	584.3	583.8	583.3	582.8	583.3	583.8	584.3
147.5°	612.4	612.0	611.7	611.5	611.2	610.9	610.6	610.3	610.6	610.9	611.2
150°	629.4	628.8	628.4	628.1	628.3	628.4	628.5	628.7	628.5	628.4	628.3
152.5°	645.1	644.8	644.6	644.4	644.3	644.0	643.9	643.7	643.9	644.0	644.3
155°	667.2	667.1	666.9	666.9	666.9	666.9	666.9	666.9	666.9	666.9	666.9
157.5°	686.6	686.5	686.3	686.4	686.7	687.0	687.3	687.6	687.3	687.0	686.7
160°	698.4	698.2	698.1	698.2	698.6	699.0	699.4	699.8	699.4	699.0	698.6
162.5°	709.4	709.4	709.3	709.5	709.8	710.0	710.3	710.7	710.3	710.0	709.8
165°	724.2	724.1	724.0	724.1	724.3	724.6	724.8	725.1	724.8	724.6	724.3
167.5°	735.0	735.0	735.0	735.2	735.8	736.3	736.8	737.4	736.8	736.3	735.8
170°	741.6	741.6	741.6	741.8	742.4	742.8	743.4	743.9	743.4	742.8	742.4
172.5°	746.2	746.2	746.2	746.6	747.0	747.6	748.1	748.6	748.1	747.6	747.0
175°	751.5	751.5	751.5	751.8	752.3	752.9	753.4	753.9	753.4	752.9	752.3
177.5°	754.5	754.6	754.7	754.9	755.3	755.7	756.2	756.6	756.2	755.7	755.3
180°	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3
2.5°	423.8	422.2	420.9	418.0	416.3	414.2	412.4	414.3	412.3	413.1	411.8
5°	410.6	405.4	401.8	396.5	391.9	387.7	384.6	384.0	382.5	381.8	379.6
7.5°	394.7	388.2	382.0	375.0	369.2	363.2	359.4	356.2	354.2	351.4	349.5
10°	385.3	376.7	369.4	361.0	353.6	347.2	342.1	339.5	337.2	333.7	332.4
12.5°	373.8	364.9	355.9	346.9	339.8	332.7	328.4	324.5	322.8	318.9	318.5
15°	359.9	346.5	337.7	328.6	318.9	313.0	309.3	305.1	303.3	300.6	298.6
17.5°	343.3	331.4	320.4	310.9	302.6	297.7	293.1	290.3	287.1	285.3	282.0
20°	331.3	320.0	309.0	298.9	292.5	286.8	283.2	280.4	277.1	276.2	272.9
22.5°	321.2	308.7	298.2	289.7	282.7	276.3	272.4	270.5	268.2	265.4	264.7
25°	304.8	291.8	282.8	274.4	268.2	262.3	259.6	257.2	255.0	252.9	252.2
27.5°	290.6	278.9	268.3	260.7	255.2	249.9	247.6	244.6	243.0	241.4	239.4
30°	280.6	268.7	259.4	252.1	246.2	241.5	238.8	236.9	235.4	233.9	232.8
32.5°	270.4	259.4	250.3	243.1	237.3	233.7	231.4	230.0	228.4	226.6	225.2
35°	256.8	244.7	235.9	229.7	225.1	222.4	219.8	218.6	216.7	216.7	215.2
37.5°	241.5	231.1	223.3	217.7	213.6	211.1	208.3	207.5	206.3	205.5	205.0
40°	232.5	222.8	215.5	209.8	205.4	203.4	201.1	199.7	199.0	198.0	197.7
42.5°	223.1	213.8	206.8	201.6	197.7	196.1	194.0	193.0	191.5	190.3	190.0
45°	208.8	199.9	193.5	189.3	186.0	183.9	182.7	180.5	179.7	178.3	178.1
47.5°	195.4	186.7	180.5	177.0	174.1	172.5	170.5	168.3	167.4	166.7	166.6
50°	185.2	177.4	171.5	168.3	165.5	163.1	161.1	159.6	159.1	159.1	159.5
52.5°	175.0	168.3	163.3	159.3	156.7	154.2	152.3	151.4	150.6	151.5	152.1
55°	160.0	153.2	149.6	145.7	143.1	140.2	139.3	138.9	138.4	139.8	140.6
57.5°	144.1	139.3	135.1	131.3	129.0	127.2	126.0	125.8	126.8	127.5	129.9
60°	134.0	128.5	124.7	121.8	119.0	117.9	117.5	117.2	117.9	119.9	123.0
62.5°	122.9	118.4	114.2	112.1	110.0	108.2	108.1	108.4	109.8	112.2	115.3
65°	106.5	102.7	100.0	97.4	95.7	94.7	95.0	95.7	97.4	100.5	103.9
67.5°	89.9	87.3	84.8	82.8	81.2	81.2	81.6	82.7	84.6	88.2	91.3
70°	79.3	76.4	74.3	73.4	72.1	71.4	72.5	74.3	76.0	79.3	82.0
72.5°	68.6	66.1	64.5	63.8	63.3	62.7	63.1	65.1	67.3	70.6	73.8
75°	52.7	51.8	50.7	50.0	49.4	49.8	50.1	52.0	53.8	57.3	60.9
77.5°	38.5	37.5	36.8	36.7	36.4	36.6	37.6	39.0	40.7	43.3	46.0
80°	29.1	28.8	28.4	28.2	28.2	28.4	29.9	30.7	32.4	34.8	37.0
82.5°	21.2	21.0	20.9	20.8	21.0	21.1	21.9	23.1	24.5	26.3	28.2
85°	11.2	10.8	11.3	11.6	11.2	11.7	12.1	12.8	13.4	14.3	15.2
87.5°	4.6	5.1	5.1	5.5	5.6	6.1	6.1	6.8	7.3	7.7	7.6
90°	4.8	5.8	6.7	7.6	8.5	9.4	10.1	10.7	11.4	12.0	12.5
92.5°	17.2	18.1	19.3	20.4	21.5	22.6	23.4	24.3	25.2	26.1	26.6
95°	39.3	40.1	41.4	42.7	44.0	45.3	46.2	47.1	48.0	49.0	49.5
97.5°	63.9	64.9	66.7	68.5	70.3	72.1	73.0	73.8	74.7	75.6	76.0
100°	82.3	83.2	84.8	86.6	88.2	90.0	91.2	92.3	93.5	94.7	95.4
102.5°	104.6	105.4	106.2	107.1	107.9	108.8	110.1	111.4	112.6	113.9	114.7
105°	136.7	137.4	138.2	138.9	139.7	140.5	141.3	142.1	142.9	143.7	144.3
107.5°	171.5	172.1	172.8	173.3	174.0	174.5	174.9	175.3	175.7	176.1	176.3
110°	195.5	196.0	196.4	196.8	197.2	197.6	198.0	198.4	198.8	199.2	199.3



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	218.7	219.1	219.6	220.1	220.6	221.1	221.3	221.5	221.7	221.8	221.8
115°	255.6	256.0	256.2	256.4	256.7	257.0	256.8	256.7	256.6	256.4	256.4
117.5°	290.7	290.9	291.1	291.4	291.6	291.8	291.9	292.0	292.1	292.2	292.0
120°	314.9	315.3	315.4	315.5	315.7	315.8	315.8	315.8	315.8	315.8	315.5
122.5°	337.7	337.9	338.3	338.7	339.0	339.3	339.2	339.1	339.0	338.9	338.7
125°	373.0	373.5	373.6	373.8	373.9	374.0	373.8	373.5	373.2	373.0	372.8
127.5°	406.9	407.3	407.4	407.6	407.7	407.9	407.7	407.7	407.5	407.3	407.2
130°	429.0	429.4	429.7	429.9	430.2	430.5	430.3	430.2	430.1	429.9	429.8
132.5°	451.8	452.3	452.3	452.2	452.2	452.1	452.0	451.9	451.7	451.6	451.3
135°	484.2	484.7	484.7	484.9	485.1	485.1	485.1	485.1	485.1	485.1	484.9
137.5°	515.6	516.1	516.4	516.7	517.0	517.3	517.5	517.6	517.8	517.9	517.6
140°	535.4	535.9	536.3	536.7	537.1	537.5	537.7	538.1	538.3	538.5	538.4
142.5°	555.2	555.7	556.3	556.7	557.2	557.7	557.9	558.0	558.2	558.3	558.1
145°	584.9	585.3	585.7	586.1	586.5	586.9	586.9	586.9	586.9	586.9	586.7
147.5°	611.5	611.7	612.0	612.4	612.7	613.0	613.3	613.6	613.9	614.3	613.9
150°	628.1	628.4	628.8	629.4	629.9	630.4	630.4	630.4	630.4	630.4	630.3
152.5°	644.4	644.6	644.8	645.1	645.2	645.5	645.8	646.1	646.4	646.7	646.7
155°	666.9	666.9	667.1	667.2	667.3	667.5	668.0	668.5	669.0	669.6	669.5
157.5°	686.4	686.3	686.5	686.6	686.7	686.9	687.4	687.9	688.4	689.0	688.8
160°	698.2	698.1	698.2	698.4	698.5	698.6	699.2	699.7	700.2	700.7	700.7
162.5°	709.5	709.3	709.4	709.4	709.4	709.5	710.1	710.7	711.3	711.9	711.9
165°	724.1	724.0	724.1	724.2	724.4	724.5	725.0	725.6	726.1	726.6	726.4
167.5°	735.2	735.0	735.0	735.0	735.0	735.0	735.8	736.6	737.4	738.1	738.1
170°	741.8	741.6	741.6	741.6	741.6	741.6	742.4	743.1	743.9	744.7	744.7
172.5°	746.6	746.2	746.2	746.2	746.2	746.2	747.0	747.8	748.6	749.4	749.4
175°	751.8	751.5	751.5	751.5	751.5	751.5	752.3	753.1	753.9	754.7	754.6
177.5°	754.9	754.7	754.6	754.5	754.4	754.2	754.9	755.5	756.1	756.8	756.7
180°	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3
2.5°	410.9	411.9	411.1	412.3	411.1	411.9	410.9	411.8	413.1	412.3	414.3
5°	378.7	377.1	378.2	377.5	378.2	377.1	378.7	379.6	381.8	382.5	384.0
7.5°	349.0	347.5	345.6	344.8	345.6	347.5	349.0	349.5	351.4	354.2	356.2
10°	330.4	328.4	328.2	326.9	328.2	328.4	330.4	332.4	333.7	337.2	339.5
12.5°	316.8	314.9	312.8	312.3	312.8	314.9	316.8	318.5	318.9	322.8	324.5
15°	297.5	296.0	294.7	295.8	294.7	296.0	297.5	298.6	300.6	303.3	305.1
17.5°	281.4	280.2	280.0	278.6	280.0	280.2	281.4	282.0	285.3	287.1	290.3
20°	271.2	270.4	270.8	268.3	270.8	270.4	271.2	272.9	276.2	277.1	280.4
22.5°	263.2	261.4	261.2	260.7	261.2	261.4	263.2	264.7	265.4	268.2	270.5
25°	250.6	249.7	248.7	249.7	248.7	249.7	250.6	252.2	252.9	255.0	257.2
27.5°	239.6	238.4	238.2	238.4	238.2	238.4	239.6	239.4	241.4	243.0	244.6
30°	232.8	231.0	231.2	231.0	231.2	231.0	232.8	232.8	233.9	235.4	236.9
32.5°	225.5	224.3	224.0	223.7	224.0	224.3	225.5	225.2	226.6	228.4	230.0
35°	214.7	214.7	213.8	213.8	213.8	214.7	214.7	215.2	216.7	216.7	218.6
37.5°	204.5	204.4	203.8	203.9	203.8	204.4	204.5	205.0	205.5	206.3	207.5
40°	196.9	196.8	196.2	195.1	196.2	196.8	196.9	197.7	198.0	199.0	199.7
42.5°	189.6	189.0	188.8	188.4	188.8	189.0	189.6	190.0	190.3	191.5	193.0
45°	178.1	178.1	177.8	177.5	177.8	178.1	178.1	178.1	178.3	179.7	180.5
47.5°	166.9	167.2	167.9	167.8	167.9	167.2	166.9	166.6	166.7	167.4	168.3
50°	160.2	160.3	160.9	161.1	160.9	160.3	160.2	159.5	159.1	159.1	159.6
52.5°	152.7	153.8	154.5	154.3	154.5	153.8	152.7	152.1	151.5	150.6	151.4
55°	142.2	143.5	144.8	145.0	144.8	143.5	142.2	140.6	139.8	138.4	138.9
57.5°	131.9	133.6	135.0	135.5	135.0	133.6	131.9	129.9	127.5	126.8	125.8
60°	124.8	127.2	128.9	129.6	128.9	127.2	124.8	123.0	119.9	117.9	117.2
62.5°	118.1	120.8	122.4	122.6	122.4	120.8	118.1	115.3	112.2	109.8	108.4
65°	107.1	109.8	111.3	112.4	111.3	109.8	107.1	103.9	100.5	97.4	95.7
67.5°	95.2	98.0	99.6	100.4	99.6	98.0	95.2	91.3	88.2	84.6	82.7
70°	86.6	89.4	91.5	92.3	91.5	89.4	86.6	82.0	79.3	76.0	74.3
72.5°	78.1	80.6	82.3	83.2	82.3	80.6	78.1	73.8	70.6	67.3	65.1
75°	63.3	66.6	68.3	69.2	68.3	66.6	63.3	60.9	57.3	53.8	52.0
77.5°	48.8	51.8	52.8	53.3	52.8	51.8	48.8	46.0	43.3	40.7	39.0
80°	39.1	41.0	42.3	42.5	42.3	41.0	39.1	37.0	34.8	32.4	30.7
82.5°	30.1	31.6	32.0	32.5	32.0	31.6	30.1	28.2	26.3	24.5	23.1
85°	16.5	17.2	17.4	17.2	17.4	17.2	16.5	15.2	14.3	13.4	12.8
87.5°	8.0	7.9	8.0	8.4	8.0	7.9	8.0	7.6	7.7	7.3	6.8
90°	12.9	13.3	13.7	14.1	13.7	13.3	12.9	12.5	12.0	11.4	10.7
92.5°	26.9	27.2	27.5	27.7	27.5	27.2	26.9	26.6	26.1	25.2	24.3
95°	49.8	50.1	50.3	50.5	50.3	50.1	49.8	49.5	49.0	48.0	47.1
97.5°	76.2	76.4	76.5	76.7	76.5	76.4	76.2	76.0	75.6	74.7	73.8
100°	95.7	95.9	96.2	96.4	96.2	95.9	95.7	95.4	94.7	93.5	92.3
102.5°	115.1	115.5	115.8	116.2	115.8	115.5	115.1	114.7	113.9	112.6	111.4
105°	144.7	145.0	145.4	145.8	145.4	145.0	144.7	144.3	143.7	142.9	142.1
107.5°	176.3	176.3	176.2	176.2	176.2	176.3	176.3	176.3	176.1	175.7	175.3
110°	199.2	199.0	198.9	198.8	198.9	199.0	199.2	199.3	199.2	198.8	198.4



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	221.6	221.3	221.1	220.9	221.1	221.3	221.6	221.8	221.8	221.7	221.5
115°	256.2	256.1	256.0	255.8	256.0	256.1	256.2	256.4	256.4	256.6	256.7
117.5°	291.5	291.0	290.4	289.9	290.4	291.0	291.5	292.0	292.2	292.1	292.0
120°	315.1	314.5	313.9	313.5	313.9	314.5	315.1	315.5	315.8	315.8	315.8
122.5°	338.2	337.8	337.4	337.0	337.4	337.8	338.2	338.7	338.9	339.0	339.1
125°	372.6	372.5	372.4	372.2	372.4	372.5	372.6	372.8	373.0	373.2	373.5
127.5°	406.9	406.6	406.4	406.2	406.4	406.6	406.9	407.2	407.3	407.5	407.7
130°	429.5	429.2	429.0	428.7	429.0	429.2	429.5	429.8	429.9	430.1	430.2
132.5°	451.0	450.6	450.3	449.9	450.3	450.6	451.0	451.3	451.6	451.7	451.9
135°	484.3	483.9	483.3	482.8	483.3	483.9	484.3	484.9	485.1	485.1	485.1
137.5°	517.0	516.3	515.7	515.0	515.7	516.3	517.0	517.6	517.9	517.8	517.6
140°	537.7	537.0	536.4	535.8	536.4	537.0	537.7	538.4	538.5	538.3	538.1
142.5°	557.5	556.8	556.1	555.5	556.1	556.8	557.5	558.1	558.3	558.2	558.0
145°	586.3	585.9	585.5	585.1	585.5	585.9	586.3	586.7	586.9	586.9	586.9
147.5°	613.1	612.2	611.3	610.5	611.3	612.2	613.1	613.9	614.3	613.9	613.6
150°	630.0	629.8	629.5	629.2	629.5	629.8	630.0	630.3	630.4	630.4	630.4
152.5°	646.2	645.7	645.2	644.8	645.2	645.7	646.2	646.7	646.7	646.4	646.1
155°	668.8	668.2	667.5	666.9	667.5	668.2	668.8	669.5	669.6	669.0	668.5
157.5°	687.9	687.1	686.2	685.3	686.2	687.1	687.9	688.8	689.0	688.4	687.9
160°	700.0	699.3	698.7	698.1	698.7	699.3	700.0	700.7	700.7	700.2	699.7
162.5°	711.1	710.3	709.6	708.8	709.6	710.3	711.1	711.9	711.9	711.3	710.7
165°	725.7	724.9	724.1	723.3	724.1	724.9	725.7	726.4	726.6	726.1	725.6
167.5°	737.3	736.5	735.7	734.8	735.7	736.5	737.3	738.1	738.1	737.4	736.6
170°	743.7	742.8	741.9	741.0	741.9	742.8	743.7	744.7	744.7	743.9	743.1
172.5°	748.6	747.7	746.9	746.2	746.9	747.7	748.6	749.4	749.4	748.6	747.8
175°	753.7	752.8	751.9	751.0	751.9	752.8	753.7	754.6	754.7	753.9	753.1
177.5°	756.0	755.3	754.6	753.8	754.6	755.3	756.0	756.7	756.8	756.1	755.5
180°	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3
2.5°	412.4	414.2	416.3	418.0	420.9	422.2	423.8	425.1	427.5	429.7	432.3
5°	384.6	387.7	391.9	396.5	401.8	405.4	410.6	413.7	419.9	425.6	431.1
7.5°	359.4	363.2	369.2	375.0	382.0	388.2	394.7	401.8	409.7	419.1	426.9
10°	342.1	347.2	353.6	361.0	369.4	376.7	385.3	393.0	402.7	413.7	424.0
12.5°	328.4	332.7	339.8	346.9	355.9	364.9	373.8	383.9	395.2	407.4	420.3
15°	309.3	313.0	318.9	328.6	337.7	346.5	359.9	369.4	383.7	397.2	412.8
17.5°	293.1	297.7	302.6	310.9	320.4	331.4	343.3	355.3	369.0	386.2	403.7
20°	283.2	286.8	292.5	298.9	309.0	320.0	331.3	343.4	360.2	378.0	396.9
22.5°	272.4	276.3	282.7	289.7	298.2	308.7	321.2	334.5	352.0	369.5	390.0
25°	259.6	262.3	268.2	274.4	282.8	291.8	304.8	319.4	336.8	356.8	377.6
27.5°	247.6	249.9	255.2	260.7	268.3	278.9	290.6	305.4	321.8	342.0	365.1
30°	238.8	241.5	246.2	252.1	259.4	268.7	280.6	294.5	312.1	331.8	356.0
32.5°	231.4	233.7	237.3	243.1	250.3	259.4	270.4	284.6	302.1	322.2	345.9
35°	219.8	222.4	225.1	229.7	235.9	244.7	256.8	270.2	287.0	306.4	328.2
37.5°	208.3	211.1	213.6	217.7	223.3	231.1	241.5	255.5	270.7	289.4	310.3
40°	201.1	203.4	205.4	209.8	215.5	222.8	232.5	244.9	261.0	278.5	295.8
42.5°	194.0	196.1	197.7	201.6	206.8	213.8	223.1	235.3	250.2	266.4	281.8
45°	182.7	183.9	186.0	189.3	193.5	199.9	208.8	219.7	232.3	247.6	259.2
47.5°	170.5	172.5	174.1	177.0	180.5	186.7	195.4	204.5	216.0	227.4	235.5
50°	161.1	163.1	165.5	168.3	171.5	177.4	185.2	194.6	204.3	213.1	220.0
52.5°	152.3	154.2	156.7	159.3	163.3	168.3	175.0	183.3	192.9	199.2	204.9
55°	139.3	140.2	143.1	145.7	149.6	153.2	160.0	167.3	173.2	177.9	182.7
57.5°	126.0	127.2	129.0	131.3	135.1	139.3	144.1	150.6	154.0	156.5	160.2
60°	117.5	117.9	119.0	121.8	124.7	128.5	134.0	138.6	141.2	143.1	146.2
62.5°	108.1	108.2	110.0	112.1	114.2	118.4	122.9	126.6	128.7	129.7	132.6
65°	95.0	94.7	95.7	97.4	100.0	102.7	106.5	109.8	109.6	110.7	112.6
67.5°	81.6	81.2	81.2	82.8	84.8	87.3	89.9	91.9	91.9	93.3	94.3
70°	72.5	71.4	72.1	73.4	74.3	76.4	79.3	80.0	80.2	80.9	81.8
72.5°	63.1	62.7	63.3	63.8	64.5	66.1	68.6	69.0	69.1	69.5	71.0
75°	50.1	49.8	49.4	50.0	50.7	51.8	52.7	53.5	53.2	53.5	54.6
77.5°	37.6	36.6	36.4	36.7	36.8	37.5	38.5	38.4	38.6	38.6	39.8
80°	29.9	28.4	28.2	28.2	28.4	28.8	29.1	29.5	28.9	29.5	29.9
82.5°	21.9	21.1	21.0	20.8	20.9	21.0	21.2	21.4	21.3	21.5	21.8
85°	12.1	11.7	11.2	11.6	11.3	10.8	11.2	10.6	10.5	10.6	10.8
87.5°	6.1	6.1	5.6	5.5	5.1	5.1	4.6	4.3	3.9	3.8	4.0
90°	10.1	9.4	8.5	7.6	6.7	5.8	4.8	3.7	2.7	1.7	0.6
92.5°	23.4	22.6	21.5	20.4	19.3	18.1	17.2	16.4	15.7	15.0	14.3
95°	46.2	45.3	44.0	42.7	41.4	40.1	39.3	39.0	38.7	38.5	38.3
97.5°	73.0	72.1	70.3	68.5	66.7	64.9	63.9	63.8	63.7	63.6	63.5
100°	91.2	90.0	88.2	86.6	84.8	83.2	82.3	82.3	82.3	82.3	82.3
102.5°	110.1	108.8	107.9	107.1	106.2	105.4	104.6	104.1	103.6	103.1	102.6
105°	141.3	140.5	139.7	138.9	138.2	137.4	136.7	136.0	135.4	134.8	134.1
107.5°	174.9	174.5	174.0	173.3	172.8	172.1	171.5	170.9	170.2	169.5	168.9
110°	198.0	197.6	197.2	196.8	196.4	196.0	195.5	194.9	194.2	193.5	192.9



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	221.3	221.1	220.6	220.1	219.6	219.1	218.7	218.4	218.0	217.7	217.4
115°	256.8	257.0	256.7	256.4	256.2	256.0	255.6	255.0	254.5	254.0	253.5
117.5°	291.9	291.8	291.6	291.4	291.1	290.9	290.7	290.4	290.2	289.9	289.7
120°	315.8	315.8	315.7	315.5	315.4	315.3	314.9	314.3	313.5	312.9	312.3
122.5°	339.2	339.3	339.0	338.7	338.3	337.9	337.7	337.5	337.2	337.0	336.8
125°	373.8	374.0	373.9	373.8	373.6	373.5	373.0	372.2	371.5	370.7	369.9
127.5°	407.7	407.9	407.7	407.6	407.4	407.3	406.9	406.5	406.1	405.6	405.2
130°	430.3	430.5	430.2	429.9	429.7	429.4	429.0	428.3	427.7	427.0	426.4
132.5°	452.0	452.1	452.2	452.2	452.3	452.3	451.8	450.8	449.6	448.6	447.5
135°	485.1	485.1	485.1	484.9	484.7	484.7	484.2	483.4	482.6	481.8	481.0
137.5°	517.5	517.3	517.0	516.7	516.4	516.1	515.6	514.8	514.0	513.3	512.5
140°	537.7	537.5	537.1	536.7	536.3	535.9	535.4	534.7	534.1	533.5	532.8
142.5°	557.9	557.7	557.2	556.7	556.3	555.7	555.2	554.7	554.1	553.6	553.0
145°	586.9	586.9	586.5	586.1	585.7	585.3	584.9	584.3	583.8	583.3	582.8
147.5°	613.3	613.0	612.7	612.4	612.0	611.7	611.5	611.2	610.9	610.6	610.3
150°	630.4	630.4	629.9	629.4	628.8	628.4	628.1	628.3	628.4	628.5	628.7
152.5°	645.8	645.5	645.2	645.1	644.8	644.6	644.4	644.3	644.0	643.9	643.7
155°	668.0	667.5	667.3	667.2	667.1	666.9	666.9	666.9	666.9	666.9	666.9
157.5°	687.4	686.9	686.7	686.6	686.5	686.3	686.4	686.7	687.0	687.3	687.6
160°	699.2	698.6	698.5	698.4	698.2	698.1	698.2	698.6	699.0	699.4	699.8
162.5°	710.1	709.5	709.4	709.4	709.4	709.3	709.5	709.8	710.0	710.3	710.7
165°	725.0	724.5	724.4	724.2	724.1	724.0	724.1	724.3	724.6	724.8	725.1
167.5°	735.8	735.0	735.0	735.0	735.0	735.0	735.2	735.8	736.3	736.8	737.4
170°	742.4	741.6	741.6	741.6	741.6	741.6	741.8	742.4	742.8	743.4	743.9
172.5°	747.0	746.2	746.2	746.2	746.2	746.2	746.6	747.0	747.6	748.1	748.6
175°	752.3	751.5	751.5	751.5	751.5	751.5	751.8	752.3	752.9	753.4	753.9
177.5°	754.9	754.2	754.4	754.5	754.6	754.7	754.9	755.3	755.7	756.2	756.6
180°	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3	431.3
2.5°	433.6	435.6	437.0	439.4	441.5	442.7	443.7	444.6	445.6	446.5	449.0
5°	436.4	441.2	445.2	451.4	457.1	461.4	466.2	470.4	473.9	478.9	482.7
7.5°	435.1	443.6	452.5	462.2	472.0	481.1	489.6	497.4	504.5	513.2	520.8
10°	434.0	445.5	456.9	469.9	483.2	494.6	505.2	516.0	523.9	534.9	544.2
12.5°	433.2	446.7	460.4	476.0	490.7	506.8	520.9	528.8	540.7	549.5	560.6
15°	429.4	447.3	466.2	483.8	504.7	519.5	532.0	547.3	558.5	569.7	581.7
17.5°	422.8	443.1	464.2	487.3	507.2	523.2	539.2	554.1	567.4	582.3	597.4
20°	419.7	440.1	464.2	487.8	507.4	524.0	540.5	556.8	571.5	590.7	608.1
22.5°	413.3	437.8	460.1	483.2	503.3	521.4	540.1	558.6	578.1	599.8	621.5
25°	401.8	426.7	450.3	473.0	493.3	516.0	536.0	560.7	585.6	614.3	641.4
27.5°	389.8	413.7	435.3	457.2	480.9	506.7	532.5	560.5	593.2	629.5	667.7
30°	380.2	402.7	423.7	446.2	471.0	499.9	528.3	561.6	599.3	640.1	685.6
32.5°	368.9	389.7	410.1	434.0	460.9	491.4	524.5	561.0	606.3	652.7	699.4
35°	349.6	367.0	388.1	413.5	443.9	478.9	517.1	560.3	612.3	665.6	704.9
37.5°	326.8	342.9	365.1	393.0	424.8	462.4	507.8	559.0	614.3	656.7	669.4
40°	311.3	326.4	349.4	378.3	410.9	450.7	500.4	554.6	608.1	635.2	624.7
42.5°	294.9	310.7	333.2	361.8	396.9	440.1	491.2	545.4	590.3	600.5	564.4
45°	269.1	285.3	307.5	336.4	374.1	421.0	474.3	523.6	549.3	530.8	475.0
47.5°	245.0	260.3	280.8	310.7	349.6	398.1	449.3	488.6	490.7	446.6	386.9
50°	228.6	242.7	263.4	293.3	331.8	381.0	427.2	458.2	444.3	394.3	337.0
52.5°	212.5	226.3	246.7	276.2	314.4	359.4	402.5	424.2	398.0	346.7	297.8
55°	189.3	201.4	221.3	248.6	284.8	326.5	363.1	370.7	336.6	286.1	246.4
57.5°	166.6	177.8	196.0	221.1	254.3	291.2	319.9	318.2	282.3	238.9	207.4
60°	151.2	162.2	178.3	202.8	233.1	264.9	289.4	283.5	247.9	210.5	183.9
62.5°	137.4	147.3	162.5	183.9	211.5	241.0	261.1	252.5	217.5	184.9	163.9
65°	117.2	125.4	138.4	156.7	179.6	203.9	219.5	208.3	178.5	153.0	136.2
67.5°	97.8	104.4	115.3	129.9	149.4	169.0	178.4	167.2	143.3	124.8	112.3
70°	85.5	91.3	99.7	112.7	129.8	146.2	153.4	143.3	122.8	106.9	97.9
72.5°	73.2	78.0	85.4	97.1	110.7	125.0	131.3	121.7	104.8	91.3	83.0
75°	56.6	59.9	65.0	73.0	83.8	95.2	98.6	90.2	79.5	69.4	63.8
77.5°	40.5	43.3	47.1	52.2	59.9	67.1	70.1	65.3	57.0	50.5	46.0
80°	31.1	32.6	35.9	40.1	46.1	50.7	52.7	49.6	43.7	39.0	35.5
82.5°	22.2	23.7	25.6	29.1	33.0	36.0	38.2	36.1	31.9	28.1	26.1
85°	10.8	11.7	12.8	14.3	17.2	19.0	18.9	17.6	15.9	14.5	13.4
87.5°	4.1	4.5	5.1	6.1	6.7	7.4	7.9	7.8	7.4	7.1	6.8
90°	1.7	2.7	3.7	4.8	5.8	6.7	7.6	8.5	9.4	10.1	10.7
92.5°	15.0	15.7	16.4	17.2	18.1	19.3	20.4	21.5	22.6	23.4	24.3
95°	38.5	38.7	39.0	39.3	40.1	41.4	42.7	44.0	45.3	46.2	47.1
97.5°	63.6	63.7	63.8	63.9	64.9	66.7	68.5	70.3	72.1	73.0	73.8
100°	82.3	82.3	82.3	82.3	83.2	84.8	86.6	88.2	90.0	91.2	92.3
102.5°	103.1	103.6	104.1	104.6	105.4	106.2	107.1	107.9	108.8	110.1	111.4
105°	134.8	135.4	136.0	136.7	137.4	138.2	138.9	139.7	140.5	141.3	142.1
107.5°	169.5	170.2	170.9	171.5	172.1	172.8	173.3	174.0	174.5	174.9	175.3
110°	193.5	194.2	194.9	195.5	196.0	196.4	196.8	197.2	197.6	198.0	198.4



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	217.7	218.0	218.4	218.7	219.1	219.6	220.1	220.6	221.1	221.3	221.5
115°	254.0	254.5	255.0	255.6	256.0	256.2	256.4	256.7	257.0	256.8	256.7
117.5°	289.9	290.2	290.4	290.7	290.9	291.1	291.4	291.6	291.8	291.9	292.0
120°	312.9	313.5	314.3	314.9	315.3	315.4	315.5	315.7	315.8	315.8	315.8
122.5°	337.0	337.2	337.5	337.7	337.9	338.3	338.7	339.0	339.3	339.2	339.1
125°	370.7	371.5	372.2	373.0	373.5	373.6	373.8	373.9	374.0	373.8	373.5
127.5°	405.6	406.1	406.5	406.9	407.3	407.4	407.6	407.7	407.9	407.7	407.7
130°	427.0	427.7	428.3	429.0	429.4	429.7	429.9	430.2	430.5	430.3	430.2
132.5°	448.6	449.6	450.8	451.8	452.3	452.3	452.2	452.2	452.1	452.0	451.9
135°	481.8	482.6	483.4	484.2	484.7	484.7	484.9	485.1	485.1	485.1	485.1
137.5°	513.3	514.0	514.8	515.6	516.1	516.4	516.7	517.0	517.3	517.5	517.6
140°	533.5	534.1	534.7	535.4	535.9	536.3	536.7	537.1	537.5	537.7	538.1
142.5°	553.6	554.1	554.7	555.2	555.7	556.3	556.7	557.2	557.7	557.9	558.0
145°	583.3	583.8	584.3	584.9	585.3	585.7	586.1	586.5	586.9	586.9	586.9
147.5°	610.6	610.9	611.2	611.5	611.7	612.0	612.4	612.7	613.0	613.3	613.6
150°	628.5	628.4	628.3	628.1	628.4	628.8	629.4	629.9	630.4	630.4	630.4
152.5°	643.9	644.0	644.3	644.4	644.6	644.8	645.1	645.2	645.5	645.8	646.1
155°	666.9	666.9	666.9	666.9	666.9	667.1	667.2	667.3	667.5	668.0	668.5
157.5°	687.3	687.0	686.7	686.4	686.3	686.5	686.6	686.7	686.9	687.4	687.9
160°	699.4	699.0	698.6	698.2	698.1	698.2	698.4	698.5	698.6	699.2	699.7
162.5°	710.3	710.0	709.8	709.5	709.3	709.4	709.4	709.4	709.5	710.1	710.7
165°	724.8	724.6	724.3	724.1	724.0	724.1	724.2	724.4	724.5	725.0	725.6
167.5°	736.8	736.3	735.8	735.2	735.0	735.0	735.0	735.0	735.0	735.8	736.6
170°	743.4	742.8	742.4	741.8	741.6	741.6	741.6	741.6	741.6	742.4	743.1
172.5°	748.1	747.6	747.0	746.6	746.2	746.2	746.2	746.2	746.2	747.0	747.8
175°	753.4	752.9	752.3	751.8	751.5	751.5	751.5	751.5	751.5	752.3	753.1
177.5°	756.2	755.7	755.3	754.9	754.7	754.6	754.5	754.4	754.2	754.9	755.5
180°	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	431.3	431.3	431.3	431.3	431.3	431.3	431.3
2.5°	451.1	452.2	454.7	453.8	455.0	455.6	456.1
5°	487.4	493.3	495.9	495.5	499.4	498.4	497.5
7.5°	528.6	534.7	538.2	542.5	544.9	545.2	547.3
10°	551.9	559.9	563.2	567.8	570.8	572.4	572.2
12.5°	569.7	576.1	583.4	585.7	589.6	591.8	591.0
15°	591.3	601.3	609.0	612.8	617.8	619.2	621.2
17.5°	610.5	623.9	632.9	644.8	649.4	652.1	650.5
20°	625.0	642.7	651.6	665.9	673.8	678.0	676.5
22.5°	642.1	661.3	677.9	690.2	702.2	707.9	709.1
25°	671.5	697.8	722.2	738.4	753.2	756.7	764.4
27.5°	704.3	735.3	761.4	778.5	788.8	792.7	795.1
30°	724.8	755.8	775.4	786.4	789.6	789.3	788.9
32.5°	735.0	754.3	758.1	755.0	747.5	741.1	734.4
35°	720.6	706.2	684.6	656.8	636.3	615.6	613.5
37.5°	648.2	601.9	565.9	525.8	502.6	488.3	478.4
40°	579.9	527.4	483.8	450.0	426.4	417.0	407.8
42.5°	505.8	455.6	417.0	388.7	371.0	360.6	353.4
45°	410.9	366.6	336.4	315.9	301.8	293.8	289.2
47.5°	336.8	304.0	278.3	263.5	253.8	247.6	247.6
50°	296.9	265.6	248.6	236.9	228.5	223.5	224.4
52.5°	261.6	238.2	223.7	213.9	207.6	204.6	204.5
55°	218.7	201.9	192.4	185.2	181.0	177.5	178.3
57.5°	187.1	172.9	166.5	160.6	157.6	156.3	154.2
60°	167.5	156.5	151.0	146.2	143.3	142.2	140.2
62.5°	150.0	141.4	136.1	132.2	129.6	129.2	127.6
65°	126.1	119.5	114.8	113.0	110.2	109.5	109.5
67.5°	103.9	99.3	95.5	93.9	92.7	92.8	92.0
70°	90.1	86.2	83.8	82.0	81.1	81.3	80.6
72.5°	78.8	74.5	72.4	71.3	70.1	70.6	70.3
75°	59.7	57.5	56.4	55.3	54.6	54.2	53.8
77.5°	43.8	41.9	41.0	40.4	40.6	39.6	40.3
80°	33.8	32.2	31.7	30.7	30.6	30.6	30.4
82.5°	24.8	23.8	23.4	22.7	22.3	22.7	22.2
85°	12.8	12.1	11.9	11.9	11.6	11.2	12.1
87.5°	7.0	6.5	6.6	6.6	6.7	6.6	6.3
90°	11.4	12.0	12.5	12.9	13.3	13.7	14.1
92.5°	25.2	26.1	26.6	26.9	27.2	27.5	27.7
95°	48.0	49.0	49.5	49.8	50.1	50.3	50.5
97.5°	74.7	75.6	76.0	76.2	76.4	76.5	76.7
100°	93.5	94.7	95.4	95.7	95.9	96.2	96.4
102.5°	112.6	113.9	114.7	115.1	115.5	115.8	116.2
105°	142.9	143.7	144.3	144.7	145.0	145.4	145.8
107.5°	175.7	176.1	176.3	176.3	176.3	176.2	176.2
110°	198.8	199.2	199.3	199.2	199.0	198.9	198.8



TEST NUMBER: P333347-927

CATALOG NUMBER: S125DIW-S375D770U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	221.7	221.8	221.8	221.6	221.3	221.1	220.9
115°	256.6	256.4	256.4	256.2	256.1	256.0	255.8
117.5°	292.1	292.2	292.0	291.5	291.0	290.4	289.9
120°	315.8	315.8	315.5	315.1	314.5	313.9	313.5
122.5°	339.0	338.9	338.7	338.2	337.8	337.4	337.0
125°	373.2	373.0	372.8	372.6	372.5	372.4	372.2
127.5°	407.5	407.3	407.2	406.9	406.6	406.4	406.2
130°	430.1	429.9	429.8	429.5	429.2	429.0	428.7
132.5°	451.7	451.6	451.3	451.0	450.6	450.3	449.9
135°	485.1	485.1	484.9	484.3	483.9	483.3	482.8
137.5°	517.8	517.9	517.6	517.0	516.3	515.7	515.0
140°	538.3	538.5	538.4	537.7	537.0	536.4	535.8
142.5°	558.2	558.3	558.1	557.5	556.8	556.1	555.5
145°	586.9	586.9	586.7	586.3	585.9	585.5	585.1
147.5°	613.9	614.3	613.9	613.1	612.2	611.3	610.5
150°	630.4	630.4	630.3	630.0	629.8	629.5	629.2
152.5°	646.4	646.7	646.7	646.2	645.7	645.2	644.8
155°	669.0	669.6	669.5	668.8	668.2	667.5	666.9
157.5°	688.4	689.0	688.8	687.9	687.1	686.2	685.3
160°	700.2	700.7	700.7	700.0	699.3	698.7	698.1
162.5°	711.3	711.9	711.9	711.1	710.3	709.6	708.8
165°	726.1	726.6	726.4	725.7	724.9	724.1	723.3
167.5°	737.4	738.1	738.1	737.3	736.5	735.7	734.8
170°	743.9	744.7	744.7	743.7	742.8	741.9	741.0
172.5°	748.6	749.4	749.4	748.6	747.7	746.9	746.2
175°	753.9	754.7	754.6	753.7	752.8	751.9	751.0
177.5°	756.1	756.8	756.7	756.0	755.3	754.6	753.8
180°	755.7	755.7	755.7	755.7	755.7	755.7	755.7

(END OF REPORT)