

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333386-927

Luminaire Tested: **S125DIW-S610D1050U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333386-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S610D1050U927-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5300.9 lumens
Efficiency: N/A
Efficacy: 117.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333386-927

CATALOG NUMBER: S125DIW-S610D1050U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

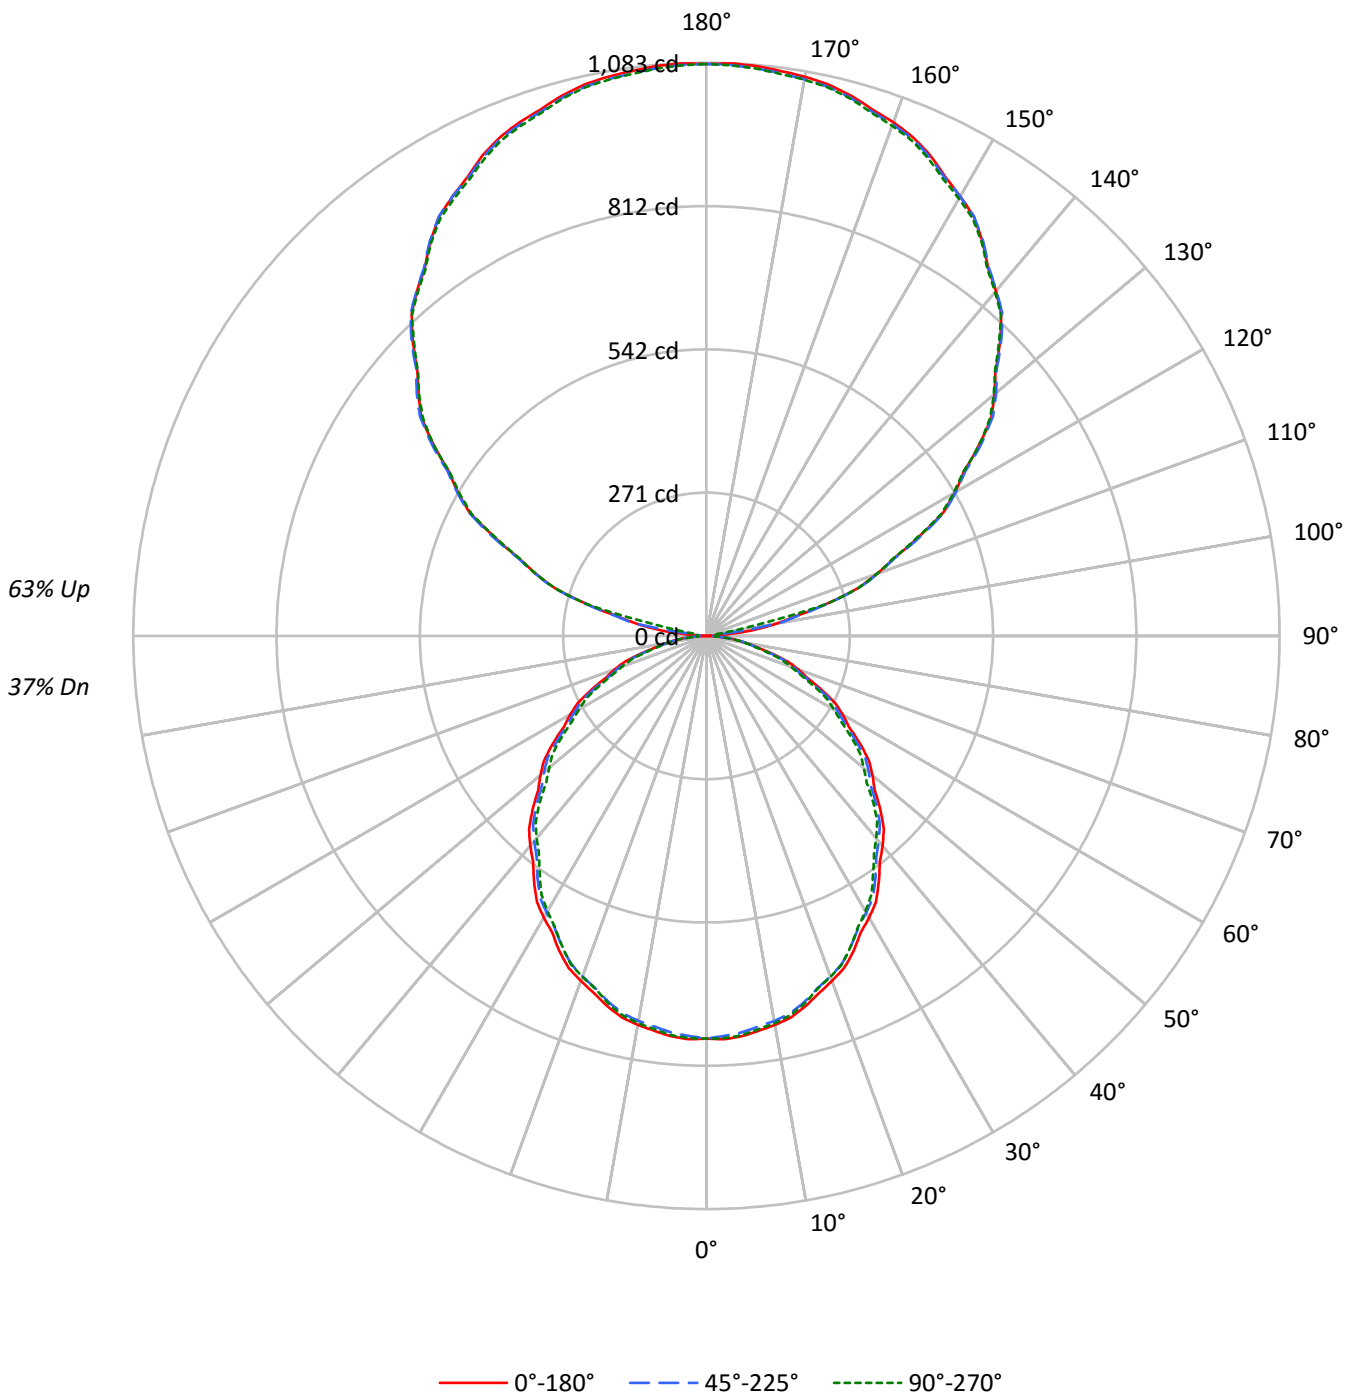



TEST NUMBER: P333386-927

CATALOG NUMBER: S125DIW-S610D1050U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45	37
1	95	91	87	83	86	82	79	76	67	64	62	52	51	50	39	38	37	31
2	86	79	73	68	78	72	67	62	58	55	52	46	44	41	35	33	32	26
3	79	69	62	57	71	63	57	52	51	47	43	41	38	35	31	29	27	22
4	72	61	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	25	22	20	17
6	61	49	41	35	55	45	38	33	37	31	28	29	25	23	22	20	18	15
7	56	44	36	31	51	40	33	29	33	28	24	27	23	20	20	18	16	13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	19	16	14	11
9	48	36	29	24	44	33	27	22	28	23	19	22	19	16	17	15	13	10
10	45	33	26	21	41	31	24	20	25	21	17	21	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4914	4914	4914
5°	4924	4877	4909
10°	4894	4844	4871
15°	4841	4785	4805
20°	4766	4704	4712
25°	4684	4606	4603
30°	4583	4502	4480
35°	4475	4389	4328
40°	4364	4268	4207
45°	4244	4156	4074
50°	4112	4022	3900
55°	3985	3869	3762
60°	3834	3716	3584
65°	3651	3533	3412
70°	3478	3320	3206
75°	3169	3064	2959
80°	2819	2775	2708
85°	2453	2497	2364



TEST NUMBER: P333386-927

CATALOG NUMBER: S125DIW-S610D1050U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	71.7	1.4
10°-20°	202.6	3.8
20°-30°	299.2	5.6
30°-40°	349.1	6.6
40°-50°	350.6	6.6
50°-60°	307.8	5.8
60°-70°	229.3	4.3
70°-80°	131.1	2.5
80°-90°	40.4	0.8
90°-100°	39.3	0.7
100°-110°	242.1	4.6
110°-120°	439.0	8.3
120°-130°	563.4	10.6
130°-140°	606.0	11.4
140°-150°	568.8	10.7
150°-160°	460.1	8.7
160°-170°	297.6	5.6
170°-180°	102.6	1.9
0°-30°	573.6	10.8
0°-40°	922.7	17.4
0°-60°	1581.1	29.8
0°-90°	1981.9	37.4
90°-120°	720.3	13.6
90°-150°	2458.6	46.4
90°-180°	3319.0	62.6
0°-180°	5300.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	761	761	761	761	761	
5°	760	758	752	757	757	72
15°	724	722	716	719	719	204
25°	657	654	646	648	646	302
35°	568	565	557	554	549	355
45°	465	462	455	448	446	358
55°	354	352	344	338	334	316
65°	239	237	231	226	223	237
75°	127	126	123	121	119	135
85°	33	34	34	33	32	37
90°	1	7	13	17	19	4
95°	46	42	13	17	17	58
105°	236	239	239	239	238	250
115°	442	446	447	444	439	438
125°	629	634	634	631	629	562
135°	784	789	788	786	781	604
145°	909	911	911	911	907	568
155°	1002	997	998	1000	994	461
165°	1057	1052	1053	1057	1051	298
175°	1081	1076	1077	1082	1076	103
180°	1081	1081	1081	1081	1081	



TEST NUMBER: P333386-927

CATALOG NUMBER: S125DIW-S610D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8
2.5°	762.7	762.4	762.1	761.8	761.4	760.7	759.7	758.6	757.6	756.5	757.6
5°	759.6	759.3	759.1	758.8	758.5	757.7	756.4	755.0	753.7	752.3	753.6
7.5°	752.6	752.3	752.1	751.8	751.5	750.7	749.2	747.7	746.2	744.8	745.9
10°	746.3	746.1	745.8	745.5	745.3	744.4	742.9	741.5	740.0	738.6	739.6
12.5°	738.6	738.2	737.7	737.2	736.7	735.8	734.4	733.1	731.7	730.3	731.2
15°	724.1	723.7	723.3	722.9	722.5	721.5	720.1	718.6	717.1	715.7	716.3
17.5°	707.3	706.8	706.2	705.6	705.0	703.9	702.4	700.8	699.3	697.8	698.6
20°	693.4	693.1	692.8	692.6	692.3	691.3	689.6	687.9	686.1	684.4	685.3
22.5°	679.4	678.9	678.4	677.9	677.5	676.4	674.8	673.2	671.5	669.9	670.5
25°	657.3	656.6	655.9	655.3	654.6	653.4	651.6	649.9	648.2	646.4	646.7
27.5°	631.4	631.0	630.6	630.2	629.8	628.7	626.9	625.1	623.3	621.5	621.5
30°	614.5	614.1	613.7	613.3	612.9	611.7	609.7	607.7	605.7	603.7	603.4
32.5°	596.2	595.6	595.0	594.4	593.7	592.6	590.8	589.0	587.2	585.4	584.9
35°	567.6	567.0	566.5	566.0	565.5	564.3	562.4	560.5	558.6	556.7	556.1
37.5°	537.8	537.2	536.5	535.8	535.2	533.9	532.2	530.4	528.6	526.9	525.9
40°	517.6	517.0	516.3	515.6	514.9	513.7	511.8	509.9	508.0	506.2	505.0
42.5°	496.0	495.4	494.8	494.2	493.7	492.5	490.6	488.8	486.9	485.0	483.9
45°	464.7	464.1	463.6	463.0	462.6	461.4	459.9	458.3	456.6	455.0	453.4
47.5°	430.9	430.9	431.0	431.0	431.0	430.1	428.2	426.3	424.4	422.4	420.8
50°	409.3	408.8	408.4	408.1	407.7	406.7	405.0	403.5	401.9	400.3	398.5
52.5°	387.1	386.8	386.6	386.3	386.0	384.9	383.3	381.5	379.9	378.1	376.6
55°	353.9	353.5	353.1	352.7	352.3	351.2	349.3	347.5	345.5	343.6	342.5
57.5°	318.9	318.7	318.5	318.2	318.1	317.1	315.5	313.9	312.4	310.9	309.3
60°	296.8	296.2	295.6	295.1	294.6	293.6	292.2	290.7	289.1	287.7	286.4
62.5°	273.6	273.2	272.7	272.4	271.9	271.1	269.8	268.5	267.3	266.0	264.6
65°	238.9	238.7	238.4	238.1	237.9	237.0	235.5	234.1	232.6	231.2	229.9
67.5°	205.3	204.8	204.2	203.7	203.1	202.3	201.2	200.1	199.0	197.9	196.9
70°	184.2	183.5	182.8	182.2	181.5	180.5	179.4	178.2	177.0	175.8	174.9
72.5°	161.1	160.6	160.2	159.7	159.2	158.6	157.9	157.1	156.3	155.5	154.6
75°	127.0	126.7	126.4	126.2	126.0	125.5	124.8	124.1	123.4	122.8	122.4
77.5°	95.6	95.5	95.4	95.2	95.1	94.9	94.5	94.2	93.8	93.4	93.2
80°	75.8	75.8	75.8	75.8	75.8	75.7	75.4	75.2	74.9	74.6	74.5
82.5°	58.5	58.3	58.1	57.8	57.7	57.5	57.4	57.4	57.4	57.3	57.0
85°	33.1	33.3	33.4	33.5	33.7	33.7	33.7	33.7	33.7	33.7	33.6
87.5°	13.2	13.5	13.7	14.0	14.3	14.5	14.7	14.8	15.0	15.1	15.3
90°	0.8	2.2	3.6	5.1	6.5	7.8	9.1	10.3	11.6	12.8	13.7
92.5°	12.4	11.3	10.4	9.3	8.3	8.4	9.5	10.6	11.7	12.8	13.7
95°	45.6	45.2	44.6	44.0	43.6	39.8	33.1	26.4	19.6	12.8	13.7
97.5°	95.4	96.3	97.3	98.2	99.2	93.0	79.6	66.2	52.8	39.5	34.4
100°	133.8	134.4	134.8	135.4	135.9	136.6	137.3	138.0	138.7	139.4	112.9
102.5°	172.9	173.6	174.3	174.9	175.6	176.2	176.6	177.0	177.4	177.8	172.9
105°	235.5	236.2	236.9	237.7	238.4	238.8	238.8	238.8	238.8	238.8	238.8
107.5°	300.6	300.6	300.6	300.6	300.6	300.8	301.1	301.5	301.8	302.2	302.2
110°	342.9	342.9	342.9	342.9	342.9	343.1	343.4	343.8	344.1	344.5	344.0



TEST NUMBER: P333386-927

CATALOG NUMBER: S125DIW-S610D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	382.6	383.1	383.5	383.9	384.4	384.7	384.9	385.1	385.3	385.6	384.8
115°	442.3	443.1	444.0	444.9	445.8	446.3	446.6	446.7	446.9	447.0	446.3
117.5°	504.0	503.9	503.9	503.8	503.8	504.1	504.8	505.5	506.1	506.8	505.9
120°	542.4	542.2	542.0	541.9	541.7	541.9	542.4	543.0	543.4	544.0	543.7
122.5°	576.4	577.0	577.7	578.4	579.1	579.6	579.8	580.0	580.3	580.5	580.2
125°	628.9	630.2	631.4	632.6	633.9	634.5	634.5	634.5	634.5	634.5	633.8
127.5°	679.1	680.0	680.9	681.8	682.6	683.0	682.9	682.9	682.7	682.6	682.2
130°	709.9	710.7	711.6	712.5	713.4	713.9	714.2	714.3	714.5	714.6	714.2
132.5°	740.6	741.6	742.7	743.7	744.7	745.0	744.7	744.3	743.9	743.5	743.4
135°	784.3	785.4	786.5	787.6	788.6	789.0	788.6	788.3	787.9	787.6	787.2
137.5°	824.6	825.5	826.4	827.4	828.3	828.6	828.3	828.0	827.6	827.3	827.4
140°	850.9	851.2	851.6	851.9	852.3	852.4	852.2	852.0	851.8	851.7	852.0
142.5°	874.6	874.8	875.0	875.2	875.4	875.7	875.9	876.2	876.4	876.6	876.7
145°	909.3	909.7	910.1	910.5	910.8	910.9	910.9	910.9	910.9	910.9	911.2
147.5°	939.8	939.8	939.7	939.6	939.5	939.6	939.8	940.0	940.2	940.4	940.6
150°	959.0	958.7	958.3	958.0	957.6	957.6	958.0	958.3	958.7	959.0	959.4
152.5°	977.6	976.8	976.0	975.3	974.5	974.3	974.6	975.0	975.3	975.7	976.0
155°	1001.5	1000.4	999.3	998.3	997.2	996.9	997.2	997.6	997.9	998.3	998.8
157.5°	1019.9	1019.3	1018.7	1018.0	1017.3	1017.1	1017.1	1017.1	1017.2	1017.2	1017.8
160°	1032.8	1031.7	1030.6	1029.5	1028.5	1028.0	1028.2	1028.4	1028.6	1028.7	1029.4
162.5°	1043.0	1042.0	1040.8	1039.8	1038.7	1038.2	1038.5	1038.6	1038.8	1038.9	1040.0
165°	1056.8	1055.7	1054.6	1053.6	1052.5	1052.0	1052.3	1052.4	1052.6	1052.7	1053.8
167.5°	1067.0	1066.0	1064.9	1063.7	1062.6	1062.2	1062.3	1062.5	1062.7	1062.9	1064.1
170°	1072.8	1071.6	1070.3	1069.1	1067.8	1067.3	1067.5	1067.6	1067.8	1068.0	1069.4
172.5°	1076.7	1075.4	1074.1	1072.9	1071.7	1071.2	1071.5	1071.8	1072.1	1072.5	1073.7
175°	1080.8	1079.7	1078.6	1077.6	1076.5	1076.1	1076.3	1076.4	1076.7	1076.8	1078.2
177.5°	1082.8	1081.9	1081.0	1080.1	1079.3	1079.0	1079.1	1079.3	1079.3	1079.5	1080.5
180°	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8



TEST NUMBER: P333386-927

CATALOG NUMBER: S125DIW-S610D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8
2.5°	758.6	759.7	760.7	761.2	761.1	761.0	760.9	760.8
5°	754.8	756.0	757.2	757.7	757.6	757.5	757.3	757.2
7.5°	747.1	748.3	749.5	750.0	749.9	749.7	749.6	749.5
10°	740.7	741.7	742.8	743.3	743.1	743.0	742.8	742.8
12.5°	732.1	732.9	733.7	734.2	734.1	734.1	734.1	734.0
15°	717.0	717.6	718.4	718.7	718.7	718.7	718.7	718.7
17.5°	699.5	700.3	701.2	701.2	700.5	699.9	699.3	698.5
20°	686.2	687.1	688.1	688.2	687.5	686.9	686.2	685.6
22.5°	671.1	671.8	672.4	672.5	672.0	671.5	671.1	670.7
25°	647.0	647.2	647.5	647.5	647.1	646.7	646.3	645.9
27.5°	621.6	621.7	621.7	621.5	621.2	620.8	620.4	620.0
30°	603.2	602.9	602.6	602.3	601.9	601.5	601.1	600.7
32.5°	584.5	583.9	583.4	582.9	582.2	581.5	580.7	580.0
35°	555.4	554.8	554.1	553.2	552.2	551.0	550.0	548.9
37.5°	524.9	523.9	522.9	522.1	521.5	520.9	520.3	519.7
40°	503.7	502.6	501.4	500.6	500.2	499.8	499.4	499.0
42.5°	482.8	481.7	480.6	479.7	479.1	478.6	477.9	477.3
45°	451.8	450.2	448.6	447.6	447.2	446.8	446.4	446.0
47.5°	419.1	417.5	415.9	414.6	413.7	412.7	411.8	410.8
50°	396.8	395.1	393.3	392.0	391.0	390.1	389.1	388.2
52.5°	375.0	373.5	372.0	370.7	369.7	368.6	367.6	366.5
55°	341.3	340.1	338.9	337.8	336.8	335.9	335.0	334.1
57.5°	307.7	306.2	304.6	303.6	303.1	302.5	302.1	301.6
60°	285.0	283.7	282.3	281.2	280.3	279.3	278.4	277.5
62.5°	263.2	261.7	260.2	259.2	258.5	257.7	257.0	256.3
65°	228.7	227.5	226.3	225.5	224.9	224.3	223.9	223.3
67.5°	195.9	194.9	193.8	193.1	192.8	192.5	192.2	191.9
70°	174.1	173.3	172.5	171.9	171.3	170.8	170.2	169.8
72.5°	153.7	152.8	151.9	151.1	150.6	150.1	149.6	149.0
75°	122.0	121.6	121.2	120.7	120.2	119.6	119.1	118.6
77.5°	92.9	92.7	92.4	92.1	91.7	91.4	91.0	90.6
80°	74.4	74.2	74.1	73.9	73.6	73.4	73.1	72.8
82.5°	56.8	56.6	56.3	56.2	56.2	56.1	56.0	56.0
85°	33.4	33.3	33.2	33.0	32.7	32.4	32.2	31.9
87.5°	15.4	15.6	15.8	15.8	15.7	15.6	15.5	15.4
90°	14.6	15.5	16.4	17.1	17.7	18.1	18.7	19.3
92.5°	14.6	15.5	16.4	17.0	17.2	17.4	17.7	18.0
95°	14.6	15.5	16.4	16.8	16.8	16.8	16.8	16.8
97.5°	29.4	24.3	19.3	16.8	16.8	16.8	16.8	16.8
100°	86.3	59.8	33.3	19.6	18.9	18.2	17.5	16.8
102.5°	167.8	162.8	157.8	149.2	137.1	125.0	112.9	100.8
105°	238.8	238.8	238.8	238.7	238.5	238.3	238.1	238.0
107.5°	302.3	302.3	302.4	302.1	301.6	301.0	300.5	300.0
110°	343.4	342.9	342.4	342.2	342.4	342.5	342.7	342.9



TEST NUMBER: P333386-927

CATALOG NUMBER: S125DIW-S610D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	384.2	383.5	382.9	382.4	382.1	381.8	381.6	381.4
115°	445.6	444.9	444.2	443.3	442.3	441.2	440.1	439.0
117.5°	505.0	504.1	503.1	502.4	502.0	501.5	501.1	500.6
120°	543.3	543.0	542.6	541.9	541.1	540.2	539.3	538.4
122.5°	579.8	579.5	579.1	578.5	577.4	576.4	575.4	574.3
125°	633.1	632.4	631.7	631.1	630.6	630.0	629.5	628.9
127.5°	681.8	681.4	681.0	680.2	678.9	677.6	676.2	674.9
130°	713.6	713.0	712.5	711.8	710.9	710.0	709.2	708.3
132.5°	743.3	743.1	743.1	742.6	741.7	740.8	739.9	739.0
135°	786.9	786.5	786.2	785.4	784.3	783.3	782.2	781.2
137.5°	827.4	827.5	827.6	827.2	826.2	825.3	824.4	823.5
140°	852.4	852.7	853.1	852.7	851.7	850.6	849.5	848.4
142.5°	876.8	876.9	876.9	876.5	875.4	874.3	873.2	872.2
145°	911.3	911.5	911.6	911.2	910.1	909.1	908.0	907.0
147.5°	940.9	941.1	941.3	940.8	939.4	938.2	936.9	935.6
150°	959.7	960.1	960.4	959.9	958.5	957.0	955.6	954.2
152.5°	976.4	976.8	977.1	976.7	975.3	974.1	972.8	971.5
155°	999.3	999.9	1000.4	1000.0	998.5	997.1	995.7	994.3
157.5°	1018.4	1018.9	1019.5	1019.1	1017.6	1016.2	1014.8	1013.4
160°	1030.2	1030.9	1031.6	1031.2	1029.8	1028.4	1027.0	1025.6
162.5°	1041.0	1042.0	1043.0	1042.7	1041.1	1039.6	1038.0	1036.4
165°	1054.9	1056.0	1057.0	1056.9	1055.4	1054.0	1052.6	1051.1
167.5°	1065.4	1066.7	1068.0	1067.9	1066.2	1064.6	1063.0	1061.4
170°	1070.9	1072.3	1073.7	1073.6	1072.0	1070.4	1068.8	1067.1
172.5°	1075.1	1076.3	1077.6	1077.4	1075.9	1074.2	1072.6	1071.0
175°	1079.7	1081.1	1082.5	1082.4	1080.8	1079.2	1077.6	1076.0
177.5°	1081.5	1082.5	1083.5	1083.5	1082.3	1081.2	1080.1	1078.9
180°	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8

(END OF REPORT)