

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333424-927

Luminaire Tested: **S125DIW-S850D1560U927-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333424-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S850D1560U927-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7678.1 lumens
Efficiency: N/A
Efficacy: 112.7 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

Luminous Intensity Polar Plot

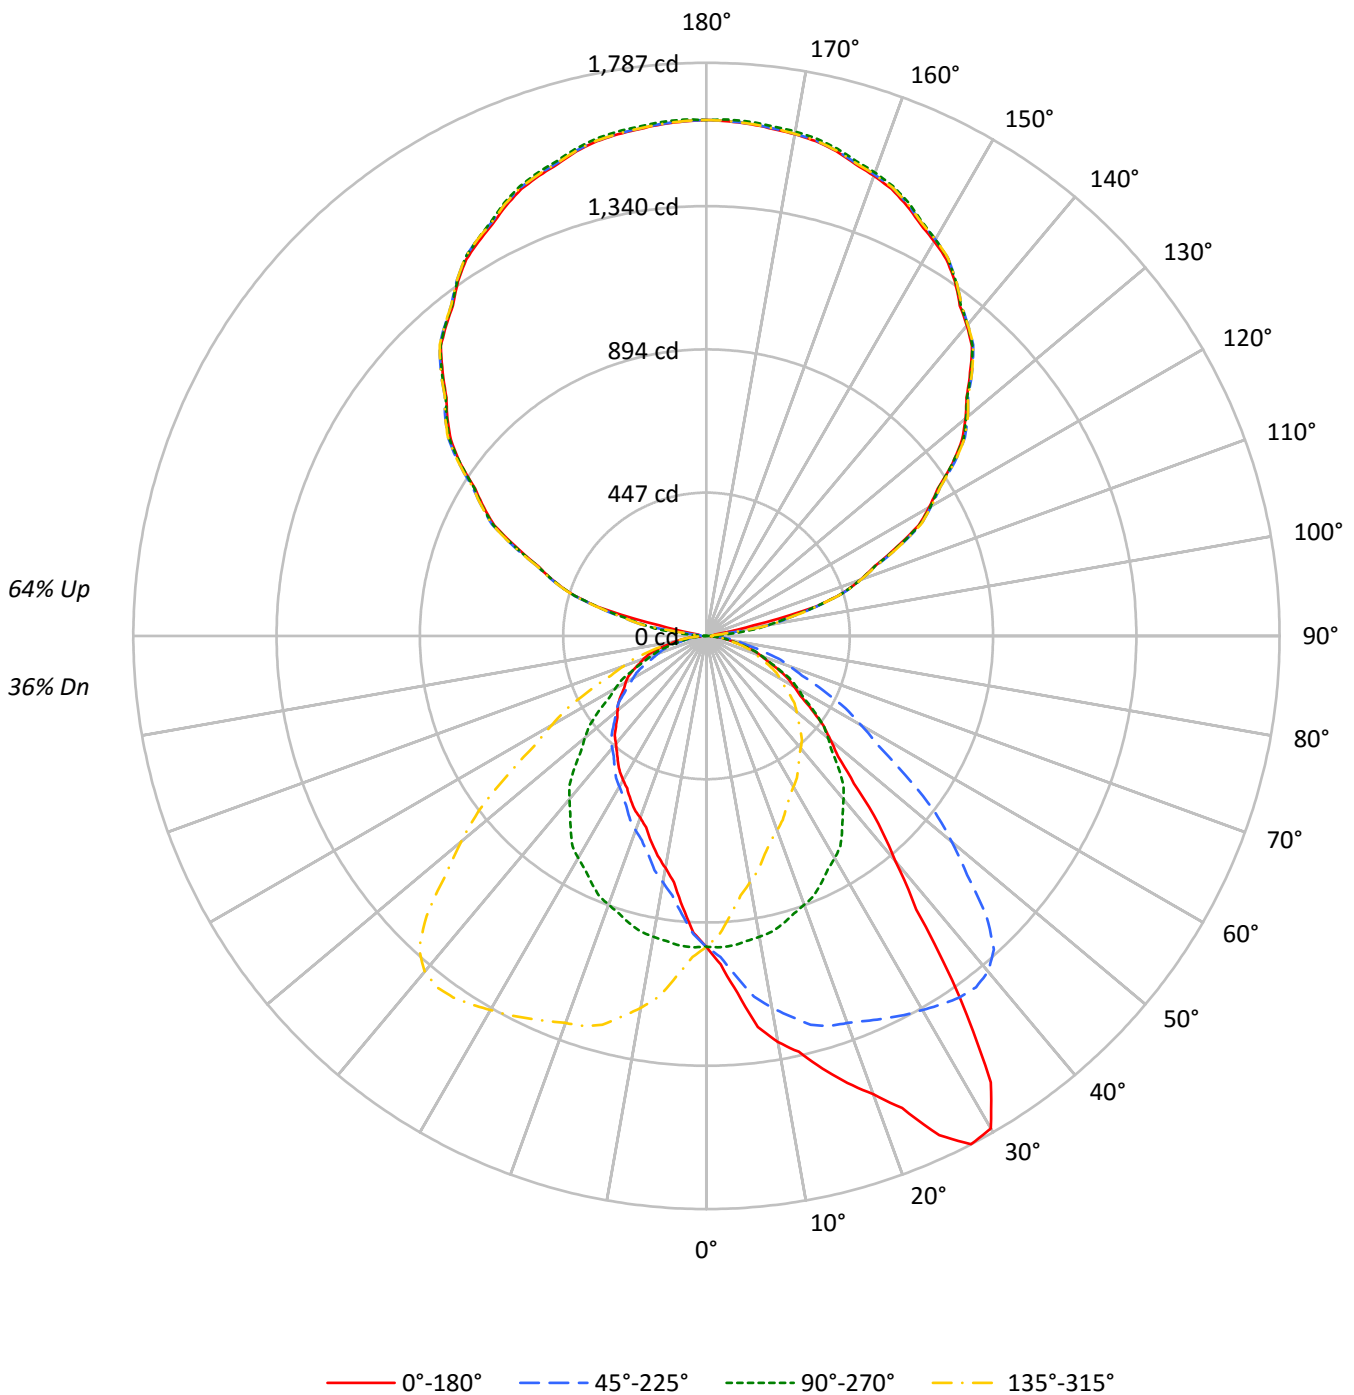



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43	36
1	95	91	87	83	86	82	79	76	66	64	62	52	50	49	38	37	37	30
2	86	79	73	68	78	72	67	63	58	55	52	45	43	41	34	32	31	26
3	79	70	63	57	71	63	57	52	51	47	43	40	37	35	30	28	27	22
4	72	62	54	48	65	56	50	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	24	22	20	16
6	61	49	41	36	55	45	38	33	37	32	28	29	25	23	22	20	18	14
7	56	44	37	31	51	40	34	29	33	28	24	26	23	20	20	18	16	13
8	52	40	33	27	47	37	30	25	30	25	22	24	20	18	18	16	14	11
9	48	37	29	24	44	33	27	23	28	23	19	22	18	16	17	14	13	10
10	45	33	26	22	41	31	24	20	25	21	17	20	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	6259	6259	6259	6259
5°	7248	6280	5499	6280
10°	8433	6248	4818	6248
15°	9335	6202	4444	6202
20°	10449	6129	4144	6129
25°	12241	6047	3998	6047
30°	13221	5967	3871	5967
35°	10871	5815	3788	5815
40°	7727	5604	3697	5604
45°	5936	5320	3644	5320
50°	5067	4967	3636	4967
55°	4512	4622	3668	4622
60°	4070	4246	3761	4246
65°	3759	3865	3859	3865
70°	3418	3473	3914	3473
75°	3019	3059	3880	3059
80°	2540	2492	3552	2492
85°	2016	1793	2868	1793



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	93.3	1.2
10°-20°	277.8	3.6
20°-30°	451.1	5.9
30°-40°	550.2	7.2
40°-50°	500.5	6.5
50°-60°	398.7	5.2
60°-70°	277.7	3.6
70°-80°	148.1	1.9
80°-90°	40.7	0.5
90°-100°	58.5	0.8
100°-110°	360.3	4.7
110°-120°	653.4	8.5
120°-130°	838.6	10.9
130°-140°	902.0	11.7
140°-150°	846.7	11.0
150°-160°	684.9	8.9
160°-170°	442.9	5.8
170°-180°	152.8	2.0
0°-30°	822.1	10.7
0°-40°	1372.3	17.9
0°-60°	2271.6	29.6
0°-90°	2738.0	35.7
90°-120°	1072.2	14.0
90°-150°	3659.5	47.7
90°-180°	4940.0	64.3
0°-180°	7678.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	969	969	969	969	969	
5°	1118	969	848	969	1118	113
15°	1396	928	665	928	1396	400
25°	1718	849	561	849	1718	785
35°	1379	738	480	738	1379	844
45°	650	582	399	582	650	520
55°	401	410	326	410	401	361
65°	246	253	252	253	246	244
75°	121	123	156	123	121	130
85°	27	24	39	24	27	32
90°	29	1	29	1	29	13
95°	25	68	25	68	25	21
105°	354	351	354	351	354	320
115°	654	658	654	658	654	649
125°	936	936	936	936	936	833
135°	1163	1167	1163	1167	1163	897
145°	1350	1354	1350	1354	1350	843
155°	1480	1491	1480	1491	1480	682
165°	1565	1573	1565	1573	1565	442
175°	1602	1609	1602	1609	1602	152
180°	1609	1609	1609	1609	1609	



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	1025.1	1023.7	1022.5	1019.8	1021.8	1016.2	1013.5	1008.9	1003.4	1001.4	999.1
5°	1118.0	1120.1	1122.1	1113.5	1114.4	1108.6	1095.4	1084.7	1076.1	1065.0	1057.2
7.5°	1229.9	1225.0	1224.6	1219.1	1209.4	1201.7	1187.9	1170.3	1153.3	1133.9	1117.8
10°	1285.9	1286.3	1282.5	1276.0	1265.7	1258.3	1240.2	1222.9	1202.0	1177.3	1159.6
12.5°	1328.0	1329.7	1325.0	1316.1	1311.1	1294.5	1280.3	1259.8	1234.9	1215.1	1188.2
15°	1396.1	1391.5	1388.3	1377.2	1368.6	1351.3	1328.6	1307.3	1280.1	1255.0	1229.9
17.5°	1461.7	1465.4	1459.2	1449.1	1422.3	1402.1	1371.7	1342.4	1308.7	1275.0	1245.1
20°	1520.4	1523.6	1514.2	1496.5	1464.4	1444.2	1404.3	1366.5	1327.4	1284.2	1251.3
22.5°	1593.4	1590.8	1578.0	1551.1	1523.3	1486.1	1442.8	1396.8	1347.8	1299.0	1255.3
25°	1717.8	1700.5	1692.7	1659.4	1622.8	1568.0	1508.8	1441.4	1380.5	1315.9	1260.0
27.5°	1786.7	1781.3	1772.6	1749.4	1710.9	1652.4	1582.5	1500.3	1414.4	1332.9	1259.7
30°	1772.9	1773.7	1774.6	1767.1	1742.5	1698.4	1629.0	1540.5	1438.4	1346.7	1262.0
32.5°	1650.5	1665.5	1679.7	1696.7	1703.6	1695.2	1651.6	1571.8	1466.8	1362.6	1260.7
35°	1378.8	1383.4	1429.8	1475.9	1538.4	1587.0	1619.5	1584.1	1495.6	1375.9	1259.1
37.5°	1075.1	1097.3	1129.5	1181.5	1271.8	1352.6	1456.5	1504.3	1475.8	1380.3	1256.2
40°	916.5	937.1	958.0	1011.1	1087.2	1185.1	1303.1	1403.9	1427.4	1366.5	1246.3
42.5°	794.1	810.3	833.6	873.5	937.2	1023.8	1136.6	1268.4	1349.4	1326.4	1225.7
45°	649.9	660.2	678.3	710.0	756.1	823.9	923.4	1067.5	1192.9	1234.5	1176.5
47.5°	556.3	556.2	570.3	592.2	625.4	683.1	756.7	869.5	1003.5	1102.6	1098.0
50°	504.3	502.2	513.3	532.3	558.6	596.8	667.2	757.2	886.1	998.3	1029.6
52.5°	459.5	459.8	466.6	480.6	502.6	535.4	587.9	669.1	779.1	894.4	953.2
55°	400.7	399.0	406.8	416.3	432.3	453.7	491.5	553.7	642.9	756.5	833.0
57.5°	346.7	351.2	354.3	360.9	374.2	388.6	420.5	466.0	536.9	634.3	715.2
60°	315.1	319.6	322.1	328.7	339.4	351.7	376.4	413.4	473.0	557.0	637.2
62.5°	286.8	290.3	291.1	297.1	305.8	317.8	337.2	368.3	415.4	488.9	567.4
65°	246.0	246.0	247.6	253.8	257.9	268.6	283.4	306.0	343.9	401.1	468.1
67.5°	206.7	208.7	208.2	211.0	214.8	223.0	233.6	252.3	280.4	322.1	375.7
70°	181.0	182.6	182.2	184.3	188.4	193.8	202.4	220.1	240.2	276.0	322.1
72.5°	158.0	158.6	157.6	160.3	162.7	167.4	177.1	186.5	205.3	235.5	273.4
75°	121.0	121.8	122.6	124.2	126.7	129.1	134.1	143.5	155.9	178.6	202.8
77.5°	90.6	89.1	91.1	90.9	92.2	94.1	98.5	103.5	113.6	127.9	146.7
80°	68.3	68.7	68.7	69.1	71.1	72.4	76.1	79.8	87.6	98.3	111.5
82.5°	49.8	50.9	50.3	51.0	52.8	53.6	55.7	58.7	63.3	71.7	81.2
85°	27.2	25.1	25.9	26.8	26.8	27.2	28.8	30.0	32.5	35.8	39.5
87.5°	13.6	14.1	14.3	14.1	14.3	14.1	15.1	14.9	15.6	16.3	17.3
90°	28.6	27.8	27.0	26.2	25.4	24.4	23.1	21.7	20.4	19.1	17.2
92.5°	26.7	26.4	26.0	25.6	25.2	24.4	23.1	21.7	20.4	19.1	17.4
95°	25.0	25.0	25.0	25.0	25.0	24.4	23.1	21.7	20.4	19.1	29.2
97.5°	25.0	25.0	25.0	25.0	25.0	28.8	36.3	43.7	51.2	58.7	78.6
100°	25.0	26.1	27.2	28.2	29.3	49.6	89.0	128.5	168.0	207.5	206.4
102.5°	150.0	168.0	186.1	204.1	222.1	234.9	242.3	249.8	257.3	264.7	264.1
105°	354.2	354.4	354.7	355.0	355.2	355.4	355.4	355.4	355.4	355.4	355.4
107.5°	446.5	447.3	448.1	448.9	449.6	450.0	450.0	450.0	449.9	449.8	449.3
110°	510.4	510.2	509.8	509.6	509.4	509.6	510.4	511.2	512.0	512.8	512.2



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	567.6	568.0	568.4	568.8	569.1	569.8	570.8	571.8	572.8	573.9	573.5
115°	653.5	655.1	656.6	658.3	659.9	661.2	662.3	663.3	664.3	665.4	665.2
117.5°	745.0	745.8	746.5	747.2	747.8	748.8	750.3	751.6	753.0	754.4	753.4
120°	801.4	802.7	804.0	805.3	806.7	807.6	808.1	808.7	809.2	809.7	808.9
122.5°	854.8	856.3	857.9	859.4	860.9	862.0	862.5	863.0	863.6	864.1	863.7
125°	936.1	936.9	937.7	938.5	939.3	940.2	941.3	942.4	943.4	944.4	944.4
127.5°	1004.6	1006.5	1008.5	1010.4	1012.4	1013.7	1014.3	1014.9	1015.4	1016.1	1016.2
130°	1054.2	1055.5	1056.9	1058.2	1059.5	1060.6	1061.4	1062.2	1063.0	1063.7	1063.4
132.5°	1099.9	1101.3	1102.6	1104.0	1105.3	1106.0	1106.2	1106.4	1106.5	1106.7	1107.2
135°	1162.7	1164.3	1165.9	1167.4	1169.0	1170.1	1170.7	1171.2	1171.7	1172.3	1172.7
137.5°	1225.7	1227.0	1228.4	1229.8	1231.2	1231.8	1231.7	1231.6	1231.5	1231.4	1231.8
140°	1262.9	1264.5	1266.1	1267.7	1269.2	1269.8	1269.2	1268.7	1268.2	1267.7	1267.9
142.5°	1298.1	1299.7	1301.3	1302.9	1304.6	1305.3	1305.2	1305.0	1305.0	1304.9	1304.5
145°	1350.0	1351.5	1353.1	1354.7	1356.3	1356.9	1356.7	1356.5	1356.1	1355.9	1355.9
147.5°	1392.7	1394.6	1396.5	1398.4	1400.3	1401.1	1400.7	1400.4	1400.1	1399.8	1399.5
150°	1420.3	1422.4	1424.5	1426.6	1428.8	1429.6	1429.0	1428.5	1428.0	1427.4	1426.9
152.5°	1446.0	1448.0	1449.9	1451.8	1453.7	1454.4	1453.8	1453.3	1452.8	1452.2	1451.8
155°	1479.9	1482.0	1484.2	1486.3	1488.4	1489.1	1488.3	1487.5	1486.7	1485.9	1485.3
157.5°	1508.3	1510.4	1512.5	1514.7	1516.8	1517.4	1516.6	1515.7	1514.9	1514.0	1513.9
160°	1526.5	1528.5	1530.7	1532.8	1534.9	1535.4	1534.4	1533.3	1532.2	1531.2	1530.9
162.5°	1542.6	1545.0	1547.3	1549.7	1552.0	1552.4	1550.9	1549.4	1547.9	1546.4	1546.2
165°	1564.6	1566.7	1568.8	1571.0	1573.0	1573.4	1571.8	1570.1	1568.5	1566.9	1566.7
167.5°	1579.8	1582.2	1584.6	1587.0	1589.4	1589.6	1587.7	1585.8	1583.9	1582.0	1581.8
170°	1588.4	1590.8	1593.2	1595.6	1598.0	1598.1	1596.0	1593.9	1591.7	1589.6	1589.4
172.5°	1594.2	1596.6	1598.9	1601.3	1603.7	1603.9	1602.0	1600.1	1598.2	1596.3	1595.9
175°	1601.6	1603.9	1606.3	1608.7	1611.1	1611.2	1609.1	1606.9	1604.9	1602.7	1602.5
177.5°	1605.8	1607.5	1609.2	1610.9	1612.6	1612.7	1611.2	1609.8	1608.3	1606.8	1606.5
180°	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	997.1	994.8	992.1	987.5	982.0	979.0	974.4	971.5	965.5	960.6	955.3
5°	1047.7	1037.0	1027.1	1014.4	1000.4	991.3	980.6	968.7	956.4	943.6	929.6
7.5°	1100.1	1081.2	1060.6	1038.5	1016.8	997.0	977.9	959.3	941.8	920.8	902.9
10°	1135.3	1111.4	1085.9	1055.9	1026.7	1001.2	975.3	952.7	929.6	905.0	883.1
12.5°	1170.5	1138.8	1102.7	1069.8	1034.6	1003.9	973.4	944.4	915.5	888.2	862.8
15°	1195.4	1167.4	1134.1	1087.2	1047.7	1005.4	965.0	927.6	892.6	862.2	830.1
17.5°	1211.7	1175.7	1140.0	1095.0	1043.1	995.8	950.1	907.3	867.8	829.3	798.4
20°	1214.7	1177.7	1140.3	1096.2	1043.1	988.9	943.3	891.8	849.5	809.5	771.7
22.5°	1213.7	1171.8	1131.0	1085.7	1034.0	984.0	928.8	876.3	830.4	791.1	751.6
25°	1204.4	1159.6	1108.6	1063.0	1011.9	958.9	902.9	848.6	801.7	756.9	717.8
27.5°	1196.7	1138.5	1080.8	1027.5	978.3	929.6	876.1	820.5	768.5	723.0	686.2
30°	1187.2	1123.4	1058.4	1002.8	952.3	905.0	854.4	800.1	745.8	701.3	661.9
32.5°	1178.6	1104.3	1035.7	975.3	921.6	875.7	829.0	777.4	724.1	679.0	639.4
35°	1162.1	1076.1	997.5	929.2	872.0	824.7	785.7	737.5	688.6	645.0	607.1
37.5°	1141.1	1039.0	954.7	883.1	820.5	770.6	734.3	697.3	650.3	608.3	574.1
40°	1124.6	1012.7	923.4	850.2	785.3	733.4	699.7	664.7	625.7	586.6	550.4
42.5°	1103.9	989.0	891.9	813.1	748.7	698.2	662.8	633.1	598.7	562.2	528.6
45°	1065.8	946.1	840.8	756.1	691.0	641.3	604.7	582.5	556.6	522.0	493.6
47.5°	1009.8	894.5	785.6	698.2	631.1	584.9	550.6	529.3	511.0	485.4	459.6
50°	960.0	856.0	745.8	658.9	591.9	545.4	513.8	494.4	478.8	459.1	437.3
52.5°	904.4	807.6	706.6	620.8	554.4	508.6	477.6	460.6	447.6	433.4	411.9
55°	816.1	733.9	640.1	558.6	497.3	452.5	425.3	410.5	399.8	389.1	376.0
57.5°	718.7	654.4	571.3	496.9	440.5	399.7	374.3	359.9	351.6	346.1	338.3
60°	650.3	595.2	523.6	455.7	400.7	364.5	339.8	328.7	321.7	317.1	311.4
62.5°	586.8	541.6	475.2	413.3	365.1	330.9	308.9	298.1	291.4	289.1	284.4
65°	493.2	458.3	403.5	352.1	311.0	281.8	263.2	252.9	248.8	246.4	246.8
67.5°	401.0	379.7	335.7	291.9	259.0	234.6	219.8	211.8	209.8	206.5	206.4
70°	344.7	328.7	291.7	253.4	224.2	205.3	192.1	183.9	181.8	180.1	179.7
72.5°	295.0	281.0	248.8	218.2	191.9	175.3	164.5	159.5	156.1	155.2	155.1
75°	221.7	213.9	188.4	164.1	146.0	134.5	127.1	122.6	120.1	119.7	120.1
77.5°	157.6	150.8	134.6	117.4	106.0	97.3	91.0	89.4	86.7	86.7	86.3
80°	118.4	113.9	103.7	90.1	80.6	73.2	69.9	67.0	66.2	65.0	66.2
82.5°	85.9	81.0	74.1	65.4	57.6	53.2	49.8	49.0	48.5	47.8	48.2
85°	42.4	42.8	38.7	32.1	28.8	26.3	24.2	24.2	23.8	23.4	23.8
87.5°	17.6	16.6	14.8	13.5	11.4	10.0	9.2	9.1	8.6	8.6	9.4
90°	15.4	13.5	11.6	9.7	7.5	5.5	3.3	1.2	3.3	5.5	7.5
92.5°	15.8	14.2	12.5	12.4	13.9	15.4	16.9	18.4	16.9	15.4	13.9
95°	39.2	49.3	59.3	64.8	65.6	66.4	67.2	68.0	67.2	66.4	65.6
97.5°	98.5	118.4	138.4	147.7	146.2	144.7	143.3	141.9	143.3	144.7	146.2
100°	205.4	204.3	203.3	202.3	201.5	200.7	199.9	199.2	199.9	200.7	201.5
102.5°	263.5	262.8	262.2	261.3	260.4	259.4	258.3	257.4	258.3	259.4	260.4
105°	355.4	355.4	355.4	354.8	353.8	352.8	351.6	350.6	351.6	352.8	353.8
107.5°	448.8	448.2	447.7	447.4	447.4	447.4	447.4	447.4	447.4	447.4	447.4
110°	511.7	511.2	510.6	510.4	510.4	510.4	510.4	510.4	510.4	510.4	510.4



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	573.2	572.9	572.6	572.1	571.5	570.8	570.2	569.6	570.2	570.8	571.5
115°	664.9	664.6	664.3	663.5	662.3	660.9	659.6	658.3	659.6	660.9	662.3
117.5°	752.3	751.4	750.4	749.9	750.0	750.0	750.0	750.1	750.0	750.0	750.0
120°	808.1	807.3	806.5	806.3	806.5	806.8	807.1	807.3	807.1	806.8	806.5
122.5°	863.3	863.0	862.6	861.9	860.9	859.9	858.9	857.9	858.9	859.9	860.9
125°	944.4	944.4	944.4	943.6	941.7	939.8	937.9	936.1	937.9	939.8	941.7
127.5°	1016.4	1016.5	1016.7	1016.1	1014.8	1013.4	1012.1	1010.7	1012.1	1013.4	1014.8
130°	1063.2	1063.0	1062.6	1061.8	1060.6	1059.2	1057.9	1056.5	1057.9	1059.2	1060.6
132.5°	1107.8	1108.4	1109.0	1108.5	1107.0	1105.4	1103.9	1102.3	1103.9	1105.4	1107.0
135°	1173.3	1173.9	1174.3	1173.9	1172.3	1170.7	1169.0	1167.4	1169.0	1170.7	1172.3
137.5°	1232.3	1232.8	1233.3	1232.9	1231.4	1230.1	1228.7	1227.3	1228.7	1230.1	1231.4
140°	1268.2	1268.4	1268.7	1268.6	1268.0	1267.5	1267.0	1266.5	1267.0	1267.5	1268.0
142.5°	1304.1	1303.8	1303.4	1303.0	1302.7	1302.3	1302.0	1301.7	1302.0	1302.3	1302.7
145°	1355.9	1355.9	1355.9	1355.7	1355.1	1354.6	1354.0	1353.5	1354.0	1354.6	1355.1
147.5°	1399.2	1398.8	1398.5	1398.4	1398.5	1398.6	1398.7	1398.8	1398.7	1398.6	1398.5
150°	1426.4	1425.8	1425.3	1425.3	1425.8	1426.4	1426.9	1427.4	1426.9	1426.4	1425.8
152.5°	1451.2	1450.6	1450.1	1450.4	1451.6	1452.8	1454.0	1455.1	1454.0	1452.8	1451.6
155°	1484.8	1484.3	1483.8	1484.3	1485.9	1487.5	1489.1	1490.6	1489.1	1487.5	1485.9
157.5°	1513.9	1513.9	1513.8	1514.3	1515.2	1516.2	1517.1	1518.1	1517.1	1516.2	1515.2
160°	1530.7	1530.4	1530.1	1530.8	1532.4	1534.0	1535.6	1537.2	1535.6	1534.0	1532.4
162.5°	1545.9	1545.6	1545.4	1546.0	1547.6	1549.3	1550.9	1552.4	1550.9	1549.3	1547.6
165°	1566.5	1566.1	1565.9	1566.5	1568.1	1569.7	1571.4	1573.0	1571.4	1569.7	1568.1
167.5°	1581.4	1581.2	1581.0	1581.6	1583.3	1584.9	1586.6	1588.2	1586.6	1584.9	1583.3
170°	1589.1	1588.8	1588.6	1589.4	1591.2	1593.1	1594.9	1596.8	1594.9	1593.1	1591.2
172.5°	1595.4	1594.9	1594.4	1595.1	1597.0	1598.8	1600.7	1602.5	1600.7	1598.8	1597.0
175°	1602.2	1602.0	1601.7	1602.3	1603.9	1605.5	1607.1	1608.7	1607.1	1605.5	1603.9
177.5°	1606.4	1606.1	1605.9	1606.5	1607.7	1609.0	1610.3	1611.5	1610.3	1609.0	1607.7
180°	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	952.4	948.7	945.8	939.2	935.6	930.7	926.7	931.0	926.4	928.4	925.3
5°	922.7	911.2	902.9	891.0	880.7	871.2	864.3	863.0	859.7	858.1	853.1
7.5°	886.9	872.5	858.4	842.8	829.6	816.2	807.6	800.6	795.9	789.7	785.5
10°	865.9	846.5	830.1	811.2	794.7	780.3	768.8	763.0	757.7	749.9	747.0
12.5°	839.9	819.9	799.8	779.6	763.8	747.7	737.8	729.1	725.5	716.6	715.7
15°	808.7	778.7	758.9	738.4	716.5	703.4	695.1	685.7	681.6	675.4	670.9
17.5°	771.5	744.7	720.0	698.7	680.0	668.9	658.7	652.2	645.2	641.1	633.7
20°	744.6	719.1	694.3	671.7	657.4	644.6	636.4	630.2	622.8	620.8	613.3
22.5°	721.8	693.7	670.0	651.0	635.3	620.9	612.0	607.8	602.7	596.4	594.8
25°	684.9	655.7	635.6	616.6	602.6	589.5	583.3	578.0	573.0	568.5	566.8
27.5°	653.0	626.9	602.9	585.8	573.7	561.7	556.2	549.7	546.1	542.5	538.1
30°	630.6	603.9	582.9	566.4	553.3	542.6	536.8	532.3	529.0	525.7	523.2
32.5°	607.5	582.8	562.4	546.4	533.2	525.1	520.0	516.8	513.2	509.2	506.1
35°	577.1	549.9	530.2	516.3	506.0	499.8	494.0	491.2	487.0	487.0	483.7
37.5°	542.8	519.4	501.9	489.2	480.0	474.4	468.2	466.2	463.6	461.8	460.7
40°	522.4	500.6	484.2	471.4	461.5	457.0	452.1	448.8	447.1	445.0	444.3
42.5°	501.4	480.5	464.8	453.0	444.4	440.5	435.9	433.6	430.3	427.6	427.1
45°	469.4	449.2	434.8	425.3	418.0	413.4	410.5	405.6	403.9	400.7	400.2
47.5°	438.9	419.6	405.5	397.8	391.3	387.5	383.0	378.1	376.2	374.5	374.4
50°	416.3	398.6	385.4	378.0	371.9	366.5	361.9	358.7	357.4	357.4	358.3
52.5°	393.2	378.2	367.0	358.0	352.1	346.4	342.2	340.2	338.3	340.3	341.8
55°	359.5	344.3	336.0	327.4	321.7	315.1	313.1	312.2	311.0	314.3	315.9
57.5°	323.8	313.1	303.5	294.9	289.8	286.0	283.2	282.7	284.9	286.5	291.9
60°	301.1	288.8	280.1	273.5	267.4	264.9	264.1	263.2	264.9	269.4	276.4
62.5°	276.1	266.1	256.7	251.8	247.3	243.2	243.0	243.5	246.8	252.0	259.0
65°	239.4	230.8	224.6	218.8	215.2	212.7	213.5	215.2	218.8	225.9	233.6
67.5°	202.2	196.2	190.7	186.0	182.4	182.4	183.3	185.8	190.1	198.2	205.3
70°	178.1	171.5	167.0	164.9	162.1	160.4	162.9	167.0	170.7	178.1	184.3
72.5°	154.1	148.5	145.0	143.5	142.4	141.0	141.8	146.2	151.3	158.7	165.9
75°	118.4	116.4	113.9	112.3	111.1	111.9	112.7	116.8	121.0	128.7	137.0
77.5°	86.4	84.3	82.9	82.5	81.8	82.1	84.5	87.5	91.6	97.3	103.5
80°	65.4	64.6	63.8	63.4	63.4	63.8	67.0	69.1	72.8	78.2	83.1
82.5°	47.6	47.1	47.0	46.9	47.2	47.3	49.3	52.0	55.1	59.1	63.4
85°	25.1	24.2	25.5	25.9	25.1	26.3	27.2	28.8	30.0	32.1	34.1
87.5°	10.1	11.2	11.2	12.0	12.4	13.4	13.3	14.9	15.8	16.7	16.6
90°	9.7	11.6	13.5	15.4	17.2	19.1	20.4	21.7	23.1	24.4	25.4
92.5°	12.4	12.5	14.2	15.8	17.4	19.1	20.4	21.7	23.1	24.4	25.2
95°	64.8	59.3	49.3	39.2	29.2	19.1	20.4	21.7	23.1	24.4	25.0
97.5°	147.7	138.4	118.4	98.5	78.6	58.7	51.2	43.7	36.3	28.8	25.0
100°	202.3	203.3	204.3	205.4	206.4	207.5	168.0	128.5	89.0	49.6	29.3
102.5°	261.3	262.2	262.8	263.5	264.1	264.7	257.3	249.8	242.3	234.9	222.1
105°	354.8	355.4	355.4	355.4	355.4	355.4	355.4	355.4	355.4	355.4	355.2
107.5°	447.4	447.7	448.2	448.8	449.3	449.8	449.9	450.0	450.0	450.0	449.6
110°	510.4	510.6	511.2	511.7	512.2	512.8	512.0	511.2	510.4	509.6	509.4



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	572.1	572.6	572.9	573.2	573.5	573.9	572.8	571.8	570.8	569.8	569.1
115°	663.5	664.3	664.6	664.9	665.2	665.4	664.3	663.3	662.3	661.2	659.9
117.5°	749.9	750.4	751.4	752.3	753.4	754.4	753.0	751.6	750.3	748.8	747.8
120°	806.3	806.5	807.3	808.1	808.9	809.7	809.2	808.7	808.1	807.6	806.7
122.5°	861.9	862.6	863.0	863.3	863.7	864.1	863.6	863.0	862.5	862.0	860.9
125°	943.6	944.4	944.4	944.4	944.4	944.4	943.4	942.4	941.3	940.2	939.3
127.5°	1016.1	1016.7	1016.5	1016.4	1016.2	1016.1	1015.4	1014.9	1014.3	1013.7	1012.4
130°	1061.8	1062.6	1063.0	1063.2	1063.4	1063.7	1063.0	1062.2	1061.4	1060.6	1059.5
132.5°	1108.5	1109.0	1108.4	1107.8	1107.2	1106.7	1106.5	1106.4	1106.2	1106.0	1105.3
135°	1173.9	1174.3	1173.9	1173.3	1172.7	1172.3	1171.7	1171.2	1170.7	1170.1	1169.0
137.5°	1232.9	1233.3	1232.8	1232.3	1231.8	1231.4	1231.5	1231.6	1231.7	1231.8	1231.2
140°	1268.6	1268.7	1268.4	1268.2	1267.9	1267.7	1268.2	1268.7	1269.2	1269.8	1269.2
142.5°	1303.0	1303.4	1303.8	1304.1	1304.5	1304.9	1305.0	1305.0	1305.2	1305.3	1304.6
145°	1355.7	1355.9	1355.9	1355.9	1355.9	1355.9	1356.1	1356.5	1356.7	1356.9	1356.3
147.5°	1398.4	1398.5	1398.8	1399.2	1399.5	1399.8	1400.1	1400.4	1400.7	1401.1	1400.3
150°	1425.3	1425.3	1425.8	1426.4	1426.9	1427.4	1428.0	1428.5	1429.0	1429.6	1428.8
152.5°	1450.4	1450.1	1450.6	1451.2	1451.8	1452.2	1452.8	1453.3	1453.8	1454.4	1453.7
155°	1484.3	1483.8	1484.3	1484.8	1485.3	1485.9	1486.7	1487.5	1488.3	1489.1	1488.4
157.5°	1514.3	1513.8	1513.9	1513.9	1513.9	1514.0	1514.9	1515.7	1516.6	1517.4	1516.8
160°	1530.8	1530.1	1530.4	1530.7	1530.9	1531.2	1532.2	1533.3	1534.4	1535.4	1534.9
162.5°	1546.0	1545.4	1545.6	1545.9	1546.2	1546.4	1547.9	1549.4	1550.9	1552.4	1552.0
165°	1566.5	1565.9	1566.1	1566.5	1566.7	1566.9	1568.5	1570.1	1571.8	1573.4	1573.0
167.5°	1581.6	1581.0	1581.2	1581.4	1581.8	1582.0	1583.9	1585.8	1587.7	1589.6	1589.4
170°	1589.4	1588.6	1588.8	1589.1	1589.4	1589.6	1591.7	1593.9	1596.0	1598.1	1598.0
172.5°	1595.1	1594.4	1594.9	1595.4	1595.9	1596.3	1598.2	1600.1	1602.0	1603.9	1603.7
175°	1602.3	1601.7	1602.0	1602.2	1602.5	1602.7	1604.9	1606.9	1609.1	1611.2	1611.1
177.5°	1606.5	1605.9	1606.1	1606.4	1606.5	1606.8	1608.3	1609.8	1611.2	1612.7	1612.6
180°	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	923.4	925.7	923.7	926.4	923.7	925.7	923.4	925.3	928.4	926.4	931.0
5°	851.0	847.4	849.9	848.2	849.9	847.4	851.0	853.1	858.1	859.7	863.0
7.5°	784.3	780.7	776.7	774.8	776.7	780.7	784.3	785.5	789.7	795.9	800.6
10°	742.5	737.9	737.5	734.7	737.5	737.9	742.5	747.0	749.9	757.7	763.0
12.5°	711.9	707.7	703.0	701.8	703.0	707.7	711.9	715.7	716.6	725.5	729.1
15°	668.4	665.1	662.3	664.7	662.3	665.1	668.4	670.9	675.4	681.6	685.7
17.5°	632.3	629.6	629.1	626.1	629.1	629.6	632.3	633.7	641.1	645.2	652.2
20°	609.6	607.5	608.4	603.0	608.4	607.5	609.6	613.3	620.8	622.8	630.2
22.5°	591.5	587.5	587.0	585.9	587.0	587.5	591.5	594.8	596.4	602.7	607.8
25°	563.2	561.1	559.0	561.1	559.0	561.1	563.2	566.8	568.5	573.0	578.0
27.5°	538.4	535.9	535.4	535.6	535.4	535.9	538.4	538.1	542.5	546.1	549.7
30°	523.2	519.1	519.5	519.1	519.5	519.1	523.2	523.2	525.7	529.0	532.3
32.5°	506.8	504.0	503.4	502.6	503.4	504.0	506.8	506.1	509.2	513.2	516.8
35°	482.5	482.5	480.5	480.5	480.5	482.5	482.5	483.7	487.0	487.0	491.2
37.5°	459.7	459.3	458.0	458.3	458.0	459.3	459.7	460.7	461.8	463.6	466.2
40°	442.6	442.2	440.9	438.5	440.9	442.2	442.6	444.3	445.0	447.1	448.8
42.5°	426.1	424.8	424.2	423.3	424.2	424.8	426.1	427.1	427.6	430.3	433.6
45°	400.2	400.2	399.4	399.0	399.4	400.2	400.2	400.2	400.7	403.9	405.6
47.5°	375.1	375.8	377.4	377.2	377.4	375.8	375.1	374.4	374.5	376.2	378.1
50°	359.9	360.4	361.6	361.9	361.6	360.4	359.9	358.3	357.4	357.4	358.7
52.5°	343.2	345.5	347.1	346.8	347.1	345.5	343.2	341.8	340.3	338.3	340.2
55°	319.6	322.5	325.3	325.8	325.3	322.5	319.6	315.9	314.3	311.0	312.2
57.5°	296.4	300.4	303.4	304.4	303.4	300.4	296.4	291.9	286.5	284.9	282.7
60°	280.5	285.9	289.6	291.2	289.6	285.9	280.5	276.4	269.4	264.9	263.2
62.5°	265.4	271.4	275.1	275.4	275.1	271.4	265.4	259.0	252.0	246.8	243.5
65°	240.7	246.8	250.1	252.5	250.1	246.8	240.7	233.6	225.9	218.8	215.2
67.5°	214.0	220.1	223.8	225.8	223.8	220.1	214.0	205.3	198.2	190.1	185.8
70°	194.6	200.7	205.7	207.3	205.7	200.7	194.6	184.3	178.1	170.7	167.0
72.5°	175.5	181.0	185.0	186.9	185.0	181.0	175.5	165.9	158.7	151.3	146.2
75°	142.4	149.7	153.4	155.5	153.4	149.7	142.4	137.0	128.7	121.0	116.8
77.5°	109.7	116.5	118.7	119.8	118.7	116.5	109.7	103.5	97.3	91.6	87.5
80°	88.0	92.1	95.0	95.5	95.0	92.1	88.0	83.1	78.2	72.8	69.1
82.5°	67.7	71.1	72.0	73.0	72.0	71.1	67.7	63.4	59.1	55.1	52.0
85°	37.0	38.7	39.1	38.7	39.1	38.7	37.0	34.1	32.1	30.0	28.8
87.5°	17.4	17.3	17.4	18.2	17.4	17.3	17.4	16.6	16.7	15.8	14.9
90°	26.2	27.0	27.8	28.6	27.8	27.0	26.2	25.4	24.4	23.1	21.7
92.5°	25.6	26.0	26.4	26.7	26.4	26.0	25.6	25.2	24.4	23.1	21.7
95°	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	24.4	23.1	21.7
97.5°	25.0	25.0	25.0	25.0	25.0	25.0	25.0	25.0	28.8	36.3	43.7
100°	28.2	27.2	26.1	25.0	26.1	27.2	28.2	29.3	49.6	89.0	128.5
102.5°	204.1	186.1	168.0	150.0	168.0	186.1	204.1	222.1	234.9	242.3	249.8
105°	355.0	354.7	354.4	354.2	354.4	354.7	355.0	355.2	355.4	355.4	355.4
107.5°	448.9	448.1	447.3	446.5	447.3	448.1	448.9	449.6	450.0	450.0	450.0
110°	509.6	509.8	510.2	510.4	510.2	509.8	509.6	509.4	509.6	510.4	511.2



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	568.8	568.4	568.0	567.6	568.0	568.4	568.8	569.1	569.8	570.8	571.8
115°	658.3	656.6	655.1	653.5	655.1	656.6	658.3	659.9	661.2	662.3	663.3
117.5°	747.2	746.5	745.8	745.0	745.8	746.5	747.2	747.8	748.8	750.3	751.6
120°	805.3	804.0	802.7	801.4	802.7	804.0	805.3	806.7	807.6	808.1	808.7
122.5°	859.4	857.9	856.3	854.8	856.3	857.9	859.4	860.9	862.0	862.5	863.0
125°	938.5	937.7	936.9	936.1	936.9	937.7	938.5	939.3	940.2	941.3	942.4
127.5°	1010.4	1008.5	1006.5	1004.6	1006.5	1008.5	1010.4	1012.4	1013.7	1014.3	1014.9
130°	1058.2	1056.9	1055.5	1054.2	1055.5	1056.9	1058.2	1059.5	1060.6	1061.4	1062.2
132.5°	1104.0	1102.6	1101.3	1099.9	1101.3	1102.6	1104.0	1105.3	1106.0	1106.2	1106.4
135°	1167.4	1165.9	1164.3	1162.7	1164.3	1165.9	1167.4	1169.0	1170.1	1170.7	1171.2
137.5°	1229.8	1228.4	1227.0	1225.7	1227.0	1228.4	1229.8	1231.2	1231.8	1231.7	1231.6
140°	1267.7	1266.1	1264.5	1262.9	1264.5	1266.1	1267.7	1269.2	1269.8	1269.2	1268.7
142.5°	1302.9	1301.3	1299.7	1298.1	1299.7	1301.3	1302.9	1304.6	1305.3	1305.2	1305.0
145°	1354.7	1353.1	1351.5	1350.0	1351.5	1353.1	1354.7	1356.3	1356.9	1356.7	1356.5
147.5°	1398.4	1396.5	1394.6	1392.7	1394.6	1396.5	1398.4	1400.3	1401.1	1400.7	1400.4
150°	1426.6	1424.5	1422.4	1420.3	1422.4	1424.5	1426.6	1428.8	1429.6	1429.0	1428.5
152.5°	1451.8	1449.9	1448.0	1446.0	1448.0	1449.9	1451.8	1453.7	1454.4	1453.8	1453.3
155°	1486.3	1484.2	1482.0	1479.9	1482.0	1484.2	1486.3	1488.4	1489.1	1488.3	1487.5
157.5°	1514.7	1512.5	1510.4	1508.3	1510.4	1512.5	1514.7	1516.8	1517.4	1516.6	1515.7
160°	1532.8	1530.7	1528.5	1526.5	1528.5	1530.7	1532.8	1534.9	1535.4	1534.4	1533.3
162.5°	1549.7	1547.3	1545.0	1542.6	1545.0	1547.3	1549.7	1552.0	1552.4	1550.9	1549.4
165°	1571.0	1568.8	1566.7	1564.6	1566.7	1568.8	1571.0	1573.0	1573.4	1571.8	1570.1
167.5°	1587.0	1584.6	1582.2	1579.8	1582.2	1584.6	1587.0	1589.4	1589.6	1587.7	1585.8
170°	1595.6	1593.2	1590.8	1588.4	1590.8	1593.2	1595.6	1598.0	1598.1	1596.0	1593.9
172.5°	1601.3	1598.9	1596.6	1594.2	1596.6	1598.9	1601.3	1603.7	1603.9	1602.0	1600.1
175°	1608.7	1606.3	1603.9	1601.6	1603.9	1606.3	1608.7	1611.1	1611.2	1609.1	1606.9
177.5°	1610.9	1609.2	1607.5	1605.8	1607.5	1609.2	1610.9	1612.6	1612.7	1611.2	1609.8
180°	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	926.7	930.7	935.6	939.2	945.8	948.7	952.4	955.3	960.6	965.5	971.5
5°	864.3	871.2	880.7	891.0	902.9	911.2	922.7	929.6	943.6	956.4	968.7
7.5°	807.6	816.2	829.6	842.8	858.4	872.5	886.9	902.9	920.8	941.8	959.3
10°	768.8	780.3	794.7	811.2	830.1	846.5	865.9	883.1	905.0	929.6	952.7
12.5°	737.8	747.7	763.8	779.6	799.8	819.9	839.9	862.8	888.2	915.5	944.4
15°	695.1	703.4	716.5	738.4	758.9	778.7	808.7	830.1	862.2	892.6	927.6
17.5°	658.7	668.9	680.0	698.7	720.0	744.7	771.5	798.4	829.3	867.8	907.3
20°	636.4	644.6	657.4	671.7	694.3	719.1	744.6	771.7	809.5	849.5	891.8
22.5°	612.0	620.9	635.3	651.0	670.0	693.7	721.8	751.6	791.1	830.4	876.3
25°	583.3	589.5	602.6	616.6	635.6	655.7	684.9	717.8	756.9	801.7	848.6
27.5°	556.2	561.7	573.7	585.8	602.9	626.9	653.0	686.2	723.0	768.5	820.5
30°	536.8	542.6	553.3	566.4	582.9	603.9	630.6	661.9	701.3	745.8	800.1
32.5°	520.0	525.1	533.2	546.4	562.4	582.8	607.5	639.4	679.0	724.1	777.4
35°	494.0	499.8	506.0	516.3	530.2	549.9	577.1	607.1	645.0	688.6	737.5
37.5°	468.2	474.4	480.0	489.2	501.9	519.4	542.8	574.1	608.3	650.3	697.3
40°	452.1	457.0	461.5	471.4	484.2	500.6	522.4	550.4	586.6	625.7	664.7
42.5°	435.9	440.5	444.4	453.0	464.8	480.5	501.4	528.6	562.2	598.7	633.1
45°	410.5	413.4	418.0	425.3	434.8	449.2	469.4	493.6	522.0	556.6	582.5
47.5°	383.0	387.5	391.3	397.8	405.5	419.6	438.9	459.6	485.4	511.0	529.3
50°	361.9	366.5	371.9	378.0	385.4	398.6	416.3	437.3	459.1	478.8	494.4
52.5°	342.2	346.4	352.1	358.0	367.0	378.2	393.2	411.9	433.4	447.6	460.6
55°	313.1	315.1	321.7	327.4	336.0	344.3	359.5	376.0	389.1	399.8	410.5
57.5°	283.2	286.0	289.8	294.9	303.5	313.1	323.8	338.3	346.1	351.6	359.9
60°	264.1	264.9	267.4	273.5	280.1	288.8	301.1	311.4	317.1	321.7	328.7
62.5°	243.0	243.2	247.3	251.8	256.7	266.1	276.1	284.4	289.1	291.4	298.1
65°	213.5	212.7	215.2	218.8	224.6	230.8	239.4	246.8	246.4	248.8	252.9
67.5°	183.3	182.4	182.4	186.0	190.7	196.2	202.2	206.4	206.5	209.8	211.8
70°	162.9	160.4	162.1	164.9	167.0	171.5	178.1	179.7	180.1	181.8	183.9
72.5°	141.8	141.0	142.4	143.5	145.0	148.5	154.1	155.1	155.2	156.1	159.5
75°	112.7	111.9	111.1	112.3	113.9	116.4	118.4	120.1	119.7	120.1	122.6
77.5°	84.5	82.1	81.8	82.5	82.9	84.3	86.4	86.3	86.7	86.7	89.4
80°	67.0	63.8	63.4	63.4	63.8	64.6	65.4	66.2	65.0	66.2	67.0
82.5°	49.3	47.3	47.2	46.9	47.0	47.1	47.6	48.2	47.8	48.5	49.0
85°	27.2	26.3	25.1	25.9	25.5	24.2	25.1	23.8	23.4	23.8	24.2
87.5°	13.3	13.4	12.4	12.0	11.2	11.2	10.1	9.4	8.6	8.6	9.1
90°	20.4	19.1	17.2	15.4	13.5	11.6	9.7	7.5	5.5	3.3	1.2
92.5°	20.4	19.1	17.4	15.8	14.2	12.5	12.4	13.9	15.4	16.9	18.4
95°	20.4	19.1	29.2	39.2	49.3	59.3	64.8	65.6	66.4	67.2	68.0
97.5°	51.2	58.7	78.6	98.5	118.4	138.4	147.7	146.2	144.7	143.3	141.9
100°	168.0	207.5	206.4	205.4	204.3	203.3	202.3	201.5	200.7	199.9	199.2
102.5°	257.3	264.7	264.1	263.5	262.8	262.2	261.3	260.4	259.4	258.3	257.4
105°	355.4	355.4	355.4	355.4	355.4	355.4	354.8	353.8	352.8	351.6	350.6
107.5°	449.9	449.8	449.3	448.8	448.2	447.7	447.4	447.4	447.4	447.4	447.4
110°	512.0	512.8	512.2	511.7	511.2	510.6	510.4	510.4	510.4	510.4	510.4



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	572.8	573.9	573.5	573.2	572.9	572.6	572.1	571.5	570.8	570.2	569.6
115°	664.3	665.4	665.2	664.9	664.6	664.3	663.5	662.3	660.9	659.6	658.3
117.5°	753.0	754.4	753.4	752.3	751.4	750.4	749.9	750.0	750.0	750.0	750.1
120°	809.2	809.7	808.9	808.1	807.3	806.5	806.3	806.5	806.8	807.1	807.3
122.5°	863.6	864.1	863.7	863.3	863.0	862.6	861.9	860.9	859.9	858.9	857.9
125°	943.4	944.4	944.4	944.4	944.4	944.4	943.6	941.7	939.8	937.9	936.1
127.5°	1015.4	1016.1	1016.2	1016.4	1016.5	1016.7	1016.1	1014.8	1013.4	1012.1	1010.7
130°	1063.0	1063.7	1063.4	1063.2	1063.0	1062.6	1061.8	1060.6	1059.2	1057.9	1056.5
132.5°	1106.5	1106.7	1107.2	1107.8	1108.4	1109.0	1108.5	1107.0	1105.4	1103.9	1102.3
135°	1171.7	1172.3	1172.7	1173.3	1173.9	1174.3	1173.9	1172.3	1170.7	1169.0	1167.4
137.5°	1231.5	1231.4	1231.8	1232.3	1232.8	1233.3	1232.9	1231.4	1230.1	1228.7	1227.3
140°	1268.2	1267.7	1267.9	1268.2	1268.4	1268.7	1268.6	1268.0	1267.5	1267.0	1266.5
142.5°	1305.0	1304.9	1304.5	1304.1	1303.8	1303.4	1303.0	1302.7	1302.3	1302.0	1301.7
145°	1356.1	1355.9	1355.9	1355.9	1355.9	1355.9	1355.7	1355.1	1354.6	1354.0	1353.5
147.5°	1400.1	1399.8	1399.5	1399.2	1398.8	1398.5	1398.4	1398.5	1398.6	1398.7	1398.8
150°	1428.0	1427.4	1426.9	1426.4	1425.8	1425.3	1425.3	1425.8	1426.4	1426.9	1427.4
152.5°	1452.8	1452.2	1451.8	1451.2	1450.6	1450.1	1450.4	1451.6	1452.8	1454.0	1455.1
155°	1486.7	1485.9	1485.3	1484.8	1484.3	1483.8	1484.3	1485.9	1487.5	1489.1	1490.6
157.5°	1514.9	1514.0	1513.9	1513.9	1513.9	1513.8	1514.3	1515.2	1516.2	1517.1	1518.1
160°	1532.2	1531.2	1530.9	1530.7	1530.4	1530.1	1530.8	1532.4	1534.0	1535.6	1537.2
162.5°	1547.9	1546.4	1546.2	1545.9	1545.6	1545.4	1546.0	1547.6	1549.3	1550.9	1552.4
165°	1568.5	1566.9	1566.7	1566.5	1566.1	1565.9	1566.5	1568.1	1569.7	1571.4	1573.0
167.5°	1583.9	1582.0	1581.8	1581.4	1581.2	1581.0	1581.6	1583.3	1584.9	1586.6	1588.2
170°	1591.7	1589.6	1589.4	1589.1	1588.8	1588.6	1589.4	1591.2	1593.1	1594.9	1596.8
172.5°	1598.2	1596.3	1595.9	1595.4	1594.9	1594.4	1595.1	1597.0	1598.8	1600.7	1602.5
175°	1604.9	1602.7	1602.5	1602.2	1602.0	1601.7	1602.3	1603.9	1605.5	1607.1	1608.7
177.5°	1608.3	1606.8	1606.5	1606.4	1606.1	1605.9	1606.5	1607.7	1609.0	1610.3	1611.5
180°	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	974.4	979.0	982.0	987.5	992.1	994.8	997.1	999.1	1001.4	1003.4	1008.9
5°	980.6	991.3	1000.4	1014.4	1027.1	1037.0	1047.7	1057.2	1065.0	1076.1	1084.7
7.5°	977.9	997.0	1016.8	1038.5	1060.6	1081.2	1100.1	1117.8	1133.9	1153.3	1170.3
10°	975.3	1001.2	1026.7	1055.9	1085.9	1111.4	1135.3	1159.6	1177.3	1202.0	1222.9
12.5°	973.4	1003.9	1034.6	1069.8	1102.7	1138.8	1170.5	1188.2	1215.1	1234.9	1259.8
15°	965.0	1005.4	1047.7	1087.2	1134.1	1167.4	1195.4	1229.9	1255.0	1280.1	1307.3
17.5°	950.1	995.8	1043.1	1095.0	1140.0	1175.7	1211.7	1245.1	1275.0	1308.7	1342.4
20°	943.3	988.9	1043.1	1096.2	1140.3	1177.7	1214.7	1251.3	1284.2	1327.4	1366.5
22.5°	928.8	984.0	1034.0	1085.7	1131.0	1171.8	1213.7	1255.3	1299.0	1347.8	1396.8
25°	902.9	958.9	1011.9	1063.0	1108.6	1159.6	1204.4	1260.0	1315.9	1380.5	1441.4
27.5°	876.1	929.6	978.3	1027.5	1080.8	1138.5	1196.7	1259.7	1332.9	1414.4	1500.3
30°	854.4	905.0	952.3	1002.8	1058.4	1123.4	1187.2	1262.0	1346.7	1438.4	1540.5
32.5°	829.0	875.7	921.6	975.3	1035.7	1104.3	1178.6	1260.7	1362.6	1466.8	1571.8
35°	785.7	824.7	872.0	929.2	997.5	1076.1	1162.1	1259.1	1375.9	1495.6	1584.1
37.5°	734.3	770.6	820.5	883.1	954.7	1039.0	1141.1	1256.2	1380.3	1475.8	1504.3
40°	699.7	733.4	785.3	850.2	923.4	1012.7	1124.6	1246.3	1366.5	1427.4	1403.9
42.5°	662.8	698.2	748.7	813.1	891.9	989.0	1103.9	1225.7	1326.4	1349.4	1268.4
45°	604.7	641.3	691.0	756.1	840.8	946.1	1065.8	1176.5	1234.5	1192.9	1067.5
47.5°	550.6	584.9	631.1	698.2	785.6	894.5	1009.8	1098.0	1102.6	1003.5	869.5
50°	513.8	545.4	591.9	658.9	745.8	856.0	960.0	1029.6	998.3	886.1	757.2
52.5°	477.6	508.6	554.4	620.8	706.6	807.6	904.4	953.2	894.4	779.1	669.1
55°	425.3	452.5	497.3	558.6	640.1	733.9	816.1	833.0	756.5	642.9	553.7
57.5°	374.3	399.7	440.5	496.9	571.3	654.4	718.7	715.2	634.3	536.9	466.0
60°	339.8	364.5	400.7	455.7	523.6	595.2	650.3	637.2	557.0	473.0	413.4
62.5°	308.9	330.9	365.1	413.3	475.2	541.6	586.8	567.4	488.9	415.4	368.3
65°	263.2	281.8	311.0	352.1	403.5	458.3	493.2	468.1	401.1	343.9	306.0
67.5°	219.8	234.6	259.0	291.9	335.7	379.7	401.0	375.7	322.1	280.4	252.3
70°	192.1	205.3	224.2	253.4	291.7	328.7	344.7	322.1	276.0	240.2	220.1
72.5°	164.5	175.3	191.9	218.2	248.8	281.0	295.0	273.4	235.5	205.3	186.5
75°	127.1	134.5	146.0	164.1	188.4	213.9	221.7	202.8	178.6	155.9	143.5
77.5°	91.0	97.3	106.0	117.4	134.6	150.8	157.6	146.7	127.9	113.6	103.5
80°	69.9	73.2	80.6	90.1	103.7	113.9	118.4	111.5	98.3	87.6	79.8
82.5°	49.8	53.2	57.6	65.4	74.1	81.0	85.9	81.2	71.7	63.3	58.7
85°	24.2	26.3	28.8	32.1	38.7	42.8	42.4	39.5	35.8	32.5	30.0
87.5°	9.2	10.0	11.4	13.5	14.8	16.6	17.6	17.3	16.3	15.6	14.9
90°	3.3	5.5	7.5	9.7	11.6	13.5	15.4	17.2	19.1	20.4	21.7
92.5°	16.9	15.4	13.9	12.4	12.5	14.2	15.8	17.4	19.1	20.4	21.7
95°	67.2	66.4	65.6	64.8	59.3	49.3	39.2	29.2	19.1	20.4	21.7
97.5°	143.3	144.7	146.2	147.7	138.4	118.4	98.5	78.6	58.7	51.2	43.7
100°	199.9	200.7	201.5	202.3	203.3	204.3	205.4	206.4	207.5	168.0	128.5
102.5°	258.3	259.4	260.4	261.3	262.2	262.8	263.5	264.1	264.7	257.3	249.8
105°	351.6	352.8	353.8	354.8	355.4	355.4	355.4	355.4	355.4	355.4	355.4
107.5°	447.4	447.4	447.4	447.4	447.7	448.2	448.8	449.3	449.8	449.9	450.0
110°	510.4	510.4	510.4	510.4	510.6	511.2	511.7	512.2	512.8	512.0	511.2



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	570.2	570.8	571.5	572.1	572.6	572.9	573.2	573.5	573.9	572.8	571.8
115°	659.6	660.9	662.3	663.5	664.3	664.6	664.9	665.2	665.4	664.3	663.3
117.5°	750.0	750.0	750.0	749.9	750.4	751.4	752.3	753.4	754.4	753.0	751.6
120°	807.1	806.8	806.5	806.3	806.5	807.3	808.1	808.9	809.7	809.2	808.7
122.5°	858.9	859.9	860.9	861.9	862.6	863.0	863.3	863.7	864.1	863.6	863.0
125°	937.9	939.8	941.7	943.6	944.4	944.4	944.4	944.4	944.4	943.4	942.4
127.5°	1012.1	1013.4	1014.8	1016.1	1016.7	1016.5	1016.4	1016.2	1016.1	1015.4	1014.9
130°	1057.9	1059.2	1060.6	1061.8	1062.6	1063.0	1063.2	1063.4	1063.7	1063.0	1062.2
132.5°	1103.9	1105.4	1107.0	1108.5	1109.0	1108.4	1107.8	1107.2	1106.7	1106.5	1106.4
135°	1169.0	1170.7	1172.3	1173.9	1174.3	1173.9	1173.3	1172.7	1172.3	1171.7	1171.2
137.5°	1228.7	1230.1	1231.4	1232.9	1233.3	1232.8	1232.3	1231.8	1231.4	1231.5	1231.6
140°	1267.0	1267.5	1268.0	1268.6	1268.7	1268.4	1268.2	1267.9	1267.7	1268.2	1268.7
142.5°	1302.0	1302.3	1302.7	1303.0	1303.4	1303.8	1304.1	1304.5	1304.9	1305.0	1305.0
145°	1354.0	1354.6	1355.1	1355.7	1355.9	1355.9	1355.9	1355.9	1355.9	1356.1	1356.5
147.5°	1398.7	1398.6	1398.5	1398.4	1398.5	1398.8	1399.2	1399.5	1399.8	1400.1	1400.4
150°	1426.9	1426.4	1425.8	1425.3	1425.3	1425.8	1426.4	1426.9	1427.4	1428.0	1428.5
152.5°	1454.0	1452.8	1451.6	1450.4	1450.1	1450.6	1451.2	1451.8	1452.2	1452.8	1453.3
155°	1489.1	1487.5	1485.9	1484.3	1483.8	1484.3	1484.8	1485.3	1485.9	1486.7	1487.5
157.5°	1517.1	1516.2	1515.2	1514.3	1513.8	1513.9	1513.9	1513.9	1514.0	1514.9	1515.7
160°	1535.6	1534.0	1532.4	1530.8	1530.1	1530.4	1530.7	1530.9	1531.2	1532.2	1533.3
162.5°	1550.9	1549.3	1547.6	1546.0	1545.4	1545.6	1545.9	1546.2	1546.4	1547.9	1549.4
165°	1571.4	1569.7	1568.1	1566.5	1565.9	1566.1	1566.5	1566.7	1566.9	1568.5	1570.1
167.5°	1586.6	1584.9	1583.3	1581.6	1581.0	1581.2	1581.4	1581.8	1582.0	1583.9	1585.8
170°	1594.9	1593.1	1591.2	1589.4	1588.6	1588.8	1589.1	1589.4	1589.6	1591.7	1593.9
172.5°	1600.7	1598.8	1597.0	1595.1	1594.4	1594.9	1595.4	1595.9	1596.3	1598.2	1600.1
175°	1607.1	1605.5	1603.9	1602.3	1601.7	1602.0	1602.2	1602.5	1602.7	1604.9	1606.9
177.5°	1610.3	1609.0	1607.7	1606.5	1605.9	1606.1	1606.4	1606.5	1606.8	1608.3	1609.8
180°	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	1013.5	1016.2	1021.8	1019.8	1022.5	1023.7	1025.1
5°	1095.4	1108.6	1114.4	1113.5	1122.1	1120.1	1118.0
7.5°	1187.9	1201.7	1209.4	1219.1	1224.6	1225.0	1229.9
10°	1240.2	1258.3	1265.7	1276.0	1282.5	1286.3	1285.9
12.5°	1280.3	1294.5	1311.1	1316.1	1325.0	1329.7	1328.0
15°	1328.6	1351.3	1368.6	1377.2	1388.3	1391.5	1396.1
17.5°	1371.7	1402.1	1422.3	1449.1	1459.2	1465.4	1461.7
20°	1404.3	1444.2	1464.4	1496.5	1514.2	1523.6	1520.4
22.5°	1442.8	1486.1	1523.3	1551.1	1578.0	1590.8	1593.4
25°	1508.8	1568.0	1622.8	1659.4	1692.7	1700.5	1717.8
27.5°	1582.5	1652.4	1710.9	1749.4	1772.6	1781.3	1786.7
30°	1629.0	1698.4	1742.5	1767.1	1774.6	1773.7	1772.9
32.5°	1651.6	1695.2	1703.6	1696.7	1679.7	1665.5	1650.5
35°	1619.5	1587.0	1538.4	1475.9	1429.8	1383.4	1378.8
37.5°	1456.5	1352.6	1271.8	1181.5	1129.5	1097.3	1075.1
40°	1303.1	1185.1	1087.2	1011.1	958.0	937.1	916.5
42.5°	1136.6	1023.8	937.2	873.5	833.6	810.3	794.1
45°	923.4	823.9	756.1	710.0	678.3	660.2	649.9
47.5°	756.7	683.1	625.4	592.2	570.3	556.2	556.3
50°	667.2	596.8	558.6	532.3	513.3	502.2	504.3
52.5°	587.9	535.4	502.6	480.6	466.6	459.8	459.5
55°	491.5	453.7	432.3	416.3	406.8	399.0	400.7
57.5°	420.5	388.6	374.2	360.9	354.3	351.2	346.7
60°	376.4	351.7	339.4	328.7	322.1	319.6	315.1
62.5°	337.2	317.8	305.8	297.1	291.1	290.3	286.8
65°	283.4	268.6	257.9	253.8	247.6	246.0	246.0
67.5°	233.6	223.0	214.8	211.0	208.2	208.7	206.7
70°	202.4	193.8	188.4	184.3	182.2	182.6	181.0
72.5°	177.1	167.4	162.7	160.3	157.6	158.6	158.0
75°	134.1	129.1	126.7	124.2	122.6	121.8	121.0
77.5°	98.5	94.1	92.2	90.9	91.1	89.1	90.6
80°	76.1	72.4	71.1	69.1	68.7	68.7	68.3
82.5°	55.7	53.6	52.8	51.0	50.3	50.9	49.8
85°	28.8	27.2	26.8	26.8	25.9	25.1	27.2
87.5°	15.1	14.1	14.3	14.1	14.3	14.1	13.6
90°	23.1	24.4	25.4	26.2	27.0	27.8	28.6
92.5°	23.1	24.4	25.2	25.6	26.0	26.4	26.7
95°	23.1	24.4	25.0	25.0	25.0	25.0	25.0
97.5°	36.3	28.8	25.0	25.0	25.0	25.0	25.0
100°	89.0	49.6	29.3	28.2	27.2	26.1	25.0
102.5°	242.3	234.9	222.1	204.1	186.1	168.0	150.0
105°	355.4	355.4	355.2	355.0	354.7	354.4	354.2
107.5°	450.0	450.0	449.6	448.9	448.1	447.3	446.5
110°	510.4	509.6	509.4	509.6	509.8	510.2	510.4



TEST NUMBER: P333424-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	570.8	569.8	569.1	568.8	568.4	568.0	567.6
115°	662.3	661.2	659.9	658.3	656.6	655.1	653.5
117.5°	750.3	748.8	747.8	747.2	746.5	745.8	745.0
120°	808.1	807.6	806.7	805.3	804.0	802.7	801.4
122.5°	862.5	862.0	860.9	859.4	857.9	856.3	854.8
125°	941.3	940.2	939.3	938.5	937.7	936.9	936.1
127.5°	1014.3	1013.7	1012.4	1010.4	1008.5	1006.5	1004.6
130°	1061.4	1060.6	1059.5	1058.2	1056.9	1055.5	1054.2
132.5°	1106.2	1106.0	1105.3	1104.0	1102.6	1101.3	1099.9
135°	1170.7	1170.1	1169.0	1167.4	1165.9	1164.3	1162.7
137.5°	1231.7	1231.8	1231.2	1229.8	1228.4	1227.0	1225.7
140°	1269.2	1269.8	1269.2	1267.7	1266.1	1264.5	1262.9
142.5°	1305.2	1305.3	1304.6	1302.9	1301.3	1299.7	1298.1
145°	1356.7	1356.9	1356.3	1354.7	1353.1	1351.5	1350.0
147.5°	1400.7	1401.1	1400.3	1398.4	1396.5	1394.6	1392.7
150°	1429.0	1429.6	1428.8	1426.6	1424.5	1422.4	1420.3
152.5°	1453.8	1454.4	1453.7	1451.8	1449.9	1448.0	1446.0
155°	1488.3	1489.1	1488.4	1486.3	1484.2	1482.0	1479.9
157.5°	1516.6	1517.4	1516.8	1514.7	1512.5	1510.4	1508.3
160°	1534.4	1535.4	1534.9	1532.8	1530.7	1528.5	1526.5
162.5°	1550.9	1552.4	1552.0	1549.7	1547.3	1545.0	1542.6
165°	1571.8	1573.4	1573.0	1571.0	1568.8	1566.7	1564.6
167.5°	1587.7	1589.6	1589.4	1587.0	1584.6	1582.2	1579.8
170°	1596.0	1598.1	1598.0	1595.6	1593.2	1590.8	1588.4
172.5°	1602.0	1603.9	1603.7	1601.3	1598.9	1596.6	1594.2
175°	1609.1	1611.2	1611.1	1608.7	1606.3	1603.9	1601.6
177.5°	1611.2	1612.7	1612.6	1610.9	1609.2	1607.5	1605.8
180°	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7	1608.7

(END OF REPORT)