

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333429-927

Luminaire Tested: **S125DIW-S850D1560U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333429-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIW-S850D1560U927-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6993.4 lumens  
Efficiency: N/A  
Efficacy: 102.7 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 68.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333429-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

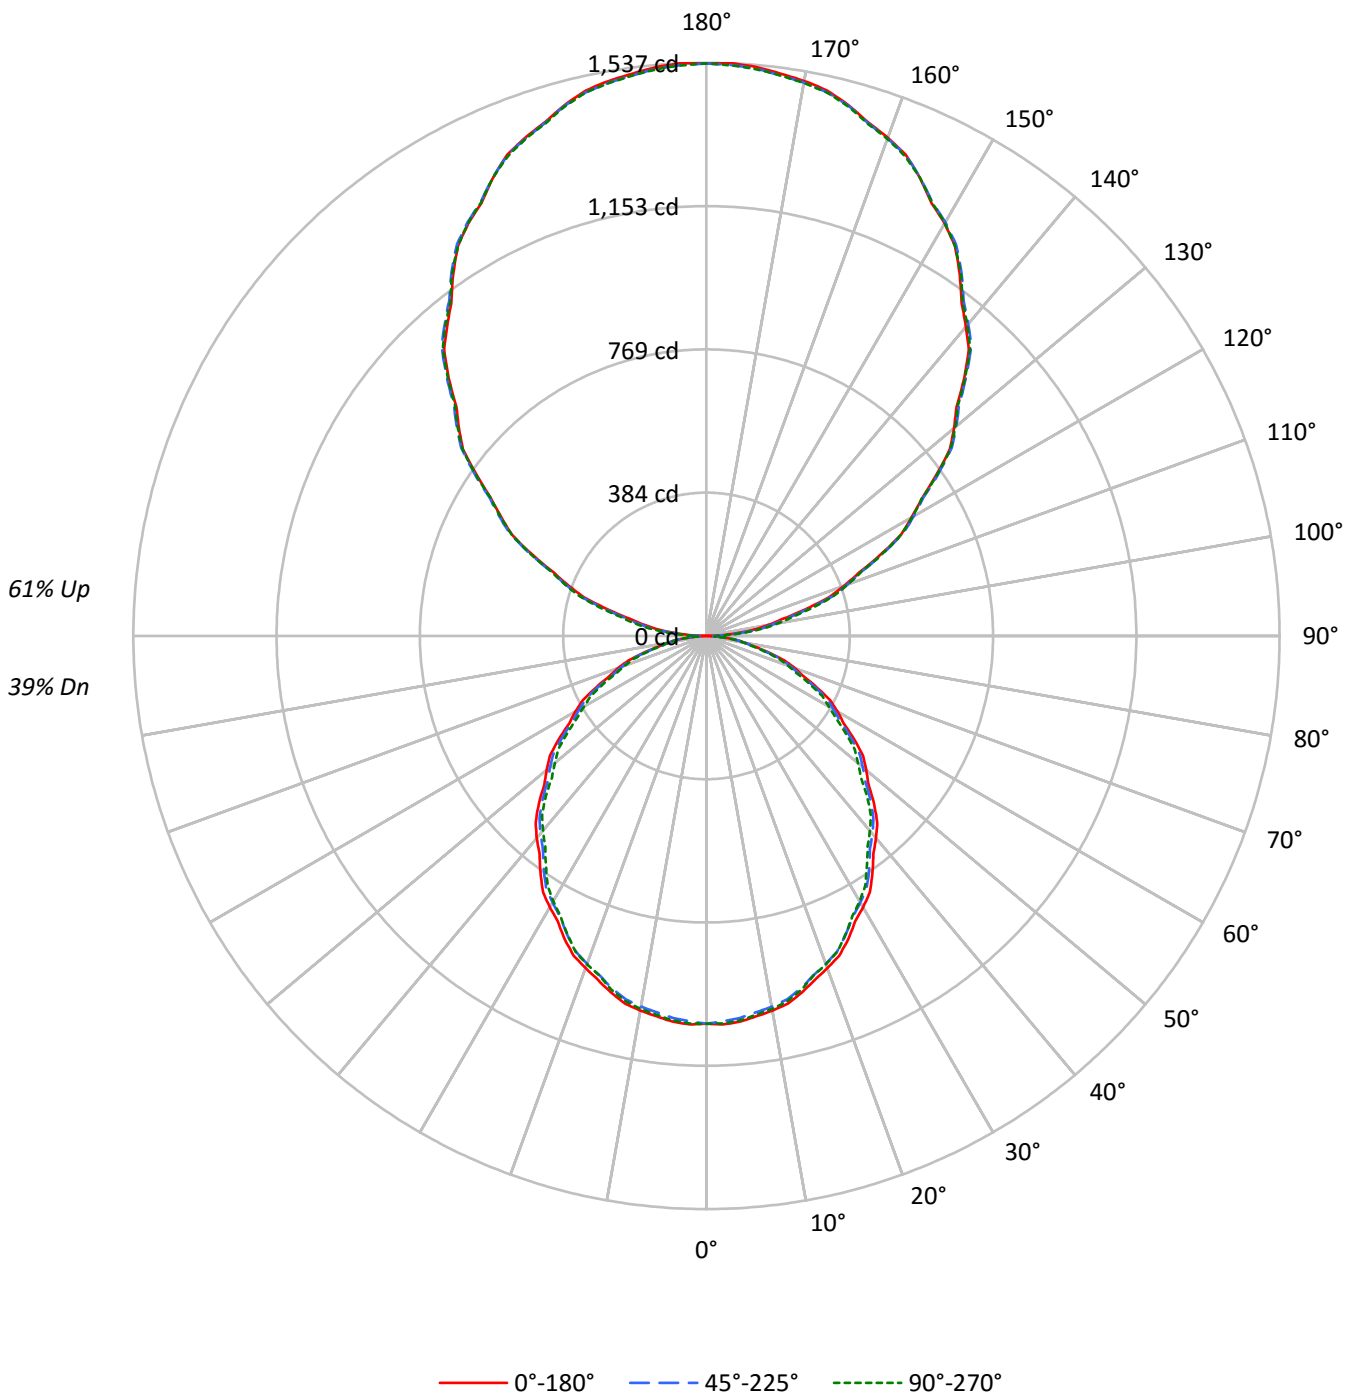



TEST NUMBER: P333429-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	95	91	87	84	86	83	79	77	67	65	63	53	52	50	40	39	39	33
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32	27
3	79	70	62	57	71	64	57	52	52	47	44	41	38	36	31	29	28	23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	56	44	36	31	51	41	34	29	34	28	24	27	23	20	21	18	16	13
8	52	40	32	27	47	37	30	25	31	25	22	25	21	18	19	16	14	12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11
10	45	33	26	22	41	31	24	20	26	21	17	21	17	15	16	14	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6716	6716	6716
5°	6731	6667	6710
10°	6690	6620	6658
15°	6618	6540	6568
20°	6514	6429	6441
25°	6402	6297	6291
30°	6264	6154	6123
35°	6117	6000	5916
40°	5966	5833	5751
45°	5802	5681	5569
50°	5621	5497	5332
55°	5447	5290	5141
60°	5239	5079	4899
65°	4991	4828	4664
70°	4755	4538	4381
75°	4332	4190	4045
80°	3857	3794	3704
85°	3349	3416	3231



TEST NUMBER: P333429-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	98.1	1.4
10°-20°	277.0	4.0
20°-30°	409.0	5.8
30°-40°	477.2	6.8
40°-50°	479.3	6.9
50°-60°	420.7	6.0
60°-70°	313.5	4.5
70°-80°	179.3	2.6
80°-90°	55.5	0.8
90°-100°	102.8	1.5
100°-110°	303.6	4.3
110°-120°	514.3	7.4
120°-130°	676.9	9.7
130°-140°	758.4	10.8
140°-150°	743.3	10.6
150°-160°	624.3	8.9
160°-170°	415.0	5.9
170°-180°	145.2	2.1
0°-30°	784.0	11.2
0°-40°	1261.2	18.0
0°-60°	2161.2	30.9
0°-90°	2709.5	38.7
90°-120°	920.8	13.2
90°-150°	3099.4	44.3
90°-180°	4284.0	61.3
0°-180°	6993.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1040	1040	1040	1040	1040	
5°	1038	1036	1028	1035	1035	98
15°	990	987	978	982	982	279
25°	898	894	884	885	883	413
35°	776	772	761	757	750	485
45°	635	631	622	612	610	489
55°	484	481	470	462	457	432
65°	327	325	316	309	305	324
75°	174	172	168	165	162	185
85°	45	46	46	45	44	51
90°	1	11	19	25	29	7
95°	78	81	92	100	103	83
105°	272	278	286	292	296	291
115°	515	520	522	521	520	509
125°	752	758	760	758	756	673
135°	977	984	986	985	981	753
145°	1184	1189	1192	1192	1189	740
155°	1355	1355	1356	1360	1355	624
165°	1473	1471	1472	1476	1470	415
175°	1532	1527	1527	1533	1526	145
180°	1535	1535	1535	1535	1535	



TEST NUMBER: P333429-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9
2.5°	1042.6	1042.1	1041.7	1041.2	1040.8	1039.8	1038.4	1037.0	1035.5	1034.0	1035.5
5°	1038.3	1037.9	1037.5	1037.2	1036.8	1035.7	1033.9	1032.1	1030.2	1028.4	1030.1
7.5°	1028.7	1028.4	1028.0	1027.6	1027.3	1026.1	1024.1	1022.1	1020.1	1018.0	1019.6
10°	1020.2	1019.9	1019.5	1019.1	1018.7	1017.6	1015.5	1013.5	1011.5	1009.5	1011.0
12.5°	1009.6	1009.0	1008.4	1007.7	1007.0	1005.8	1003.9	1002.0	1000.1	998.3	999.5
15°	989.8	989.2	988.6	988.1	987.5	986.3	984.3	982.2	980.2	978.2	979.1
17.5°	966.9	966.1	965.3	964.5	963.7	962.2	960.1	958.1	955.9	953.9	955.0
20°	947.8	947.5	947.1	946.7	946.3	944.9	942.5	940.2	937.8	935.4	936.8
22.5°	928.7	928.0	927.4	926.7	926.1	924.6	922.4	920.1	917.9	915.7	916.6
25°	898.4	897.5	896.6	895.6	894.8	893.1	890.7	888.4	886.0	883.6	884.0
27.5°	863.0	862.5	862.0	861.4	860.9	859.4	856.9	854.4	852.0	849.5	849.6
30°	840.0	839.5	838.9	838.4	837.8	836.1	833.5	830.7	827.9	825.2	824.8
32.5°	815.0	814.1	813.3	812.5	811.7	810.0	807.6	805.1	802.6	800.2	799.5
35°	775.9	775.1	774.4	773.6	772.9	771.3	768.7	766.1	763.6	761.0	760.1
37.5°	735.2	734.3	733.3	732.5	731.5	729.8	727.5	725.0	722.6	720.3	718.8
40°	707.6	706.6	705.8	704.8	703.9	702.2	699.6	697.0	694.5	691.9	690.3
42.5°	677.9	677.2	676.4	675.7	674.9	673.2	670.7	668.0	665.5	663.0	661.5
45°	635.2	634.4	633.7	633.0	632.2	630.7	628.6	626.4	624.2	622.0	619.8
47.5°	589.1	589.1	589.1	589.1	589.2	588.0	585.3	582.7	580.0	577.4	575.1
50°	559.4	558.9	558.3	557.8	557.3	555.9	553.7	551.5	549.3	547.1	544.7
52.5°	529.2	528.8	528.4	528.0	527.6	526.2	523.9	521.5	519.2	516.8	514.8
55°	483.8	483.2	482.7	482.1	481.6	480.0	477.4	474.9	472.3	469.8	468.1
57.5°	435.9	435.6	435.3	435.0	434.7	433.5	431.3	429.2	427.0	424.8	422.7
60°	405.6	404.9	404.2	403.4	402.7	401.3	399.3	397.3	395.3	393.2	391.4
62.5°	374.0	373.4	372.9	372.2	371.7	370.5	368.8	367.1	365.4	363.6	361.7
65°	326.6	326.2	325.9	325.5	325.2	324.0	321.9	320.0	317.9	315.9	314.3
67.5°	280.7	280.0	279.2	278.4	277.7	276.5	275.0	273.5	272.0	270.5	269.1
70°	251.8	250.8	249.9	249.0	248.1	246.8	245.2	243.5	241.9	240.3	239.2
72.5°	220.1	219.5	218.9	218.3	217.7	216.8	215.8	214.7	213.7	212.6	211.4
75°	173.6	173.3	172.9	172.5	172.1	171.5	170.6	169.7	168.7	167.9	167.3
77.5°	130.6	130.5	130.4	130.2	130.1	129.8	129.2	128.7	128.2	127.7	127.4
80°	103.7	103.7	103.7	103.7	103.7	103.5	103.1	102.7	102.3	102.0	101.9
82.5°	79.9	79.7	79.4	79.1	78.8	78.6	78.5	78.5	78.4	78.3	78.0
85°	45.2	45.5	45.6	45.8	45.9	46.1	46.1	46.1	46.1	46.1	45.9
87.5°	18.0	18.5	18.9	19.3	19.7	20.0	20.3	20.5	20.7	20.9	21.2
90°	1.2	3.3	5.5	7.6	9.7	11.6	13.5	15.4	17.3	19.1	20.4
92.5°	28.9	30.4	31.9	33.4	34.9	36.8	39.1	41.3	43.6	45.9	47.6
95°	77.6	78.2	78.7	79.2	79.8	81.4	84.1	86.7	89.4	92.0	93.9
97.5°	129.0	129.2	129.4	129.7	129.9	131.8	135.5	139.2	142.8	146.5	148.2
100°	167.2	167.2	167.2	167.2	167.2	169.0	172.5	175.9	179.4	182.8	185.2
102.5°	208.3	209.5	210.5	211.5	212.6	214.0	215.8	217.5	219.3	221.0	223.6
105°	272.4	273.7	275.0	276.4	277.7	279.2	280.7	282.3	283.9	285.6	287.2
107.5°	343.1	344.4	345.8	347.1	348.4	349.7	350.9	352.1	353.4	354.6	355.4
110°	391.9	393.2	394.5	395.9	397.2	398.2	399.0	399.8	400.6	401.4	402.2



TEST NUMBER: P333429-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	441.6	442.3	443.0	443.6	444.3	445.2	446.2	447.2	448.2	449.2	449.6
115°	514.9	516.0	517.1	518.1	519.2	520.0	520.5	521.0	521.6	522.1	521.8
117.5°	588.5	589.0	589.5	589.9	590.4	590.9	591.4	591.8	592.3	592.9	593.0
120°	634.4	635.7	637.1	638.4	639.7	640.5	640.8	641.0	641.3	641.6	641.6
122.5°	684.1	684.6	685.1	685.6	686.0	686.6	687.3	688.0	688.6	689.4	689.1
125°	751.5	753.0	754.7	756.3	757.9	758.8	759.1	759.3	759.6	759.9	759.3
127.5°	823.2	824.1	825.0	825.9	826.8	827.4	827.8	828.1	828.4	828.7	828.4
130°	866.2	867.5	868.9	870.1	871.5	872.4	873.0	873.5	874.0	874.6	874.3
132.5°	909.2	911.4	913.5	915.8	917.9	918.9	918.9	918.7	918.6	918.5	918.2
135°	977.3	978.9	980.5	982.1	983.7	984.6	984.8	985.2	985.4	985.6	985.6
137.5°	1041.3	1042.9	1044.4	1045.9	1047.5	1048.5	1049.2	1049.7	1050.3	1050.9	1051.2
140°	1082.4	1083.8	1085.1	1086.4	1087.7	1088.8	1089.6	1090.4	1091.2	1092.0	1092.5
142.5°	1123.6	1124.7	1125.8	1126.9	1128.0	1129.0	1130.0	1131.1	1132.1	1133.1	1133.4
145°	1184.0	1185.0	1186.1	1187.2	1188.3	1189.1	1189.9	1190.7	1191.5	1192.3	1192.3
147.5°	1239.9	1240.5	1241.0	1241.7	1242.2	1242.9	1243.5	1244.1	1244.8	1245.4	1246.0
150°	1277.2	1276.9	1276.7	1276.4	1276.1	1276.5	1277.6	1278.7	1279.7	1280.8	1280.8
152.5°	1307.7	1308.1	1308.5	1308.8	1309.2	1309.6	1310.1	1310.5	1310.9	1311.4	1312.0
155°	1354.9	1354.9	1354.9	1354.9	1354.9	1354.9	1355.3	1355.5	1355.7	1356.1	1357.1
157.5°	1396.9	1396.3	1395.7	1395.1	1394.6	1394.4	1394.6	1395.0	1395.2	1395.4	1396.5
160°	1421.7	1420.9	1420.1	1419.4	1418.6	1418.3	1418.6	1418.8	1419.1	1419.4	1420.4
162.5°	1443.8	1443.1	1442.6	1442.0	1441.4	1441.1	1441.1	1441.2	1441.3	1441.3	1442.6
165°	1473.1	1472.6	1472.0	1471.6	1471.0	1470.8	1471.2	1471.4	1471.6	1472.0	1473.0
167.5°	1497.9	1496.9	1495.9	1494.8	1493.7	1493.2	1493.2	1493.2	1493.2	1493.2	1494.8
170°	1511.3	1510.3	1509.2	1508.2	1507.1	1506.6	1506.6	1506.6	1506.6	1506.6	1508.2
172.5°	1520.9	1519.9	1518.8	1517.7	1516.6	1516.2	1516.2	1516.2	1516.2	1516.2	1517.7
175°	1531.7	1530.6	1529.5	1528.4	1527.4	1526.9	1526.9	1526.9	1526.9	1526.9	1528.4
177.5°	1537.2	1536.3	1535.5	1534.6	1533.7	1533.2	1533.0	1532.8	1532.6	1532.4	1533.7
180°	1535.2	1535.2	1535.2	1535.2	1535.2	1535.2	1535.2	1535.2	1535.2	1535.2	1535.2



TEST NUMBER: P333429-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9
2.5°	1037.0	1038.4	1039.8	1040.5	1040.4	1040.2	1040.1	1039.9
5°	1031.7	1033.3	1035.0	1035.7	1035.5	1035.4	1035.1	1035.0
7.5°	1021.3	1022.9	1024.5	1025.2	1025.0	1024.8	1024.6	1024.5
10°	1012.4	1013.9	1015.3	1016.0	1015.8	1015.6	1015.4	1015.3
12.5°	1000.6	1001.8	1003.0	1003.5	1003.5	1003.5	1003.5	1003.4
15°	980.1	981.0	981.9	982.3	982.3	982.3	982.3	982.3
17.5°	956.2	957.3	958.4	958.5	957.6	956.7	955.8	954.9
20°	938.0	939.3	940.6	940.7	939.8	938.9	938.0	937.1
22.5°	917.3	918.2	919.1	919.2	918.5	917.9	917.3	916.7
25°	884.3	884.7	885.1	884.9	884.5	883.9	883.4	882.8
27.5°	849.7	849.8	849.9	849.6	849.1	848.5	848.0	847.4
30°	824.5	824.1	823.7	823.3	822.8	822.2	821.7	821.1
32.5°	798.8	798.2	797.6	796.7	795.7	794.7	793.8	792.8
35°	759.2	758.3	757.4	756.2	754.7	753.3	751.8	750.4
37.5°	717.5	716.1	714.8	713.7	712.9	712.0	711.2	710.3
40°	688.6	687.0	685.3	684.2	683.7	683.2	682.6	682.1
42.5°	660.0	658.5	657.0	655.8	655.0	654.1	653.2	652.4
45°	617.6	615.4	613.2	611.8	611.3	610.8	610.2	609.7
47.5°	572.9	570.7	568.5	566.7	565.5	564.2	562.8	561.6
50°	542.3	540.0	537.6	535.8	534.5	533.2	532.0	530.7
52.5°	512.7	510.6	508.5	506.8	505.3	503.9	502.5	501.1
55°	466.5	464.9	463.2	461.8	460.4	459.1	457.9	456.6
57.5°	420.6	418.5	416.4	414.9	414.2	413.6	412.9	412.2
60°	389.6	387.8	386.0	384.4	383.1	381.8	380.6	379.3
62.5°	359.7	357.7	355.8	354.3	353.3	352.3	351.3	350.3
65°	312.7	311.0	309.3	308.2	307.4	306.7	305.9	305.2
67.5°	267.8	266.3	265.0	264.0	263.6	263.2	262.7	262.3
70°	238.1	236.9	235.8	235.0	234.2	233.5	232.7	232.0
72.5°	210.1	208.9	207.6	206.6	205.9	205.2	204.5	203.7
75°	166.8	166.2	165.6	165.0	164.3	163.5	162.8	162.1
77.5°	127.1	126.7	126.4	126.0	125.4	124.9	124.5	123.9
80°	101.6	101.5	101.3	101.0	100.7	100.3	99.9	99.6
82.5°	77.6	77.3	77.0	76.8	76.8	76.7	76.6	76.5
85°	45.7	45.6	45.3	45.1	44.7	44.4	44.0	43.6
87.5°	21.5	21.7	22.0	22.1	21.9	21.8	21.6	21.5
90°	21.8	23.1	24.4	25.5	26.3	27.1	27.9	28.7
92.5°	49.4	51.1	52.9	54.0	54.7	55.2	55.8	56.4
95°	95.7	97.6	99.4	100.6	101.2	101.7	102.2	102.7
97.5°	150.0	151.7	153.4	154.6	154.9	155.2	155.5	155.8
100°	187.6	190.0	192.3	193.8	194.3	194.9	195.4	195.9
102.5°	226.2	228.9	231.4	233.1	233.9	234.6	235.4	236.1
105°	288.8	290.3	291.9	293.1	293.9	294.7	295.5	296.3
107.5°	356.2	357.0	357.7	358.1	358.1	358.1	358.0	357.9
110°	403.1	403.9	404.6	404.9	404.6	404.3	404.1	403.9





TEST NUMBER: P333429-927

CATALOG NUMBER: S125DIW-S850D1560U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	450.0	450.4	450.7	450.7	450.2	449.7	449.2	448.8
115°	521.6	521.3	521.0	520.8	520.5	520.2	520.0	519.8
117.5°	593.3	593.5	593.7	593.3	592.2	591.1	590.1	589.0
120°	641.6	641.6	641.6	641.0	640.0	638.9	637.9	636.8
122.5°	689.0	688.7	688.5	688.0	687.1	686.3	685.4	684.6
125°	758.8	758.3	757.7	757.3	757.1	756.8	756.5	756.3
127.5°	828.1	827.9	827.6	827.2	826.6	826.2	825.6	825.1
130°	874.0	873.8	873.5	873.1	872.6	872.0	871.5	871.0
132.5°	918.0	917.7	917.4	917.0	916.2	915.4	914.7	913.9
135°	985.6	985.6	985.6	985.2	984.0	983.0	981.9	980.9
137.5°	1051.5	1051.9	1052.2	1051.7	1050.4	1049.0	1047.7	1046.3
140°	1093.1	1093.6	1094.1	1093.7	1092.4	1091.1	1089.7	1088.4
142.5°	1133.7	1134.0	1134.4	1133.9	1132.5	1131.2	1129.9	1128.5
145°	1192.3	1192.3	1192.3	1191.9	1191.1	1190.3	1189.5	1188.7
147.5°	1246.7	1247.3	1247.9	1247.4	1245.5	1243.7	1242.0	1240.2
150°	1280.8	1280.8	1280.8	1280.5	1279.9	1279.5	1278.9	1278.3
152.5°	1312.6	1313.3	1313.9	1313.8	1312.8	1311.9	1310.9	1310.0
155°	1358.1	1359.2	1360.3	1360.2	1358.8	1357.5	1356.1	1354.9
157.5°	1397.6	1398.7	1399.7	1399.4	1397.6	1395.8	1394.1	1392.3
160°	1421.5	1422.5	1423.6	1423.5	1422.1	1420.8	1419.5	1418.2
162.5°	1443.9	1445.2	1446.4	1446.3	1444.8	1443.2	1441.7	1440.1
165°	1474.0	1475.1	1476.2	1475.9	1474.3	1472.7	1471.2	1469.5
167.5°	1496.4	1497.9	1499.5	1499.5	1497.9	1496.3	1494.6	1492.9
170°	1509.7	1511.3	1512.9	1512.8	1510.9	1509.1	1507.2	1505.4
172.5°	1519.3	1520.9	1522.5	1522.5	1520.8	1519.2	1517.5	1515.9
175°	1530.1	1531.7	1533.3	1533.1	1531.3	1529.4	1527.6	1525.7
177.5°	1534.9	1536.2	1537.5	1537.4	1535.9	1534.4	1532.9	1531.4
180°	1535.2	1535.2	1535.2	1535.2	1535.2	1535.2	1535.2	1535.2

(END OF REPORT)