

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333722-927

Luminaire Tested: **S125RDIW-S1270D470U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333722-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S1270D470U927-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 470 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5348.9 lumens
Efficiency: N/A
Efficacy: 102.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 52.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333722-927

CATALOG NUMBER: S125RDIW-S1270D470U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

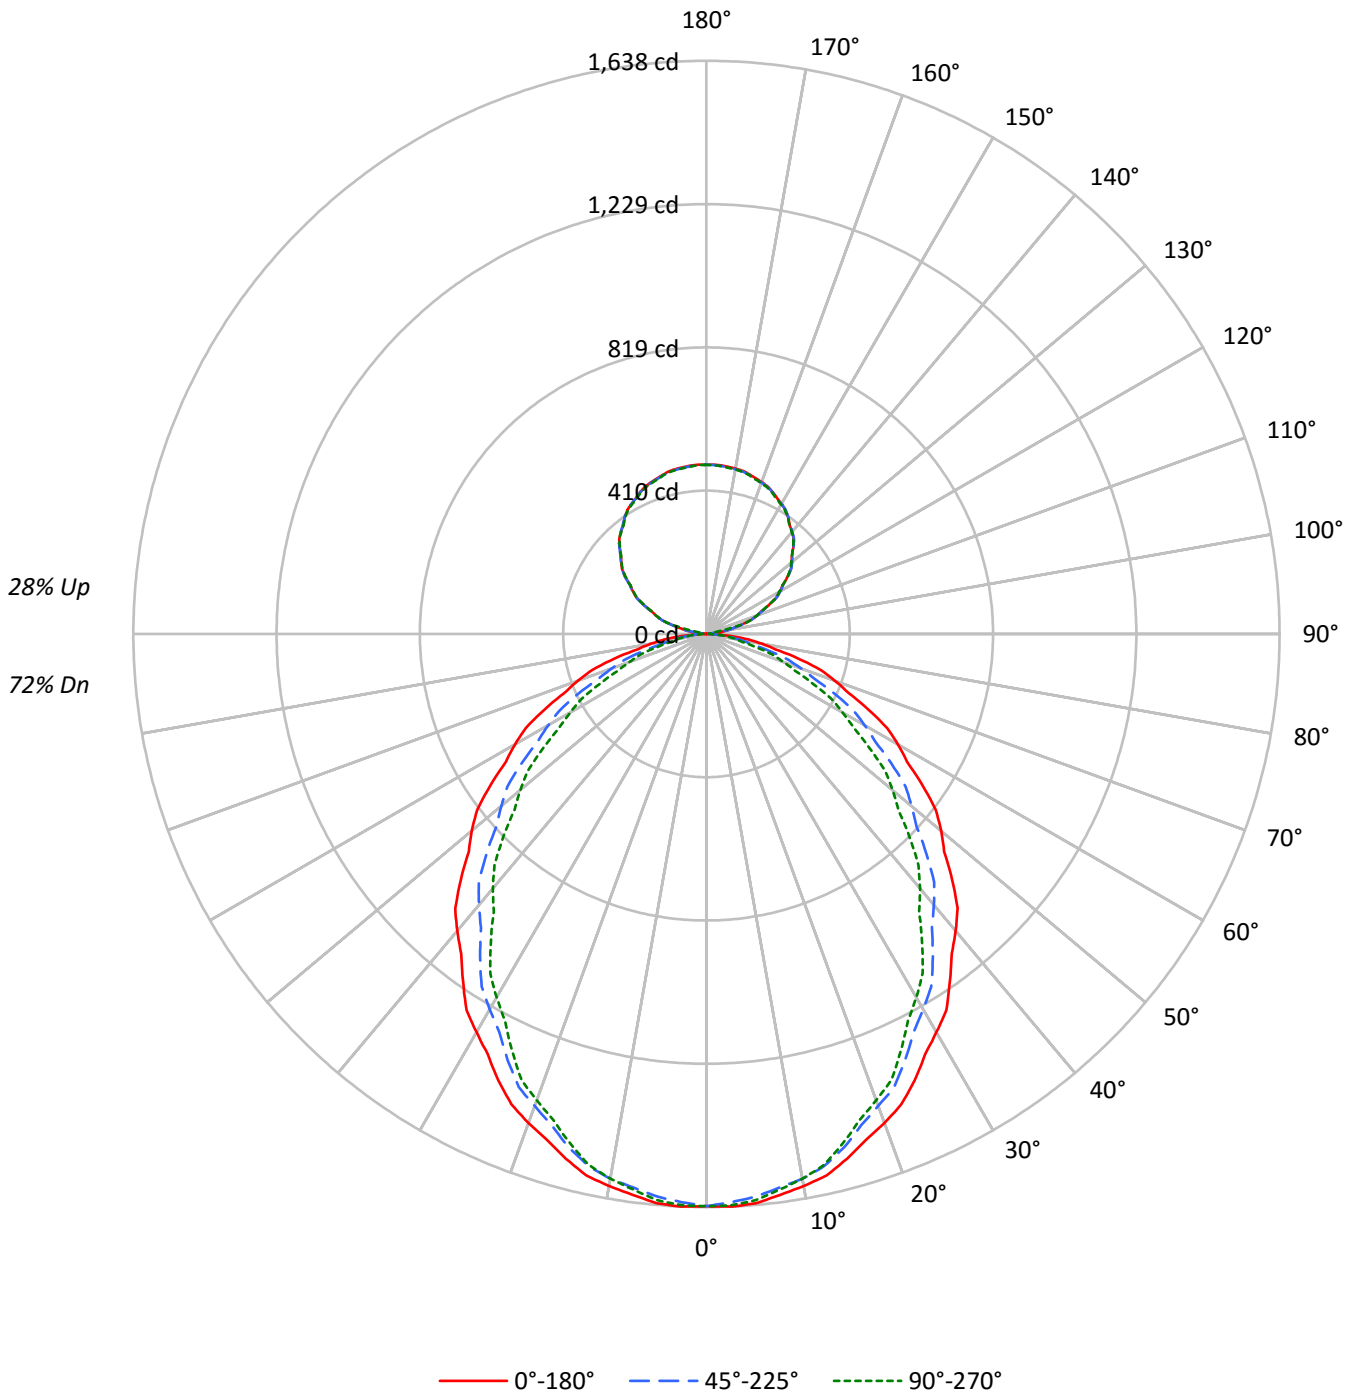



TEST NUMBER: P333722-927

CATALOG NUMBER: S125RDIW-S1270D470U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	77	77	77	72
1	103	99	95	91	98	94	90	87	85	82	80	76	74	72	68	67	65	62
2	94	87	80	75	89	82	77	72	74	70	66	67	64	61	60	58	56	52
3	86	76	69	63	81	73	66	61	66	61	56	60	55	52	54	50	48	44
4	79	68	60	54	75	65	57	52	59	53	48	53	49	45	48	44	41	38
5	73	61	52	46	69	58	51	45	53	47	42	48	43	39	44	39	36	33
6	67	55	46	41	64	52	45	39	48	42	37	44	38	34	40	35	32	29
7	62	50	42	36	59	48	40	35	44	37	33	40	35	31	36	32	29	26
8	58	45	37	32	55	43	36	31	40	34	29	37	31	27	33	29	26	24
9	54	42	34	29	51	40	33	28	37	31	26	34	29	25	31	27	23	21
10	51	38	31	26	48	37	30	25	34	28	24	31	26	23	29	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10561	10561	10561
5°	10585	10466	10529
10°	10506	10368	10368
15°	10380	10158	10075
20°	10221	9864	9745
25°	10033	9576	9365
30°	9801	9238	8944
35°	9563	8891	8472
40°	9340	8528	8008
45°	9070	8122	7501
50°	8799	7681	6974
55°	8483	7260	6411
60°	8169	6748	5807
65°	7795	6154	5115
70°	7370	5410	4409
75°	6780	4561	3666
80°	5973	3582	3080
85°	5039	2927	2749



TEST NUMBER: P333722-927

CATALOG NUMBER: S125RDIW-S1270D470U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.8	2.9
10°-20°	429.7	8.0
20°-30°	623.1	11.7
30°-40°	710.2	13.3
40°-50°	692.3	12.9
50°-60°	582.7	10.9
60°-70°	408.5	7.6
70°-80°	210.0	3.9
80°-90°	54.0	1.0
90°-100°	17.6	0.3
100°-110°	108.3	2.0
110°-120°	196.4	3.7
120°-130°	252.0	4.7
130°-140°	271.1	5.1
140°-150°	254.4	4.8
150°-160°	205.8	3.8
160°-170°	133.1	2.5
170°-180°	45.9	0.9
0°-30°	1206.6	22.6
0°-40°	1916.8	35.8
0°-60°	3191.8	59.7
0°-90°	3864.3	72.2
90°-120°	322.2	6.0
90°-150°	1099.7	20.6
90°-180°	1485.0	27.8
0°-180°	5348.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1635	1635	1635	1635	1635	
5°	1633	1627	1614	1626	1624	155
15°	1552	1544	1519	1517	1507	437
25°	1408	1388	1344	1328	1314	648
35°	1213	1182	1128	1093	1074	759
45°	993	955	889	842	821	766
55°	753	712	645	591	569	674
65°	510	467	403	355	335	505
75°	272	234	183	157	147	288
85°	68	47	40	38	37	76
90°	0	3	6	8	9	4
95°	20	19	6	7	8	26
105°	105	107	107	107	106	112
115°	198	200	200	198	196	196
125°	281	284	284	282	281	251
135°	351	353	352	351	349	270
145°	407	407	408	408	406	254
155°	448	446	447	447	445	206
165°	473	471	471	473	470	133
175°	484	481	482	484	481	46
180°	484	484	484	484	484	



TEST NUMBER: P333722-927

CATALOG NUMBER: S125RDIW-S1270D470U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3
2.5°	1638.2	1637.6	1636.9	1636.3	1635.6	1634.2	1632.0	1629.8	1627.6	1625.4	1627.6
5°	1632.8	1631.7	1630.6	1629.5	1628.4	1626.4	1623.3	1620.3	1617.3	1614.3	1617.0
7.5°	1616.8	1615.7	1614.7	1613.6	1612.6	1610.3	1606.6	1603.0	1599.4	1595.8	1597.7
10°	1602.0	1601.1	1600.3	1599.5	1598.6	1596.3	1592.4	1588.6	1584.8	1581.0	1581.8
12.5°	1585.2	1584.1	1583.0	1582.0	1581.0	1577.9	1572.7	1567.6	1562.3	1557.2	1557.8
15°	1552.5	1550.9	1549.3	1547.6	1545.9	1542.2	1536.4	1530.7	1525.0	1519.2	1518.9
17.5°	1515.7	1513.2	1510.7	1508.2	1505.6	1500.7	1493.5	1486.2	1479.0	1471.7	1470.4
20°	1487.1	1484.3	1481.5	1478.8	1476.1	1470.3	1461.6	1452.8	1444.0	1435.2	1433.8
22.5°	1455.5	1452.7	1449.9	1447.2	1444.5	1438.5	1429.3	1420.1	1410.8	1401.6	1398.9
25°	1408.0	1403.9	1399.8	1395.7	1391.5	1384.4	1374.3	1364.1	1353.9	1343.8	1340.2
27.5°	1353.7	1348.7	1343.7	1338.7	1333.7	1325.8	1314.9	1304.0	1293.2	1282.3	1277.3
30°	1314.2	1308.9	1303.7	1298.5	1293.3	1284.9	1273.4	1261.9	1250.3	1238.8	1232.5
32.5°	1275.7	1269.6	1263.5	1257.4	1251.3	1242.3	1230.6	1218.9	1207.0	1195.3	1188.4
35°	1212.9	1206.3	1199.7	1193.1	1186.5	1177.0	1164.7	1152.4	1140.0	1127.7	1119.7
37.5°	1151.4	1143.4	1135.4	1127.4	1119.3	1108.9	1096.2	1083.5	1070.7	1058.0	1048.5
40°	1107.9	1099.6	1091.4	1083.2	1075.0	1064.2	1051.1	1037.9	1024.7	1011.5	1001.2
42.5°	1062.5	1054.0	1045.5	1037.0	1028.6	1017.6	1004.0	990.4	976.8	963.1	953.2
45°	993.0	985.1	977.1	969.2	961.2	949.7	934.5	919.5	904.4	889.3	878.3
47.5°	921.1	912.8	904.4	896.0	887.6	875.8	860.5	845.3	830.1	814.9	803.6
50°	875.7	866.6	857.5	848.5	839.5	827.1	811.4	795.8	780.1	764.5	753.0
52.5°	826.2	817.0	807.7	798.4	789.2	777.1	762.4	747.7	732.8	718.1	705.7
55°	753.4	744.7	735.9	727.1	718.3	706.2	690.9	675.5	660.1	644.8	632.4
57.5°	679.8	670.4	661.0	651.6	642.2	630.2	615.4	600.5	585.7	570.8	558.8
60°	632.4	622.7	613.1	603.6	594.0	581.7	566.9	552.1	537.3	522.4	510.4
62.5°	582.0	572.8	563.6	554.4	545.3	533.2	518.2	503.1	488.1	473.0	461.8
65°	510.1	500.7	491.5	482.1	472.8	460.8	446.3	431.7	417.2	402.7	391.7
67.5°	438.7	429.4	420.0	410.7	401.4	389.8	375.8	361.9	347.9	334.0	323.9
70°	390.3	381.0	371.6	362.3	353.0	341.4	327.7	314.0	300.2	286.5	278.1
72.5°	342.9	333.7	324.6	315.5	306.4	295.4	282.6	269.7	256.9	244.1	236.2
75°	271.7	263.5	255.2	247.0	238.8	228.9	217.4	205.9	194.3	182.8	176.7
77.5°	201.1	194.5	187.9	181.3	174.8	166.8	157.6	148.4	139.2	129.9	125.7
80°	160.6	154.0	147.4	140.8	134.2	127.1	119.4	111.7	104.0	96.3	93.9
82.5°	121.0	115.1	109.2	103.2	97.4	91.7	86.4	81.2	75.9	70.7	69.5
85°	68.0	63.0	58.1	53.1	48.2	45.0	43.6	42.3	40.9	39.5	39.2
87.5°	22.8	21.4	20.0	18.5	17.2	16.4	16.3	16.2	16.1	16.0	16.1
90°	0.4	1.0	1.7	2.3	2.9	3.5	4.0	4.6	5.1	5.7	6.1
92.5°	5.5	5.1	4.6	4.2	3.7	3.7	4.3	4.8	5.2	5.7	6.1
95°	20.4	20.2	20.0	19.7	19.5	17.8	14.8	11.8	8.8	5.7	6.1
97.5°	42.6	43.1	43.5	44.0	44.4	41.6	35.6	29.6	23.6	17.7	15.4
100°	59.8	60.1	60.4	60.6	60.8	61.1	61.4	61.7	62.0	62.3	50.5
102.5°	77.3	77.6	78.0	78.3	78.6	78.8	79.0	79.1	79.4	79.5	77.3
105°	105.4	105.7	106.0	106.3	106.6	106.8	106.8	106.8	106.8	106.8	106.8
107.5°	134.4	134.4	134.4	134.4	134.4	134.5	134.7	134.8	135.0	135.1	135.2
110°	153.4	153.4	153.4	153.4	153.4	153.4	153.6	153.8	153.9	154.1	153.8



TEST NUMBER: P333722-927

CATALOG NUMBER: S125RDIW-S1270D470U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	171.2	171.3	171.5	171.7	171.9	172.1	172.1	172.3	172.4	172.5	172.1
115°	197.8	198.2	198.6	199.0	199.4	199.6	199.7	199.8	199.9	199.9	199.6
117.5°	225.5	225.4	225.4	225.4	225.4	225.5	225.8	226.1	226.4	226.7	226.3
120°	242.6	242.6	242.5	242.4	242.3	242.4	242.6	242.9	243.1	243.4	243.2
122.5°	257.9	258.1	258.4	258.7	259.0	259.2	259.4	259.4	259.6	259.7	259.5
125°	281.3	281.9	282.4	283.0	283.5	283.8	283.8	283.8	283.8	283.8	283.5
127.5°	303.7	304.2	304.6	305.0	305.4	305.5	305.5	305.5	305.4	305.3	305.1
130°	317.5	317.9	318.3	318.7	319.1	319.3	319.4	319.5	319.6	319.6	319.4
132.5°	331.3	331.8	332.2	332.6	333.1	333.3	333.1	333.0	332.7	332.6	332.6
135°	350.9	351.3	351.8	352.3	352.8	352.9	352.8	352.6	352.4	352.3	352.1
137.5°	368.8	369.2	369.6	370.1	370.5	370.7	370.5	370.3	370.2	370.0	370.1
140°	380.6	380.7	380.9	381.0	381.2	381.3	381.2	381.1	381.0	381.0	381.1
142.5°	391.2	391.3	391.4	391.5	391.6	391.7	391.8	391.9	392.1	392.1	392.1
145°	406.8	406.9	407.1	407.3	407.4	407.5	407.5	407.5	407.5	407.5	407.6
147.5°	420.4	420.3	420.3	420.3	420.3	420.3	420.4	420.5	420.6	420.6	420.7
150°	429.0	428.8	428.6	428.5	428.3	428.3	428.5	428.6	428.8	429.0	429.1
152.5°	437.3	437.0	436.6	436.3	435.9	435.8	435.9	436.1	436.3	436.4	436.6
155°	448.0	447.5	447.0	446.6	446.1	445.9	446.1	446.2	446.4	446.6	446.8
157.5°	456.2	455.9	455.7	455.3	455.0	455.0	455.0	455.0	455.0	455.0	455.3
160°	461.9	461.4	461.0	460.5	460.0	459.9	459.9	460.0	460.1	460.2	460.5
162.5°	466.5	466.0	465.6	465.1	464.6	464.5	464.5	464.6	464.7	464.8	465.2
165°	472.7	472.2	471.7	471.3	470.8	470.6	470.6	470.7	470.8	470.9	471.3
167.5°	477.3	476.8	476.3	475.8	475.3	475.1	475.2	475.2	475.3	475.4	476.0
170°	479.9	479.3	478.7	478.2	477.6	477.4	477.4	477.5	477.6	477.7	478.3
172.5°	481.6	481.0	480.5	479.9	479.3	479.2	479.3	479.4	479.6	479.7	480.3
175°	483.5	483.0	482.5	482.0	481.6	481.3	481.4	481.5	481.6	481.6	482.3
177.5°	484.3	483.9	483.5	483.2	482.8	482.6	482.7	482.8	482.8	482.9	483.3
180°	483.5	483.5	483.5	483.5	483.5	483.5	483.5	483.5	483.5	483.5	483.5



TEST NUMBER: P333722-927

CATALOG NUMBER: S125RDIW-S1270D470U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3
2.5°	1629.8	1632.0	1634.2	1635.1	1635.0	1634.7	1634.5	1634.3
5°	1619.8	1622.5	1625.2	1626.4	1625.8	1625.2	1624.7	1624.1
7.5°	1599.6	1601.6	1603.5	1604.1	1603.5	1602.9	1602.3	1601.7
10°	1582.5	1583.4	1584.2	1584.2	1583.4	1582.5	1581.8	1581.0
12.5°	1558.5	1559.0	1559.6	1559.3	1558.1	1556.8	1555.5	1554.3
15°	1518.6	1518.4	1518.1	1516.7	1514.3	1511.8	1509.3	1506.8
17.5°	1469.0	1467.6	1466.3	1464.6	1462.5	1460.5	1458.5	1456.4
20°	1432.4	1431.1	1429.7	1427.8	1425.3	1422.8	1420.4	1417.9
22.5°	1396.2	1393.5	1390.8	1388.5	1386.5	1384.4	1382.4	1380.4
25°	1336.6	1333.1	1329.5	1326.2	1323.2	1320.2	1317.2	1314.2
27.5°	1272.3	1267.3	1262.3	1258.4	1255.5	1252.5	1249.6	1246.7
30°	1226.2	1219.9	1213.5	1209.2	1206.7	1204.2	1201.7	1199.3
32.5°	1181.4	1174.4	1167.4	1162.4	1159.3	1156.1	1153.0	1149.9
35°	1111.7	1103.7	1095.8	1089.9	1086.1	1082.2	1078.4	1074.5
37.5°	1038.9	1029.4	1019.8	1013.1	1009.4	1005.7	1002.0	998.2
40°	990.7	980.2	969.9	963.0	959.6	956.4	953.1	949.8
42.5°	943.2	933.2	923.2	915.8	910.9	906.1	901.3	896.4
45°	867.3	856.3	845.3	837.8	833.7	829.6	825.5	821.3
47.5°	792.3	781.0	769.7	761.8	757.2	752.7	748.1	743.5
50°	741.5	729.9	718.4	710.6	706.5	702.3	698.2	694.1
52.5°	693.2	680.9	668.4	660.2	656.1	652.0	647.8	643.7
55°	620.0	607.7	595.3	586.9	582.6	578.1	573.8	569.4
57.5°	546.7	534.6	522.5	514.6	510.6	506.8	502.9	499.0
60°	498.3	486.2	474.1	466.0	461.9	457.8	453.7	449.6
62.5°	450.7	439.4	428.3	420.6	416.5	412.3	408.2	404.1
65°	380.7	369.7	358.7	351.2	347.1	342.9	338.8	334.7
67.5°	313.9	303.8	293.8	287.1	283.8	280.5	277.3	273.9
70°	269.5	261.0	252.5	246.6	243.3	240.0	236.7	233.5
72.5°	228.4	220.5	212.6	207.6	205.4	203.3	201.1	198.8
75°	170.7	164.7	158.7	154.6	152.7	150.8	148.9	146.9
77.5°	121.4	117.2	113.0	110.2	108.8	107.3	105.9	104.5
80°	91.4	89.0	86.4	84.9	84.4	83.8	83.3	82.8
82.5°	68.4	67.2	66.1	65.3	65.0	64.6	64.3	64.0
85°	39.0	38.7	38.4	38.2	37.9	37.6	37.3	37.1
87.5°	16.2	16.2	16.3	16.2	16.1	15.9	15.8	15.5
90°	6.5	6.9	7.3	7.7	7.9	8.2	8.4	8.6
92.5°	6.5	6.9	7.3	7.6	7.7	7.8	7.9	8.0
95°	6.5	6.9	7.3	7.5	7.5	7.5	7.5	7.5
97.5°	13.2	10.9	8.6	7.5	7.5	7.5	7.5	7.5
100°	38.7	26.8	14.9	8.8	8.5	8.2	7.8	7.5
102.5°	75.1	72.8	70.6	66.8	61.3	55.9	50.5	45.1
105°	106.8	106.8	106.8	106.8	106.7	106.6	106.5	106.5
107.5°	135.2	135.2	135.2	135.1	134.9	134.7	134.4	134.2
110°	153.6	153.4	153.1	153.0	153.1	153.2	153.3	153.4



TEST NUMBER: P333722-927

CATALOG NUMBER: S125RDIW-S1270D470U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	171.8	171.5	171.3	171.0	171.0	170.8	170.7	170.6
115°	199.3	199.0	198.7	198.3	197.8	197.3	196.9	196.4
117.5°	225.9	225.5	225.1	224.7	224.5	224.3	224.1	223.9
120°	243.0	242.9	242.7	242.4	242.0	241.6	241.2	240.8
122.5°	259.4	259.2	259.0	258.7	258.3	257.8	257.4	256.9
125°	283.2	282.9	282.6	282.3	282.0	281.8	281.5	281.3
127.5°	305.0	304.8	304.7	304.3	303.6	303.1	302.5	301.9
130°	319.2	318.9	318.7	318.4	318.0	317.6	317.2	316.8
132.5°	332.5	332.4	332.4	332.2	331.8	331.4	331.0	330.6
135°	352.0	351.8	351.6	351.3	350.9	350.4	349.9	349.4
137.5°	370.1	370.2	370.2	370.0	369.6	369.2	368.8	368.4
140°	381.3	381.4	381.6	381.4	381.0	380.5	380.0	379.5
142.5°	392.2	392.2	392.3	392.1	391.6	391.1	390.6	390.1
145°	407.7	407.7	407.8	407.6	407.1	406.6	406.2	405.7
147.5°	420.9	421.0	421.0	420.8	420.3	419.7	419.1	418.5
150°	429.3	429.4	429.6	429.4	428.7	428.1	427.5	426.8
152.5°	436.7	436.9	437.0	436.9	436.3	435.7	435.1	434.6
155°	447.0	447.3	447.5	447.3	446.6	446.0	445.4	444.7
157.5°	455.5	455.7	456.0	455.8	455.2	454.6	453.9	453.3
160°	460.8	461.1	461.4	461.3	460.7	460.0	459.4	458.8
162.5°	465.6	466.1	466.5	466.4	465.7	465.0	464.3	463.6
165°	471.9	472.4	472.9	472.8	472.1	471.4	470.8	470.2
167.5°	476.6	477.1	477.7	477.7	476.9	476.2	475.5	474.8
170°	479.0	479.7	480.3	480.2	479.5	478.8	478.1	477.4
172.5°	480.9	481.4	482.0	482.0	481.3	480.5	479.8	479.1
175°	482.9	483.5	484.2	484.2	483.5	482.8	482.0	481.3
177.5°	483.8	484.2	484.7	484.7	484.1	483.6	483.1	482.6
180°	483.5	483.5	483.5	483.5	483.5	483.5	483.5	483.5

(END OF REPORT)