

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333726-927

Luminaire Tested: **S125RDIW-S1270D770U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333726-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S1270D770U927-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 770 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6296.5 lumens
Efficiency: N/A
Efficacy: 105.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333726-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

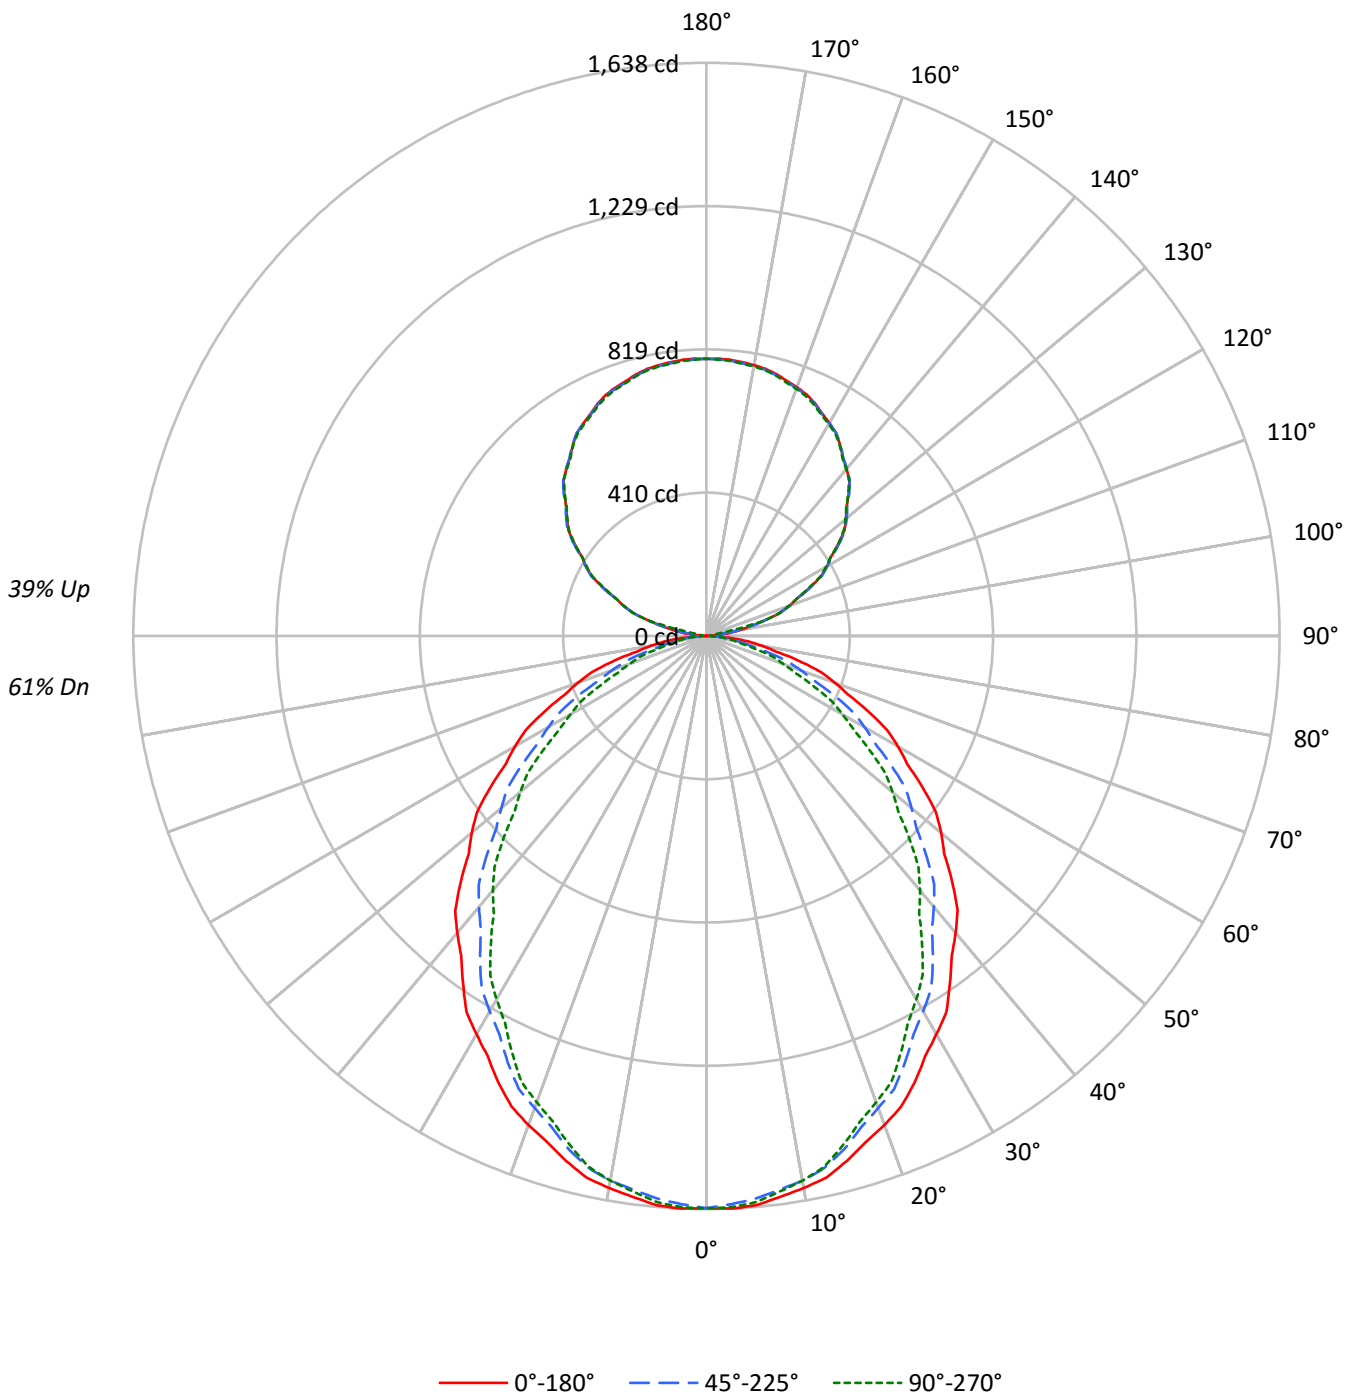



TEST NUMBER: P333726-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	61
1	101	96	92	89	94	90	87	84	79	77	74	69	67	65	59	58	57	52
2	92	84	78	73	86	79	74	69	70	66	62	61	58	55	53	50	48	44
3	84	74	67	61	78	70	63	58	62	57	52	54	50	47	47	44	41	38
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	39	36	33
5	71	59	51	45	66	56	48	43	49	43	39	43	39	35	38	34	31	28
6	65	53	45	39	61	50	43	37	45	39	34	39	35	31	34	31	28	25
7	60	48	40	34	57	45	38	33	41	35	30	36	31	27	32	28	25	22
8	56	44	36	31	53	41	34	29	37	31	27	33	28	25	29	25	22	20
9	52	40	33	27	49	38	31	26	34	28	24	30	26	22	27	23	20	18
10	49	37	30	25	46	35	28	24	31	26	22	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10561	10561	10561
5°	10585	10466	10529
10°	10506	10368	10368
15°	10380	10158	10075
20°	10221	9864	9745
25°	10033	9576	9365
30°	9801	9238	8944
35°	9563	8891	8472
40°	9340	8528	8008
45°	9070	8122	7501
50°	8799	7681	6974
55°	8483	7260	6411
60°	8169	6748	5807
65°	7795	6154	5115
70°	7370	5410	4409
75°	6780	4561	3666
80°	5973	3582	3080
85°	5039	2927	2749



TEST NUMBER: P333726-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.8	2.4
10°-20°	429.7	6.8
20°-30°	623.1	9.9
30°-40°	710.2	11.3
40°-50°	692.3	11.0
50°-60°	582.7	9.3
60°-70°	408.5	6.5
70°-80°	210.0	3.3
80°-90°	54.7	0.9
90°-100°	28.8	0.5
100°-110°	177.3	2.8
110°-120°	321.6	5.1
120°-130°	412.8	6.6
130°-140°	444.0	7.1
140°-150°	416.7	6.6
150°-160°	337.1	5.4
160°-170°	218.0	3.5
170°-180°	75.2	1.2
0°-30°	1206.6	19.2
0°-40°	1916.8	30.4
0°-60°	3191.8	50.7
0°-90°	3864.9	61.4
90°-120°	527.8	8.4
90°-150°	1801.3	28.6
90°-180°	2432.0	38.6
0°-180°	6296.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1635	1635	1635	1635	1635	
5°	1633	1627	1614	1626	1624	155
15°	1552	1544	1519	1517	1507	437
25°	1408	1388	1344	1328	1314	648
35°	1213	1182	1128	1093	1074	759
45°	993	955	889	842	821	766
55°	753	712	645	591	569	674
65°	510	467	403	355	335	505
75°	272	234	183	157	147	288
85°	68	47	40	38	37	76
90°	1	5	9	12	14	5
95°	33	31	9	12	12	43
105°	172	175	175	175	174	183
115°	324	327	328	325	322	321
125°	461	465	465	463	461	411
135°	575	578	577	576	572	443
145°	666	667	667	668	664	416
155°	734	730	731	733	728	338
165°	774	771	771	774	770	219
175°	792	789	789	793	788	75
180°	792	792	792	792	792	



TEST NUMBER: P333726-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3
2.5°	1638.2	1637.6	1636.9	1636.3	1635.6	1634.2	1632.0	1629.8	1627.6	1625.4	1627.6
5°	1632.8	1631.7	1630.6	1629.5	1628.4	1626.4	1623.3	1620.3	1617.3	1614.3	1617.0
7.5°	1616.8	1615.7	1614.7	1613.6	1612.6	1610.3	1606.6	1603.0	1599.4	1595.8	1597.7
10°	1602.0	1601.1	1600.3	1599.5	1598.6	1596.3	1592.4	1588.6	1584.8	1581.0	1581.8
12.5°	1585.2	1584.1	1583.0	1582.0	1581.0	1577.9	1572.7	1567.6	1562.3	1557.2	1557.8
15°	1552.5	1550.9	1549.3	1547.6	1545.9	1542.2	1536.4	1530.7	1525.0	1519.2	1518.9
17.5°	1515.7	1513.2	1510.7	1508.2	1505.6	1500.7	1493.5	1486.2	1479.0	1471.7	1470.4
20°	1487.1	1484.3	1481.5	1478.8	1476.1	1470.3	1461.6	1452.8	1444.0	1435.2	1433.8
22.5°	1455.5	1452.7	1449.9	1447.2	1444.5	1438.5	1429.3	1420.1	1410.8	1401.6	1398.9
25°	1408.0	1403.9	1399.8	1395.7	1391.5	1384.4	1374.3	1364.1	1353.9	1343.8	1340.2
27.5°	1353.7	1348.7	1343.7	1338.7	1333.7	1325.8	1314.9	1304.0	1293.2	1282.3	1277.3
30°	1314.2	1308.9	1303.7	1298.5	1293.3	1284.9	1273.4	1261.9	1250.3	1238.8	1232.5
32.5°	1275.7	1269.6	1263.5	1257.4	1251.3	1242.3	1230.6	1218.9	1207.0	1195.3	1188.4
35°	1212.9	1206.3	1199.7	1193.1	1186.5	1177.0	1164.7	1152.4	1140.0	1127.7	1119.7
37.5°	1151.4	1143.4	1135.4	1127.4	1119.3	1108.9	1096.2	1083.5	1070.7	1058.0	1048.5
40°	1107.9	1099.6	1091.4	1083.2	1075.0	1064.2	1051.1	1037.9	1024.7	1011.5	1001.2
42.5°	1062.5	1054.0	1045.5	1037.0	1028.6	1017.6	1004.0	990.4	976.8	963.1	953.2
45°	993.0	985.1	977.1	969.2	961.2	949.7	934.5	919.5	904.4	889.3	878.3
47.5°	921.1	912.8	904.4	896.0	887.6	875.8	860.5	845.3	830.1	814.9	803.6
50°	875.7	866.6	857.5	848.5	839.5	827.1	811.4	795.8	780.1	764.5	753.0
52.5°	826.2	817.0	807.7	798.4	789.2	777.1	762.4	747.7	732.8	718.1	705.7
55°	753.4	744.7	735.9	727.1	718.3	706.2	690.9	675.5	660.1	644.8	632.4
57.5°	679.8	670.4	661.0	651.6	642.2	630.2	615.4	600.5	585.7	570.8	558.8
60°	632.4	622.7	613.1	603.6	594.0	581.7	566.9	552.1	537.3	522.4	510.4
62.5°	582.0	572.8	563.6	554.4	545.3	533.2	518.2	503.1	488.1	473.0	461.8
65°	510.1	500.7	491.5	482.1	472.8	460.8	446.3	431.7	417.2	402.7	391.7
67.5°	438.7	429.4	420.0	410.7	401.4	389.8	375.8	361.9	347.9	334.0	323.9
70°	390.3	381.0	371.6	362.3	353.0	341.4	327.7	314.0	300.2	286.5	278.1
72.5°	342.9	333.7	324.6	315.5	306.4	295.4	282.6	269.7	256.9	244.1	236.2
75°	271.7	263.5	255.2	247.0	238.8	228.9	217.4	205.9	194.3	182.8	176.7
77.5°	201.1	194.5	187.9	181.3	174.8	166.8	157.6	148.4	139.2	129.9	125.7
80°	160.6	154.0	147.4	140.8	134.2	127.1	119.4	111.7	104.0	96.3	93.9
82.5°	121.0	115.1	109.2	103.2	97.4	91.7	86.4	81.2	75.9	70.7	69.5
85°	68.0	63.0	58.1	53.1	48.2	45.0	43.6	42.3	40.9	39.5	39.2
87.5°	22.8	21.5	20.2	18.9	17.5	16.9	16.8	16.8	16.7	16.7	16.8
90°	0.6	1.7	2.7	3.7	4.8	5.7	6.7	7.6	8.5	9.4	10.1
92.5°	9.0	8.3	7.6	6.8	6.1	6.2	7.0	7.8	8.6	9.4	10.1
95°	33.4	33.0	32.6	32.3	31.9	29.2	24.2	19.3	14.3	9.4	10.1
97.5°	69.9	70.6	71.3	71.9	72.6	68.1	58.3	48.5	38.7	28.9	25.2
100°	98.0	98.4	98.8	99.2	99.6	100.1	100.6	101.1	101.6	102.1	82.7
102.5°	126.7	127.1	127.7	128.2	128.7	129.0	129.4	129.7	130.0	130.3	126.7
105°	172.5	173.1	173.6	174.1	174.7	174.9	174.9	174.9	174.9	174.9	174.9
107.5°	220.2	220.2	220.2	220.2	220.2	220.4	220.6	220.9	221.2	221.4	221.4
110°	251.2	251.2	251.2	251.2	251.2	251.4	251.6	251.9	252.2	252.4	252.0



TEST NUMBER: P333726-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	280.4	280.7	281.0	281.3	281.6	281.9	282.0	282.2	282.3	282.5	281.9
115°	324.0	324.6	325.3	326.0	326.6	327.0	327.2	327.3	327.4	327.6	327.0
117.5°	369.2	369.2	369.2	369.2	369.1	369.3	369.9	370.3	370.8	371.3	370.7
120°	397.4	397.3	397.1	397.0	396.9	397.0	397.4	397.8	398.2	398.5	398.3
122.5°	422.2	422.8	423.3	423.7	424.3	424.6	424.8	424.9	425.2	425.3	425.1
125°	460.8	461.7	462.6	463.5	464.5	464.9	464.9	464.9	464.9	464.9	464.4
127.5°	497.5	498.2	498.8	499.5	500.1	500.4	500.3	500.3	500.2	500.1	499.8
130°	520.1	520.7	521.3	522.0	522.7	523.1	523.2	523.3	523.5	523.6	523.2
132.5°	542.6	543.4	544.2	544.9	545.7	545.9	545.6	545.3	545.0	544.7	544.6
135°	574.6	575.4	576.2	577.0	577.8	578.1	577.8	577.5	577.3	577.0	576.7
137.5°	604.1	604.8	605.5	606.2	606.8	607.0	606.8	606.6	606.3	606.1	606.2
140°	623.4	623.6	623.9	624.2	624.4	624.5	624.3	624.2	624.1	623.9	624.2
142.5°	640.7	640.9	641.0	641.2	641.4	641.5	641.7	641.9	642.1	642.3	642.3
145°	666.2	666.5	666.8	667.0	667.3	667.4	667.4	667.4	667.4	667.4	667.5
147.5°	688.6	688.5	688.4	688.4	688.3	688.4	688.6	688.6	688.8	689.0	689.1
150°	702.6	702.3	702.1	701.8	701.6	701.6	701.8	702.1	702.3	702.6	702.9
152.5°	716.2	715.7	715.1	714.5	713.9	713.8	714.1	714.3	714.5	714.8	715.1
155°	733.7	732.9	732.1	731.3	730.6	730.3	730.6	730.9	731.1	731.3	731.7
157.5°	747.2	746.8	746.3	745.8	745.4	745.1	745.1	745.2	745.2	745.2	745.7
160°	756.6	755.8	755.0	754.2	753.5	753.1	753.3	753.4	753.5	753.7	754.2
162.5°	764.1	763.3	762.6	761.8	761.0	760.7	760.8	761.0	761.0	761.2	761.9
165°	774.2	773.4	772.7	771.9	771.1	770.8	770.9	771.0	771.2	771.3	772.1
167.5°	781.7	780.9	780.1	779.3	778.5	778.2	778.3	778.4	778.6	778.7	779.6
170°	786.0	785.1	784.1	783.2	782.3	781.9	782.0	782.2	782.3	782.4	783.5
172.5°	788.8	787.9	787.0	786.0	785.1	784.8	785.1	785.3	785.5	785.8	786.6
175°	791.9	791.1	790.3	789.5	788.7	788.4	788.5	788.6	788.8	788.9	790.0
177.5°	793.2	792.6	792.0	791.4	790.8	790.4	790.6	790.7	790.8	790.9	791.6
180°	791.9	791.9	791.9	791.9	791.9	791.9	791.9	791.9	791.9	791.9	791.9



TEST NUMBER: P333726-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3
2.5°	1629.8	1632.0	1634.2	1635.1	1635.0	1634.7	1634.5	1634.3
5°	1619.8	1622.5	1625.2	1626.4	1625.8	1625.2	1624.7	1624.1
7.5°	1599.6	1601.6	1603.5	1604.1	1603.5	1602.9	1602.3	1601.7
10°	1582.5	1583.4	1584.2	1584.2	1583.4	1582.5	1581.8	1581.0
12.5°	1558.5	1559.0	1559.6	1559.3	1558.1	1556.8	1555.5	1554.3
15°	1518.6	1518.4	1518.1	1516.7	1514.3	1511.8	1509.3	1506.8
17.5°	1469.0	1467.6	1466.3	1464.6	1462.5	1460.5	1458.5	1456.4
20°	1432.4	1431.1	1429.7	1427.8	1425.3	1422.8	1420.4	1417.9
22.5°	1396.2	1393.5	1390.8	1388.5	1386.5	1384.4	1382.4	1380.4
25°	1336.6	1333.1	1329.5	1326.2	1323.2	1320.2	1317.2	1314.2
27.5°	1272.3	1267.3	1262.3	1258.4	1255.5	1252.5	1249.6	1246.7
30°	1226.2	1219.9	1213.5	1209.2	1206.7	1204.2	1201.7	1199.3
32.5°	1181.4	1174.4	1167.4	1162.4	1159.3	1156.1	1153.0	1149.9
35°	1111.7	1103.7	1095.8	1089.9	1086.1	1082.2	1078.4	1074.5
37.5°	1038.9	1029.4	1019.8	1013.1	1009.4	1005.7	1002.0	998.2
40°	990.7	980.2	969.9	963.0	959.6	956.4	953.1	949.8
42.5°	943.2	933.2	923.2	915.8	910.9	906.1	901.3	896.4
45°	867.3	856.3	845.3	837.8	833.7	829.6	825.5	821.3
47.5°	792.3	781.0	769.7	761.8	757.2	752.7	748.1	743.5
50°	741.5	729.9	718.4	710.6	706.5	702.3	698.2	694.1
52.5°	693.2	680.9	668.4	660.2	656.1	652.0	647.8	643.7
55°	620.0	607.7	595.3	586.9	582.6	578.1	573.8	569.4
57.5°	546.7	534.6	522.5	514.6	510.6	506.8	502.9	499.0
60°	498.3	486.2	474.1	466.0	461.9	457.8	453.7	449.6
62.5°	450.7	439.4	428.3	420.6	416.5	412.3	408.2	404.1
65°	380.7	369.7	358.7	351.2	347.1	342.9	338.8	334.7
67.5°	313.9	303.8	293.8	287.1	283.8	280.5	277.3	273.9
70°	269.5	261.0	252.5	246.6	243.3	240.0	236.7	233.5
72.5°	228.4	220.5	212.6	207.6	205.4	203.3	201.1	198.8
75°	170.7	164.7	158.7	154.6	152.7	150.8	148.9	146.9
77.5°	121.4	117.2	113.0	110.2	108.8	107.3	105.9	104.5
80°	91.4	89.0	86.4	84.9	84.4	83.8	83.3	82.8
82.5°	68.4	67.2	66.1	65.3	65.0	64.6	64.3	64.0
85°	39.0	38.7	38.4	38.2	37.9	37.6	37.3	37.1
87.5°	17.0	17.1	17.2	17.2	17.1	17.0	16.8	16.6
90°	10.7	11.3	12.0	12.5	12.9	13.3	13.7	14.1
92.5°	10.7	11.3	12.0	12.4	12.6	12.8	13.0	13.2
95°	10.7	11.3	12.0	12.4	12.4	12.4	12.4	12.4
97.5°	21.5	17.8	14.2	12.4	12.4	12.4	12.4	12.4
100°	63.3	43.8	24.4	14.4	13.9	13.4	12.8	12.4
102.5°	122.9	119.3	115.6	109.3	100.4	91.6	82.7	73.8
105°	174.9	174.9	174.9	174.8	174.8	174.6	174.4	174.4
107.5°	221.5	221.5	221.5	221.3	220.9	220.5	220.1	219.8
110°	251.6	251.2	250.8	250.7	250.8	251.0	251.1	251.2



TEST NUMBER: P333726-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	281.5	281.0	280.4	280.1	280.0	279.8	279.6	279.4
115°	326.5	326.0	325.4	324.8	324.0	323.2	322.4	321.6
117.5°	369.9	369.3	368.6	368.1	367.7	367.4	367.1	366.8
120°	398.1	397.8	397.5	397.0	396.4	395.8	395.1	394.4
122.5°	424.8	424.5	424.3	423.7	423.0	422.2	421.5	420.7
125°	463.8	463.3	462.8	462.3	461.9	461.5	461.2	460.8
127.5°	499.6	499.2	499.0	498.4	497.3	496.4	495.4	494.5
130°	522.8	522.4	522.0	521.5	520.9	520.2	519.5	518.9
132.5°	544.5	544.5	544.4	544.1	543.4	542.7	542.1	541.5
135°	576.5	576.2	576.0	575.4	574.6	573.9	573.1	572.3
137.5°	606.3	606.3	606.3	606.0	605.3	604.7	604.0	603.3
140°	624.5	624.7	625.0	624.7	623.9	623.2	622.4	621.6
142.5°	642.4	642.5	642.5	642.1	641.4	640.6	639.8	639.0
145°	667.7	667.8	667.9	667.6	666.8	666.0	665.3	664.5
147.5°	689.3	689.4	689.6	689.2	688.3	687.4	686.4	685.5
150°	703.1	703.4	703.7	703.3	702.2	701.2	700.1	699.1
152.5°	715.3	715.6	715.9	715.5	714.5	713.7	712.7	711.8
155°	732.1	732.5	732.9	732.6	731.6	730.6	729.5	728.4
157.5°	746.1	746.5	746.9	746.6	745.5	744.5	743.5	742.4
160°	754.7	755.3	755.7	755.5	754.5	753.4	752.4	751.3
162.5°	762.6	763.3	764.1	763.9	762.8	761.6	760.5	759.3
165°	772.9	773.6	774.4	774.3	773.2	772.2	771.2	770.1
167.5°	780.5	781.5	782.4	782.4	781.2	780.0	778.8	777.6
170°	784.5	785.6	786.6	786.6	785.4	784.2	783.0	781.9
172.5°	787.6	788.5	789.5	789.3	788.2	787.0	785.8	784.7
175°	791.0	792.0	793.1	793.0	791.9	790.7	789.5	788.3
177.5°	792.3	793.1	793.8	793.8	792.9	792.1	791.2	790.4
180°	791.9	791.9	791.9	791.9	791.9	791.9	791.9	791.9

(END OF REPORT)