

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333727-927

Luminaire Tested: **S125RDIW-S1270D770U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333727-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S1270D770U927-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5973.6 lumens
Efficiency: N/A
Efficacy: 99.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333727-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

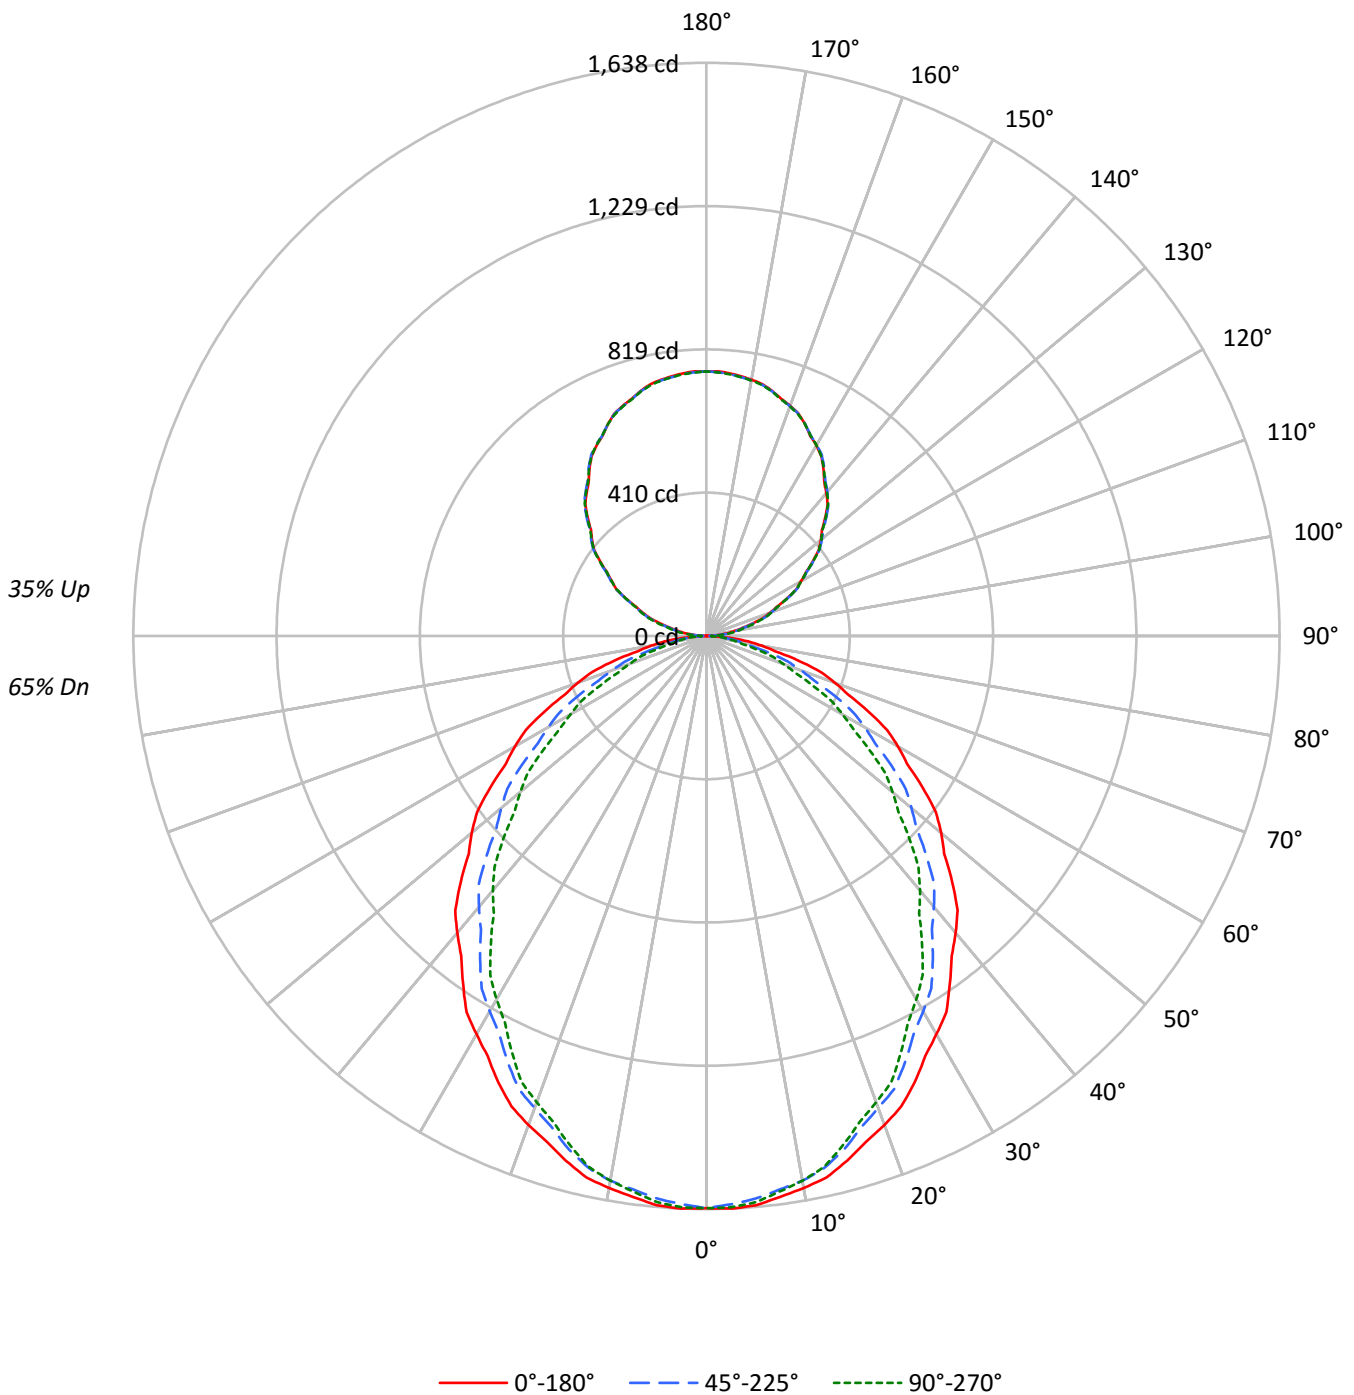



TEST NUMBER: P333727-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	80	80	80	70	70	70	65
1	101	97	93	90	95	91	88	85	81	78	76	71	69	67	62	61	59	55
2	93	85	79	74	87	80	75	70	71	67	63	63	60	57	55	53	50	47
3	85	75	68	62	79	71	64	59	63	58	54	56	52	48	49	46	43	40
4	78	67	59	53	73	63	56	50	56	50	46	50	45	42	44	40	37	34
5	71	60	51	45	67	56	49	43	50	44	40	45	40	36	40	36	33	30
6	66	54	45	40	62	51	43	38	46	39	35	41	36	32	36	32	29	26
7	61	49	41	35	57	46	39	34	41	35	31	37	32	28	33	29	26	23
8	57	44	36	31	53	42	35	30	38	32	28	34	29	25	30	26	23	21
9	53	41	33	28	50	39	32	27	35	29	25	31	26	23	28	24	21	19
10	50	37	30	25	47	36	29	24	32	27	23	29	24	21	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10561	10561	10561
5°	10585	10466	10529
10°	10506	10368	10368
15°	10380	10158	10075
20°	10221	9864	9745
25°	10033	9576	9365
30°	9801	9238	8944
35°	9563	8891	8472
40°	9340	8528	8008
45°	9070	8122	7501
50°	8799	7681	6974
55°	8483	7260	6411
60°	8169	6748	5807
65°	7795	6154	5115
70°	7370	5410	4409
75°	6780	4561	3666
80°	5973	3582	3080
85°	5039	2927	2749



TEST NUMBER: P333727-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.8	2.6
10°-20°	429.7	7.2
20°-30°	623.1	10.4
30°-40°	710.2	11.9
40°-50°	692.3	11.6
50°-60°	582.7	9.8
60°-70°	408.5	6.8
70°-80°	210.0	3.5
80°-90°	54.7	0.9
90°-100°	50.6	0.8
100°-110°	149.5	2.5
110°-120°	253.2	4.2
120°-130°	333.2	5.6
130°-140°	373.3	6.2
140°-150°	365.9	6.1
150°-160°	307.3	5.1
160°-170°	204.3	3.4
170°-180°	71.5	1.2
0°-30°	1206.6	20.2
0°-40°	1916.8	32.1
0°-60°	3191.8	53.4
0°-90°	3864.9	64.7
90°-120°	453.2	7.6
90°-150°	1525.6	25.5
90°-180°	2109.0	35.3
0°-180°	5973.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1635	1635	1635	1635	1635	
5°	1633	1627	1614	1626	1624	155
15°	1552	1544	1519	1517	1507	437
25°	1408	1388	1344	1328	1314	648
35°	1213	1182	1128	1093	1074	759
45°	993	955	889	842	821	766
55°	753	712	645	591	569	674
65°	510	467	403	355	335	505
75°	272	234	183	157	147	288
85°	68	47	40	38	37	76
90°	1	5	9	12	14	5
95°	38	40	45	49	50	41
105°	134	137	140	144	146	143
115°	254	256	257	256	256	251
125°	370	373	374	373	372	331
135°	481	484	485	485	483	371
145°	583	585	587	587	585	364
155°	667	667	668	670	667	307
165°	725	724	724	726	723	204
175°	754	752	752	755	751	72
180°	756	756	756	756	756	



TEST NUMBER: P333727-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3
2.5°	1638.2	1637.6	1636.9	1636.3	1635.6	1634.2	1632.0	1629.8	1627.6	1625.4	1627.6
5°	1632.8	1631.7	1630.6	1629.5	1628.4	1626.4	1623.3	1620.3	1617.3	1614.3	1617.0
7.5°	1616.8	1615.7	1614.7	1613.6	1612.6	1610.3	1606.6	1603.0	1599.4	1595.8	1597.7
10°	1602.0	1601.1	1600.3	1599.5	1598.6	1596.3	1592.4	1588.6	1584.8	1581.0	1581.8
12.5°	1585.2	1584.1	1583.0	1582.0	1581.0	1577.9	1572.7	1567.6	1562.3	1557.2	1557.8
15°	1552.5	1550.9	1549.3	1547.6	1545.9	1542.2	1536.4	1530.7	1525.0	1519.2	1518.9
17.5°	1515.7	1513.2	1510.7	1508.2	1505.6	1500.7	1493.5	1486.2	1479.0	1471.7	1470.4
20°	1487.1	1484.3	1481.5	1478.8	1476.1	1470.3	1461.6	1452.8	1444.0	1435.2	1433.8
22.5°	1455.5	1452.7	1449.9	1447.2	1444.5	1438.5	1429.3	1420.1	1410.8	1401.6	1398.9
25°	1408.0	1403.9	1399.8	1395.7	1391.5	1384.4	1374.3	1364.1	1353.9	1343.8	1340.2
27.5°	1353.7	1348.7	1343.7	1338.7	1333.7	1325.8	1314.9	1304.0	1293.2	1282.3	1277.3
30°	1314.2	1308.9	1303.7	1298.5	1293.3	1284.9	1273.4	1261.9	1250.3	1238.8	1232.5
32.5°	1275.7	1269.6	1263.5	1257.4	1251.3	1242.3	1230.6	1218.9	1207.0	1195.3	1188.4
35°	1212.9	1206.3	1199.7	1193.1	1186.5	1177.0	1164.7	1152.4	1140.0	1127.7	1119.7
37.5°	1151.4	1143.4	1135.4	1127.4	1119.3	1108.9	1096.2	1083.5	1070.7	1058.0	1048.5
40°	1107.9	1099.6	1091.4	1083.2	1075.0	1064.2	1051.1	1037.9	1024.7	1011.5	1001.2
42.5°	1062.5	1054.0	1045.5	1037.0	1028.6	1017.6	1004.0	990.4	976.8	963.1	953.2
45°	993.0	985.1	977.1	969.2	961.2	949.7	934.5	919.5	904.4	889.3	878.3
47.5°	921.1	912.8	904.4	896.0	887.6	875.8	860.5	845.3	830.1	814.9	803.6
50°	875.7	866.6	857.5	848.5	839.5	827.1	811.4	795.8	780.1	764.5	753.0
52.5°	826.2	817.0	807.7	798.4	789.2	777.1	762.4	747.7	732.8	718.1	705.7
55°	753.4	744.7	735.9	727.1	718.3	706.2	690.9	675.5	660.1	644.8	632.4
57.5°	679.8	670.4	661.0	651.6	642.2	630.2	615.4	600.5	585.7	570.8	558.8
60°	632.4	622.7	613.1	603.6	594.0	581.7	566.9	552.1	537.3	522.4	510.4
62.5°	582.0	572.8	563.6	554.4	545.3	533.2	518.2	503.1	488.1	473.0	461.8
65°	510.1	500.7	491.5	482.1	472.8	460.8	446.3	431.7	417.2	402.7	391.7
67.5°	438.7	429.4	420.0	410.7	401.4	389.8	375.8	361.9	347.9	334.0	323.9
70°	390.3	381.0	371.6	362.3	353.0	341.4	327.7	314.0	300.2	286.5	278.1
72.5°	342.9	333.7	324.6	315.5	306.4	295.4	282.6	269.7	256.9	244.1	236.2
75°	271.7	263.5	255.2	247.0	238.8	228.9	217.4	205.9	194.3	182.8	176.7
77.5°	201.1	194.5	187.9	181.3	174.8	166.8	157.6	148.4	139.2	129.9	125.7
80°	160.6	154.0	147.4	140.8	134.2	127.1	119.4	111.7	104.0	96.3	93.9
82.5°	121.0	115.1	109.2	103.2	97.4	91.7	86.4	81.2	75.9	70.7	69.5
85°	68.0	63.0	58.1	53.1	48.2	45.0	43.6	42.3	40.9	39.5	39.2
87.5°	22.8	21.5	20.2	18.9	17.5	16.9	16.8	16.8	16.7	16.7	16.8
90°	0.6	1.7	2.7	3.7	4.8	5.8	6.7	7.6	8.5	9.4	10.1
92.5°	14.3	15.0	15.7	16.4	17.2	18.1	19.3	20.4	21.5	22.6	23.4
95°	38.3	38.5	38.7	39.0	39.3	40.1	41.4	42.7	44.0	45.3	46.2
97.5°	63.5	63.6	63.7	63.8	63.9	64.9	66.7	68.5	70.3	72.1	73.0
100°	82.3	82.3	82.3	82.3	82.3	83.2	84.8	86.6	88.2	90.0	91.2
102.5°	102.6	103.1	103.6	104.1	104.6	105.4	106.2	107.1	107.9	108.8	110.1
105°	134.1	134.8	135.4	136.0	136.7	137.4	138.2	138.9	139.7	140.5	141.3
107.5°	168.9	169.5	170.2	170.9	171.5	172.1	172.8	173.3	174.0	174.5	174.9
110°	192.9	193.5	194.2	194.9	195.5	196.0	196.4	196.8	197.2	197.6	198.0



TEST NUMBER: P333727-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	217.4	217.7	218.0	218.4	218.7	219.1	219.6	220.1	220.6	221.1	221.3
115°	253.5	254.0	254.5	255.0	255.6	256.0	256.2	256.4	256.7	257.0	256.8
117.5°	289.7	289.9	290.2	290.4	290.7	290.9	291.1	291.4	291.6	291.8	291.9
120°	312.3	312.9	313.5	314.3	314.9	315.3	315.4	315.5	315.7	315.8	315.8
122.5°	336.8	337.0	337.2	337.5	337.7	337.9	338.3	338.7	339.0	339.3	339.2
125°	369.9	370.7	371.5	372.2	373.0	373.5	373.6	373.8	373.9	374.0	373.8
127.5°	405.2	405.6	406.1	406.5	406.9	407.3	407.4	407.6	407.7	407.9	407.7
130°	426.4	427.0	427.7	428.3	429.0	429.4	429.7	429.9	430.2	430.5	430.3
132.5°	447.5	448.6	449.6	450.8	451.8	452.3	452.3	452.2	452.2	452.1	452.0
135°	481.0	481.8	482.6	483.4	484.2	484.7	484.7	484.9	485.1	485.1	485.1
137.5°	512.5	513.3	514.0	514.8	515.6	516.1	516.4	516.7	517.0	517.3	517.5
140°	532.8	533.5	534.1	534.7	535.4	535.9	536.3	536.7	537.1	537.5	537.7
142.5°	553.0	553.6	554.1	554.7	555.2	555.7	556.3	556.7	557.2	557.7	557.9
145°	582.8	583.3	583.8	584.3	584.9	585.3	585.7	586.1	586.5	586.9	586.9
147.5°	610.3	610.6	610.9	611.2	611.5	611.7	612.0	612.4	612.7	613.0	613.3
150°	628.7	628.5	628.4	628.3	628.1	628.4	628.8	629.4	629.9	630.4	630.4
152.5°	643.7	643.9	644.0	644.3	644.4	644.6	644.8	645.1	645.2	645.5	645.8
155°	666.9	666.9	666.9	666.9	666.9	666.9	667.1	667.2	667.3	667.5	668.0
157.5°	687.6	687.3	687.0	686.7	686.4	686.3	686.5	686.6	686.7	686.9	687.4
160°	699.8	699.4	699.0	698.6	698.2	698.1	698.2	698.4	698.5	698.6	699.2
162.5°	710.7	710.3	710.0	709.8	709.5	709.3	709.4	709.4	709.4	709.5	710.1
165°	725.1	724.8	724.6	724.3	724.1	724.0	724.1	724.2	724.4	724.5	725.0
167.5°	737.4	736.8	736.3	735.8	735.2	735.0	735.0	735.0	735.0	735.0	735.8
170°	743.9	743.4	742.8	742.4	741.8	741.6	741.6	741.6	741.6	741.6	742.4
172.5°	748.6	748.1	747.6	747.0	746.6	746.2	746.2	746.2	746.2	746.2	747.0
175°	753.9	753.4	752.9	752.3	751.8	751.5	751.5	751.5	751.5	751.5	752.3
177.5°	756.6	756.2	755.7	755.3	754.9	754.7	754.6	754.5	754.4	754.2	754.9
180°	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7



TEST NUMBER: P333727-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3	1635.3
2.5°	1629.8	1632.0	1634.2	1635.1	1635.0	1634.7	1634.5	1634.3
5°	1619.8	1622.5	1625.2	1626.4	1625.8	1625.2	1624.7	1624.1
7.5°	1599.6	1601.6	1603.5	1604.1	1603.5	1602.9	1602.3	1601.7
10°	1582.5	1583.4	1584.2	1584.2	1583.4	1582.5	1581.8	1581.0
12.5°	1558.5	1559.0	1559.6	1559.3	1558.1	1556.8	1555.5	1554.3
15°	1518.6	1518.4	1518.1	1516.7	1514.3	1511.8	1509.3	1506.8
17.5°	1469.0	1467.6	1466.3	1464.6	1462.5	1460.5	1458.5	1456.4
20°	1432.4	1431.1	1429.7	1427.8	1425.3	1422.8	1420.4	1417.9
22.5°	1396.2	1393.5	1390.8	1388.5	1386.5	1384.4	1382.4	1380.4
25°	1336.6	1333.1	1329.5	1326.2	1323.2	1320.2	1317.2	1314.2
27.5°	1272.3	1267.3	1262.3	1258.4	1255.5	1252.5	1249.6	1246.7
30°	1226.2	1219.9	1213.5	1209.2	1206.7	1204.2	1201.7	1199.3
32.5°	1181.4	1174.4	1167.4	1162.4	1159.3	1156.1	1153.0	1149.9
35°	1111.7	1103.7	1095.8	1089.9	1086.1	1082.2	1078.4	1074.5
37.5°	1038.9	1029.4	1019.8	1013.1	1009.4	1005.7	1002.0	998.2
40°	990.7	980.2	969.9	963.0	959.6	956.4	953.1	949.8
42.5°	943.2	933.2	923.2	915.8	910.9	906.1	901.3	896.4
45°	867.3	856.3	845.3	837.8	833.7	829.6	825.5	821.3
47.5°	792.3	781.0	769.7	761.8	757.2	752.7	748.1	743.5
50°	741.5	729.9	718.4	710.6	706.5	702.3	698.2	694.1
52.5°	693.2	680.9	668.4	660.2	656.1	652.0	647.8	643.7
55°	620.0	607.7	595.3	586.9	582.6	578.1	573.8	569.4
57.5°	546.7	534.6	522.5	514.6	510.6	506.8	502.9	499.0
60°	498.3	486.2	474.1	466.0	461.9	457.8	453.7	449.6
62.5°	450.7	439.4	428.3	420.6	416.5	412.3	408.2	404.1
65°	380.7	369.7	358.7	351.2	347.1	342.9	338.8	334.7
67.5°	313.9	303.8	293.8	287.1	283.8	280.5	277.3	273.9
70°	269.5	261.0	252.5	246.6	243.3	240.0	236.7	233.5
72.5°	228.4	220.5	212.6	207.6	205.4	203.3	201.1	198.8
75°	170.7	164.7	158.7	154.6	152.7	150.8	148.9	146.9
77.5°	121.4	117.2	113.0	110.2	108.8	107.3	105.9	104.5
80°	91.4	89.0	86.4	84.9	84.4	83.8	83.3	82.8
82.5°	68.4	67.2	66.1	65.3	65.0	64.6	64.3	64.0
85°	39.0	38.7	38.4	38.2	37.9	37.6	37.3	37.1
87.5°	17.0	17.1	17.2	17.2	17.1	17.0	16.8	16.6
90°	10.7	11.4	12.0	12.5	12.9	13.3	13.7	14.1
92.5°	24.3	25.2	26.1	26.6	26.9	27.2	27.5	27.7
95°	47.1	48.0	49.0	49.5	49.8	50.1	50.3	50.5
97.5°	73.8	74.7	75.6	76.0	76.2	76.4	76.5	76.7
100°	92.3	93.5	94.7	95.4	95.7	95.9	96.2	96.4
102.5°	111.4	112.6	113.9	114.7	115.1	115.5	115.8	116.2
105°	142.1	142.9	143.7	144.3	144.7	145.0	145.4	145.8
107.5°	175.3	175.7	176.1	176.3	176.3	176.3	176.2	176.2
110°	198.4	198.8	199.2	199.3	199.2	199.0	198.9	198.8



TEST NUMBER: P333727-927

CATALOG NUMBER: S125RDIW-S1270D770U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	221.5	221.7	221.8	221.8	221.6	221.3	221.1	220.9
115°	256.7	256.6	256.4	256.4	256.2	256.1	256.0	255.8
117.5°	292.0	292.1	292.2	292.0	291.5	291.0	290.4	289.9
120°	315.8	315.8	315.8	315.5	315.1	314.5	313.9	313.5
122.5°	339.1	339.0	338.9	338.7	338.2	337.8	337.4	337.0
125°	373.5	373.2	373.0	372.8	372.6	372.5	372.4	372.2
127.5°	407.7	407.5	407.3	407.2	406.9	406.6	406.4	406.2
130°	430.2	430.1	429.9	429.8	429.5	429.2	429.0	428.7
132.5°	451.9	451.7	451.6	451.3	451.0	450.6	450.3	449.9
135°	485.1	485.1	485.1	484.9	484.3	483.9	483.3	482.8
137.5°	517.6	517.8	517.9	517.6	517.0	516.3	515.7	515.0
140°	538.1	538.3	538.5	538.4	537.7	537.0	536.4	535.8
142.5°	558.0	558.2	558.3	558.1	557.5	556.8	556.1	555.5
145°	586.9	586.9	586.9	586.7	586.3	585.9	585.5	585.1
147.5°	613.6	613.9	614.3	613.9	613.1	612.2	611.3	610.5
150°	630.4	630.4	630.4	630.3	630.0	629.8	629.5	629.2
152.5°	646.1	646.4	646.7	646.7	646.2	645.7	645.2	644.8
155°	668.5	669.0	669.6	669.5	668.8	668.2	667.5	666.9
157.5°	687.9	688.4	689.0	688.8	687.9	687.1	686.2	685.3
160°	699.7	700.2	700.7	700.7	700.0	699.3	698.7	698.1
162.5°	710.7	711.3	711.9	711.9	711.1	710.3	709.6	708.8
165°	725.6	726.1	726.6	726.4	725.7	724.9	724.1	723.3
167.5°	736.6	737.4	738.1	738.1	737.3	736.5	735.7	734.8
170°	743.1	743.9	744.7	744.7	743.7	742.8	741.9	741.0
172.5°	747.8	748.6	749.4	749.4	748.6	747.7	746.9	746.2
175°	753.1	753.9	754.7	754.6	753.7	752.8	751.9	751.0
177.5°	755.5	756.1	756.8	756.7	756.0	755.3	754.6	753.8
180°	755.7	755.7	755.7	755.7	755.7	755.7	755.7	755.7

(END OF REPORT)