

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333654-927

Luminaire Tested: **S125RDIW-S375D1340U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333654-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S375D1340U927-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5396.9 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 46.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333654-927

CATALOG NUMBER: S125RDIW-S375D1340U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

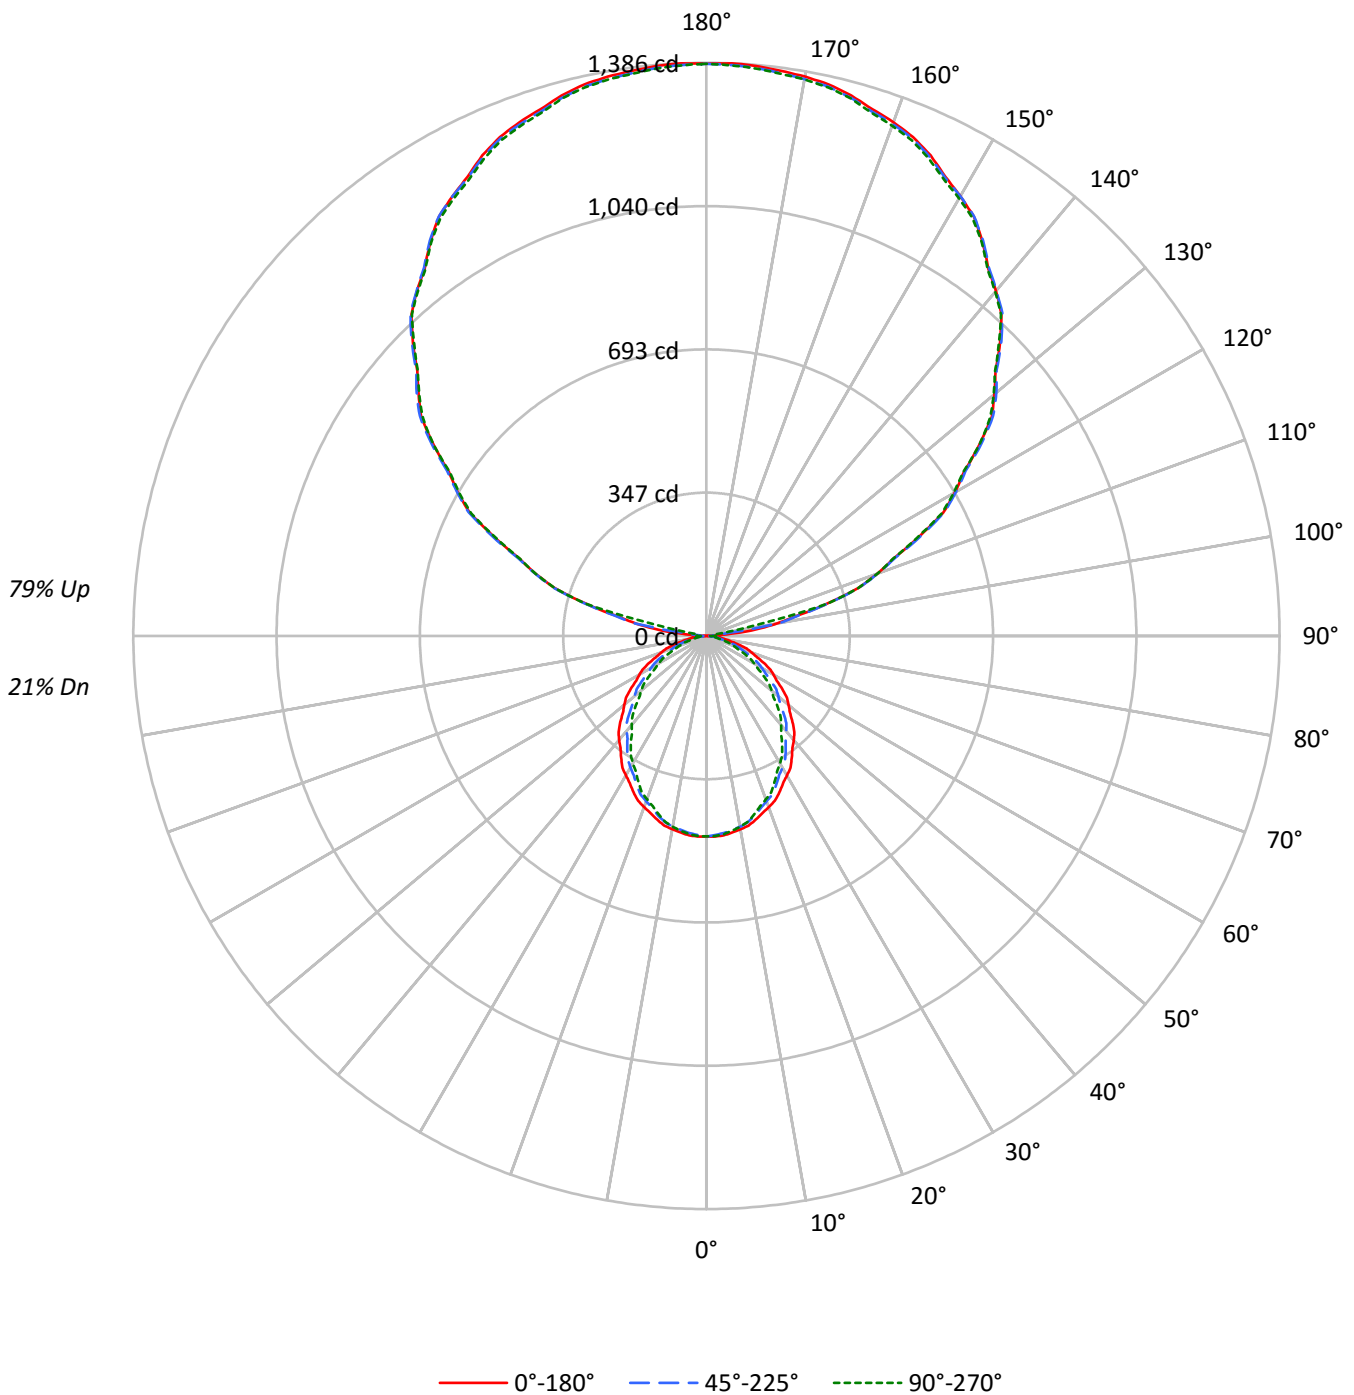



TEST NUMBER: P333654-927

CATALOG NUMBER: S125RDIW-S375D1340U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	89	89	89	89	67	67	67	48	48	48	30	30	30	21
1	91	87	84	80	81	77	74	72	59	57	55	42	41	40	26	26	25	18
2	83	76	71	66	74	68	63	59	52	49	46	37	35	33	23	22	21	15
3	76	67	60	55	67	60	54	49	46	42	38	33	30	28	21	19	18	13
4	69	59	52	46	61	53	46	42	40	36	33	29	26	24	19	17	16	11
5	64	53	45	39	56	47	40	36	36	32	28	26	23	21	17	15	14	10
6	58	47	39	34	52	42	35	31	32	28	24	23	20	18	15	13	12	9
7	54	42	35	29	48	38	31	27	29	25	21	21	18	16	14	12	11	8
8	50	38	31	26	44	34	28	23	27	22	19	19	16	14	13	11	10	7
9	46	35	28	23	41	31	25	21	24	20	17	18	15	13	12	10	9	6
10	43	32	25	20	38	28	22	18	22	18	15	16	13	11	11	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3130	3130	3130
5°	3138	3102	3121
10°	3114	3074	3074
15°	3077	3011	2986
20°	3030	2924	2889
25°	2974	2838	2776
30°	2905	2738	2651
35°	2834	2636	2511
40°	2769	2528	2373
45°	2689	2408	2223
50°	2608	2277	2067
55°	2514	2152	1901
60°	2421	2001	1721
65°	2311	1825	1516
70°	2185	1603	1307
75°	2011	1352	1088
80°	1770	1060	915
85°	1489	867	815



TEST NUMBER: P333654-927

CATALOG NUMBER: S125RDIW-S375D1340U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	45.6	0.8
10°-20°	127.4	2.4
20°-30°	184.7	3.4
30°-40°	210.5	3.9
40°-50°	205.2	3.8
50°-60°	172.7	3.2
60°-70°	121.1	2.2
70°-80°	62.2	1.2
80°-90°	18.6	0.3
90°-100°	50.3	0.9
100°-110°	309.9	5.7
110°-120°	562.0	10.4
120°-130°	721.3	13.4
130°-140°	775.8	14.4
140°-150°	728.2	13.5
150°-160°	589.1	10.9
160°-170°	381.0	7.1
170°-180°	131.4	2.4
0°-30°	357.7	6.6
0°-40°	568.2	10.5
0°-60°	946.1	17.5
0°-90°	1148.0	21.3
90°-120°	922.2	17.1
90°-150°	3147.5	58.3
90°-180°	4249.0	78.7
0°-180°	5396.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	485	485	485	485	485	
5°	484	482	478	482	481	46
15°	460	458	450	450	447	130
25°	417	411	398	394	390	192
35°	360	350	334	324	318	225
45°	294	283	264	249	243	227
55°	223	211	191	175	169	200
65°	151	138	119	105	99	150
75°	81	69	54	46	44	85
85°	20	14	12	11	11	23
90°	1	9	16	21	25	3
95°	58	53	16	21	22	75
105°	302	305	306	306	305	320
115°	566	571	572	568	562	561
125°	805	812	812	808	805	719
135°	1004	1010	1008	1006	1000	774
145°	1164	1166	1166	1167	1161	728
155°	1282	1276	1278	1280	1273	590
165°	1353	1347	1348	1353	1346	382
175°	1384	1378	1378	1386	1377	132
180°	1384	1384	1384	1384	1384	



TEST NUMBER: P333654-927

CATALOG NUMBER: S125RDIW-S375D1340U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	484.7	484.7	484.7	484.7	484.7	484.7	484.7	484.7	484.7	484.7	484.7
2.5°	485.6	485.4	485.2	485.1	484.8	484.4	483.8	483.1	482.4	481.8	482.4
5°	484.0	483.7	483.4	483.0	482.7	482.1	481.2	480.3	479.4	478.5	479.3
7.5°	479.3	479.0	478.6	478.3	478.0	477.3	476.3	475.2	474.1	473.0	473.6
10°	474.8	474.6	474.4	474.1	473.9	473.2	472.1	470.9	469.8	468.7	468.9
12.5°	469.8	469.5	469.3	469.0	468.7	467.7	466.2	464.7	463.1	461.6	461.8
15°	460.2	459.7	459.2	458.8	458.3	457.2	455.4	453.8	452.0	450.4	450.3
17.5°	449.3	448.5	447.8	447.0	446.3	444.9	442.7	440.5	438.4	436.3	435.9
20°	440.8	440.0	439.2	438.4	437.5	435.9	433.2	430.6	428.0	425.4	425.0
22.5°	431.4	430.6	429.8	429.0	428.2	426.4	423.7	421.0	418.2	415.5	414.7
25°	417.4	416.1	414.9	413.7	412.5	410.4	407.3	404.3	401.3	398.3	397.3
27.5°	401.2	399.8	398.3	396.8	395.3	393.0	389.8	386.5	383.3	380.1	378.6
30°	389.5	388.0	386.4	384.9	383.3	380.9	377.5	374.1	370.7	367.2	365.4
32.5°	378.1	376.3	374.5	372.7	370.9	368.3	364.8	361.3	357.8	354.3	352.3
35°	359.5	357.6	355.6	353.6	351.7	348.9	345.2	341.6	337.9	334.3	331.9
37.5°	341.3	338.9	336.5	334.1	331.8	328.7	325.0	321.2	317.4	313.6	310.8
40°	328.4	326.0	323.5	321.1	318.6	315.4	311.6	307.7	303.7	299.8	296.8
42.5°	314.9	312.4	309.9	307.4	304.9	301.7	297.6	293.6	289.5	285.5	282.6
45°	294.4	292.0	289.6	287.2	284.9	281.5	277.0	272.6	268.1	263.6	260.3
47.5°	273.1	270.5	268.1	265.5	263.1	259.6	255.1	250.6	246.1	241.5	238.2
50°	259.6	256.9	254.2	251.5	248.8	245.2	240.5	235.9	231.2	226.6	223.2
52.5°	244.9	242.2	239.4	236.7	233.9	230.4	226.0	221.6	217.2	212.9	209.2
55°	223.3	220.7	218.1	215.6	212.9	209.4	204.8	200.2	195.7	191.1	187.4
57.5°	201.5	198.8	195.9	193.1	190.4	186.8	182.4	178.0	173.6	169.2	165.6
60°	187.4	184.6	181.7	178.9	176.0	172.5	168.0	163.7	159.2	154.9	151.3
62.5°	172.5	169.8	167.1	164.4	161.6	158.0	153.6	149.2	144.7	140.2	136.9
65°	151.2	148.5	145.7	142.9	140.1	136.6	132.3	128.0	123.7	119.4	116.1
67.5°	130.1	127.3	124.5	121.8	119.0	115.5	111.4	107.3	103.1	99.0	96.0
70°	115.7	113.0	110.2	107.4	104.6	101.2	97.1	93.1	89.0	84.9	82.4
72.5°	101.6	98.9	96.3	93.6	90.9	87.5	83.7	79.9	76.1	72.3	70.0
75°	80.6	78.1	75.7	73.2	70.8	67.9	64.4	61.0	57.6	54.2	52.4
77.5°	59.6	57.7	55.7	53.7	51.8	49.4	46.7	44.0	41.3	38.5	37.2
80°	47.6	45.6	43.7	41.7	39.8	37.7	35.4	33.1	30.8	28.5	27.8
82.5°	35.9	34.1	32.4	30.6	28.8	27.2	25.7	24.1	22.5	20.9	20.6
85°	20.1	18.7	17.2	15.8	14.3	13.3	12.9	12.5	12.1	11.7	11.6
87.5°	7.0	6.8	6.7	6.7	6.6	6.7	6.9	7.1	7.4	7.7	7.9
90°	1.0	2.9	4.7	6.5	8.3	10.1	11.6	13.2	14.8	16.4	17.6
92.5°	15.8	14.5	13.2	12.0	10.7	10.8	12.2	13.5	15.0	16.4	17.6
95°	58.5	57.8	57.1	56.4	55.7	51.0	42.4	33.7	25.0	16.4	17.6
97.5°	122.1	123.3	124.5	125.7	127.0	119.0	101.9	84.8	67.6	50.5	44.0
100°	171.3	172.0	172.6	173.3	174.0	174.8	175.7	176.7	177.5	178.5	144.5
102.5°	221.3	222.2	223.1	223.9	224.8	225.5	226.1	226.6	227.1	227.7	221.3
105°	301.6	302.5	303.4	304.3	305.2	305.6	305.6	305.6	305.6	305.6	305.6
107.5°	384.8	384.8	384.8	384.8	384.8	385.1	385.6	386.0	386.4	386.9	386.9
110°	439.0	439.0	439.0	439.0	439.0	439.2	439.7	440.1	440.6	441.0	440.4



TEST NUMBER: P333654-927

CATALOG NUMBER: S125RDIW-S375D1340U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	489.9	490.4	491.0	491.5	492.0	492.5	492.7	493.0	493.3	493.5	492.7
115°	566.2	567.3	568.5	569.6	570.8	571.4	571.6	571.9	572.1	572.4	571.4
117.5°	645.2	645.1	645.1	645.0	645.0	645.4	646.3	647.1	648.0	648.9	647.7
120°	694.3	694.2	694.0	693.7	693.5	693.7	694.3	695.1	695.8	696.4	696.0
122.5°	737.8	738.7	739.6	740.5	741.3	742.0	742.3	742.6	742.9	743.2	742.8
125°	805.2	806.8	808.3	809.9	811.5	812.3	812.3	812.3	812.3	812.3	811.4
127.5°	869.3	870.5	871.6	872.7	873.9	874.4	874.3	874.2	874.0	873.9	873.4
130°	908.7	909.9	911.0	912.2	913.3	914.0	914.3	914.4	914.7	914.9	914.3
132.5°	948.2	949.4	950.8	952.1	953.4	953.9	953.3	952.8	952.4	951.8	951.7
135°	1004.2	1005.5	1006.9	1008.2	1009.6	1010.0	1009.6	1009.2	1008.7	1008.2	1007.8
137.5°	1055.7	1056.8	1058.0	1059.1	1060.3	1060.7	1060.3	1059.9	1059.5	1059.1	1059.2
140°	1089.3	1089.7	1090.2	1090.6	1091.1	1091.2	1091.0	1090.8	1090.5	1090.3	1090.8
142.5°	1119.6	1119.9	1120.1	1120.5	1120.7	1121.0	1121.3	1121.7	1122.0	1122.3	1122.4
145°	1164.1	1164.6	1165.1	1165.5	1165.9	1166.2	1166.2	1166.2	1166.2	1166.2	1166.4
147.5°	1203.1	1203.0	1202.9	1202.8	1202.8	1202.8	1203.1	1203.4	1203.6	1204.0	1204.2
150°	1227.7	1227.2	1226.9	1226.4	1225.9	1225.9	1226.4	1226.9	1227.2	1227.7	1228.2
152.5°	1251.5	1250.5	1249.5	1248.6	1247.5	1247.2	1247.7	1248.2	1248.6	1249.0	1249.5
155°	1282.1	1280.7	1279.4	1278.0	1276.6	1276.2	1276.6	1277.1	1277.6	1278.0	1278.7
157.5°	1305.7	1304.9	1304.0	1303.2	1302.4	1302.0	1302.0	1302.1	1302.2	1302.2	1302.9
160°	1322.1	1320.7	1319.4	1318.0	1316.6	1316.1	1316.3	1316.5	1316.8	1317.0	1317.9
162.5°	1335.2	1333.9	1332.5	1331.1	1329.8	1329.2	1329.4	1329.7	1329.8	1330.1	1331.3
165°	1352.9	1351.5	1350.1	1348.8	1347.4	1346.8	1347.0	1347.3	1347.5	1347.7	1349.1
167.5°	1366.0	1364.6	1363.2	1361.8	1360.3	1359.8	1359.9	1360.2	1360.4	1360.7	1362.3
170°	1373.4	1371.8	1370.2	1368.6	1367.0	1366.3	1366.5	1366.8	1367.0	1367.2	1369.0
172.5°	1378.3	1376.7	1375.1	1373.5	1371.9	1371.3	1371.7	1372.1	1372.5	1372.9	1374.6
175°	1383.6	1382.3	1380.9	1379.5	1378.2	1377.6	1377.8	1378.1	1378.3	1378.5	1380.3
177.5°	1386.1	1385.0	1383.9	1382.8	1381.7	1381.2	1381.5	1381.6	1381.8	1382.0	1383.3
180°	1383.6	1383.6	1383.6	1383.6	1383.6	1383.6	1383.6	1383.6	1383.6	1383.6	1383.6



TEST NUMBER: P333654-927

CATALOG NUMBER: S125RDIW-S375D1340U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	484.7	484.7	484.7	484.7	484.7	484.7	484.7	484.7
2.5°	483.1	483.8	484.4	484.7	484.7	484.6	484.5	484.4
5°	480.1	480.9	481.7	482.1	482.0	481.7	481.6	481.4
7.5°	474.1	474.8	475.3	475.5	475.3	475.2	475.0	474.8
10°	469.1	469.4	469.6	469.6	469.4	469.1	468.9	468.7
12.5°	461.9	462.2	462.3	462.2	461.8	461.4	461.1	460.7
15°	450.1	450.0	450.0	449.6	448.9	448.1	447.4	446.6
17.5°	435.5	435.1	434.7	434.1	433.6	432.9	432.3	431.7
20°	424.6	424.2	423.8	423.3	422.5	421.8	421.0	420.3
22.5°	413.8	413.0	412.3	411.5	411.0	410.4	409.8	409.2
25°	396.2	395.1	394.1	393.2	392.2	391.3	390.5	389.5
27.5°	377.2	375.7	374.1	373.0	372.2	371.3	370.4	369.6
30°	363.5	361.6	359.7	358.5	357.7	357.0	356.2	355.5
32.5°	350.2	348.2	346.0	344.6	343.6	342.7	341.7	340.9
35°	329.5	327.2	324.8	323.1	321.9	320.8	319.6	318.5
37.5°	307.9	305.1	302.3	300.3	299.2	298.1	297.0	295.9
40°	293.7	290.6	287.5	285.4	284.5	283.5	282.5	281.5
42.5°	279.6	276.6	273.6	271.5	270.1	268.5	267.1	265.7
45°	257.1	253.8	250.6	248.3	247.2	245.9	244.7	243.4
47.5°	234.9	231.5	228.1	225.8	224.4	223.1	221.7	220.4
50°	219.8	216.3	212.9	210.6	209.5	208.2	207.0	205.7
52.5°	205.5	201.8	198.1	195.7	194.5	193.3	192.0	190.8
55°	183.8	180.1	176.5	174.0	172.7	171.3	170.1	168.8
57.5°	162.1	158.5	154.9	152.5	151.4	150.2	149.1	147.9
60°	147.7	144.1	140.5	138.2	136.9	135.7	134.5	133.2
62.5°	133.6	130.2	126.9	124.7	123.4	122.2	121.0	119.8
65°	112.8	109.6	106.3	104.1	102.9	101.6	100.4	99.2
67.5°	93.0	90.1	87.1	85.1	84.1	83.2	82.1	81.2
70°	79.9	77.4	74.9	73.1	72.1	71.1	70.2	69.2
72.5°	67.7	65.4	63.1	61.6	60.9	60.3	59.6	58.9
75°	50.6	48.8	47.1	45.9	45.3	44.7	44.1	43.6
77.5°	36.0	34.8	33.5	32.6	32.2	31.8	31.4	31.0
80°	27.1	26.4	25.7	25.2	25.0	24.9	24.7	24.6
82.5°	20.3	19.9	19.6	19.3	19.3	19.2	19.1	18.9
85°	11.6	11.5	11.4	11.3	11.2	11.2	11.1	11.0
87.5°	8.2	8.4	8.6	8.7	8.8	8.9	9.0	9.0
90°	18.7	19.8	21.0	21.9	22.6	23.2	23.9	24.6
92.5°	18.7	19.8	21.0	21.7	22.0	22.3	22.7	23.0
95°	18.7	19.8	21.0	21.5	21.5	21.5	21.5	21.5
97.5°	37.6	31.2	24.7	21.5	21.5	21.5	21.5	21.5
100°	110.5	76.6	42.6	25.2	24.2	23.4	22.4	21.5
102.5°	214.8	208.4	202.0	191.0	175.5	160.0	144.5	129.0
105°	305.6	305.6	305.6	305.5	305.3	305.1	304.8	304.6
107.5°	387.0	387.1	387.1	386.7	386.0	385.4	384.7	384.0
110°	439.7	439.0	438.3	438.1	438.3	438.6	438.8	439.0



TEST NUMBER: P333654-927

CATALOG NUMBER: S125RDIW-S375D1340U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	491.8	491.0	490.1	489.5	489.2	488.9	488.5	488.2
115°	570.5	569.6	568.7	567.5	566.2	564.8	563.4	562.1
117.5°	646.5	645.3	644.1	643.2	642.6	642.1	641.4	640.9
120°	695.5	695.1	694.6	693.8	692.7	691.5	690.4	689.3
122.5°	742.3	741.8	741.4	740.5	739.2	737.8	736.5	735.2
125°	810.5	809.6	808.7	807.9	807.2	806.5	805.8	805.2
127.5°	872.9	872.4	871.9	870.8	869.1	867.4	865.7	864.0
130°	913.5	912.8	912.2	911.2	910.1	908.9	907.8	906.7
132.5°	951.6	951.4	951.3	950.6	949.5	948.4	947.2	946.1
135°	1007.3	1006.9	1006.4	1005.5	1004.2	1002.7	1001.4	1000.1
137.5°	1059.3	1059.4	1059.5	1058.9	1057.7	1056.5	1055.3	1054.2
140°	1091.2	1091.6	1092.1	1091.6	1090.3	1088.9	1087.6	1086.2
142.5°	1122.4	1122.6	1122.7	1122.0	1120.6	1119.3	1117.9	1116.6
145°	1166.6	1166.9	1167.1	1166.6	1165.1	1163.8	1162.4	1161.1
147.5°	1204.5	1204.8	1205.1	1204.4	1202.7	1201.0	1199.4	1197.8
150°	1228.7	1229.1	1229.5	1228.8	1227.0	1225.2	1223.4	1221.5
152.5°	1250.0	1250.5	1250.9	1250.3	1248.6	1247.1	1245.4	1243.7
155°	1279.4	1280.0	1280.7	1280.2	1278.3	1276.5	1274.7	1272.9
157.5°	1303.7	1304.4	1305.1	1304.6	1302.7	1300.9	1299.1	1297.3
160°	1318.8	1319.7	1320.6	1320.2	1318.3	1316.5	1314.7	1312.9
162.5°	1332.6	1334.0	1335.2	1334.8	1332.8	1330.8	1328.8	1326.8
165°	1350.4	1351.9	1353.2	1353.0	1351.1	1349.3	1347.5	1345.7
167.5°	1364.0	1365.6	1367.2	1367.0	1364.9	1362.9	1360.9	1358.8
170°	1370.9	1372.7	1374.5	1374.4	1372.4	1370.3	1368.3	1366.2
172.5°	1376.3	1377.9	1379.5	1379.3	1377.3	1375.2	1373.2	1371.1
175°	1382.1	1383.9	1385.8	1385.7	1383.6	1381.6	1379.5	1377.4
177.5°	1384.6	1385.8	1387.1	1387.0	1385.5	1384.1	1382.6	1381.2
180°	1383.6	1383.6	1383.6	1383.6	1383.6	1383.6	1383.6	1383.6

(END OF REPORT)