

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333670-927

Luminaire Tested: **S125RDIW-S610D1050U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333670-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S610D1050U927-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5203.8 lumens
Efficiency: N/A
Efficacy: 115.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333670-927

CATALOG NUMBER: S125RDIW-S610D1050U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

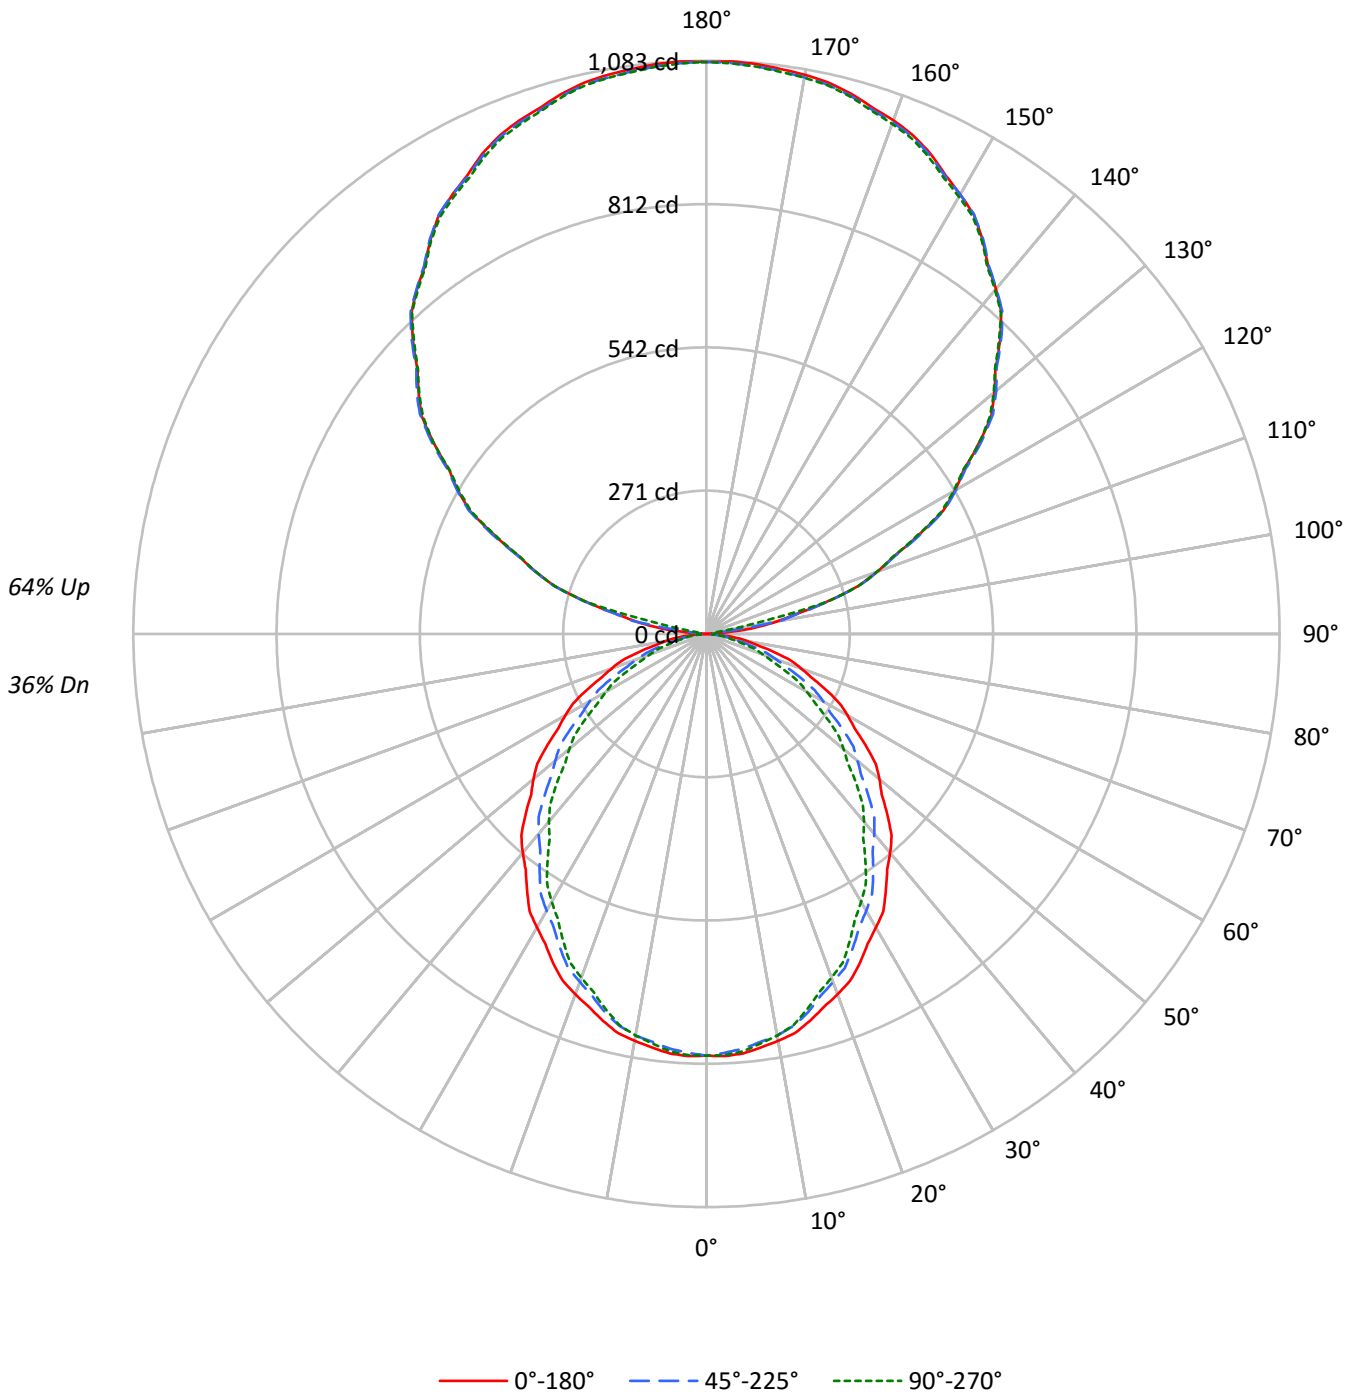



TEST NUMBER: P333670-927

CATALOG NUMBER: S125RDIW-S610D1050U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	43	43	43	36
1	95	91	87	84	86	82	79	76	66	64	62	52	51	49	39	38	37	31
2	86	79	73	68	78	72	67	63	58	55	52	46	43	41	34	33	31	26
3	79	70	63	57	71	63	57	53	52	47	44	41	38	35	30	28	27	22
4	72	62	54	48	65	56	50	45	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20	17
6	61	49	41	36	55	45	38	33	37	32	28	29	26	23	22	20	18	15
7	56	44	37	31	51	41	34	29	33	28	25	27	23	20	20	18	16	13
8	52	40	33	28	47	37	30	26	30	25	22	24	21	18	19	16	14	12
9	49	37	29	25	44	34	27	23	28	23	19	22	19	16	17	15	13	11
10	45	34	27	22	41	31	25	20	26	21	18	21	17	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5147	5147	5147
5°	5159	5100	5131
10°	5119	5052	5052
15°	5059	4950	4910
20°	4981	4807	4748
25°	4890	4666	4563
30°	4776	4502	4359
35°	4660	4332	4128
40°	4552	4156	3903
45°	4420	3958	3656
50°	4287	3744	3399
55°	4135	3538	3125
60°	3981	3289	2830
65°	3799	2998	2492
70°	3592	2638	2149
75°	3306	2221	1787
80°	2912	1748	1499
85°	2453	1430	1341



TEST NUMBER: P333670-927

CATALOG NUMBER: S125RDIW-S610D1050U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.9	1.4
10°-20°	209.4	4.0
20°-30°	303.7	5.8
30°-40°	346.1	6.7
40°-50°	337.4	6.5
50°-60°	284.0	5.5
60°-70°	199.1	3.8
70°-80°	102.3	2.0
80°-90°	28.1	0.5
90°-100°	39.3	0.8
100°-110°	242.1	4.7
110°-120°	439.0	8.4
120°-130°	563.4	10.8
130°-140°	606.0	11.6
140°-150°	568.8	10.9
150°-160°	460.1	8.8
160°-170°	297.6	5.7
170°-180°	102.6	2.0
0°-30°	588.0	11.3
0°-40°	934.1	18.0
0°-60°	1555.4	29.9
0°-90°	1884.9	36.2
90°-120°	720.3	13.8
90°-150°	2458.6	47.2
90°-180°	3319.0	63.8
0°-180°	5203.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	797	797	797	797	797	
5°	796	793	787	792	792	75
15°	757	752	740	739	734	213
25°	686	676	655	647	640	316
35°	591	576	550	533	524	370
45°	484	466	433	410	400	373
55°	367	347	314	288	278	328
65°	249	228	196	173	163	246
75°	132	114	89	76	72	140
85°	33	23	19	19	18	37
90°	1	7	13	17	19	3
95°	46	42	13	17	17	58
105°	236	239	239	239	238	250
115°	442	446	447	444	439	438
125°	629	634	634	631	629	562
135°	784	789	788	786	781	604
145°	909	911	911	911	907	568
155°	1002	997	998	1000	994	461
165°	1057	1052	1053	1057	1051	298
175°	1081	1076	1077	1082	1076	103
180°	1081	1081	1081	1081	1081	



TEST NUMBER: P333670-927

CATALOG NUMBER: S125RDIW-S610D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9
2.5°	798.4	798.0	797.7	797.4	797.1	796.4	795.3	794.2	793.1	792.1	793.1
5°	795.7	795.2	794.6	794.1	793.5	792.6	791.1	789.6	788.1	786.6	788.0
7.5°	787.9	787.3	786.9	786.3	785.8	784.7	782.9	781.2	779.4	777.6	778.6
10°	780.6	780.2	779.8	779.4	779.0	777.9	776.0	774.2	772.3	770.4	770.8
12.5°	772.5	772.0	771.4	771.0	770.4	768.9	766.4	763.9	761.4	758.8	759.1
15°	756.6	755.7	754.9	754.2	753.4	751.5	748.8	745.9	743.1	740.3	740.2
17.5°	738.6	737.4	736.2	735.0	733.7	731.3	727.8	724.3	720.7	717.2	716.5
20°	724.7	723.3	722.0	720.6	719.3	716.5	712.3	708.0	703.7	699.4	698.7
22.5°	709.2	707.9	706.6	705.3	703.9	701.0	696.5	692.1	687.5	683.0	681.8
25°	686.2	684.1	682.1	680.2	678.1	674.6	669.7	664.7	659.8	654.8	653.2
27.5°	659.7	657.3	654.8	652.4	649.9	646.1	640.8	635.5	630.2	624.9	622.4
30°	640.4	637.9	635.3	632.8	630.3	626.1	620.5	615.0	609.3	603.7	600.6
32.5°	621.6	618.7	615.7	612.8	609.7	605.4	599.7	594.0	588.2	582.5	579.1
35°	591.0	587.9	584.6	581.5	578.2	573.6	567.6	561.6	555.6	549.5	545.7
37.5°	561.1	557.1	553.3	549.4	545.5	540.4	534.2	528.0	521.8	515.6	511.0
40°	539.9	535.9	531.9	527.8	523.9	518.6	512.2	505.8	499.4	493.0	487.9
42.5°	517.8	513.7	509.5	505.4	501.3	495.9	489.3	482.6	476.0	469.4	464.5
45°	483.9	480.1	476.2	472.3	468.4	462.8	455.4	448.1	440.7	433.3	428.0
47.5°	448.9	444.8	440.7	436.7	432.5	426.7	419.4	411.9	404.6	397.1	391.7
50°	426.7	422.3	417.9	413.5	409.1	403.1	395.5	387.9	380.2	372.6	366.9
52.5°	402.7	398.2	393.6	389.1	384.6	378.7	371.5	364.3	357.1	349.9	343.9
55°	367.2	362.9	358.6	354.3	350.1	344.1	336.7	329.2	321.7	314.2	308.2
57.5°	331.3	326.7	322.1	317.6	313.0	307.0	299.8	292.6	285.4	278.2	272.3
60°	308.2	303.5	298.8	294.1	289.5	283.5	276.2	269.0	261.8	254.6	248.7
62.5°	283.6	279.2	274.6	270.2	265.8	259.8	252.5	245.2	237.9	230.5	225.1
65°	248.6	244.1	239.5	235.0	230.4	224.6	217.5	210.4	203.3	196.2	190.8
67.5°	213.8	209.2	204.7	200.2	195.6	190.0	183.2	176.3	169.5	162.7	157.9
70°	190.2	185.7	181.1	176.6	172.0	166.4	159.7	153.0	146.3	139.7	135.5
72.5°	167.1	162.6	158.2	153.8	149.3	143.9	137.7	131.4	125.2	118.9	115.1
75°	132.5	128.4	124.4	120.4	116.4	111.5	105.9	100.3	94.7	89.0	86.1
77.5°	98.0	94.7	91.6	88.3	85.2	81.3	76.8	72.3	67.8	63.3	61.2
80°	78.3	75.0	71.9	68.6	65.4	61.9	58.1	54.4	50.7	47.0	45.7
82.5°	59.0	56.1	53.2	50.3	47.5	44.7	42.1	39.5	37.0	34.5	33.9
85°	33.1	30.7	28.3	25.9	23.4	21.9	21.2	20.6	20.0	19.3	19.1
87.5°	11.2	10.8	10.3	9.8	9.3	9.2	9.3	9.5	9.7	9.8	10.0
90°	0.8	2.2	3.6	5.1	6.5	7.8	9.1	10.3	11.6	12.8	13.7
92.5°	12.4	11.3	10.4	9.3	8.3	8.4	9.5	10.6	11.7	12.8	13.7
95°	45.6	45.2	44.6	44.0	43.6	39.8	33.1	26.4	19.6	12.8	13.7
97.5°	95.4	96.3	97.3	98.2	99.2	93.0	79.6	66.2	52.8	39.5	34.4
100°	133.8	134.4	134.8	135.4	135.9	136.6	137.3	138.0	138.7	139.4	112.9
102.5°	172.9	173.6	174.3	174.9	175.6	176.2	176.6	177.0	177.4	177.8	172.9
105°	235.5	236.2	236.9	237.7	238.4	238.8	238.8	238.8	238.8	238.8	238.8
107.5°	300.6	300.6	300.6	300.6	300.6	300.8	301.1	301.5	301.8	302.2	302.2
110°	342.9	342.9	342.9	342.9	342.9	343.1	343.4	343.8	344.1	344.5	344.0



TEST NUMBER: P333670-927

CATALOG NUMBER: S125RDIW-S610D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	382.6	383.1	383.5	383.9	384.4	384.7	384.9	385.1	385.3	385.6	384.8
115°	442.3	443.1	444.0	444.9	445.8	446.3	446.6	446.7	446.9	447.0	446.3
117.5°	504.0	503.9	503.9	503.8	503.8	504.1	504.8	505.5	506.1	506.8	505.9
120°	542.4	542.2	542.0	541.9	541.7	541.9	542.4	543.0	543.4	544.0	543.7
122.5°	576.4	577.0	577.7	578.4	579.1	579.6	579.8	580.0	580.3	580.5	580.2
125°	628.9	630.2	631.4	632.6	633.9	634.5	634.5	634.5	634.5	634.5	633.8
127.5°	679.1	680.0	680.9	681.8	682.6	683.0	682.9	682.9	682.7	682.6	682.2
130°	709.9	710.7	711.6	712.5	713.4	713.9	714.2	714.3	714.5	714.6	714.2
132.5°	740.6	741.6	742.7	743.7	744.7	745.0	744.7	744.3	743.9	743.5	743.4
135°	784.3	785.4	786.5	787.6	788.6	789.0	788.6	788.3	787.9	787.6	787.2
137.5°	824.6	825.5	826.4	827.4	828.3	828.6	828.3	828.0	827.6	827.3	827.4
140°	850.9	851.2	851.6	851.9	852.3	852.4	852.2	852.0	851.8	851.7	852.0
142.5°	874.6	874.8	875.0	875.2	875.4	875.7	875.9	876.2	876.4	876.6	876.7
145°	909.3	909.7	910.1	910.5	910.8	910.9	910.9	910.9	910.9	910.9	911.2
147.5°	939.8	939.8	939.7	939.6	939.5	939.6	939.8	940.0	940.2	940.4	940.6
150°	959.0	958.7	958.3	958.0	957.6	957.6	958.0	958.3	958.7	959.0	959.4
152.5°	977.6	976.8	976.0	975.3	974.5	974.3	974.6	975.0	975.3	975.7	976.0
155°	1001.5	1000.4	999.3	998.3	997.2	996.9	997.2	997.6	997.9	998.3	998.8
157.5°	1019.9	1019.3	1018.7	1018.0	1017.3	1017.1	1017.1	1017.1	1017.2	1017.2	1017.8
160°	1032.8	1031.7	1030.6	1029.5	1028.5	1028.0	1028.2	1028.4	1028.6	1028.7	1029.4
162.5°	1043.0	1042.0	1040.8	1039.8	1038.7	1038.2	1038.5	1038.6	1038.8	1038.9	1040.0
165°	1056.8	1055.7	1054.6	1053.6	1052.5	1052.0	1052.3	1052.4	1052.6	1052.7	1053.8
167.5°	1067.0	1066.0	1064.9	1063.7	1062.6	1062.2	1062.3	1062.5	1062.7	1062.9	1064.1
170°	1072.8	1071.6	1070.3	1069.1	1067.8	1067.3	1067.5	1067.6	1067.8	1068.0	1069.4
172.5°	1076.7	1075.4	1074.1	1072.9	1071.7	1071.2	1071.5	1071.8	1072.1	1072.5	1073.7
175°	1080.8	1079.7	1078.6	1077.6	1076.5	1076.1	1076.3	1076.4	1076.7	1076.8	1078.2
177.5°	1082.8	1081.9	1081.0	1080.1	1079.3	1079.0	1079.1	1079.3	1079.3	1079.5	1080.5
180°	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8



TEST NUMBER: P333670-927

CATALOG NUMBER: S125RDIW-S610D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9
2.5°	794.2	795.3	796.4	796.9	796.8	796.6	796.5	796.5
5°	789.3	790.7	792.0	792.6	792.3	792.0	791.8	791.5
7.5°	779.5	780.5	781.4	781.7	781.4	781.1	780.9	780.5
10°	771.2	771.6	772.1	772.1	771.6	771.2	770.8	770.4
12.5°	759.5	759.8	760.0	759.9	759.2	758.7	758.0	757.4
15°	740.1	739.9	739.8	739.1	737.9	736.7	735.5	734.3
17.5°	715.9	715.2	714.5	713.7	712.7	711.7	710.7	709.7
20°	698.1	697.4	696.7	695.8	694.6	693.4	692.2	690.9
22.5°	680.4	679.1	677.8	676.6	675.7	674.6	673.7	672.6
25°	651.4	649.7	647.9	646.3	644.8	643.3	641.9	640.4
27.5°	620.0	617.6	615.1	613.2	611.8	610.4	609.0	607.5
30°	597.5	594.5	591.4	589.2	588.0	586.8	585.7	584.5
32.5°	575.7	572.4	568.9	566.5	564.9	563.4	561.9	560.4
35°	541.8	537.9	534.0	531.2	529.3	527.4	525.5	523.6
37.5°	506.3	501.6	496.9	493.7	491.9	490.1	488.3	486.5
40°	482.8	477.7	472.6	469.3	467.7	466.0	464.5	462.9
42.5°	459.6	454.7	449.9	446.2	443.9	441.6	439.2	436.9
45°	422.6	417.3	411.9	408.3	406.3	404.3	402.3	400.3
47.5°	386.1	380.6	375.1	371.2	369.0	366.8	364.6	362.3
50°	361.3	355.7	350.1	346.3	344.3	342.3	340.2	338.3
52.5°	337.9	331.8	325.7	321.7	319.7	317.7	315.7	313.7
55°	302.1	296.1	290.1	286.1	283.9	281.8	279.6	277.5
57.5°	266.4	260.5	254.7	250.7	248.8	246.9	245.1	243.2
60°	242.8	236.9	231.1	227.1	225.1	223.1	221.1	219.1
62.5°	219.6	214.1	208.7	204.9	203.0	201.0	198.9	196.9
65°	185.5	180.1	174.8	171.1	169.1	167.2	165.1	163.1
67.5°	153.0	148.1	143.1	139.9	138.3	136.7	135.1	133.5
70°	131.3	127.2	123.0	120.2	118.6	117.0	115.3	113.8
72.5°	111.3	107.4	103.6	101.2	100.1	99.0	98.0	96.9
75°	83.2	80.2	77.3	75.3	74.5	73.5	72.6	71.6
77.5°	59.2	57.1	55.1	53.7	53.0	52.3	51.7	50.9
80°	44.5	43.3	42.1	41.4	41.1	40.9	40.6	40.3
82.5°	33.3	32.7	32.2	31.8	31.7	31.5	31.4	31.2
85°	19.0	18.9	18.7	18.6	18.5	18.3	18.2	18.1
87.5°	10.1	10.3	10.5	10.6	10.6	10.6	10.6	10.6
90°	14.6	15.5	16.4	17.1	17.7	18.1	18.7	19.3
92.5°	14.6	15.5	16.4	17.0	17.2	17.4	17.7	18.0
95°	14.6	15.5	16.4	16.8	16.8	16.8	16.8	16.8
97.5°	29.4	24.3	19.3	16.8	16.8	16.8	16.8	16.8
100°	86.3	59.8	33.3	19.6	18.9	18.2	17.5	16.8
102.5°	167.8	162.8	157.8	149.2	137.1	125.0	112.9	100.8
105°	238.8	238.8	238.8	238.7	238.5	238.3	238.1	238.0
107.5°	302.3	302.3	302.4	302.1	301.6	301.0	300.5	300.0
110°	343.4	342.9	342.4	342.2	342.4	342.5	342.7	342.9



TEST NUMBER: P333670-927

CATALOG NUMBER: S125RDIW-S610D1050U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	384.2	383.5	382.9	382.4	382.1	381.8	381.6	381.4
115°	445.6	444.9	444.2	443.3	442.3	441.2	440.1	439.0
117.5°	505.0	504.1	503.1	502.4	502.0	501.5	501.1	500.6
120°	543.3	543.0	542.6	541.9	541.1	540.2	539.3	538.4
122.5°	579.8	579.5	579.1	578.5	577.4	576.4	575.4	574.3
125°	633.1	632.4	631.7	631.1	630.6	630.0	629.5	628.9
127.5°	681.8	681.4	681.0	680.2	678.9	677.6	676.2	674.9
130°	713.6	713.0	712.5	711.8	710.9	710.0	709.2	708.3
132.5°	743.3	743.1	743.1	742.6	741.7	740.8	739.9	739.0
135°	786.9	786.5	786.2	785.4	784.3	783.3	782.2	781.2
137.5°	827.4	827.5	827.6	827.2	826.2	825.3	824.4	823.5
140°	852.4	852.7	853.1	852.7	851.7	850.6	849.5	848.4
142.5°	876.8	876.9	876.9	876.5	875.4	874.3	873.2	872.2
145°	911.3	911.5	911.6	911.2	910.1	909.1	908.0	907.0
147.5°	940.9	941.1	941.3	940.8	939.4	938.2	936.9	935.6
150°	959.7	960.1	960.4	959.9	958.5	957.0	955.6	954.2
152.5°	976.4	976.8	977.1	976.7	975.3	974.1	972.8	971.5
155°	999.3	999.9	1000.4	1000.0	998.5	997.1	995.7	994.3
157.5°	1018.4	1018.9	1019.5	1019.1	1017.6	1016.2	1014.8	1013.4
160°	1030.2	1030.9	1031.6	1031.2	1029.8	1028.4	1027.0	1025.6
162.5°	1041.0	1042.0	1043.0	1042.7	1041.1	1039.6	1038.0	1036.4
165°	1054.9	1056.0	1057.0	1056.9	1055.4	1054.0	1052.6	1051.1
167.5°	1065.4	1066.7	1068.0	1067.9	1066.2	1064.6	1063.0	1061.4
170°	1070.9	1072.3	1073.7	1073.6	1072.0	1070.4	1068.8	1067.1
172.5°	1075.1	1076.3	1077.6	1077.4	1075.9	1074.2	1072.6	1071.0
175°	1079.7	1081.1	1082.5	1082.4	1080.8	1079.2	1077.6	1076.0
177.5°	1081.5	1082.5	1083.5	1083.5	1082.3	1081.2	1080.1	1078.9
180°	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8	1080.8

(END OF REPORT)