

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333452-830

Luminaire Tested: **S125DIW-S1090D1340U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333452-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1090D1340U830-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9243.9 lumens
Efficiency: N/A
Efficacy: 132.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 69.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333452-830

CATALOG NUMBER: S125DIW-S1090D1340U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

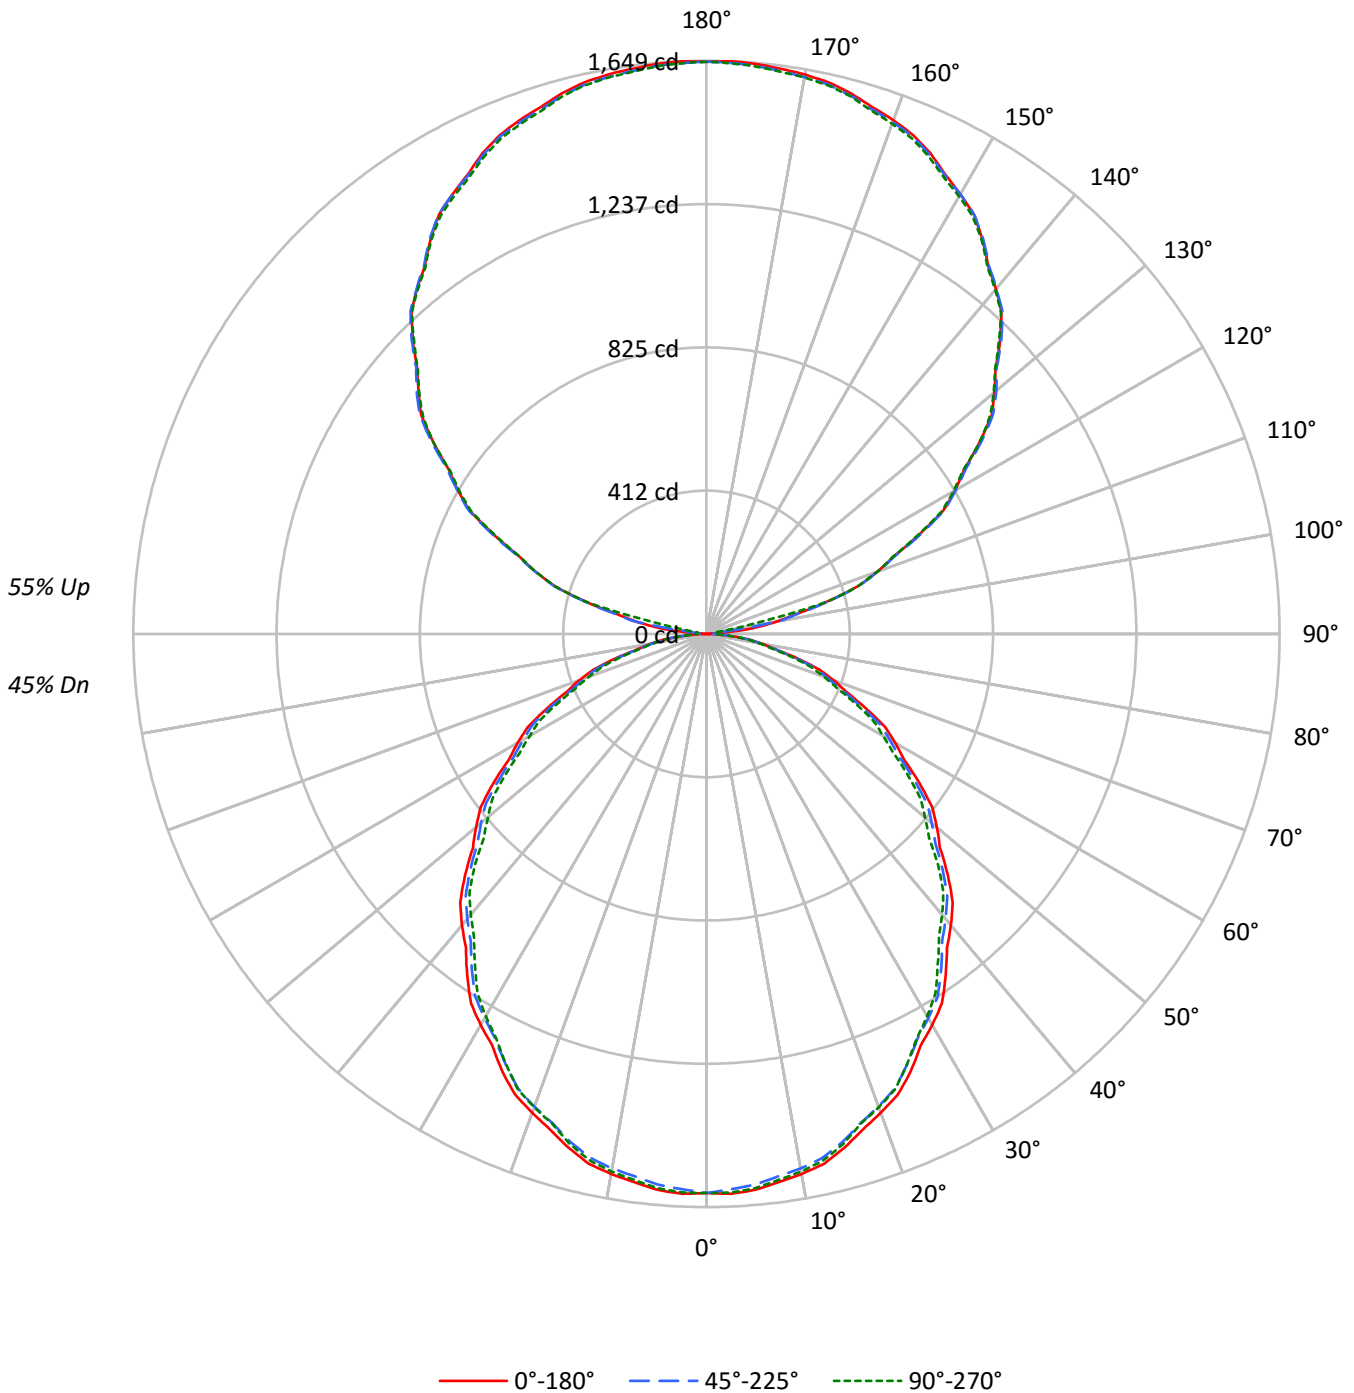



TEST NUMBER: P333452-830

CATALOG NUMBER: S125DIW-S1090D1340U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	106	106	106	106	97	97	97	97	81	81	81		66	66	66		52	52	52	45
1	97	92	88	85	88	85	81	78	71	68	66		58	56	55		46	45	44	38
2	88	81	74	69	80	74	69	64	62	58	55		51	48	45		40	38	37	32
3	80	71	64	58	73	65	59	54	55	50	46		45	41	38		36	33	31	27
4	73	63	55	49	67	58	51	45	48	43	39		40	36	33		32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34		36	32	28		29	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29		32	28	25		26	23	21	18
7	57	45	37	32	52	42	35	30	35	30	26		29	25	22		24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23		27	23	20		22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	20		25	21	18		20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18		23	19	16		19	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10388	10388	10388
5°	10410	10311	10377
10°	10347	10238	10297
15°	10235	10116	10158
20°	10074	9943	9961
25°	9902	9738	9729
30°	9688	9517	9470
35°	9460	9280	9150
40°	9226	9022	8893
45°	8972	8786	8611
50°	8694	8501	8246
55°	8425	8180	7952
60°	8103	7856	7576
65°	7719	7467	7213
70°	7353	7017	6775
75°	6697	6478	6253
80°	5962	5869	5724
85°	5180	5283	4994



TEST NUMBER: P333452-830

CATALOG NUMBER: S125DIW-S1090D1340U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.6	1.6
10°-20°	428.4	4.6
20°-30°	632.5	6.8
30°-40°	738.0	8.0
40°-50°	741.2	8.0
50°-60°	650.7	7.0
60°-70°	484.8	5.2
70°-80°	277.2	3.0
80°-90°	84.1	0.9
90°-100°	59.8	0.6
100°-110°	368.7	4.0
110°-120°	668.7	7.2
120°-130°	858.2	9.3
130°-140°	923.1	10.0
140°-150°	866.4	9.4
150°-160°	700.9	7.6
160°-170°	453.3	4.9
170°-180°	156.3	1.7
0°-30°	1212.5	13.1
0°-40°	1950.5	21.1
0°-60°	3342.4	36.2
0°-90°	4188.5	45.3
90°-120°	1097.2	11.9
90°-150°	3744.9	40.5
90°-180°	5055.0	54.7
0°-180°	9243.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1608	1608	1608	1608	1608	
5°	1606	1603	1590	1601	1601	152
15°	1531	1526	1513	1519	1519	431
25°	1390	1383	1367	1369	1365	639
35°	1200	1194	1177	1170	1160	750
45°	982	977	962	947	943	757
55°	748	744	726	715	706	668
65°	505	502	489	477	472	501
75°	268	266	260	256	251	286
85°	70	71	71	70	67	78
90°	1	11	20	26	29	7
95°	70	64	20	25	26	89
105°	359	363	364	364	362	380
115°	674	680	681	676	669	668
125°	958	966	966	962	958	855
135°	1195	1202	1200	1197	1190	921
145°	1385	1387	1388	1388	1382	866
155°	1525	1519	1521	1523	1514	703
165°	1610	1603	1604	1610	1601	455
175°	1646	1639	1640	1649	1639	157
180°	1646	1646	1646	1646	1646	



TEST NUMBER: P333452-830

CATALOG NUMBER: S125DIW-S1090D1340U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4
2.5°	1612.4	1611.7	1611.0	1610.3	1609.7	1608.2	1605.9	1603.6	1601.4	1599.1	1601.4
5°	1605.8	1605.2	1604.7	1604.1	1603.5	1601.9	1599.0	1596.2	1593.4	1590.5	1593.1
7.5°	1591.0	1590.4	1589.9	1589.3	1588.7	1586.9	1583.8	1580.6	1577.5	1574.4	1577.0
10°	1577.8	1577.3	1576.7	1576.1	1575.6	1573.7	1570.6	1567.4	1564.3	1561.2	1563.5
12.5°	1561.5	1560.5	1559.4	1558.4	1557.5	1555.5	1552.6	1549.7	1546.8	1543.9	1545.8
15°	1530.7	1529.8	1529.0	1528.1	1527.3	1525.3	1522.2	1519.1	1516.0	1512.9	1514.3
17.5°	1495.3	1494.1	1492.8	1491.6	1490.3	1488.1	1484.9	1481.7	1478.5	1475.2	1477.0
20°	1465.8	1465.3	1464.7	1464.1	1463.6	1461.4	1457.7	1454.1	1450.4	1446.7	1448.7
22.5°	1436.2	1435.3	1434.3	1433.2	1432.2	1429.9	1426.5	1423.1	1419.7	1416.2	1417.5
25°	1389.5	1388.1	1386.7	1385.3	1383.8	1381.3	1377.6	1373.9	1370.3	1366.6	1367.2
27.5°	1334.7	1333.9	1333.0	1332.2	1331.3	1329.1	1325.2	1321.4	1317.7	1313.9	1314.0
30°	1299.1	1298.3	1297.4	1296.6	1295.7	1293.2	1288.9	1284.7	1280.4	1276.2	1275.6
32.5°	1260.5	1259.1	1257.8	1256.5	1255.3	1252.7	1248.9	1245.1	1241.3	1237.6	1236.5
35°	1199.9	1198.7	1197.6	1196.5	1195.3	1192.8	1188.8	1184.9	1180.9	1177.0	1175.5
37.5°	1137.0	1135.6	1134.2	1132.7	1131.3	1128.8	1125.0	1121.3	1117.6	1113.9	1111.7
40°	1094.3	1092.9	1091.5	1090.1	1088.6	1085.9	1081.9	1078.0	1074.0	1070.1	1067.5
42.5°	1048.5	1047.3	1046.1	1044.9	1043.7	1041.1	1037.2	1033.2	1029.3	1025.3	1022.9
45°	982.3	981.2	980.1	978.9	977.8	975.5	972.1	968.7	965.4	962.0	958.6
47.5°	911.1	911.1	911.2	911.3	911.3	909.3	905.2	901.1	897.0	893.0	889.5
50°	865.3	864.4	863.6	862.7	861.9	859.7	856.3	852.9	849.5	846.1	842.4
52.5°	818.4	817.7	817.2	816.5	816.0	813.8	810.2	806.5	803.0	799.3	796.1
55°	748.2	747.3	746.5	745.6	744.8	742.3	738.4	734.4	730.5	726.5	724.0
57.5°	674.1	673.6	673.3	672.8	672.3	670.4	667.0	663.7	660.4	657.0	653.7
60°	627.3	626.1	625.0	623.9	622.7	620.7	617.6	614.4	611.3	608.2	605.4
62.5°	578.4	577.5	576.6	575.7	574.9	573.1	570.3	567.7	565.1	562.4	559.3
65°	505.1	504.5	504.0	503.4	502.8	501.1	497.9	494.8	491.7	488.6	486.1
67.5°	434.1	432.9	431.8	430.6	429.4	427.6	425.3	423.0	420.7	418.4	416.2
70°	389.4	388.0	386.5	385.1	383.7	381.7	379.2	376.6	374.1	371.6	369.9
72.5°	340.5	339.5	338.6	337.6	336.7	335.4	333.8	332.1	330.5	328.8	326.9
75°	268.4	267.9	267.3	266.7	266.2	265.2	263.8	262.4	261.0	259.6	258.7
77.5°	202.1	201.8	201.6	201.4	201.1	200.7	199.8	199.1	198.3	197.5	197.0
80°	160.3	160.3	160.3	160.3	160.3	160.0	159.5	158.9	158.3	157.8	157.5
82.5°	123.7	123.2	122.8	122.3	121.9	121.6	121.5	121.4	121.2	121.1	120.6
85°	69.9	70.2	70.5	70.8	71.1	71.3	71.3	71.3	71.3	71.3	71.0
87.5°	27.7	28.2	28.6	29.0	29.5	29.8	29.9	30.1	30.3	30.3	30.6
90°	1.2	3.4	5.6	7.7	9.9	12.0	13.9	15.7	17.6	19.5	20.9
92.5°	18.8	17.2	15.7	14.2	12.7	12.8	14.5	16.1	17.8	19.5	20.9
95°	69.6	68.7	68.0	67.1	66.3	60.7	50.4	40.2	29.8	19.5	20.9
97.5°	145.2	146.7	148.2	149.6	151.1	141.6	121.2	100.9	80.4	60.0	52.4
100°	203.8	204.6	205.4	206.2	207.1	208.0	209.1	210.2	211.2	212.4	171.9
102.5°	263.3	264.4	265.4	266.5	267.5	268.3	269.0	269.7	270.2	270.9	263.3
105°	358.8	359.9	361.0	362.0	363.2	363.6	363.6	363.6	363.6	363.6	363.6
107.5°	457.9	457.9	457.9	457.9	457.9	458.2	458.7	459.2	459.8	460.3	460.3
110°	522.4	522.4	522.4	522.4	522.4	522.5	523.1	523.7	524.2	524.7	524.0



TEST NUMBER: P333452-830

CATALOG NUMBER: S125DIW-S1090D1340U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	582.9	583.5	584.2	584.8	585.4	586.0	586.3	586.5	586.9	587.2	586.2
115°	673.6	675.0	676.4	677.7	679.1	679.9	680.1	680.4	680.7	681.0	679.9
117.5°	767.6	767.5	767.5	767.4	767.4	767.9	768.9	770.0	771.0	772.0	770.6
120°	826.1	826.0	825.7	825.4	825.1	825.4	826.1	827.0	827.8	828.6	828.1
122.5°	877.9	878.9	880.0	881.0	882.0	882.8	883.2	883.5	883.9	884.3	883.7
125°	958.0	959.9	961.8	963.7	965.5	966.5	966.5	966.5	966.5	966.5	965.4
127.5°	1034.3	1035.8	1037.1	1038.4	1039.8	1040.4	1040.2	1040.1	1039.9	1039.7	1039.2
130°	1081.2	1082.6	1083.9	1085.3	1086.7	1087.5	1087.8	1088.0	1088.3	1088.5	1087.8
132.5°	1128.1	1129.6	1131.2	1132.8	1134.3	1134.9	1134.3	1133.7	1133.1	1132.5	1132.4
135°	1194.8	1196.4	1198.0	1199.6	1201.3	1201.7	1201.3	1200.7	1200.1	1199.6	1199.1
137.5°	1256.0	1257.4	1258.8	1260.2	1261.6	1262.1	1261.6	1261.1	1260.7	1260.2	1260.3
140°	1296.0	1296.6	1297.1	1297.6	1298.2	1298.4	1298.1	1297.8	1297.5	1297.2	1297.8
142.5°	1332.1	1332.5	1332.8	1333.1	1333.4	1333.8	1334.2	1334.5	1334.9	1335.3	1335.4
145°	1385.1	1385.6	1386.2	1386.8	1387.2	1387.5	1387.5	1387.5	1387.5	1387.5	1387.8
147.5°	1431.4	1431.3	1431.3	1431.2	1431.1	1431.2	1431.4	1431.8	1432.1	1432.5	1432.8
150°	1460.8	1460.2	1459.7	1459.2	1458.6	1458.6	1459.2	1459.7	1460.2	1460.8	1461.3
152.5°	1489.0	1487.9	1486.7	1485.5	1484.3	1483.9	1484.5	1485.1	1485.6	1486.1	1486.7
155°	1525.4	1523.8	1522.2	1520.6	1518.9	1518.4	1518.9	1519.5	1520.0	1520.6	1521.4
157.5°	1553.5	1552.6	1551.5	1550.6	1549.6	1549.2	1549.2	1549.3	1549.4	1549.4	1550.2
160°	1573.0	1571.4	1569.8	1568.1	1566.5	1565.8	1566.1	1566.4	1566.7	1567.0	1568.0
162.5°	1588.7	1587.1	1585.4	1583.8	1582.2	1581.5	1581.8	1582.1	1582.2	1582.5	1584.0
165°	1609.7	1608.0	1606.4	1604.8	1603.2	1602.4	1602.7	1603.0	1603.3	1603.5	1605.1
167.5°	1625.2	1623.6	1621.9	1620.2	1618.5	1617.9	1618.1	1618.3	1618.6	1618.9	1620.9
170°	1634.1	1632.2	1630.2	1628.3	1626.5	1625.6	1625.9	1626.2	1626.5	1626.7	1628.9
172.5°	1639.9	1638.0	1636.2	1634.2	1632.3	1631.6	1632.1	1632.6	1633.0	1633.5	1635.5
175°	1646.2	1644.6	1643.0	1641.3	1639.7	1639.1	1639.4	1639.6	1639.9	1640.1	1642.3
177.5°	1649.2	1647.8	1646.6	1645.3	1644.0	1643.4	1643.7	1643.9	1644.1	1644.3	1645.9
180°	1646.2	1646.2	1646.2	1646.2	1646.2	1646.2	1646.2	1646.2	1646.2	1646.2	1646.2



TEST NUMBER: P333452-830

CATALOG NUMBER: S125DIW-S1090D1340U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4
2.5°	1603.6	1605.9	1608.2	1609.2	1609.0	1608.7	1608.5	1608.4
5°	1595.6	1598.2	1600.7	1601.9	1601.6	1601.3	1601.0	1600.7
7.5°	1579.4	1582.0	1584.4	1585.5	1585.3	1585.0	1584.7	1584.4
10°	1565.8	1568.0	1570.3	1571.3	1571.0	1570.7	1570.5	1570.2
12.5°	1547.6	1549.4	1551.1	1552.1	1552.0	1551.9	1551.9	1551.8
15°	1515.7	1517.1	1518.5	1519.3	1519.3	1519.3	1519.3	1519.3
17.5°	1478.8	1480.5	1482.2	1482.4	1481.0	1479.6	1478.2	1476.8
20°	1450.7	1452.6	1454.6	1454.9	1453.5	1452.1	1450.7	1449.3
22.5°	1418.8	1420.1	1421.4	1421.5	1420.6	1419.7	1418.7	1417.7
25°	1367.7	1368.3	1368.9	1368.7	1367.8	1367.0	1366.1	1365.3
27.5°	1314.1	1314.2	1314.4	1314.0	1313.2	1312.3	1311.5	1310.6
30°	1275.1	1274.5	1273.9	1273.3	1272.4	1271.6	1270.7	1269.9
32.5°	1235.5	1234.4	1233.5	1232.2	1230.7	1229.2	1227.6	1226.1
35°	1174.1	1172.7	1171.3	1169.5	1167.2	1165.0	1162.7	1160.5
37.5°	1109.7	1107.6	1105.5	1103.8	1102.5	1101.2	1099.9	1098.6
40°	1065.0	1062.4	1059.9	1058.2	1057.3	1056.5	1055.6	1054.8
42.5°	1020.7	1018.3	1016.1	1014.2	1013.0	1011.6	1010.3	1009.0
45°	955.2	951.8	948.4	946.2	945.4	944.5	943.7	942.8
47.5°	886.1	882.6	879.2	876.5	874.5	872.5	870.5	868.6
50°	838.8	835.1	831.4	828.6	826.6	824.6	822.7	820.7
52.5°	792.9	789.7	786.5	783.7	781.5	779.3	777.1	774.9
55°	721.4	718.9	716.3	714.1	712.1	710.1	708.1	706.2
57.5°	650.5	647.2	643.9	641.8	640.7	639.6	638.6	637.4
60°	602.6	599.7	596.9	594.5	592.5	590.5	588.5	586.5
62.5°	556.3	553.3	550.2	547.9	546.4	544.9	543.3	541.8
65°	483.5	481.0	478.4	476.5	475.4	474.3	473.2	472.0
67.5°	414.1	411.9	409.7	408.3	407.6	407.0	406.3	405.7
70°	368.2	366.5	364.8	363.4	362.2	361.1	360.0	358.8
72.5°	325.0	323.0	321.1	319.6	318.5	317.4	316.2	315.1
75°	257.9	257.0	256.2	255.1	254.0	252.9	251.8	250.6
77.5°	196.4	196.0	195.5	194.8	194.0	193.2	192.4	191.6
80°	157.2	156.9	156.7	156.2	155.6	155.0	154.5	153.9
82.5°	120.1	119.6	119.1	118.8	118.7	118.6	118.5	118.3
85°	70.7	70.4	70.1	69.7	69.1	68.5	68.0	67.4
87.5°	30.9	31.2	31.5	31.5	31.2	30.8	30.5	30.3
90°	22.2	23.6	25.0	26.0	26.9	27.6	28.5	29.3
92.5°	22.2	23.6	25.0	25.8	26.2	26.6	27.0	27.3
95°	22.2	23.6	25.0	25.6	25.6	25.6	25.6	25.6
97.5°	44.8	37.1	29.4	25.6	25.6	25.6	25.6	25.6
100°	131.5	91.1	50.7	30.0	28.8	27.8	26.7	25.6
102.5°	255.6	248.0	240.3	227.2	208.9	190.4	171.9	153.5
105°	363.6	363.6	363.6	363.5	363.3	363.0	362.7	362.4
107.5°	460.4	460.5	460.5	460.1	459.3	458.5	457.7	456.9
110°	523.1	522.4	521.5	521.2	521.5	521.8	522.1	522.4



TEST NUMBER: P333452-830

CATALOG NUMBER: S125DIW-S1090D1340U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	585.1	584.2	583.2	582.4	582.0	581.6	581.3	580.9
115°	678.8	677.7	676.7	675.2	673.6	672.0	670.3	668.7
117.5°	769.2	767.8	766.4	765.3	764.6	763.9	763.2	762.5
120°	827.6	827.0	826.4	825.5	824.2	822.7	821.4	820.1
122.5°	883.2	882.6	882.1	881.0	879.5	877.9	876.3	874.8
125°	964.3	963.3	962.1	961.2	960.5	959.6	958.8	958.0
127.5°	1038.6	1037.9	1037.4	1036.0	1034.1	1032.1	1030.0	1028.0
130°	1086.9	1086.1	1085.3	1084.2	1082.9	1081.5	1080.2	1078.8
132.5°	1132.2	1132.0	1131.8	1131.1	1129.7	1128.4	1127.0	1125.7
135°	1198.5	1198.0	1197.4	1196.4	1194.8	1193.1	1191.5	1189.9
137.5°	1260.4	1260.5	1260.6	1259.9	1258.5	1257.1	1255.7	1254.2
140°	1298.4	1298.8	1299.4	1298.8	1297.2	1295.6	1294.0	1292.3
142.5°	1335.5	1335.7	1335.8	1335.0	1333.3	1331.7	1330.1	1328.5
145°	1388.1	1388.4	1388.6	1388.0	1386.3	1384.7	1383.1	1381.5
147.5°	1433.1	1433.4	1433.8	1432.9	1431.0	1429.0	1427.1	1425.1
150°	1461.9	1462.4	1462.9	1462.1	1459.9	1457.7	1455.6	1453.4
152.5°	1487.2	1487.8	1488.3	1487.6	1485.6	1483.8	1481.8	1479.8
155°	1522.2	1523.0	1523.8	1523.1	1521.0	1518.8	1516.6	1514.5
157.5°	1551.1	1552.0	1552.8	1552.2	1550.0	1547.8	1545.7	1543.5
160°	1569.1	1570.2	1571.3	1570.7	1568.6	1566.4	1564.2	1562.1
162.5°	1585.5	1587.1	1588.7	1588.2	1585.8	1583.4	1581.0	1578.7
165°	1606.8	1608.4	1610.1	1609.8	1607.6	1605.4	1603.3	1601.1
167.5°	1622.9	1624.8	1626.7	1626.5	1624.0	1621.6	1619.2	1616.7
170°	1631.1	1633.2	1635.4	1635.3	1632.9	1630.4	1628.0	1625.5
172.5°	1637.5	1639.5	1641.3	1641.2	1638.7	1636.3	1633.8	1631.4
175°	1644.5	1646.6	1648.8	1648.7	1646.2	1643.8	1641.3	1638.9
177.5°	1647.4	1648.9	1650.4	1650.3	1648.5	1646.8	1645.0	1643.3
180°	1646.2	1646.2	1646.2	1646.2	1646.2	1646.2	1646.2	1646.2

(END OF REPORT)