

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333357-830

Luminaire Tested: **S125DIW-S375D1050U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333357-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIW-S375D1050U830-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4859.9 lumens  
Efficiency: N/A  
Efficacy: 127.9 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 38  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333357-830

CATALOG NUMBER: S125DIW-S375D1050U830-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

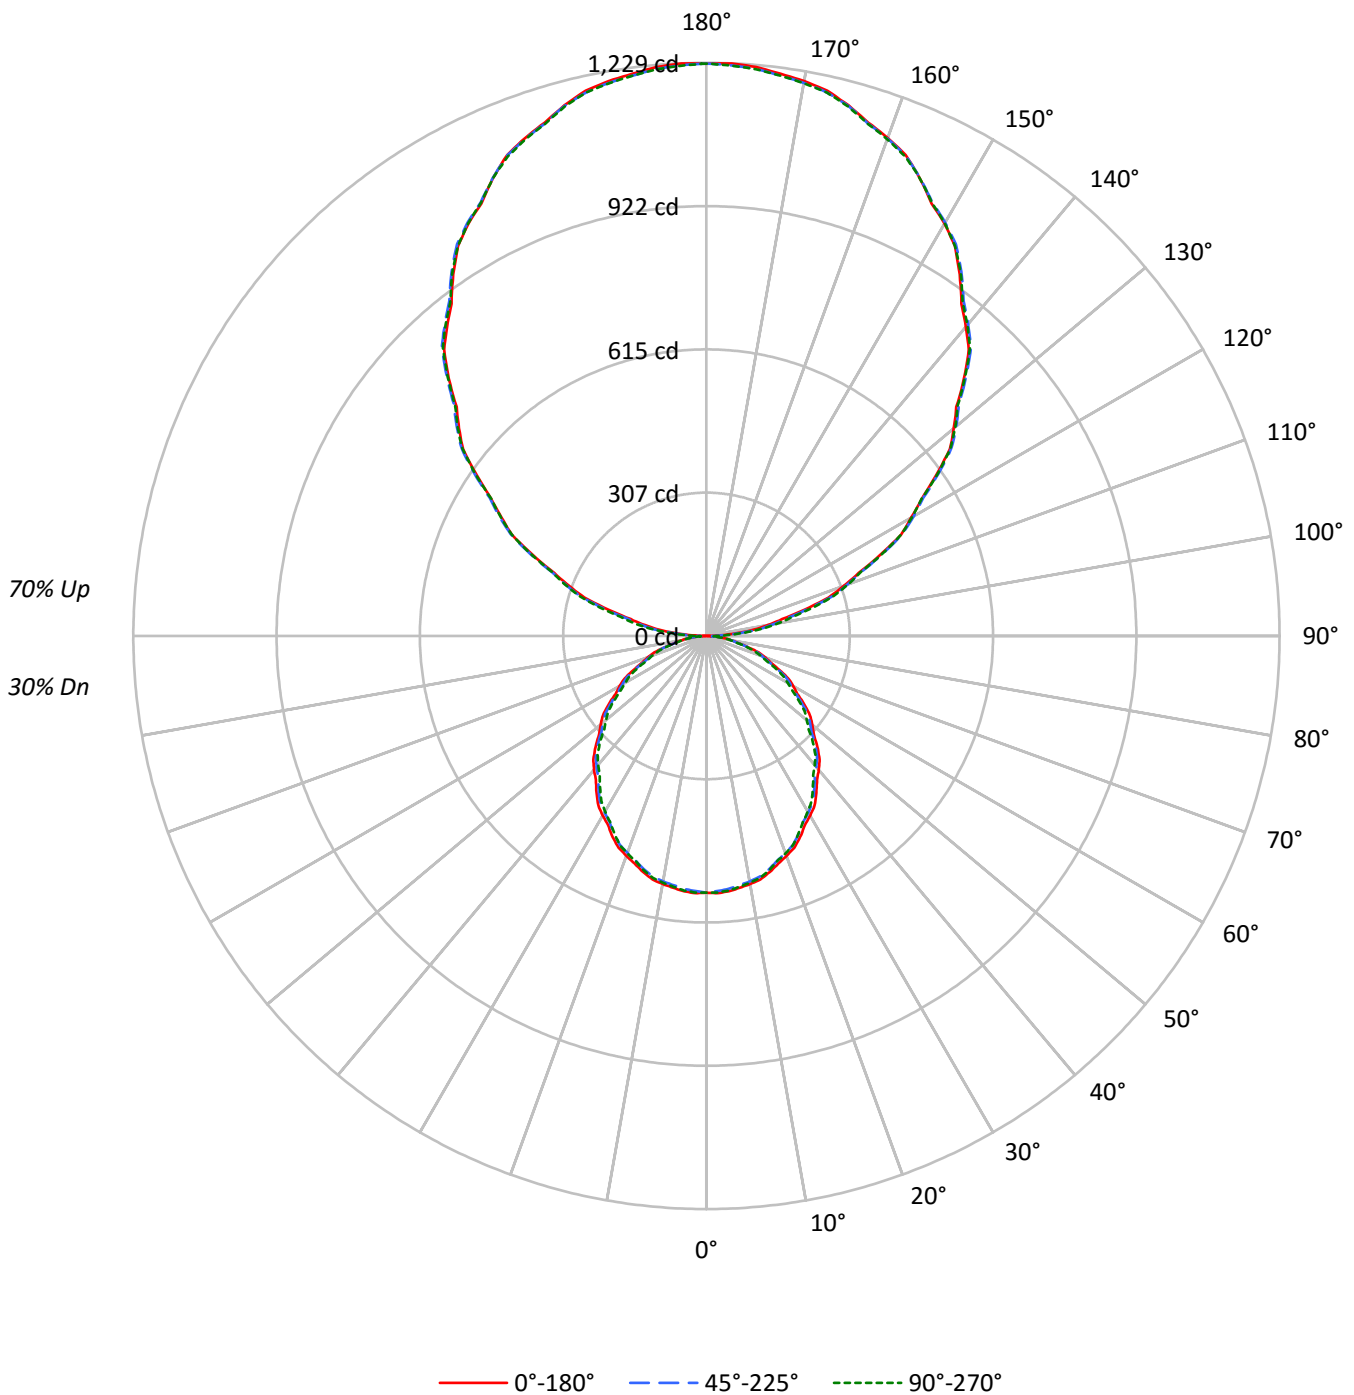



TEST NUMBER: P333357-830

CATALOG NUMBER: S125DIW-S375D1050U830-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	37	37	37
1	93	89	85	82	83	80	77	74	63	61	59	47	46	45	33	32	31
2	85	78	72	67	76	70	65	60	55	52	49	41	39	37	29	28	26
3	77	68	61	55	69	61	55	50	48	44	41	37	34	31	26	24	22
4	71	60	53	47	63	54	48	43	43	38	35	33	29	27	23	21	19
5	65	53	46	40	58	48	41	36	38	33	30	29	26	23	21	18	17
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	19	16	15
7	55	43	35	30	49	39	32	27	31	26	23	24	20	18	17	15	13
8	51	39	31	26	45	35	29	24	28	23	20	22	18	16	16	13	12
9	47	35	28	23	42	32	26	21	26	21	18	20	17	14	14	12	10
10	44	32	25	21	39	29	23	19	24	19	16	18	15	13	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3556	3556	3556
5°	3564	3530	3553
10°	3543	3505	3525
15°	3504	3463	3477
20°	3449	3404	3410
25°	3390	3334	3331
30°	3317	3258	3242
35°	3239	3177	3132
40°	3159	3089	3044
45°	3072	3008	2948
50°	2976	2910	2823
55°	2884	2800	2723
60°	2773	2689	2595
65°	2644	2557	2470
70°	2517	2402	2319
75°	2293	2218	2141
80°	2042	2008	1960
85°	1771	1808	1712



TEST NUMBER: P333357-830

CATALOG NUMBER: S125DIW-S375D1050U830-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	51.9	1.1
10°-20°	146.6	3.0
20°-30°	216.5	4.5
30°-40°	252.7	5.2
40°-50°	253.8	5.2
50°-60°	222.8	4.6
60°-70°	166.0	3.4
70°-80°	94.9	2.0
80°-90°	30.3	0.6
90°-100°	82.2	1.7
100°-110°	242.7	5.0
110°-120°	411.1	8.5
120°-130°	541.1	11.1
130°-140°	606.3	12.5
140°-150°	594.2	12.2
150°-160°	499.1	10.3
160°-170°	331.7	6.8
170°-180°	116.1	2.4
0°-30°	415.1	8.5
0°-40°	667.8	13.7
0°-60°	1144.3	23.5
0°-90°	1435.4	29.5
90°-120°	736.0	15.1
90°-150°	2477.6	51.0
90°-180°	3424.0	70.5
0°-180°	4859.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	551	551	551	551	551	
5°	550	549	544	548	548	52
15°	524	522	518	520	520	148
25°	476	473	468	469	467	219
35°	411	409	403	401	397	257
45°	336	334	329	324	323	259
55°	256	255	249	245	242	229
65°	173	172	167	164	162	172
75°	92	91	89	88	86	98
85°	24	24	24	24	23	27
90°	1	8	15	20	23	5
95°	62	64	74	80	82	66
105°	218	223	228	234	237	233
115°	412	415	417	416	416	407
125°	601	606	607	606	604	538
135°	781	787	788	788	784	602
145°	946	950	953	953	950	591
155°	1083	1083	1084	1087	1083	499
165°	1178	1176	1177	1180	1175	332
175°	1224	1221	1220	1226	1220	116
180°	1227	1227	1227	1227	1227	



TEST NUMBER: P333357-830

CATALOG NUMBER: S125DIW-S375D1050U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6
2.5°	552.0	551.8	551.6	551.3	551.1	550.5	549.8	549.0	548.3	547.4	548.3
5°	549.7	549.5	549.3	549.1	548.9	548.4	547.4	546.5	545.4	544.5	545.4
7.5°	544.7	544.5	544.3	544.1	543.9	543.3	542.2	541.1	540.1	539.0	539.9
10°	540.2	540.0	539.8	539.6	539.4	538.8	537.7	536.6	535.6	534.5	535.3
12.5°	534.6	534.2	533.9	533.6	533.2	532.5	531.5	530.6	529.5	528.6	529.1
15°	524.1	523.8	523.5	523.2	522.8	522.2	521.1	520.1	519.0	517.9	518.4
17.5°	511.9	511.5	511.0	510.7	510.2	509.4	508.3	507.3	506.1	505.0	505.7
20°	501.8	501.6	501.4	501.2	501.1	500.3	499.1	497.8	496.5	495.3	496.0
22.5°	491.7	491.3	491.0	490.7	490.3	489.6	488.3	487.2	486.0	484.8	485.3
25°	475.7	475.2	474.7	474.2	473.7	472.9	471.6	470.3	469.1	467.9	468.1
27.5°	456.9	456.7	456.4	456.1	455.8	455.0	453.7	452.4	451.1	449.8	449.9
30°	444.8	444.5	444.1	443.8	443.6	442.7	441.3	439.8	438.4	436.9	436.7
32.5°	431.5	431.0	430.6	430.2	429.7	428.9	427.5	426.2	425.0	423.7	423.3
35°	410.8	410.4	410.0	409.6	409.3	408.3	407.0	405.7	404.3	402.9	402.5
37.5°	389.3	388.8	388.3	387.8	387.3	386.4	385.1	383.9	382.6	381.4	380.6
40°	374.7	374.1	373.6	373.2	372.7	371.7	370.4	369.1	367.7	366.4	365.5
42.5°	358.9	358.5	358.2	357.7	357.3	356.5	355.1	353.7	352.3	351.0	350.2
45°	336.3	335.9	335.5	335.2	334.7	333.9	332.8	331.7	330.5	329.3	328.2
47.5°	311.9	311.9	311.9	312.0	312.0	311.3	309.9	308.5	307.1	305.7	304.5
50°	296.2	296.0	295.7	295.3	295.0	294.4	293.1	292.0	290.9	289.6	288.4
52.5°	280.2	279.9	279.7	279.6	279.4	278.6	277.4	276.2	274.8	273.6	272.6
55°	256.1	255.8	255.5	255.2	255.0	254.1	252.8	251.5	250.1	248.7	247.9
57.5°	230.8	230.6	230.5	230.4	230.2	229.5	228.4	227.2	226.1	225.0	223.9
60°	214.7	214.3	214.0	213.6	213.2	212.4	211.4	210.4	209.2	208.2	207.3
62.5°	198.0	197.7	197.4	197.1	196.8	196.1	195.3	194.4	193.4	192.6	191.5
65°	173.0	172.8	172.6	172.4	172.2	171.5	170.5	169.4	168.3	167.3	166.4
67.5°	148.6	148.3	147.8	147.4	147.0	146.4	145.6	144.8	144.0	143.3	142.5
70°	133.3	132.8	132.3	131.9	131.4	130.6	129.8	128.9	128.1	127.2	126.6
72.5°	116.6	116.2	115.9	115.6	115.3	114.8	114.2	113.7	113.1	112.5	111.9
75°	91.9	91.7	91.5	91.3	91.1	90.8	90.3	89.8	89.4	88.9	88.6
77.5°	69.2	69.1	69.0	68.9	68.9	68.7	68.4	68.1	67.9	67.6	67.4
80°	54.9	54.9	54.9	54.9	54.9	54.8	54.6	54.4	54.2	54.0	53.9
82.5°	42.3	42.2	42.0	41.8	41.8	41.7	41.6	41.6	41.5	41.5	41.3
85°	23.9	24.0	24.1	24.2	24.3	24.4	24.4	24.4	24.4	24.4	24.3
87.5°	9.6	9.9	10.3	10.7	10.9	11.2	11.5	11.7	11.9	12.2	12.3
90°	0.9	2.6	4.3	6.0	7.7	9.3	10.8	12.3	13.8	15.3	16.3
92.5°	23.1	24.3	25.4	26.7	27.9	29.4	31.2	33.0	34.9	36.7	38.1
95°	62.1	62.5	63.0	63.3	63.8	65.0	67.2	69.3	71.4	73.5	75.0
97.5°	103.1	103.3	103.5	103.7	103.9	105.4	108.3	111.2	114.1	117.1	118.5
100°	133.7	133.7	133.7	133.7	133.7	135.1	137.8	140.6	143.4	146.1	148.1
102.5°	166.5	167.4	168.2	169.1	169.9	171.1	172.5	173.9	175.3	176.7	178.8
105°	217.7	218.8	219.9	220.9	222.0	223.2	224.4	225.7	227.0	228.3	229.5
107.5°	274.3	275.3	276.4	277.5	278.5	279.6	280.5	281.5	282.5	283.4	284.1
110°	313.2	314.3	315.4	316.4	317.5	318.4	319.0	319.6	320.3	320.9	321.5



TEST NUMBER: P333357-830

CATALOG NUMBER: S125DIW-S375D1050U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	353.0	353.5	354.1	354.7	355.2	355.9	356.7	357.5	358.3	359.1	359.4
115°	411.6	412.5	413.3	414.2	415.0	415.7	416.0	416.5	416.9	417.4	417.2
117.5°	470.4	470.8	471.2	471.6	472.0	472.4	472.8	473.2	473.5	473.9	474.1
120°	507.1	508.2	509.3	510.3	511.3	512.0	512.2	512.5	512.6	512.8	512.8
122.5°	546.9	547.2	547.6	548.0	548.4	548.8	549.4	550.0	550.5	551.1	550.9
125°	600.7	602.0	603.2	604.5	605.8	606.5	606.8	607.0	607.2	607.4	607.0
127.5°	658.0	658.7	659.5	660.2	660.9	661.4	661.7	661.9	662.1	662.4	662.2
130°	692.4	693.4	694.6	695.6	696.6	697.4	697.9	698.2	698.7	699.1	698.9
132.5°	726.8	728.5	730.3	732.0	733.8	734.6	734.5	734.4	734.3	734.2	734.1
135°	781.2	782.5	783.7	785.0	786.4	787.0	787.3	787.5	787.7	787.9	787.9
137.5°	832.5	833.7	834.9	836.1	837.4	838.2	838.7	839.1	839.6	840.1	840.3
140°	865.3	866.3	867.4	868.5	869.5	870.3	871.0	871.7	872.2	872.9	873.4
142.5°	898.1	899.0	899.9	900.8	901.7	902.6	903.3	904.2	904.9	905.8	906.0
145°	946.4	947.3	948.1	949.0	949.8	950.6	951.2	951.9	952.5	953.1	953.1
147.5°	991.2	991.6	992.1	992.5	993.0	993.5	994.0	994.5	995.0	995.5	996.1
150°	1021.0	1020.8	1020.5	1020.3	1020.1	1020.4	1021.2	1022.1	1022.9	1023.8	1023.8
152.5°	1045.4	1045.7	1045.9	1046.3	1046.6	1046.9	1047.3	1047.5	1047.9	1048.3	1048.8
155°	1083.0	1083.0	1083.0	1083.0	1083.0	1083.1	1083.4	1083.5	1083.7	1084.0	1084.9
157.5°	1116.6	1116.2	1115.7	1115.2	1114.7	1114.7	1114.8	1115.0	1115.3	1115.5	1116.3
160°	1136.5	1135.9	1135.2	1134.6	1134.0	1133.8	1134.0	1134.2	1134.3	1134.6	1135.5
162.5°	1154.0	1153.6	1153.1	1152.6	1152.2	1152.0	1152.1	1152.1	1152.2	1152.2	1153.2
165°	1177.6	1177.1	1176.7	1176.3	1175.8	1175.7	1176.0	1176.2	1176.4	1176.6	1177.4
167.5°	1197.4	1196.6	1195.7	1194.9	1194.0	1193.6	1193.6	1193.6	1193.6	1193.6	1194.9
170°	1208.2	1207.3	1206.5	1205.6	1204.8	1204.3	1204.3	1204.3	1204.3	1204.3	1205.6
172.5°	1215.8	1214.9	1214.1	1213.2	1212.4	1211.9	1211.9	1211.9	1211.9	1211.9	1213.2
175°	1224.4	1223.5	1222.7	1221.8	1221.0	1220.5	1220.5	1220.5	1220.5	1220.5	1221.8
177.5°	1228.8	1228.0	1227.4	1226.7	1226.1	1225.6	1225.4	1225.3	1225.1	1224.9	1226.0
180°	1227.2	1227.2	1227.2	1227.2	1227.2	1227.2	1227.2	1227.2	1227.2	1227.2	1227.2



TEST NUMBER: P333357-830

CATALOG NUMBER: S125DIW-S375D1050U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6
2.5°	549.0	549.8	550.5	550.9	550.8	550.7	550.7	550.6
5°	546.2	547.1	548.0	548.4	548.3	548.2	548.1	548.0
7.5°	540.7	541.6	542.4	542.8	542.7	542.6	542.5	542.4
10°	536.0	536.8	537.6	537.9	537.8	537.7	537.6	537.5
12.5°	529.8	530.5	531.0	531.3	531.3	531.3	531.3	531.2
15°	518.9	519.3	519.9	520.1	520.1	520.1	520.1	520.1
17.5°	506.2	506.8	507.5	507.5	507.0	506.5	506.1	505.6
20°	496.6	497.3	497.9	498.1	497.6	497.1	496.6	496.2
22.5°	485.7	486.2	486.6	486.6	486.4	486.0	485.7	485.3
25°	468.3	468.4	468.6	468.5	468.3	468.0	467.7	467.4
27.5°	449.9	449.9	450.0	449.9	449.5	449.2	448.9	448.7
30°	436.5	436.3	436.1	435.9	435.6	435.4	435.0	434.7
32.5°	423.0	422.6	422.3	421.9	421.3	420.8	420.3	419.7
35°	402.0	401.5	401.0	400.4	399.6	398.8	398.0	397.3
37.5°	379.9	379.2	378.4	377.9	377.4	377.0	376.5	376.1
40°	364.6	363.7	362.9	362.3	362.0	361.7	361.4	361.1
42.5°	349.4	348.6	347.8	347.2	346.8	346.3	345.9	345.4
45°	327.0	325.8	324.7	324.0	323.7	323.4	323.1	322.8
47.5°	303.3	302.2	301.0	300.0	299.4	298.7	298.0	297.4
50°	287.2	285.9	284.6	283.7	283.0	282.3	281.6	281.0
52.5°	271.5	270.3	269.2	268.3	267.6	266.8	266.1	265.3
55°	246.9	246.1	245.2	244.5	243.8	243.1	242.4	241.8
57.5°	222.7	221.6	220.5	219.7	219.3	219.0	218.6	218.2
60°	206.3	205.3	204.3	203.5	202.8	202.2	201.5	200.9
62.5°	190.5	189.4	188.3	187.6	187.1	186.5	186.0	185.5
65°	165.5	164.7	163.8	163.2	162.8	162.4	162.0	161.6
67.5°	141.8	141.0	140.3	139.8	139.6	139.3	139.1	138.8
70°	126.0	125.5	124.9	124.4	124.0	123.7	123.2	122.8
72.5°	111.2	110.6	109.9	109.4	109.1	108.7	108.2	107.8
75°	88.3	88.0	87.7	87.4	87.0	86.6	86.2	85.8
77.5°	67.3	67.1	66.9	66.7	66.4	66.2	65.9	65.6
80°	53.8	53.7	53.6	53.4	53.3	53.1	52.9	52.7
82.5°	41.1	40.9	40.8	40.6	40.6	40.6	40.5	40.5
85°	24.2	24.1	24.0	23.8	23.7	23.5	23.3	23.1
87.5°	12.5	12.7	13.0	13.1	13.0	13.0	13.0	12.9
90°	17.4	18.5	19.5	20.4	21.0	21.7	22.2	22.9
92.5°	39.5	40.9	42.3	43.2	43.6	44.1	44.6	45.1
95°	76.5	77.9	79.5	80.4	80.9	81.2	81.7	82.1
97.5°	119.9	121.3	122.7	123.5	123.8	124.0	124.3	124.5
100°	150.0	151.8	153.7	155.0	155.3	155.8	156.2	156.7
102.5°	180.9	182.9	185.0	186.3	186.9	187.6	188.1	188.7
105°	230.8	232.1	233.4	234.3	235.0	235.5	236.2	236.9
107.5°	284.7	285.4	286.0	286.3	286.3	286.3	286.2	286.2
110°	322.2	322.8	323.5	323.7	323.5	323.2	323.0	322.8





TEST NUMBER: P333357-830

CATALOG NUMBER: S125DIW-S375D1050U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	359.7	360.0	360.2	360.2	359.9	359.5	359.1	358.7
115°	416.9	416.7	416.5	416.3	416.0	415.8	415.7	415.5
117.5°	474.2	474.4	474.6	474.2	473.3	472.5	471.6	470.8
120°	512.8	512.8	512.8	512.5	511.6	510.8	509.9	509.1
122.5°	550.7	550.5	550.4	550.0	549.3	548.6	547.9	547.2
125°	606.5	606.1	605.7	605.4	605.2	604.9	604.7	604.5
127.5°	661.9	661.8	661.6	661.3	660.8	660.4	660.0	659.6
130°	698.7	698.4	698.2	698.0	697.5	697.1	696.6	696.3
132.5°	733.8	733.6	733.4	733.0	732.4	731.8	731.2	730.6
135°	787.9	787.9	787.9	787.5	786.6	785.8	784.9	784.1
137.5°	840.6	840.8	841.0	840.7	839.6	838.6	837.4	836.4
140°	873.7	874.2	874.6	874.3	873.3	872.1	871.1	870.1
142.5°	906.3	906.5	906.8	906.3	905.3	904.3	903.2	902.1
145°	953.1	953.1	953.1	952.8	952.2	951.5	950.9	950.3
147.5°	996.6	997.0	997.6	997.1	995.7	994.2	992.8	991.4
150°	1023.8	1023.8	1023.8	1023.6	1023.1	1022.8	1022.3	1021.9
152.5°	1049.2	1049.8	1050.3	1050.2	1049.4	1048.7	1047.8	1047.1
155°	1085.7	1086.6	1087.4	1087.2	1086.2	1085.1	1084.1	1083.0
157.5°	1117.2	1118.0	1118.9	1118.6	1117.2	1115.8	1114.4	1113.0
160°	1136.3	1137.2	1138.0	1137.8	1136.8	1135.8	1134.7	1133.6
162.5°	1154.2	1155.2	1156.2	1156.1	1154.9	1153.7	1152.4	1151.2
165°	1178.3	1179.1	1180.0	1179.8	1178.6	1177.2	1176.0	1174.7
167.5°	1196.2	1197.4	1198.7	1198.7	1197.4	1196.1	1194.8	1193.4
170°	1206.8	1208.2	1209.4	1209.3	1207.8	1206.4	1204.9	1203.3
172.5°	1214.5	1215.8	1217.0	1217.0	1215.7	1214.4	1213.1	1211.7
175°	1223.0	1224.4	1225.7	1225.5	1224.1	1222.6	1221.1	1219.6
177.5°	1227.0	1228.0	1229.0	1228.9	1227.8	1226.5	1225.4	1224.2
180°	1227.2	1227.2	1227.2	1227.2	1227.2	1227.2	1227.2	1227.2

(END OF REPORT)