

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333350-830

Luminaire Tested: **S125DIW-S375D770U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333350-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S375D770U830-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4327.8 lumens
Efficiency: N/A
Efficacy: 142.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 30.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333350-830

CATALOG NUMBER: S125DIW-S375D770U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

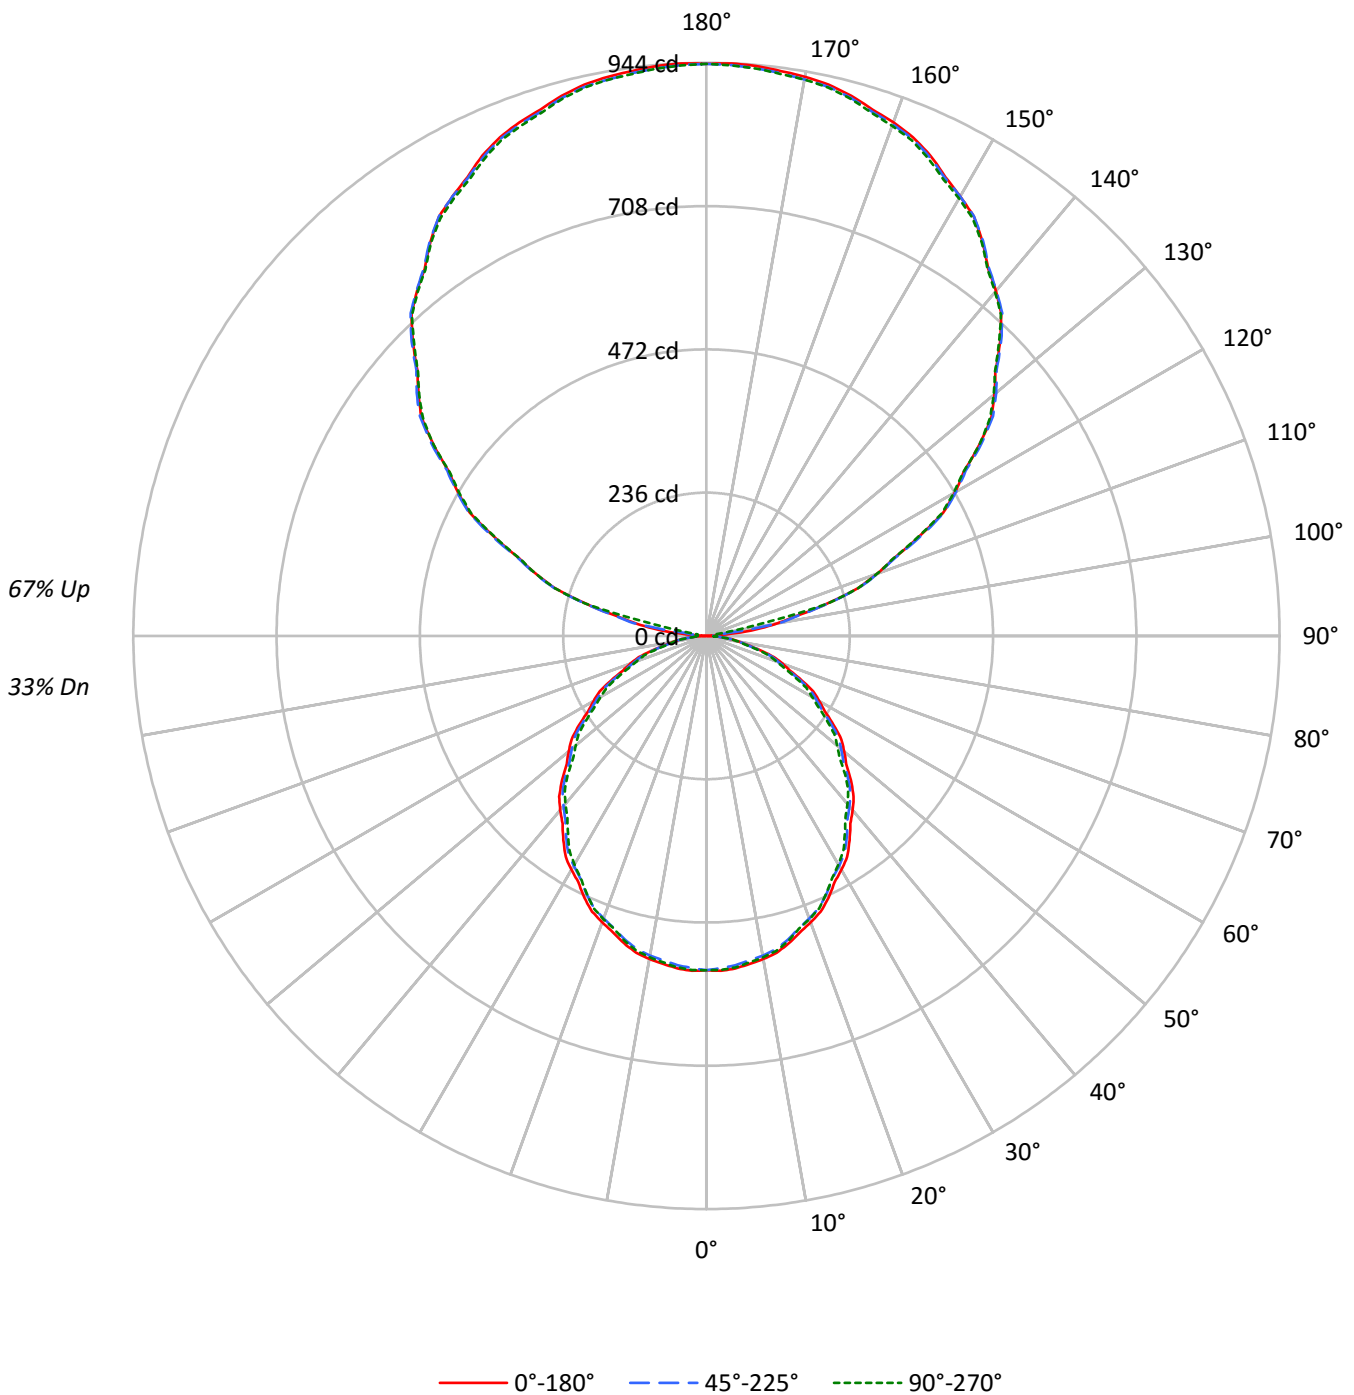



TEST NUMBER: P333350-830

CATALOG NUMBER: S125DIW-S375D770U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	33
1	94	90	86	82	85	81	78	75	65	62	60	50	48	47	36	35	34	28
2	86	78	72	67	77	71	66	61	57	53	50	44	41	39	31	30	29	23
3	78	69	62	56	70	62	56	51	50	46	42	38	36	33	28	26	24	20
4	71	61	53	47	64	55	48	43	44	39	36	34	31	28	25	23	21	17
5	65	54	46	40	59	49	42	37	39	34	31	31	27	24	22	20	18	15
6	60	48	40	35	54	44	37	32	35	30	27	28	24	21	20	18	16	13
7	55	43	36	30	50	40	33	28	32	27	23	25	21	19	18	16	14	11
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13	10
9	48	36	29	24	43	33	26	22	27	22	18	21	17	15	16	13	11	9
10	45	33	26	21	40	30	24	20	24	20	16	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3556	3556	3556
5°	3564	3530	3553
10°	3543	3505	3525
15°	3504	3463	3477
20°	3449	3404	3410
25°	3390	3334	3331
30°	3317	3258	3242
35°	3239	3177	3132
40°	3159	3089	3044
45°	3072	3008	2948
50°	2976	2910	2823
55°	2884	2800	2723
60°	2773	2689	2595
65°	2644	2557	2470
70°	2517	2402	2319
75°	2293	2218	2141
80°	2042	2008	1960
85°	1771	1808	1712



TEST NUMBER: P333350-830

CATALOG NUMBER: S125DIW-S375D770U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.9	1.2
10°-20°	146.6	3.4
20°-30°	216.5	5.0
30°-40°	252.7	5.8
40°-50°	253.8	5.9
50°-60°	222.8	5.1
60°-70°	166.0	3.8
70°-80°	94.9	2.2
80°-90°	29.6	0.7
90°-100°	34.2	0.8
100°-110°	211.0	4.9
110°-120°	382.7	8.8
120°-130°	491.1	11.3
130°-140°	528.2	12.2
140°-150°	495.8	11.5
150°-160°	401.1	9.3
160°-170°	259.4	6.0
170°-180°	89.5	2.1
0°-30°	415.1	9.6
0°-40°	667.8	15.4
0°-60°	1144.3	26.4
0°-90°	1434.7	33.2
90°-120°	627.9	14.5
90°-150°	2143.1	49.5
90°-180°	2893.0	66.8
0°-180°	4327.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	551	551	551	551	551	
5°	550	549	544	548	548	52
15°	524	522	518	520	520	148
25°	476	473	468	469	467	219
35°	411	409	403	401	397	257
45°	336	334	329	324	323	259
55°	256	255	249	245	242	229
65°	173	172	167	164	162	172
75°	92	91	89	88	86	98
85°	24	24	24	24	23	27
90°	1	6	11	15	17	3
95°	40	36	11	14	15	51
105°	205	208	208	208	208	218
115°	386	389	390	387	383	382
125°	548	553	553	550	548	489
135°	684	688	686	685	681	527
145°	793	794	794	794	791	496
155°	873	869	870	872	867	402
165°	921	917	918	921	916	260
175°	942	938	939	944	938	90
180°	942	942	942	942	942	



TEST NUMBER: P333350-830

CATALOG NUMBER: S125DIW-S375D770U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6
2.5°	552.0	551.8	551.6	551.3	551.1	550.5	549.8	549.0	548.3	547.4	548.3
5°	549.7	549.5	549.3	549.1	548.9	548.4	547.4	546.5	545.4	544.5	545.4
7.5°	544.7	544.5	544.3	544.1	543.9	543.3	542.2	541.1	540.1	539.0	539.9
10°	540.2	540.0	539.8	539.6	539.4	538.8	537.7	536.6	535.6	534.5	535.3
12.5°	534.6	534.2	533.9	533.6	533.2	532.5	531.5	530.6	529.5	528.6	529.1
15°	524.1	523.8	523.5	523.2	522.8	522.2	521.1	520.1	519.0	517.9	518.4
17.5°	511.9	511.5	511.0	510.7	510.2	509.4	508.3	507.3	506.1	505.0	505.7
20°	501.8	501.6	501.4	501.2	501.1	500.3	499.1	497.8	496.5	495.3	496.0
22.5°	491.7	491.3	491.0	490.7	490.3	489.6	488.3	487.2	486.0	484.8	485.3
25°	475.7	475.2	474.7	474.2	473.7	472.9	471.6	470.3	469.1	467.9	468.1
27.5°	456.9	456.7	456.4	456.1	455.8	455.0	453.7	452.4	451.1	449.8	449.9
30°	444.8	444.5	444.1	443.8	443.6	442.7	441.3	439.8	438.4	436.9	436.7
32.5°	431.5	431.0	430.6	430.2	429.7	428.9	427.5	426.2	425.0	423.7	423.3
35°	410.8	410.4	410.0	409.6	409.3	408.3	407.0	405.7	404.3	402.9	402.5
37.5°	389.3	388.8	388.3	387.8	387.3	386.4	385.1	383.9	382.6	381.4	380.6
40°	374.7	374.1	373.6	373.2	372.7	371.7	370.4	369.1	367.7	366.4	365.5
42.5°	358.9	358.5	358.2	357.7	357.3	356.5	355.1	353.7	352.3	351.0	350.2
45°	336.3	335.9	335.5	335.2	334.7	333.9	332.8	331.7	330.5	329.3	328.2
47.5°	311.9	311.9	311.9	312.0	312.0	311.3	309.9	308.5	307.1	305.7	304.5
50°	296.2	296.0	295.7	295.3	295.0	294.4	293.1	292.0	290.9	289.6	288.4
52.5°	280.2	279.9	279.7	279.6	279.4	278.6	277.4	276.2	274.8	273.6	272.6
55°	256.1	255.8	255.5	255.2	255.0	254.1	252.8	251.5	250.1	248.7	247.9
57.5°	230.8	230.6	230.5	230.4	230.2	229.5	228.4	227.2	226.1	225.0	223.9
60°	214.7	214.3	214.0	213.6	213.2	212.4	211.4	210.4	209.2	208.2	207.3
62.5°	198.0	197.7	197.4	197.1	196.8	196.1	195.3	194.4	193.4	192.6	191.5
65°	173.0	172.8	172.6	172.4	172.2	171.5	170.5	169.4	168.3	167.3	166.4
67.5°	148.6	148.3	147.8	147.4	147.0	146.4	145.6	144.8	144.0	143.3	142.5
70°	133.3	132.8	132.3	131.9	131.4	130.6	129.8	128.9	128.1	127.2	126.6
72.5°	116.6	116.2	115.9	115.6	115.3	114.8	114.2	113.7	113.1	112.5	111.9
75°	91.9	91.7	91.5	91.3	91.1	90.8	90.3	89.8	89.4	88.9	88.6
77.5°	69.2	69.1	69.0	68.9	68.9	68.7	68.4	68.1	67.9	67.6	67.4
80°	54.9	54.9	54.9	54.9	54.9	54.8	54.6	54.4	54.2	54.0	53.9
82.5°	42.3	42.2	42.0	41.8	41.8	41.7	41.6	41.6	41.5	41.5	41.3
85°	23.9	24.0	24.1	24.2	24.3	24.4	24.4	24.4	24.4	24.4	24.3
87.5°	9.5	9.8	10.1	10.3	10.6	10.7	10.8	11.0	11.1	11.3	11.4
90°	0.7	2.0	3.2	4.4	5.7	6.8	7.9	9.0	10.1	11.2	12.0
92.5°	10.7	9.9	9.0	8.1	7.3	7.4	8.3	9.2	10.2	11.2	12.0
95°	39.8	39.3	38.8	38.5	38.0	34.8	28.8	23.0	17.1	11.2	12.0
97.5°	83.1	84.0	84.8	85.6	86.4	81.1	69.4	57.7	46.0	34.4	30.0
100°	116.6	117.1	117.5	118.0	118.5	119.0	119.7	120.3	120.9	121.5	98.4
102.5°	150.7	151.3	151.9	152.5	153.1	153.5	153.9	154.3	154.7	155.0	150.7
105°	205.3	205.9	206.6	207.2	207.8	208.1	208.1	208.1	208.1	208.1	208.1
107.5°	262.0	262.0	262.0	262.0	262.0	262.2	262.5	262.8	263.2	263.4	263.4
110°	298.9	298.9	298.9	298.9	298.9	299.1	299.4	299.7	300.0	300.3	299.8



TEST NUMBER: P333350-830

CATALOG NUMBER: S125DIW-S375D770U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	333.6	333.9	334.3	334.7	335.1	335.4	335.5	335.7	335.9	336.1	335.5
115°	385.5	386.3	387.1	387.9	388.6	389.1	389.3	389.4	389.6	389.7	389.1
117.5°	439.3	439.2	439.2	439.2	439.1	439.4	440.1	440.6	441.2	441.8	441.0
120°	472.8	472.7	472.5	472.3	472.2	472.3	472.8	473.3	473.7	474.2	473.9
122.5°	502.4	503.0	503.6	504.2	504.8	505.2	505.4	505.6	505.9	506.1	505.8
125°	548.3	549.3	550.4	551.5	552.6	553.1	553.1	553.1	553.1	553.1	552.5
127.5°	591.9	592.8	593.5	594.3	595.0	595.4	595.3	595.2	595.1	595.0	594.7
130°	618.8	619.5	620.3	621.1	621.9	622.4	622.5	622.6	622.8	622.9	622.5
132.5°	645.5	646.5	647.4	648.3	649.2	649.5	649.1	648.8	648.5	648.1	648.0
135°	683.7	684.7	685.6	686.5	687.5	687.8	687.5	687.1	686.8	686.5	686.2
137.5°	718.8	719.6	720.4	721.2	722.0	722.3	722.0	721.7	721.4	721.1	721.2
140°	741.7	742.0	742.3	742.6	742.9	743.0	742.8	742.7	742.5	742.3	742.7
142.5°	762.3	762.5	762.7	762.9	763.1	763.3	763.6	763.7	763.9	764.2	764.2
145°	792.7	793.0	793.3	793.6	793.9	794.1	794.1	794.1	794.1	794.1	794.2
147.5°	819.3	819.2	819.1	819.1	819.0	819.1	819.3	819.4	819.5	819.7	819.9
150°	835.9	835.7	835.4	835.0	834.7	834.7	835.0	835.4	835.7	835.9	836.3
152.5°	852.2	851.5	850.8	850.2	849.4	849.2	849.6	849.9	850.2	850.5	850.8
155°	873.0	872.0	871.1	870.2	869.3	868.9	869.3	869.6	869.9	870.2	870.6
157.5°	889.0	888.5	888.0	887.4	886.8	886.6	886.6	886.6	886.6	886.6	887.2
160°	900.2	899.3	898.3	897.4	896.5	896.1	896.3	896.5	896.5	896.7	897.4
162.5°	909.2	908.2	907.3	906.3	905.4	905.0	905.2	905.4	905.5	905.7	906.5
165°	921.1	920.2	919.4	918.4	917.5	917.1	917.2	917.4	917.6	917.7	918.6
167.5°	930.1	929.2	928.2	927.3	926.2	925.9	926.0	926.1	926.3	926.5	927.6
170°	935.2	934.1	932.9	931.9	930.8	930.3	930.5	930.7	930.8	930.9	932.2
172.5°	938.5	937.5	936.3	935.2	934.2	933.8	934.1	934.3	934.6	934.9	935.9
175°	942.2	941.2	940.3	939.3	938.4	938.0	938.2	938.3	938.5	938.7	939.9
177.5°	943.8	943.0	942.4	941.6	940.8	940.5	940.7	940.8	940.8	941.0	941.9
180°	942.2	942.2	942.2	942.2	942.2	942.2	942.2	942.2	942.2	942.2	942.2



TEST NUMBER: P333350-830

CATALOG NUMBER: S125DIW-S375D770U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6
2.5°	549.0	549.8	550.5	550.9	550.8	550.7	550.7	550.6
5°	546.2	547.1	548.0	548.4	548.3	548.2	548.1	548.0
7.5°	540.7	541.6	542.4	542.8	542.7	542.6	542.5	542.4
10°	536.0	536.8	537.6	537.9	537.8	537.7	537.6	537.5
12.5°	529.8	530.5	531.0	531.3	531.3	531.3	531.3	531.2
15°	518.9	519.3	519.9	520.1	520.1	520.1	520.1	520.1
17.5°	506.2	506.8	507.5	507.5	507.0	506.5	506.1	505.6
20°	496.6	497.3	497.9	498.1	497.6	497.1	496.6	496.2
22.5°	485.7	486.2	486.6	486.6	486.4	486.0	485.7	485.3
25°	468.3	468.4	468.6	468.5	468.3	468.0	467.7	467.4
27.5°	449.9	449.9	450.0	449.9	449.5	449.2	448.9	448.7
30°	436.5	436.3	436.1	435.9	435.6	435.4	435.0	434.7
32.5°	423.0	422.6	422.3	421.9	421.3	420.8	420.3	419.7
35°	402.0	401.5	401.0	400.4	399.6	398.8	398.0	397.3
37.5°	379.9	379.2	378.4	377.9	377.4	377.0	376.5	376.1
40°	364.6	363.7	362.9	362.3	362.0	361.7	361.4	361.1
42.5°	349.4	348.6	347.8	347.2	346.8	346.3	345.9	345.4
45°	327.0	325.8	324.7	324.0	323.7	323.4	323.1	322.8
47.5°	303.3	302.2	301.0	300.0	299.4	298.7	298.0	297.4
50°	287.2	285.9	284.6	283.7	283.0	282.3	281.6	281.0
52.5°	271.5	270.3	269.2	268.3	267.6	266.8	266.1	265.3
55°	246.9	246.1	245.2	244.5	243.8	243.1	242.4	241.8
57.5°	222.7	221.6	220.5	219.7	219.3	219.0	218.6	218.2
60°	206.3	205.3	204.3	203.5	202.8	202.2	201.5	200.9
62.5°	190.5	189.4	188.3	187.6	187.1	186.5	186.0	185.5
65°	165.5	164.7	163.8	163.2	162.8	162.4	162.0	161.6
67.5°	141.8	141.0	140.3	139.8	139.6	139.3	139.1	138.8
70°	126.0	125.5	124.9	124.4	124.0	123.7	123.2	122.8
72.5°	111.2	110.6	109.9	109.4	109.1	108.7	108.2	107.8
75°	88.3	88.0	87.7	87.4	87.0	86.6	86.2	85.8
77.5°	67.3	67.1	66.9	66.7	66.4	66.2	65.9	65.6
80°	53.8	53.7	53.6	53.4	53.3	53.1	52.9	52.7
82.5°	41.1	40.9	40.8	40.6	40.6	40.6	40.5	40.5
85°	24.2	24.1	24.0	23.8	23.7	23.5	23.3	23.1
87.5°	11.6	11.8	11.9	12.0	11.9	11.9	11.8	11.7
90°	12.7	13.5	14.2	14.9	15.4	15.8	16.3	16.8
92.5°	12.7	13.5	14.2	14.8	15.0	15.2	15.5	15.6
95°	12.7	13.5	14.2	14.7	14.7	14.7	14.7	14.7
97.5°	25.6	21.2	16.9	14.7	14.7	14.7	14.7	14.7
100°	75.3	52.1	29.0	17.2	16.5	15.9	15.3	14.7
102.5°	146.3	141.9	137.5	130.1	119.5	109.0	98.4	87.8
105°	208.1	208.1	208.1	208.0	207.9	207.7	207.5	207.5
107.5°	263.5	263.5	263.5	263.3	262.9	262.4	261.9	261.5
110°	299.4	298.9	298.4	298.3	298.4	298.6	298.8	298.9



TEST NUMBER: P333350-830

CATALOG NUMBER: S125DIW-S375D770U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	334.9	334.3	333.7	333.3	333.1	332.9	332.6	332.4
115°	388.4	387.9	387.2	386.4	385.5	384.6	383.6	382.7
117.5°	440.2	439.4	438.6	438.0	437.5	437.2	436.8	436.4
120°	473.6	473.3	473.0	472.4	471.6	470.9	470.1	469.3
122.5°	505.4	505.1	504.8	504.2	503.3	502.4	501.5	500.6
125°	551.9	551.3	550.6	550.1	549.6	549.1	548.7	548.3
127.5°	594.4	594.0	593.7	593.0	591.7	590.6	589.5	588.3
130°	622.1	621.6	621.1	620.5	619.7	619.0	618.1	617.4
132.5°	647.9	647.8	647.7	647.3	646.5	645.7	645.0	644.2
135°	685.9	685.6	685.3	684.7	683.7	682.8	681.8	680.9
137.5°	721.3	721.3	721.4	721.0	720.2	719.4	718.6	717.8
140°	743.0	743.3	743.7	743.3	742.3	741.5	740.6	739.6
142.5°	764.3	764.4	764.4	764.0	763.1	762.1	761.2	760.3
145°	794.4	794.6	794.7	794.3	793.3	792.4	791.5	790.6
147.5°	820.1	820.3	820.5	820.0	819.0	817.8	816.7	815.6
150°	836.6	836.9	837.3	836.8	835.5	834.2	833.0	831.8
152.5°	851.1	851.4	851.8	851.3	850.2	849.1	848.0	846.9
155°	871.1	871.6	872.0	871.7	870.4	869.2	868.0	866.7
157.5°	887.7	888.2	888.6	888.3	887.0	885.8	884.6	883.4
160°	898.0	898.6	899.2	898.9	897.7	896.5	895.2	893.9
162.5°	907.4	908.2	909.2	908.9	907.6	906.2	904.8	903.4
165°	919.5	920.5	921.4	921.2	920.0	918.8	917.6	916.2
167.5°	928.7	929.8	930.9	930.9	929.4	928.0	926.6	925.2
170°	933.4	934.7	935.9	935.9	934.4	933.0	931.6	930.3
172.5°	937.1	938.2	939.3	939.1	937.8	936.4	935.0	933.6
175°	941.1	942.4	943.6	943.5	942.2	940.8	939.3	937.9
177.5°	942.7	943.6	944.5	944.4	943.4	942.4	941.4	940.5
180°	942.2	942.2	942.2	942.2	942.2	942.2	942.2	942.2

(END OF REPORT)