

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333398-830

Luminaire Tested: **S125DIW-S610D1560U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333398-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIW-S610D1560U830-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1560 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8237.2 lumens  
Efficiency: N/A  
Efficacy: 135.9 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 60.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333398-830

CATALOG NUMBER: S125DIW-S610D1560U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

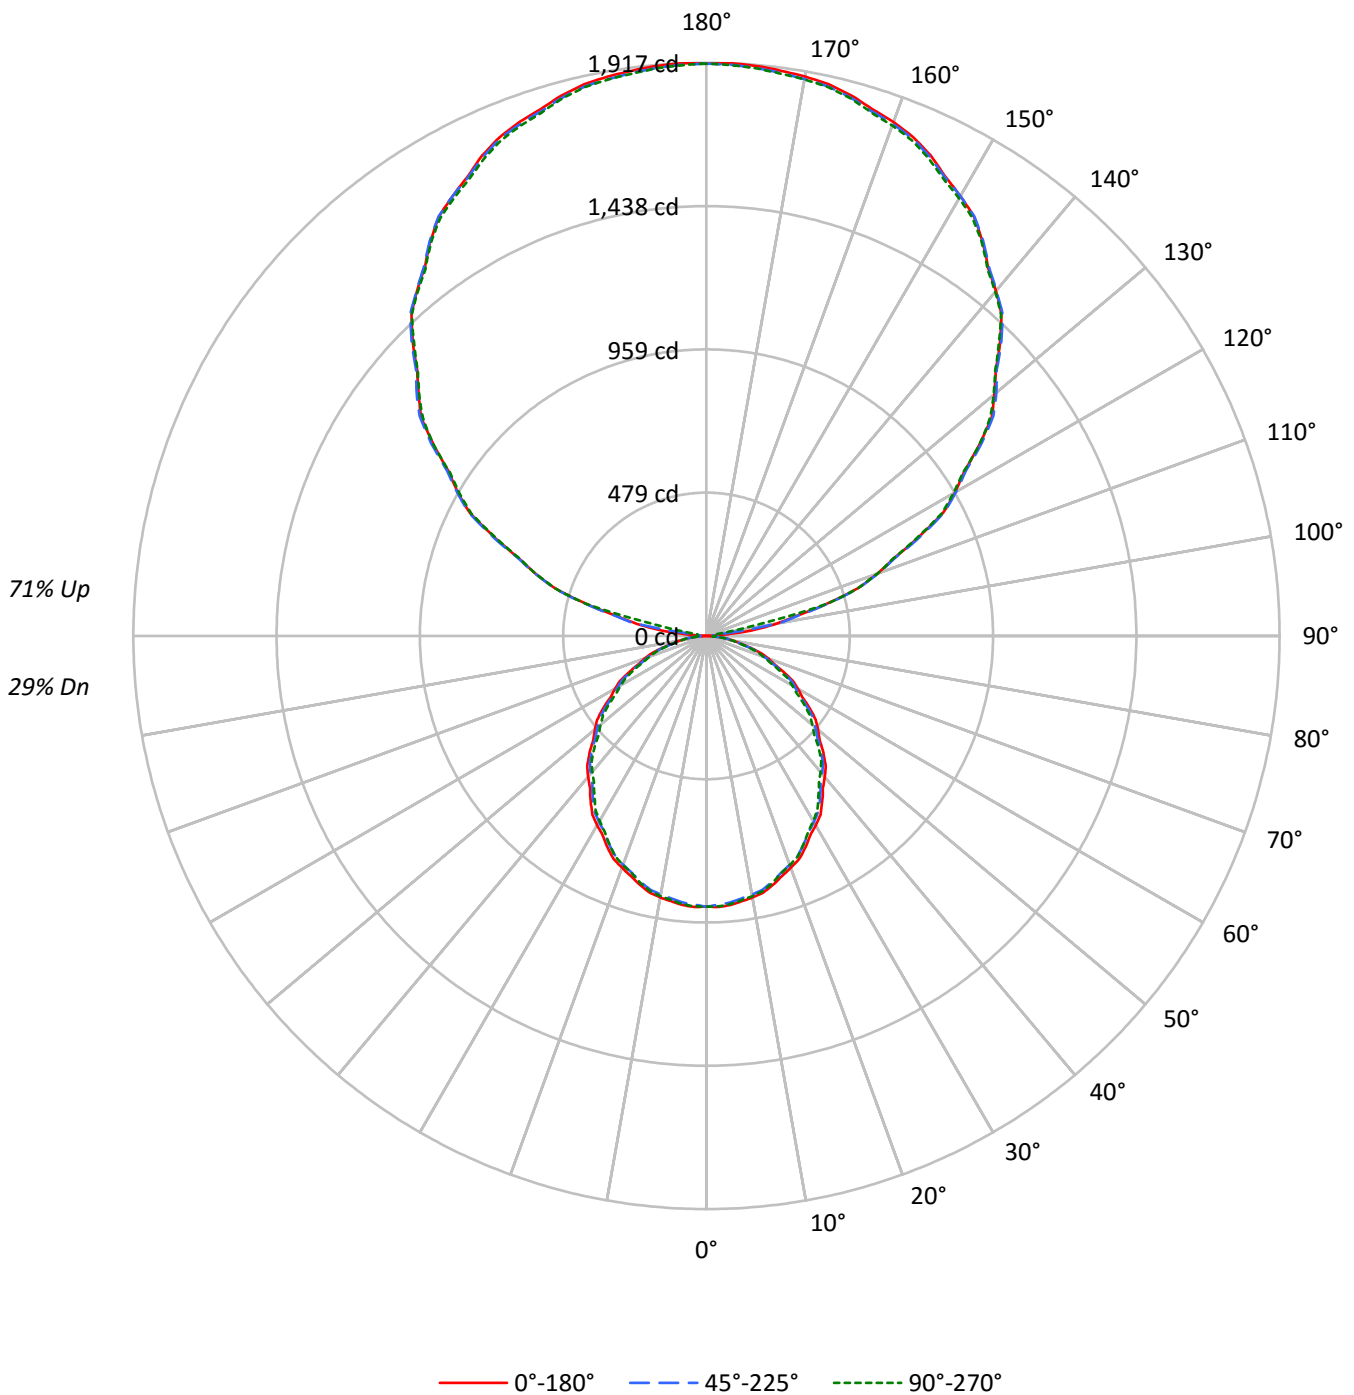



TEST NUMBER: P333398-830

CATALOG NUMBER: S125DIW-S610D1560U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	37	37	37	29
1	93	89	85	82	83	80	76	74	62	60	58	47	45	44	32	31	31	24
2	85	77	71	67	75	70	65	60	55	51	48	41	39	37	28	27	26	20
3	77	68	61	55	69	61	55	50	48	44	40	36	33	31	25	23	22	17
4	70	60	52	47	63	54	48	42	43	38	34	32	29	26	22	20	19	15
5	65	53	46	40	58	48	41	36	38	33	29	29	25	23	20	18	16	13
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	14	11
7	55	43	35	30	49	39	32	27	31	26	22	23	20	18	17	14	13	10
8	51	39	31	26	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10	8
10	44	32	25	21	39	29	23	19	24	19	16	18	15	12	13	11	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5846	5846	5846
5°	5859	5803	5841
10°	5823	5762	5795
15°	5760	5693	5717
20°	5670	5597	5606
25°	5573	5481	5476
30°	5452	5357	5330
35°	5324	5222	5149
40°	5193	5078	5005
45°	5050	4945	4847
50°	4893	4786	4641
55°	4741	4604	4476
60°	4561	4421	4265
65°	4345	4202	4060
70°	4137	3950	3814
75°	3770	3646	3521
80°	3355	3303	3221
85°	2920	2971	2816



TEST NUMBER: P333398-830

CATALOG NUMBER: S125DIW-S610D1560U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	85.3	1.0
10°-20°	241.1	2.9
20°-30°	356.0	4.3
30°-40°	415.4	5.0
40°-50°	417.2	5.1
50°-60°	366.2	4.4
60°-70°	272.9	3.3
70°-80°	156.0	1.9
80°-90°	49.4	0.6
90°-100°	69.6	0.8
100°-110°	428.7	5.2
110°-120°	777.5	9.4
120°-130°	997.8	12.1
130°-140°	1073.2	13.0
140°-150°	1007.4	12.2
150°-160°	814.9	9.9
160°-170°	527.0	6.4
170°-180°	181.8	2.2
0°-30°	682.4	8.3
0°-40°	1097.8	13.3
0°-60°	1881.2	22.8
0°-90°	2359.4	28.6
90°-120°	1275.7	15.5
90°-150°	4354.1	52.9
90°-180°	5878.0	71.4
0°-180°	8237.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	905	905	905	905	905	
5°	904	902	895	901	901	86
15°	862	859	852	855	855	243
25°	782	778	769	770	768	360
35°	675	672	662	659	653	422
45°	553	550	541	533	531	426
55°	421	418	409	403	398	376
65°	284	282	275	269	266	282
75°	151	150	146	144	141	161
85°	39	40	40	39	38	44
90°	1	13	23	30	34	6
95°	81	74	23	29	30	103
105°	417	422	423	423	421	442
115°	783	790	792	786	778	776
125°	1114	1123	1124	1118	1114	994
135°	1389	1397	1395	1392	1383	1070
145°	1610	1613	1613	1614	1606	1007
155°	1774	1766	1768	1771	1761	817
165°	1872	1864	1864	1872	1862	528
175°	1914	1906	1907	1917	1906	182
180°	1914	1914	1914	1914	1914	



TEST NUMBER: P333398-830

CATALOG NUMBER: S125DIW-S610D1560U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	905.2	905.2	905.2	905.2	905.2	905.2	905.2	905.2	905.2	905.2	905.2
2.5°	907.5	907.1	906.7	906.3	906.0	905.1	903.9	902.6	901.4	900.0	901.4
5°	903.8	903.4	903.1	902.8	902.5	901.5	899.9	898.3	896.7	895.1	896.6
7.5°	895.4	895.1	894.8	894.5	894.2	893.2	891.4	889.7	887.9	886.2	887.5
10°	888.0	887.7	887.4	887.0	886.7	885.7	883.9	882.2	880.4	878.7	880.0
12.5°	878.8	878.3	877.7	877.1	876.6	875.4	873.8	872.2	870.5	868.9	870.0
15°	861.5	861.0	860.5	860.1	859.6	858.5	856.8	855.0	853.2	851.5	852.2
17.5°	841.6	840.9	840.2	839.5	838.8	837.5	835.8	833.9	832.1	830.3	831.2
20°	825.0	824.6	824.3	824.1	823.7	822.6	820.5	818.4	816.3	814.3	815.4
22.5°	808.3	807.8	807.2	806.6	806.1	804.8	802.9	801.0	799.0	797.0	797.8
25°	782.0	781.2	780.4	779.7	778.8	777.4	775.3	773.3	771.2	769.1	769.5
27.5°	751.2	750.7	750.3	749.8	749.3	748.0	745.8	743.8	741.6	739.5	739.5
30°	731.1	730.7	730.2	729.7	729.2	727.8	725.5	723.0	720.7	718.3	717.9
32.5°	709.4	708.7	707.9	707.2	706.4	705.0	702.9	700.8	698.6	696.5	696.0
35°	675.3	674.7	674.0	673.4	672.8	671.4	669.1	666.8	664.7	662.4	661.7
37.5°	639.9	639.1	638.4	637.5	636.8	635.3	633.2	631.1	629.0	626.9	625.8
40°	615.9	615.1	614.3	613.5	612.7	611.1	609.0	606.7	604.5	602.3	600.9
42.5°	590.1	589.5	588.7	588.1	587.4	586.0	583.7	581.5	579.3	577.0	575.8
45°	552.9	552.2	551.6	550.9	550.4	549.0	547.1	545.3	543.3	541.4	539.5
47.5°	512.7	512.7	512.8	512.8	512.8	511.7	509.4	507.2	504.9	502.6	500.7
50°	487.0	486.4	486.0	485.5	485.0	483.9	481.9	480.0	478.2	476.3	474.2
52.5°	460.6	460.2	460.0	459.6	459.2	458.0	456.0	453.9	451.9	449.9	448.1
55°	421.1	420.6	420.1	419.6	419.1	417.8	415.6	413.4	411.1	408.9	407.5
57.5°	379.4	379.2	378.9	378.6	378.4	377.3	375.4	373.5	371.6	369.9	368.0
60°	353.1	352.4	351.8	351.1	350.5	349.3	347.6	345.8	344.0	342.3	340.7
62.5°	325.6	325.1	324.5	324.0	323.5	322.5	321.0	319.5	318.0	316.5	314.8
65°	284.3	284.0	283.7	283.3	283.0	282.0	280.2	278.5	276.7	275.0	273.5
67.5°	244.3	243.6	243.0	242.3	241.7	240.7	239.4	238.1	236.8	235.4	234.2
70°	219.1	218.4	217.5	216.8	215.9	214.8	213.4	212.0	210.6	209.2	208.1
72.5°	191.6	191.1	190.6	190.0	189.5	188.7	187.8	186.9	186.0	185.0	184.0
75°	151.1	150.8	150.4	150.1	149.9	149.3	148.5	147.7	146.8	146.1	145.6
77.5°	113.8	113.6	113.5	113.3	113.2	112.9	112.4	112.1	111.6	111.1	110.8
80°	90.2	90.2	90.2	90.2	90.2	90.1	89.7	89.4	89.2	88.8	88.6
82.5°	69.7	69.4	69.1	68.8	68.6	68.4	68.3	68.3	68.2	68.1	67.9
85°	39.4	39.6	39.7	39.9	40.1	40.1	40.1	40.1	40.1	40.1	40.0
87.5°	15.7	16.2	16.8	17.2	17.8	18.2	18.5	18.9	19.1	19.4	19.8
90°	1.4	4.0	6.5	9.0	11.5	13.9	16.1	18.3	20.5	22.7	24.3
92.5°	21.9	20.1	18.3	16.6	14.8	14.9	16.9	18.8	20.7	22.7	24.3
95°	80.9	79.9	79.0	78.0	77.1	70.6	58.6	46.7	34.7	22.7	24.3
97.5°	168.8	170.5	172.2	174.0	175.7	164.7	140.9	117.3	93.5	69.8	60.9
100°	237.0	237.9	238.8	239.8	240.7	241.9	243.1	244.4	245.6	246.9	199.9
102.5°	306.2	307.4	308.6	309.8	310.9	312.0	312.7	313.5	314.2	315.0	306.1
105°	417.2	418.4	419.7	420.9	422.2	422.8	422.8	422.8	422.8	422.8	422.8
107.5°	532.3	532.3	532.3	532.3	532.3	532.6	533.3	534.0	534.6	535.2	535.3
110°	607.3	607.3	607.3	607.3	607.3	607.6	608.2	608.9	609.4	610.1	609.2



TEST NUMBER: P333398-830

CATALOG NUMBER: S125DIW-S610D1560U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	677.7	678.4	679.2	680.0	680.7	681.3	681.6	682.0	682.4	682.8	681.6
115°	783.3	784.8	786.4	788.0	789.5	790.4	790.8	791.1	791.5	791.7	790.4
117.5°	892.5	892.4	892.3	892.3	892.2	892.8	894.0	895.1	896.4	897.6	895.9
120°	960.5	960.3	960.0	959.6	959.3	959.6	960.5	961.5	962.4	963.4	962.8
122.5°	1020.8	1021.9	1023.1	1024.4	1025.5	1026.3	1026.8	1027.2	1027.7	1028.1	1027.5
125°	1113.8	1116.0	1118.2	1120.4	1122.7	1123.7	1123.7	1123.7	1123.7	1123.7	1122.5
127.5°	1202.6	1204.2	1205.8	1207.4	1208.9	1209.7	1209.5	1209.3	1209.1	1208.9	1208.2
130°	1257.1	1258.7	1260.3	1261.9	1263.4	1264.3	1264.7	1265.0	1265.3	1265.6	1264.7
132.5°	1311.5	1313.4	1315.2	1317.1	1318.9	1319.5	1318.8	1318.1	1317.4	1316.7	1316.5
135°	1389.0	1390.9	1392.9	1394.8	1396.7	1397.2	1396.7	1396.0	1395.3	1394.8	1394.1
137.5°	1460.3	1461.9	1463.6	1465.2	1466.9	1467.4	1466.8	1466.2	1465.7	1465.1	1465.3
140°	1506.8	1507.5	1508.1	1508.7	1509.4	1509.5	1509.2	1508.9	1508.5	1508.3	1508.9
142.5°	1548.8	1549.2	1549.5	1549.9	1550.3	1550.8	1551.2	1551.6	1552.1	1552.6	1552.7
145°	1610.4	1611.0	1611.7	1612.3	1613.0	1613.3	1613.3	1613.3	1613.3	1613.3	1613.5
147.5°	1664.3	1664.2	1664.1	1664.0	1663.8	1664.0	1664.3	1664.7	1665.1	1665.5	1665.8
150°	1698.4	1697.7	1697.1	1696.5	1695.8	1695.8	1696.5	1697.1	1697.7	1698.4	1699.0
152.5°	1731.3	1729.9	1728.5	1727.1	1725.7	1725.3	1726.0	1726.6	1727.3	1727.9	1728.5
155°	1773.6	1771.7	1769.8	1767.9	1766.0	1765.4	1766.0	1766.6	1767.3	1767.9	1768.9
157.5°	1806.2	1805.1	1803.9	1802.8	1801.7	1801.1	1801.2	1801.3	1801.3	1801.4	1802.4
160°	1828.9	1827.0	1825.1	1823.3	1821.4	1820.5	1820.9	1821.2	1821.5	1821.8	1823.1
162.5°	1847.1	1845.2	1843.3	1841.4	1839.5	1838.7	1839.0	1839.4	1839.7	1839.9	1841.7
165°	1871.5	1869.6	1867.6	1865.8	1863.9	1863.1	1863.4	1863.8	1864.1	1864.3	1866.2
167.5°	1889.6	1887.7	1885.7	1883.8	1881.8	1881.0	1881.3	1881.6	1882.0	1882.3	1884.5
170°	1899.9	1897.6	1895.5	1893.2	1891.0	1890.1	1890.4	1890.7	1891.0	1891.3	1893.9
172.5°	1906.7	1904.5	1902.2	1900.1	1897.8	1897.1	1897.6	1898.2	1898.8	1899.3	1901.6
175°	1914.0	1912.1	1910.3	1908.4	1906.5	1905.7	1906.0	1906.3	1906.7	1907.0	1909.5
177.5°	1917.4	1915.9	1914.4	1912.9	1911.4	1910.7	1911.0	1911.3	1911.5	1911.8	1913.5
180°	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0



TEST NUMBER: P333398-830

CATALOG NUMBER: S125DIW-S610D1560U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	905.2	905.2	905.2	905.2	905.2	905.2	905.2	905.2
2.5°	902.6	903.9	905.1	905.7	905.6	905.4	905.3	905.2
5°	898.1	899.5	900.9	901.5	901.4	901.3	901.1	900.9
7.5°	888.9	890.3	891.7	892.4	892.2	892.0	891.9	891.7
10°	881.3	882.5	883.8	884.4	884.2	884.0	883.8	883.7
12.5°	871.0	872.0	873.0	873.5	873.5	873.5	873.5	873.4
15°	853.1	853.8	854.7	855.1	855.1	855.1	855.1	855.1
17.5°	832.3	833.2	834.2	834.3	833.5	832.7	832.0	831.1
20°	816.4	817.6	818.7	818.9	818.0	817.3	816.4	815.7
22.5°	798.5	799.3	800.0	800.1	799.6	799.0	798.4	798.0
25°	769.8	770.1	770.4	770.3	769.9	769.4	768.9	768.5
27.5°	739.6	739.7	739.7	739.5	739.0	738.6	738.1	737.6
30°	717.7	717.4	717.0	716.6	716.1	715.7	715.2	714.7
32.5°	695.4	694.7	694.2	693.5	692.7	691.8	690.9	690.0
35°	660.8	660.1	659.2	658.2	657.0	655.6	654.4	653.1
37.5°	624.5	623.4	622.2	621.2	620.5	619.8	619.1	618.3
40°	599.4	597.9	596.5	595.6	595.1	594.7	594.2	593.7
42.5°	574.5	573.2	571.8	570.8	570.0	569.4	568.6	567.9
45°	537.5	535.6	533.8	532.5	532.1	531.6	531.1	530.7
47.5°	498.7	496.7	494.8	493.3	492.2	491.1	489.9	488.8
50°	472.1	470.0	468.0	466.4	465.2	464.1	463.0	461.9
52.5°	446.2	444.4	442.6	441.1	439.9	438.6	437.3	436.1
55°	406.0	404.6	403.2	401.9	400.8	399.6	398.6	397.5
57.5°	366.1	364.3	362.4	361.2	360.6	360.0	359.4	358.8
60°	339.1	337.5	335.9	334.6	333.5	332.3	331.2	330.2
62.5°	313.1	311.4	309.6	308.4	307.6	306.6	305.8	304.9
65°	272.1	270.7	269.3	268.2	267.6	266.9	266.4	265.7
67.5°	233.1	231.9	230.6	229.8	229.4	229.0	228.7	228.3
70°	207.2	206.2	205.3	204.5	203.9	203.2	202.6	202.0
72.5°	182.9	181.8	180.7	179.8	179.2	178.6	178.0	177.3
75°	145.2	144.7	144.2	143.6	143.0	142.3	141.8	141.1
77.5°	110.6	110.3	110.0	109.6	109.1	108.8	108.3	107.8
80°	88.5	88.3	88.1	87.9	87.6	87.3	87.0	86.6
82.5°	67.6	67.3	67.0	66.8	66.8	66.7	66.6	66.6
85°	39.8	39.6	39.5	39.2	38.9	38.5	38.3	38.0
87.5°	20.1	20.4	20.7	20.8	20.7	20.7	20.6	20.5
90°	25.8	27.4	29.0	30.3	31.2	32.1	33.1	34.0
92.5°	25.8	27.4	29.0	30.0	30.4	30.9	31.4	31.8
95°	25.8	27.4	29.0	29.8	29.8	29.8	29.8	29.8
97.5°	52.0	43.2	34.2	29.8	29.8	29.8	29.8	29.8
100°	152.9	105.9	59.0	34.9	33.6	32.3	31.1	29.8
102.5°	297.2	288.3	279.5	264.3	242.8	221.4	199.9	178.5
105°	422.8	422.8	422.8	422.6	422.4	422.1	421.7	421.4
107.5°	535.4	535.4	535.5	535.0	534.0	533.1	532.2	531.2
110°	608.2	607.3	606.3	606.1	606.3	606.6	607.0	607.3





TEST NUMBER: P333398-830

CATALOG NUMBER: S125DIW-S610D1560U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	680.3	679.2	678.0	677.1	676.7	676.3	675.8	675.3
115°	789.2	788.0	786.6	785.1	783.3	781.3	779.4	777.5
117.5°	894.3	892.7	891.0	889.8	889.0	888.2	887.3	886.5
120°	962.1	961.5	960.9	959.8	958.2	956.6	955.1	953.5
122.5°	1026.8	1026.2	1025.6	1024.4	1022.6	1020.7	1018.9	1017.0
125°	1121.2	1119.9	1118.7	1117.6	1116.6	1115.7	1114.7	1113.8
127.5°	1207.5	1206.8	1206.1	1204.6	1202.2	1200.0	1197.6	1195.2
130°	1263.8	1262.8	1261.9	1260.6	1259.0	1257.4	1255.8	1254.2
132.5°	1316.4	1316.2	1316.0	1315.0	1313.5	1311.9	1310.3	1308.7
135°	1393.5	1392.9	1392.2	1390.9	1389.0	1387.1	1385.3	1383.4
137.5°	1465.4	1465.5	1465.7	1464.9	1463.2	1461.6	1459.9	1458.3
140°	1509.5	1510.1	1510.8	1510.1	1508.3	1506.4	1504.5	1502.6
142.5°	1552.7	1552.9	1553.0	1552.2	1550.2	1548.3	1546.4	1544.5
145°	1613.9	1614.2	1614.5	1613.7	1611.8	1610.0	1608.1	1606.2
147.5°	1666.2	1666.6	1667.0	1666.0	1663.8	1661.5	1659.3	1657.0
150°	1699.6	1700.3	1700.9	1700.0	1697.4	1694.9	1692.4	1689.9
152.5°	1729.2	1729.8	1730.4	1729.6	1727.3	1725.0	1722.8	1720.5
155°	1769.8	1770.8	1771.7	1770.8	1768.4	1765.9	1763.3	1760.8
157.5°	1803.4	1804.4	1805.4	1804.7	1802.1	1799.6	1797.1	1794.6
160°	1824.3	1825.6	1826.8	1826.3	1823.7	1821.2	1818.6	1816.2
162.5°	1843.5	1845.3	1847.0	1846.5	1843.8	1841.0	1838.2	1835.4
165°	1868.1	1870.1	1872.0	1871.6	1869.2	1866.6	1864.1	1861.5
167.5°	1886.8	1889.0	1891.3	1891.0	1888.2	1885.4	1882.5	1879.7
170°	1896.4	1898.9	1901.4	1901.3	1898.5	1895.6	1892.7	1889.9
172.5°	1903.8	1906.1	1908.4	1908.1	1905.3	1902.4	1899.6	1896.8
175°	1911.9	1914.5	1917.0	1916.8	1914.0	1911.2	1908.4	1905.5
177.5°	1915.3	1917.0	1918.8	1918.7	1916.7	1914.7	1912.6	1910.6
180°	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0

(END OF REPORT)