

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333719-830

Luminaire Tested: **S125RDIW-S1090D1560U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333719-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIW-S1090D1560U830-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9081.0 lumens  
Efficiency: N/A  
Efficacy: 118.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 76.6  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333719-830

CATALOG NUMBER: S125RDIW-S1090D1560U830-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

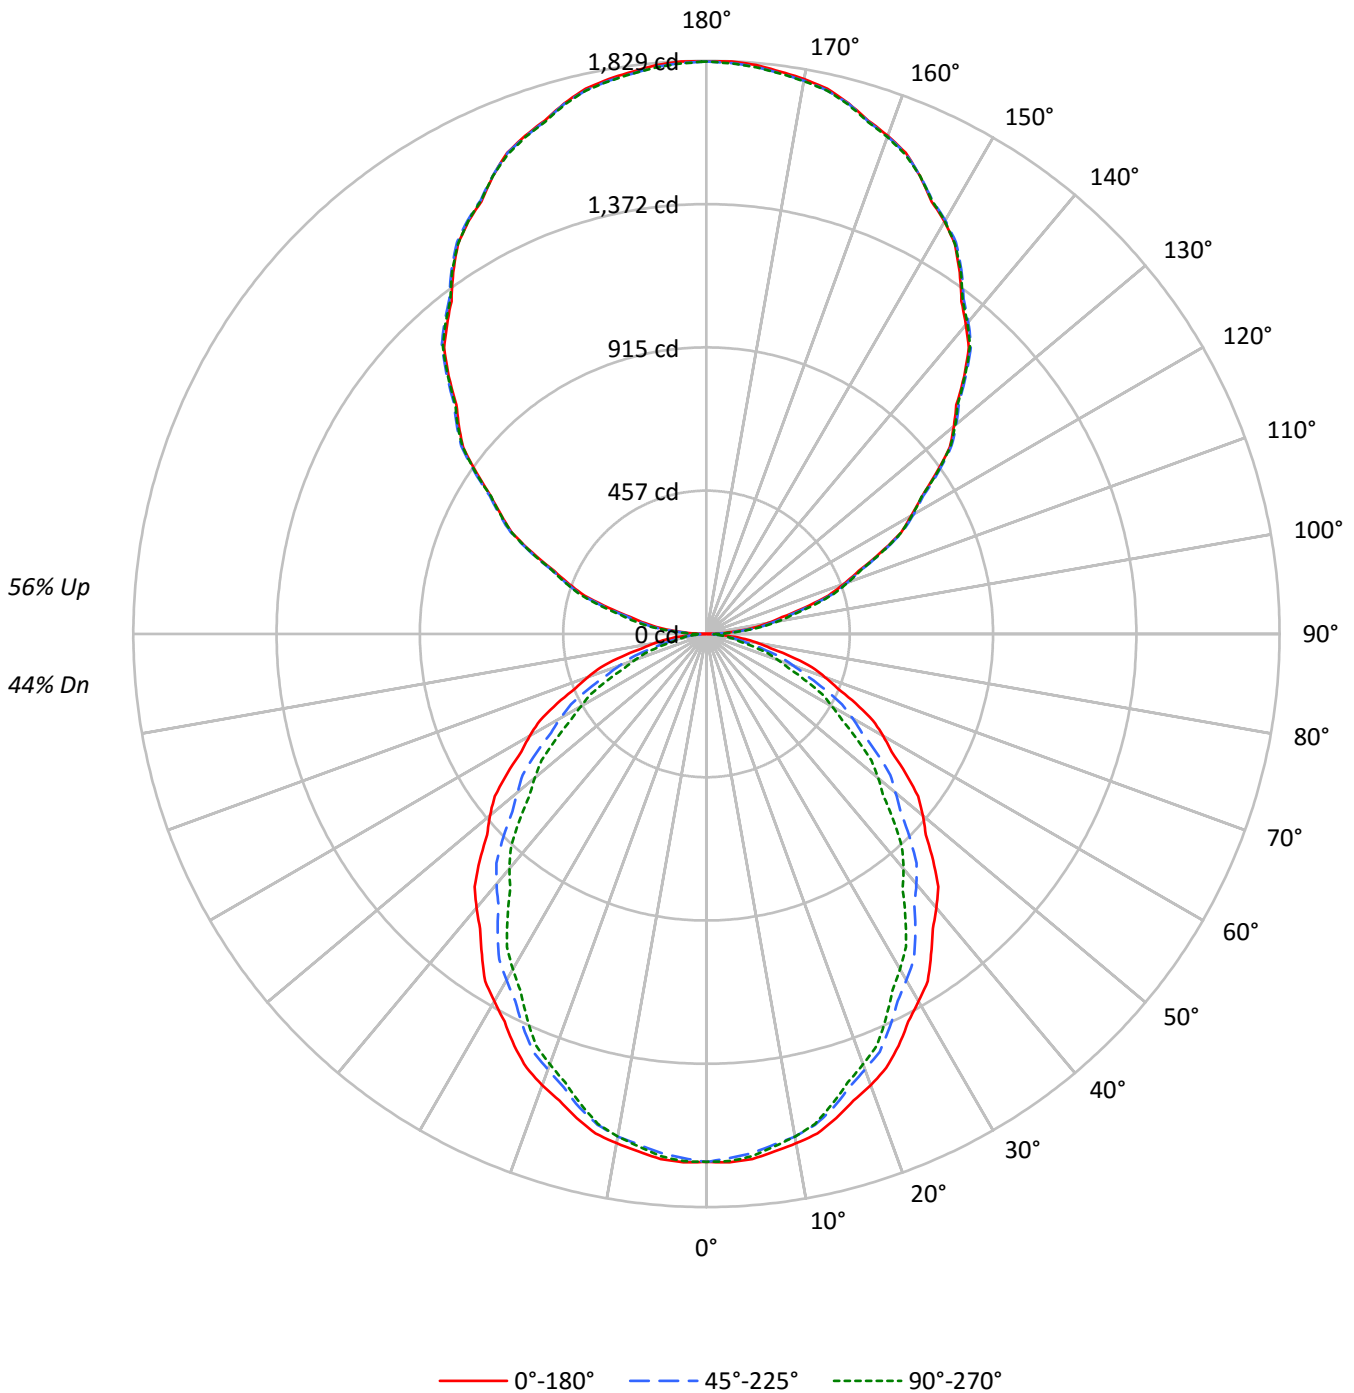



TEST NUMBER: P333719-830

CATALOG NUMBER: S125RDIW-S1090D1560U830-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	50	50	50	44
1	97	92	89	85	88	85	81	79	70	68	66	57	56	54	45	44	43	37
2	88	81	75	70	80	74	69	65	62	58	55	50	48	45	40	38	36	32
3	80	71	64	58	73	65	59	54	55	50	46	45	41	39	35	33	31	27
4	74	63	55	49	67	58	51	46	49	44	40	40	36	33	32	29	27	23
5	68	56	48	42	62	52	45	40	44	38	34	36	32	29	29	26	24	20
6	62	50	43	37	57	47	40	34	39	34	30	32	28	25	26	23	21	18
7	58	46	38	32	53	42	35	30	36	30	26	30	25	22	24	21	19	16
8	53	41	34	29	49	38	32	27	32	27	23	27	23	20	22	19	17	14
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	20	17	15	13
10	46	35	28	23	43	32	26	21	27	22	19	23	19	16	19	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10880	10880	10880
5°	10906	10781	10847
10°	10823	10681	10681
15°	10694	10465	10380
20°	10529	10162	10040
25°	10337	9865	9648
30°	10097	9517	9214
35°	9851	9159	8728
40°	9622	8786	8250
45°	9344	8368	7728
50°	9064	7913	7185
55°	8740	7479	6604
60°	8415	6952	5983
65°	8031	6339	5269
70°	7593	5574	4539
75°	6984	4699	3778
80°	6152	3689	3169
85°	5180	3016	2831



TEST NUMBER: P333719-830

CATALOG NUMBER: S125RDIW-S1090D1560U830-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	158.4	1.7
10°-20°	442.7	4.9
20°-30°	642.0	7.1
30°-40°	731.6	8.1
40°-50°	713.2	7.9
50°-60°	600.3	6.6
60°-70°	420.8	4.6
70°-80°	216.3	2.4
80°-90°	58.6	0.6
90°-100°	122.3	1.3
100°-110°	361.3	4.0
110°-120°	611.9	6.7
120°-130°	805.3	8.9
130°-140°	902.4	9.9
140°-150°	884.4	9.7
150°-160°	742.8	8.2
160°-170°	493.8	5.4
170°-180°	172.8	1.9
0°-30°	1243.1	13.7
0°-40°	1974.7	21.7
0°-60°	3288.2	36.2
0°-90°	3983.9	43.9
90°-120°	1095.5	12.1
90°-150°	3687.7	40.6
90°-180°	5097.0	56.1
0°-180°	9081.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1685	1685	1685	1685	1685	
5°	1682	1677	1663	1675	1673	159
15°	1599	1591	1565	1563	1552	451
25°	1451	1430	1384	1368	1354	667
35°	1250	1218	1162	1126	1107	782
45°	1023	984	916	867	846	789
55°	776	734	664	609	586	694
65°	526	481	415	366	345	520
75°	280	241	188	161	151	296
85°	70	48	41	39	38	79
90°	1	13	23	30	34	8
95°	92	96	109	119	122	99
105°	324	331	340	348	352	346
115°	613	618	621	620	618	606
125°	894	902	904	901	900	800
135°	1163	1171	1173	1172	1167	896
145°	1409	1414	1419	1418	1414	880
155°	1612	1612	1613	1618	1612	742
165°	1753	1750	1751	1756	1748	494
175°	1822	1817	1817	1824	1815	173
180°	1827	1827	1827	1827	1827	



TEST NUMBER: P333719-830

CATALOG NUMBER: S125RDIW-S1090D1560U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1684.7	1684.7	1684.7	1684.7	1684.7	1684.7	1684.7	1684.7	1684.7	1684.7	1684.7
2.5°	1687.7	1687.1	1686.4	1685.6	1685.0	1683.6	1681.3	1679.0	1676.8	1674.5	1676.8
5°	1682.2	1681.0	1679.9	1678.8	1677.6	1675.5	1672.4	1669.2	1666.1	1663.0	1665.8
7.5°	1665.6	1664.5	1663.4	1662.4	1661.2	1658.9	1655.1	1651.4	1647.7	1644.0	1646.0
10°	1650.3	1649.4	1648.6	1647.8	1646.9	1644.5	1640.6	1636.6	1632.7	1628.7	1629.6
12.5°	1633.0	1631.9	1630.9	1629.8	1628.7	1625.5	1620.2	1614.9	1609.6	1604.2	1604.9
15°	1599.4	1597.7	1596.0	1594.3	1592.6	1588.8	1582.9	1577.0	1571.0	1565.1	1564.8
17.5°	1561.5	1558.9	1556.3	1553.7	1551.0	1546.1	1538.6	1531.2	1523.6	1516.2	1514.8
20°	1532.0	1529.2	1526.4	1523.5	1520.7	1514.8	1505.7	1496.7	1487.6	1478.6	1477.2
22.5°	1499.4	1496.6	1493.7	1490.9	1488.1	1482.0	1472.4	1462.9	1453.4	1443.9	1441.1
25°	1450.6	1446.3	1442.1	1437.8	1433.6	1426.3	1415.8	1405.3	1394.9	1384.4	1380.7
27.5°	1394.6	1389.4	1384.2	1379.1	1373.9	1365.8	1354.6	1343.4	1332.2	1321.0	1315.9
30°	1353.9	1348.5	1343.1	1337.8	1332.4	1323.7	1311.8	1300.0	1288.1	1276.2	1269.7
32.5°	1314.1	1307.9	1301.6	1295.3	1289.0	1279.9	1267.7	1255.7	1243.5	1231.4	1224.3
35°	1249.5	1242.7	1236.0	1229.2	1222.4	1212.6	1199.9	1187.1	1174.4	1161.7	1153.5
37.5°	1186.1	1177.9	1169.6	1161.4	1153.1	1142.5	1129.3	1116.2	1103.1	1090.0	1080.1
40°	1141.3	1132.8	1124.4	1115.9	1107.4	1096.4	1082.8	1069.2	1055.6	1042.1	1031.3
42.5°	1094.5	1085.8	1077.1	1068.4	1059.7	1048.3	1034.3	1020.3	1006.3	992.2	981.9
45°	1023.0	1014.8	1006.6	998.4	990.2	978.4	962.8	947.3	931.7	916.2	904.8
47.5°	949.0	940.3	931.6	923.0	914.4	902.2	886.6	870.8	855.2	839.5	827.8
50°	902.1	892.8	883.4	874.1	864.8	852.1	835.9	819.8	803.7	787.6	775.7
52.5°	851.2	841.7	832.1	822.6	813.0	800.6	785.4	770.2	755.0	739.8	727.0
55°	776.2	767.1	758.1	749.0	740.0	727.5	711.7	695.9	680.0	664.2	651.5
57.5°	700.3	690.7	681.0	671.3	661.7	649.2	634.0	618.7	603.4	588.1	575.7
60°	651.5	641.6	631.7	621.8	611.9	599.3	584.0	568.7	553.5	538.2	525.8
62.5°	599.6	590.1	580.7	571.2	561.8	549.3	533.9	518.3	502.8	487.3	475.8
65°	525.5	515.9	506.2	496.6	487.0	474.8	459.8	444.8	429.8	414.8	403.5
67.5°	451.9	442.3	432.7	423.1	413.5	401.5	387.1	372.8	358.4	344.0	333.8
70°	402.1	392.5	382.9	373.2	363.6	351.8	337.6	323.5	309.3	295.2	286.4
72.5°	353.3	343.8	334.4	325.1	315.7	304.3	291.2	277.9	264.7	251.5	243.4
75°	279.9	271.5	263.0	254.5	246.0	235.8	223.9	212.1	200.2	188.3	182.1
77.5°	207.2	200.4	193.6	186.8	180.0	171.8	162.4	152.9	143.4	133.8	129.5
80°	165.4	158.6	151.8	145.1	138.3	130.9	123.0	115.1	107.2	99.2	96.7
82.5°	124.7	118.6	112.4	106.4	100.3	94.5	89.1	83.6	78.2	72.8	71.6
85°	69.9	64.8	59.8	54.7	49.6	46.4	45.0	43.5	42.1	40.7	40.4
87.5°	23.7	22.6	21.6	20.5	19.4	18.9	19.1	19.4	19.6	19.8	20.2
90°	1.4	4.0	6.5	9.0	11.5	13.9	16.1	18.3	20.5	22.7	24.3
92.5°	34.4	36.2	38.0	39.7	41.5	43.7	46.5	49.1	51.8	54.6	56.6
95°	92.4	93.0	93.7	94.3	94.9	96.8	100.0	103.1	106.3	109.4	111.7
97.5°	153.5	153.7	154.0	154.3	154.6	156.8	161.2	165.6	169.9	174.3	176.3
100°	199.0	199.0	199.0	199.0	199.0	201.0	205.2	209.2	213.4	217.4	220.4
102.5°	247.9	249.2	250.4	251.7	253.0	254.7	256.7	258.8	260.9	263.0	266.1
105°	324.1	325.6	327.3	328.9	330.5	332.2	334.0	335.9	337.8	339.8	341.7
107.5°	408.2	409.8	411.4	413.0	414.5	416.1	417.5	419.0	420.5	421.9	422.8
110°	466.3	467.9	469.4	471.0	472.6	473.8	474.8	475.7	476.6	477.6	478.5



TEST NUMBER: P333719-830

CATALOG NUMBER: S125RDIW-S1090D1560U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	525.4	526.2	527.1	527.8	528.7	529.7	530.8	532.1	533.3	534.5	534.9
115°	612.7	614.0	615.2	616.4	617.7	618.7	619.3	619.9	620.6	621.2	620.9
117.5°	700.2	700.8	701.3	701.9	702.5	703.0	703.6	704.2	704.7	705.4	705.6
120°	754.8	756.4	758.0	759.6	761.1	762.0	762.4	762.7	763.0	763.4	763.4
122.5°	814.0	814.5	815.1	815.7	816.2	816.9	817.7	818.6	819.4	820.2	819.9
125°	894.1	896.0	898.0	899.8	901.7	902.9	903.1	903.4	903.8	904.1	903.4
127.5°	979.4	980.5	981.6	982.6	983.7	984.5	984.9	985.2	985.6	986.0	985.6
130°	1030.6	1032.2	1033.8	1035.3	1036.9	1038.0	1038.7	1039.2	1039.9	1040.6	1040.2
132.5°	1081.8	1084.4	1086.9	1089.6	1092.1	1093.3	1093.3	1093.1	1093.0	1092.9	1092.5
135°	1162.8	1164.7	1166.6	1168.5	1170.4	1171.5	1171.8	1172.1	1172.4	1172.7	1172.7
137.5°	1239.0	1240.9	1242.6	1244.4	1246.3	1247.5	1248.3	1249.0	1249.6	1250.4	1250.8
140°	1287.9	1289.5	1291.0	1292.6	1294.2	1295.4	1296.4	1297.4	1298.4	1299.3	1299.9
142.5°	1336.8	1338.1	1339.4	1340.8	1342.1	1343.3	1344.5	1345.8	1347.0	1348.1	1348.5
145°	1408.7	1409.9	1411.3	1412.5	1413.8	1414.9	1415.8	1416.7	1417.7	1418.6	1418.6
147.5°	1475.3	1475.9	1476.6	1477.3	1478.0	1478.8	1479.5	1480.3	1481.0	1481.8	1482.5
150°	1519.6	1519.3	1519.0	1518.6	1518.3	1518.8	1520.0	1521.4	1522.6	1523.9	1523.9
152.5°	1555.9	1556.4	1556.9	1557.3	1557.7	1558.2	1558.8	1559.2	1559.7	1560.3	1561.0
155°	1612.0	1612.0	1612.0	1612.0	1612.0	1612.1	1612.5	1612.8	1613.1	1613.4	1614.7
157.5°	1662.0	1661.3	1660.7	1659.9	1659.3	1659.1	1659.3	1659.7	1660.0	1660.3	1661.6
160°	1691.6	1690.6	1689.7	1688.8	1687.8	1687.5	1687.8	1688.1	1688.5	1688.8	1690.0
162.5°	1717.8	1717.0	1716.4	1715.7	1715.0	1714.7	1714.7	1714.8	1714.9	1714.9	1716.5
165°	1752.8	1752.1	1751.4	1750.9	1750.2	1750.0	1750.4	1750.7	1751.0	1751.3	1752.6
167.5°	1782.3	1781.0	1779.8	1778.5	1777.3	1776.6	1776.6	1776.6	1776.6	1776.6	1778.5
170°	1798.2	1797.0	1795.6	1794.4	1793.2	1792.5	1792.5	1792.5	1792.5	1792.5	1794.4
172.5°	1809.6	1808.4	1807.0	1805.8	1804.5	1803.9	1803.9	1803.9	1803.9	1803.9	1805.8
175°	1822.4	1821.1	1819.9	1818.5	1817.3	1816.7	1816.7	1816.7	1816.7	1816.7	1818.5
177.5°	1828.9	1827.9	1826.9	1825.9	1824.9	1824.2	1824.0	1823.7	1823.4	1823.3	1824.8
180°	1826.6	1826.6	1826.6	1826.6	1826.6	1826.6	1826.6	1826.6	1826.6	1826.6	1826.6



TEST NUMBER: P333719-830

CATALOG NUMBER: S125RDIW-S1090D1560U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1684.7	1684.7	1684.7	1684.7	1684.7	1684.7	1684.7	1684.7
2.5°	1679.0	1681.3	1683.6	1684.5	1684.3	1684.1	1683.9	1683.7
5°	1668.7	1671.5	1674.3	1675.5	1674.9	1674.3	1673.8	1673.2
7.5°	1647.9	1649.9	1651.9	1652.6	1651.9	1651.3	1650.7	1650.0
10°	1630.4	1631.3	1632.1	1632.1	1631.3	1630.4	1629.6	1628.7
12.5°	1605.5	1606.1	1606.8	1606.4	1605.1	1603.8	1602.5	1601.2
15°	1564.5	1564.2	1564.0	1562.5	1560.0	1557.5	1554.9	1552.4
17.5°	1513.3	1511.9	1510.5	1508.8	1506.7	1504.6	1502.5	1500.4
20°	1475.7	1474.3	1472.9	1470.9	1468.4	1465.8	1463.3	1460.8
22.5°	1438.4	1435.6	1432.9	1430.4	1428.3	1426.3	1424.1	1422.0
25°	1377.1	1373.4	1369.7	1366.3	1363.2	1360.1	1357.0	1353.9
27.5°	1310.7	1305.6	1300.4	1296.4	1293.4	1290.3	1287.3	1284.4
30°	1263.2	1256.7	1250.2	1245.7	1243.1	1240.6	1238.0	1235.5
32.5°	1217.1	1209.8	1202.7	1197.5	1194.3	1191.1	1187.8	1184.6
35°	1145.3	1137.1	1128.9	1122.9	1118.9	1114.9	1111.0	1107.0
37.5°	1070.3	1060.5	1050.6	1043.8	1039.9	1036.0	1032.2	1028.3
40°	1020.6	1009.8	999.1	992.0	988.6	985.2	981.8	978.5
42.5°	971.7	961.3	951.0	943.4	938.4	933.5	928.5	923.5
45°	893.5	882.2	870.9	863.1	858.8	854.6	850.4	846.1
47.5°	816.2	804.6	793.0	784.8	780.0	775.3	770.7	766.0
50°	763.8	752.0	740.1	732.1	727.8	723.6	719.3	715.1
52.5°	714.3	701.4	688.6	680.1	675.9	671.7	667.4	663.2
55°	638.8	626.0	613.3	604.6	600.1	595.6	591.1	586.5
57.5°	563.3	550.8	538.4	530.1	526.1	522.1	518.0	514.1
60°	513.3	500.9	488.4	480.1	475.9	471.6	467.4	463.2
62.5°	464.3	452.7	441.2	433.3	429.0	424.8	420.6	416.3
65°	392.2	380.9	369.6	361.7	357.5	353.3	349.0	344.8
67.5°	323.4	313.0	302.7	295.8	292.4	289.0	285.6	282.2
70°	277.7	268.9	260.1	254.0	250.6	247.2	243.8	240.4
72.5°	235.3	227.2	219.0	213.9	211.6	209.3	207.1	204.8
75°	175.9	169.7	163.4	159.3	157.3	155.3	153.4	151.4
77.5°	125.2	120.8	116.4	113.5	112.1	110.6	109.1	107.6
80°	94.2	91.6	89.1	87.5	86.9	86.3	85.8	85.2
82.5°	70.4	69.2	68.1	67.3	66.9	66.5	66.3	65.9
85°	40.2	39.9	39.6	39.3	39.0	38.7	38.5	38.2
87.5°	20.5	20.7	21.1	21.2	21.2	21.1	21.1	21.1
90°	25.9	27.5	29.0	30.3	31.3	32.2	33.2	34.1
92.5°	58.7	60.8	63.0	64.3	65.0	65.7	66.4	67.1
95°	113.9	116.1	118.3	119.7	120.4	121.0	121.6	122.2
97.5°	178.4	180.5	182.6	183.9	184.3	184.6	185.0	185.4
100°	223.2	226.0	228.8	230.6	231.2	231.9	232.5	233.1
102.5°	269.2	272.3	275.3	277.4	278.2	279.1	280.0	280.9
105°	343.6	345.4	347.3	348.7	349.7	350.6	351.6	352.5
107.5°	423.8	424.7	425.7	426.1	426.0	426.0	425.9	425.8
110°	479.6	480.5	481.5	481.7	481.5	481.1	480.8	480.5





TEST NUMBER: P333719-830

CATALOG NUMBER: S125RDIW-S1090D1560U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	535.4	535.8	536.2	536.2	535.6	535.1	534.5	534.0
115°	620.6	620.3	619.9	619.6	619.3	619.0	618.7	618.4
117.5°	705.9	706.2	706.3	705.9	704.6	703.3	702.1	700.8
120°	763.4	763.4	763.4	762.7	761.5	760.2	758.9	757.7
122.5°	819.7	819.4	819.2	818.6	817.6	816.5	815.5	814.5
125°	902.9	902.2	901.5	901.1	900.8	900.4	900.1	899.8
127.5°	985.3	985.1	984.7	984.2	983.5	983.0	982.3	981.7
130°	1039.9	1039.6	1039.2	1038.8	1038.2	1037.6	1036.9	1036.3
132.5°	1092.2	1091.9	1091.6	1091.0	1090.1	1089.2	1088.4	1087.4
135°	1172.7	1172.7	1172.7	1172.1	1170.8	1169.6	1168.3	1167.1
137.5°	1251.1	1251.5	1251.9	1251.3	1249.7	1248.1	1246.5	1244.9
140°	1300.5	1301.2	1301.7	1301.3	1299.8	1298.2	1296.6	1295.0
142.5°	1348.9	1349.2	1349.7	1349.1	1347.5	1346.0	1344.3	1342.7
145°	1418.6	1418.6	1418.6	1418.1	1417.2	1416.3	1415.3	1414.4
147.5°	1483.3	1484.0	1484.8	1484.1	1482.0	1479.8	1477.7	1475.6
150°	1523.9	1523.9	1523.9	1523.5	1522.9	1522.3	1521.6	1521.0
152.5°	1561.8	1562.5	1563.3	1563.1	1562.0	1560.9	1559.7	1558.6
155°	1615.9	1617.2	1618.4	1618.3	1616.7	1615.1	1613.5	1612.0
157.5°	1662.8	1664.2	1665.4	1665.0	1662.8	1660.8	1658.7	1656.6
160°	1691.3	1692.5	1693.8	1693.7	1692.1	1690.5	1688.9	1687.3
162.5°	1718.0	1719.5	1721.0	1720.8	1719.0	1717.1	1715.3	1713.4
165°	1753.8	1755.1	1756.3	1756.1	1754.2	1752.3	1750.4	1748.4
167.5°	1780.4	1782.3	1784.1	1784.1	1782.2	1780.3	1778.3	1776.3
170°	1796.3	1798.2	1800.1	1800.0	1797.7	1795.5	1793.3	1791.1
172.5°	1807.7	1809.6	1811.5	1811.5	1809.5	1807.5	1805.5	1803.6
175°	1820.5	1822.4	1824.3	1824.1	1821.9	1819.7	1817.5	1815.2
177.5°	1826.3	1827.8	1829.3	1829.2	1827.4	1825.6	1823.8	1822.1
180°	1826.6	1826.6	1826.6	1826.6	1826.6	1826.6	1826.6	1826.6

(END OF REPORT)