

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333698-830

Luminaire Tested: **S125RDIW-S850D1560U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333698-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S850D1560U830-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8943.5 lumens
Efficiency: N/A
Efficacy: 131.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333698-830

CATALOG NUMBER: S125RDIW-S850D1560U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

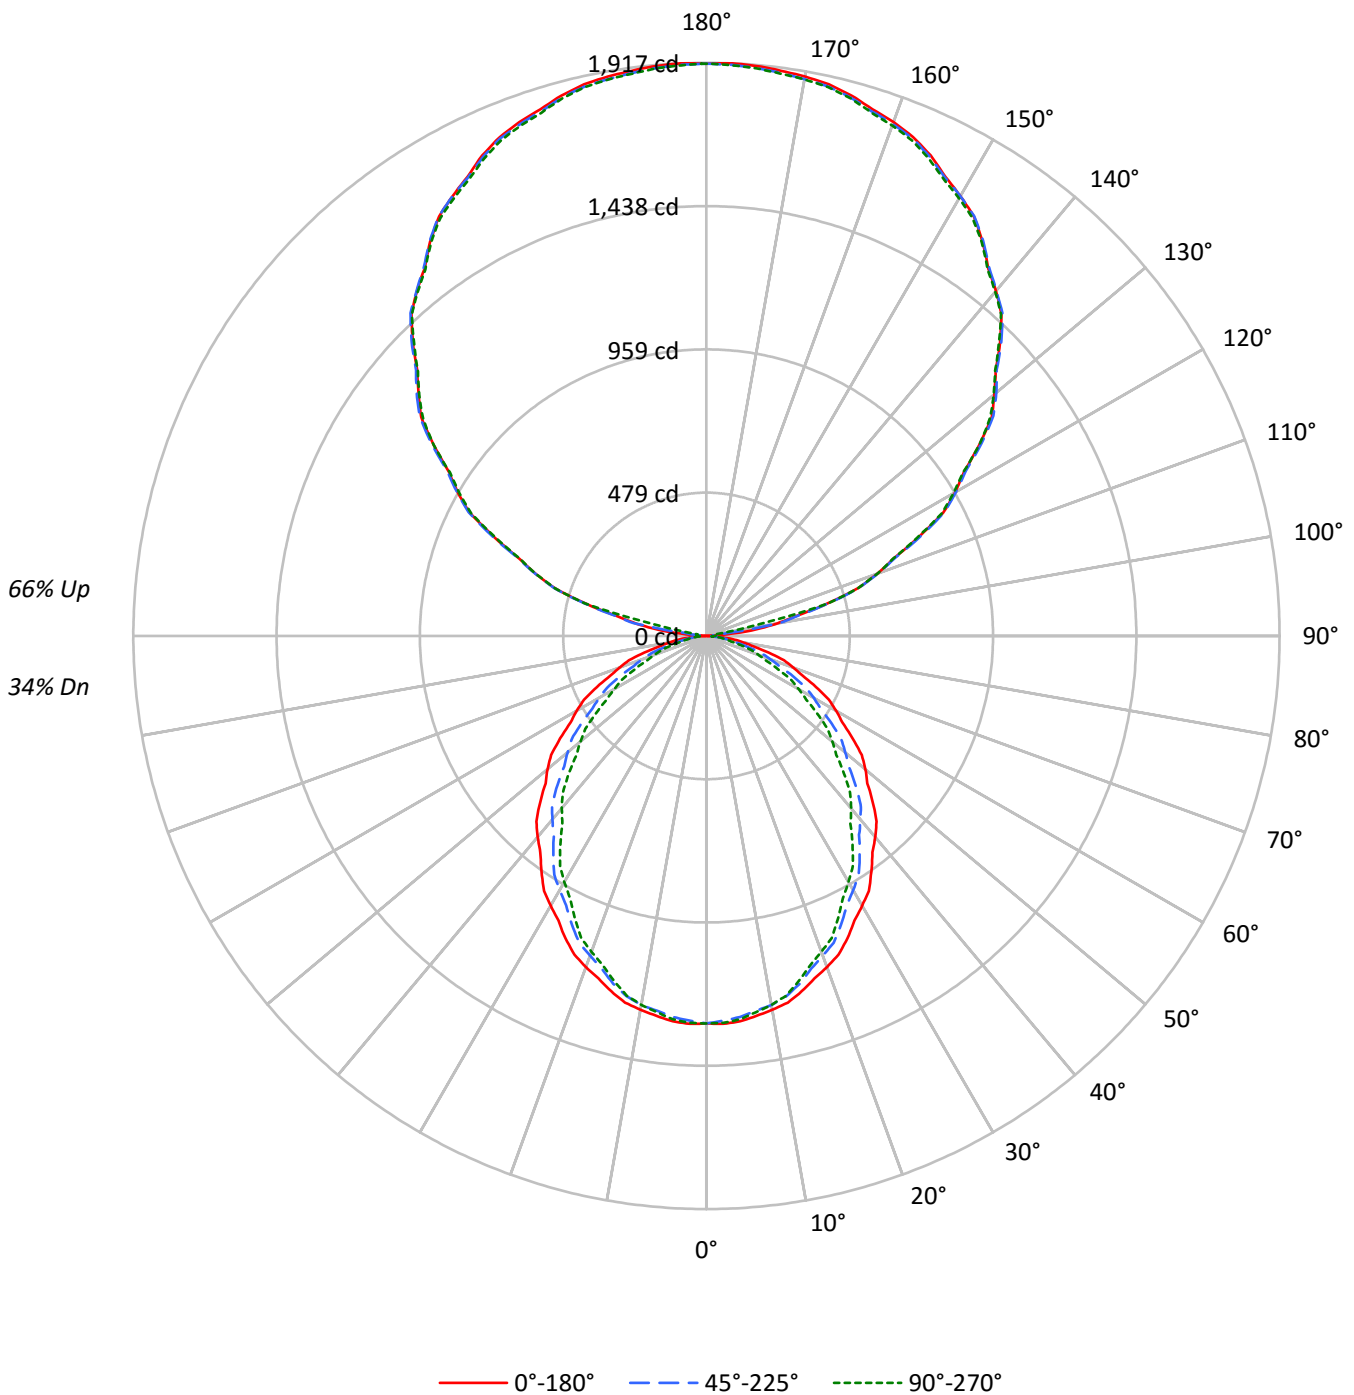



TEST NUMBER: P333698-830

CATALOG NUMBER: S125RDIW-S850D1560U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	75	75	75	57	57	57	42	42	42	34
1	94	90	87	83	85	82	79	76	66	63	61	51	49	48	37	36	35	29
2	86	79	73	68	77	71	67	62	58	54	51	45	42	40	33	31	30	25
3	79	69	62	57	71	63	57	52	51	47	43	40	37	34	29	27	26	21
4	72	61	54	48	65	56	49	44	45	40	37	35	32	29	26	24	22	18
5	66	55	47	41	59	50	43	38	40	35	32	32	28	25	24	21	19	16
6	61	49	41	36	55	45	38	33	36	31	28	29	25	22	21	19	17	14
7	56	44	36	31	50	40	34	29	33	28	24	26	22	20	20	17	15	12
8	52	40	33	27	47	37	30	25	30	25	21	24	20	18	18	15	14	11
9	48	36	29	24	44	33	27	23	27	23	19	22	18	16	17	14	12	10
10	45	33	26	22	41	31	24	20	25	20	17	20	17	14	15	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8371	8371	8371
5°	8390	8294	8345
10°	8326	8217	8217
15°	8227	8050	7985
20°	8100	7818	7724
25°	7953	7590	7422
30°	7767	7322	7088
35°	7579	7046	6714
40°	7403	6759	6347
45°	7188	6437	5945
50°	6973	6089	5528
55°	6723	5754	5082
60°	6473	5349	4602
65°	6178	4876	4053
70°	5840	4288	3493
75°	5375	3616	2907
80°	4731	2838	2440
85°	3987	2319	2179



TEST NUMBER: P333698-830

CATALOG NUMBER: S125RDIW-S850D1560U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.9	1.4
10°-20°	340.6	3.8
20°-30°	493.9	5.5
30°-40°	562.9	6.3
40°-50°	548.6	6.1
50°-60°	461.8	5.2
60°-70°	323.7	3.6
70°-80°	166.4	1.9
80°-90°	46.0	0.5
90°-100°	69.6	0.8
100°-110°	428.7	4.8
110°-120°	777.5	8.7
120°-130°	997.8	11.2
130°-140°	1073.2	12.0
140°-150°	1007.4	11.3
150°-160°	814.9	9.1
160°-170°	527.0	5.9
170°-180°	181.8	2.0
0°-30°	956.3	10.7
0°-40°	1519.2	17.0
0°-60°	2529.7	28.3
0°-90°	3065.8	34.3
90°-120°	1275.7	14.3
90°-150°	4354.1	48.7
90°-180°	5878.0	65.7
0°-180°	8943.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1296	1296	1296	1296	1296	
5°	1294	1290	1279	1289	1287	123
15°	1230	1224	1204	1203	1194	347
25°	1116	1100	1065	1052	1042	513
35°	961	937	894	866	852	602
45°	787	757	705	667	651	607
55°	597	564	511	468	451	534
65°	404	370	319	281	265	400
75°	215	185	145	124	116	228
85°	54	37	31	30	29	61
90°	1	13	23	30	34	6
95°	81	74	23	29	30	103
105°	417	422	423	423	421	442
115°	783	790	792	786	778	776
125°	1114	1123	1124	1118	1114	994
135°	1389	1397	1395	1392	1383	1070
145°	1610	1613	1613	1614	1606	1007
155°	1774	1766	1768	1771	1761	817
165°	1872	1864	1864	1872	1862	528
175°	1914	1906	1907	1917	1906	182
180°	1914	1914	1914	1914	1914	



TEST NUMBER: P333698-830

CATALOG NUMBER: S125RDIW-S850D1560U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1298.4	1297.9	1297.3	1296.8	1296.3	1295.1	1293.5	1291.7	1290.0	1288.2	1290.0
5°	1294.1	1293.3	1292.3	1291.5	1290.6	1289.0	1286.6	1284.2	1281.8	1279.4	1281.6
7.5°	1281.4	1280.5	1279.7	1278.8	1278.1	1276.2	1273.4	1270.5	1267.6	1264.7	1266.2
10°	1269.6	1268.9	1268.3	1267.6	1267.0	1265.2	1262.2	1259.0	1256.0	1253.0	1253.6
12.5°	1256.3	1255.5	1254.6	1253.9	1253.0	1250.6	1246.4	1242.4	1238.3	1234.2	1234.6
15°	1230.5	1229.2	1227.9	1226.5	1225.2	1222.3	1217.8	1213.1	1208.6	1204.0	1203.8
17.5°	1201.3	1199.3	1197.3	1195.3	1193.3	1189.4	1183.6	1177.9	1172.1	1166.4	1165.4
20°	1178.6	1176.4	1174.2	1172.1	1169.9	1165.3	1158.4	1151.4	1144.4	1137.5	1136.4
22.5°	1153.5	1151.3	1149.1	1147.0	1144.8	1140.1	1132.7	1125.5	1118.1	1110.9	1108.7
25°	1116.0	1112.7	1109.4	1106.2	1102.9	1097.2	1089.2	1081.1	1073.1	1065.1	1062.2
27.5°	1072.9	1068.9	1065.0	1061.0	1057.1	1050.7	1042.2	1033.5	1024.9	1016.2	1012.3
30°	1041.5	1037.4	1033.3	1029.2	1025.0	1018.3	1009.3	1000.1	991.0	981.8	976.9
32.5°	1011.0	1006.2	1001.4	996.6	991.6	984.6	975.3	966.0	956.7	947.3	941.9
35°	961.3	956.0	950.8	945.6	940.4	932.8	923.1	913.3	903.5	893.7	887.4
37.5°	912.5	906.2	899.8	893.4	887.1	878.9	868.8	858.7	848.6	838.5	830.9
40°	878.1	871.6	865.0	858.5	852.0	843.5	833.0	822.6	812.2	801.7	793.4
42.5°	842.1	835.4	828.7	821.9	815.2	806.5	795.7	784.9	774.1	763.4	755.4
45°	787.0	780.7	774.4	768.1	761.8	752.6	740.6	728.8	716.8	704.8	696.1
47.5°	730.1	723.4	716.7	710.1	703.4	694.1	682.0	670.0	657.9	645.8	636.9
50°	694.0	686.8	679.7	672.5	665.3	655.5	643.1	630.7	618.3	606.0	596.8
52.5°	654.9	647.5	640.2	632.8	625.5	616.0	604.3	592.6	580.8	569.1	559.3
55°	597.1	590.1	583.2	576.3	569.3	559.7	547.5	535.4	523.2	511.0	501.1
57.5°	538.8	531.3	523.9	516.4	509.1	499.5	487.7	475.9	464.2	452.4	442.9
60°	501.1	493.6	486.0	478.3	470.7	461.1	449.3	437.5	425.8	414.1	404.5
62.5°	461.3	454.0	446.8	439.4	432.2	422.6	410.7	398.8	386.8	374.9	366.1
65°	404.3	396.9	389.5	382.1	374.7	365.2	353.7	342.1	330.6	319.1	310.4
67.5°	347.7	340.3	332.9	325.6	318.1	308.9	297.8	286.8	275.8	264.7	256.7
70°	309.3	301.9	294.5	287.1	279.7	270.6	259.8	248.8	238.0	227.1	220.4
72.5°	271.7	264.5	257.3	250.1	242.9	234.1	223.9	213.8	203.6	193.4	187.2
75°	215.4	208.9	202.3	195.8	189.3	181.4	172.3	163.2	154.0	144.9	140.1
77.5°	159.4	154.1	148.9	143.7	138.5	132.2	124.9	117.6	110.3	103.0	99.6
80°	127.2	122.1	116.8	111.6	106.4	100.8	94.6	88.5	82.5	76.3	74.4
82.5°	96.0	91.2	86.5	81.8	77.1	72.7	68.5	64.4	60.1	56.0	55.0
85°	53.8	50.0	46.0	42.1	38.2	35.6	34.6	33.5	32.4	31.3	31.1
87.5°	18.3	17.6	16.9	16.1	15.5	15.2	15.5	15.7	16.0	16.3	16.6
90°	1.4	4.0	6.5	9.0	11.5	13.9	16.1	18.3	20.5	22.7	24.3
92.5°	21.9	20.1	18.3	16.6	14.8	14.9	16.9	18.8	20.7	22.7	24.3
95°	80.9	79.9	79.0	78.0	77.1	70.6	58.6	46.7	34.7	22.7	24.3
97.5°	168.8	170.5	172.2	174.0	175.7	164.7	140.9	117.3	93.5	69.8	60.9
100°	237.0	237.9	238.8	239.8	240.7	241.9	243.1	244.4	245.6	246.9	199.9
102.5°	306.2	307.4	308.6	309.8	310.9	312.0	312.7	313.5	314.2	315.0	306.1
105°	417.2	418.4	419.7	420.9	422.2	422.8	422.8	422.8	422.8	422.8	422.8
107.5°	532.3	532.3	532.3	532.3	532.3	532.6	533.3	534.0	534.6	535.2	535.3
110°	607.3	607.3	607.3	607.3	607.3	607.6	608.2	608.9	609.4	610.1	609.2



TEST NUMBER: P333698-830

CATALOG NUMBER: S125RDIW-S850D1560U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	677.7	678.4	679.2	680.0	680.7	681.3	681.6	682.0	682.4	682.8	681.6
115°	783.3	784.8	786.4	788.0	789.5	790.4	790.8	791.1	791.5	791.7	790.4
117.5°	892.5	892.4	892.3	892.3	892.2	892.8	894.0	895.1	896.4	897.6	895.9
120°	960.5	960.3	960.0	959.6	959.3	959.6	960.5	961.5	962.4	963.4	962.8
122.5°	1020.8	1021.9	1023.1	1024.4	1025.5	1026.3	1026.8	1027.2	1027.7	1028.1	1027.5
125°	1113.8	1116.0	1118.2	1120.4	1122.7	1123.7	1123.7	1123.7	1123.7	1123.7	1122.5
127.5°	1202.6	1204.2	1205.8	1207.4	1208.9	1209.7	1209.5	1209.3	1209.1	1208.9	1208.2
130°	1257.1	1258.7	1260.3	1261.9	1263.4	1264.3	1264.7	1265.0	1265.3	1265.6	1264.7
132.5°	1311.5	1313.4	1315.2	1317.1	1318.9	1319.5	1318.8	1318.1	1317.4	1316.7	1316.5
135°	1389.0	1390.9	1392.9	1394.8	1396.7	1397.2	1396.7	1396.0	1395.3	1394.8	1394.1
137.5°	1460.3	1461.9	1463.6	1465.2	1466.9	1467.4	1466.8	1466.2	1465.7	1465.1	1465.3
140°	1506.8	1507.5	1508.1	1508.7	1509.4	1509.5	1509.2	1508.9	1508.5	1508.3	1508.9
142.5°	1548.8	1549.2	1549.5	1549.9	1550.3	1550.8	1551.2	1551.6	1552.1	1552.6	1552.7
145°	1610.4	1611.0	1611.7	1612.3	1613.0	1613.3	1613.3	1613.3	1613.3	1613.3	1613.5
147.5°	1664.3	1664.2	1664.1	1664.0	1663.8	1664.0	1664.3	1664.7	1665.1	1665.5	1665.8
150°	1698.4	1697.7	1697.1	1696.5	1695.8	1695.8	1696.5	1697.1	1697.7	1698.4	1699.0
152.5°	1731.3	1729.9	1728.5	1727.1	1725.7	1725.3	1726.0	1726.6	1727.3	1727.9	1728.5
155°	1773.6	1771.7	1769.8	1767.9	1766.0	1765.4	1766.0	1766.6	1767.3	1767.9	1768.9
157.5°	1806.2	1805.1	1803.9	1802.8	1801.7	1801.1	1801.2	1801.3	1801.3	1801.4	1802.4
160°	1828.9	1827.0	1825.1	1823.3	1821.4	1820.5	1820.9	1821.2	1821.5	1821.8	1823.1
162.5°	1847.1	1845.2	1843.3	1841.4	1839.5	1838.7	1839.0	1839.4	1839.7	1839.9	1841.7
165°	1871.5	1869.6	1867.6	1865.8	1863.9	1863.1	1863.4	1863.8	1864.1	1864.3	1866.2
167.5°	1889.6	1887.7	1885.7	1883.8	1881.8	1881.0	1881.3	1881.6	1882.0	1882.3	1884.5
170°	1899.9	1897.6	1895.5	1893.2	1891.0	1890.1	1890.4	1890.7	1891.0	1891.3	1893.9
172.5°	1906.7	1904.5	1902.2	1900.1	1897.8	1897.1	1897.6	1898.2	1898.8	1899.3	1901.6
175°	1914.0	1912.1	1910.3	1908.4	1906.5	1905.7	1906.0	1906.3	1906.7	1907.0	1909.5
177.5°	1917.4	1915.9	1914.4	1912.9	1911.4	1910.7	1911.0	1911.3	1911.5	1911.8	1913.5
180°	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0



TEST NUMBER: P333698-830

CATALOG NUMBER: S125RDIW-S850D1560U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1291.7	1293.5	1295.1	1296.0	1295.8	1295.6	1295.4	1295.2
5°	1283.7	1285.9	1288.1	1289.0	1288.5	1288.1	1287.7	1287.2
7.5°	1267.8	1269.3	1270.8	1271.3	1270.8	1270.4	1269.9	1269.4
10°	1254.2	1254.9	1255.6	1255.6	1254.9	1254.2	1253.6	1253.0
12.5°	1235.1	1235.6	1236.1	1235.9	1234.8	1233.8	1232.8	1231.8
15°	1203.6	1203.3	1203.2	1202.1	1200.1	1198.2	1196.2	1194.2
17.5°	1164.2	1163.2	1162.1	1160.7	1159.1	1157.5	1155.9	1154.3
20°	1135.3	1134.2	1133.1	1131.6	1129.6	1127.7	1125.7	1123.8
22.5°	1106.5	1104.5	1102.3	1100.4	1098.8	1097.2	1095.6	1094.0
25°	1059.4	1056.6	1053.8	1051.1	1048.7	1046.3	1044.0	1041.5
27.5°	1008.3	1004.4	1000.4	997.3	995.0	992.7	990.4	988.1
30°	971.9	966.9	961.8	958.4	956.4	954.4	952.4	950.5
32.5°	936.3	930.8	925.3	921.2	918.8	916.3	913.8	911.3
35°	881.1	874.8	868.5	863.8	860.7	857.7	854.7	851.6
37.5°	823.4	815.8	808.2	803.0	800.0	797.0	794.1	791.2
40°	785.1	776.9	768.6	763.2	760.6	758.0	755.4	752.8
42.5°	747.5	739.6	731.7	725.8	722.0	718.1	714.3	710.5
45°	687.4	678.7	670.0	664.0	660.7	657.5	654.2	650.9
47.5°	627.9	619.0	610.0	603.7	600.1	596.5	592.9	589.3
50°	587.7	578.5	569.4	563.2	560.0	556.7	553.4	550.2
52.5°	549.5	539.6	529.8	523.2	520.0	516.7	513.5	510.2
55°	491.4	481.6	471.8	465.1	461.8	458.3	454.8	451.3
57.5°	433.3	423.8	414.2	407.8	404.7	401.6	398.6	395.5
60°	394.9	385.3	375.8	369.4	366.1	362.9	359.6	356.3
62.5°	357.1	348.3	339.4	333.4	330.1	326.8	323.6	320.3
65°	301.7	293.0	284.3	278.3	275.0	271.8	268.5	265.2
67.5°	248.7	240.8	232.8	227.5	225.0	222.3	219.7	217.2
70°	213.6	206.9	200.1	195.5	192.8	190.2	187.7	185.0
72.5°	181.0	174.7	168.5	164.6	162.8	161.1	159.4	157.6
75°	135.3	130.5	125.7	122.6	121.0	119.5	118.0	116.5
77.5°	96.2	92.9	89.5	87.4	86.2	85.1	84.0	82.8
80°	72.5	70.5	68.5	67.3	66.9	66.4	66.0	65.6
82.5°	54.2	53.3	52.3	51.7	51.5	51.3	51.0	50.7
85°	30.9	30.6	30.4	30.3	30.0	29.8	29.6	29.4
87.5°	16.9	17.2	17.5	17.7	17.7	17.7	17.7	17.8
90°	25.8	27.4	29.0	30.3	31.2	32.1	33.1	34.0
92.5°	25.8	27.4	29.0	30.0	30.4	30.9	31.4	31.8
95°	25.8	27.4	29.0	29.8	29.8	29.8	29.8	29.8
97.5°	52.0	43.2	34.2	29.8	29.8	29.8	29.8	29.8
100°	152.9	105.9	59.0	34.9	33.6	32.3	31.1	29.8
102.5°	297.2	288.3	279.5	264.3	242.8	221.4	199.9	178.5
105°	422.8	422.8	422.8	422.6	422.4	422.1	421.7	421.4
107.5°	535.4	535.4	535.5	535.0	534.0	533.1	532.2	531.2
110°	608.2	607.3	606.3	606.1	606.3	606.6	607.0	607.3



TEST NUMBER: P333698-830

CATALOG NUMBER: S125RDIW-S850D1560U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	680.3	679.2	678.0	677.1	676.7	676.3	675.8	675.3
115°	789.2	788.0	786.6	785.1	783.3	781.3	779.4	777.5
117.5°	894.3	892.7	891.0	889.8	889.0	888.2	887.3	886.5
120°	962.1	961.5	960.9	959.8	958.2	956.6	955.1	953.5
122.5°	1026.8	1026.2	1025.6	1024.4	1022.6	1020.7	1018.9	1017.0
125°	1121.2	1119.9	1118.7	1117.6	1116.6	1115.7	1114.7	1113.8
127.5°	1207.5	1206.8	1206.1	1204.6	1202.2	1200.0	1197.6	1195.2
130°	1263.8	1262.8	1261.9	1260.6	1259.0	1257.4	1255.8	1254.2
132.5°	1316.4	1316.2	1316.0	1315.0	1313.5	1311.9	1310.3	1308.7
135°	1393.5	1392.9	1392.2	1390.9	1389.0	1387.1	1385.3	1383.4
137.5°	1465.4	1465.5	1465.7	1464.9	1463.2	1461.6	1459.9	1458.3
140°	1509.5	1510.1	1510.8	1510.1	1508.3	1506.4	1504.5	1502.6
142.5°	1552.7	1552.9	1553.0	1552.2	1550.2	1548.3	1546.4	1544.5
145°	1613.9	1614.2	1614.5	1613.7	1611.8	1610.0	1608.1	1606.2
147.5°	1666.2	1666.6	1667.0	1666.0	1663.8	1661.5	1659.3	1657.0
150°	1699.6	1700.3	1700.9	1700.0	1697.4	1694.9	1692.4	1689.9
152.5°	1729.2	1729.8	1730.4	1729.6	1727.3	1725.0	1722.8	1720.5
155°	1769.8	1770.8	1771.7	1770.8	1768.4	1765.9	1763.3	1760.8
157.5°	1803.4	1804.4	1805.4	1804.7	1802.1	1799.6	1797.1	1794.6
160°	1824.3	1825.6	1826.8	1826.3	1823.7	1821.2	1818.6	1816.2
162.5°	1843.5	1845.3	1847.0	1846.5	1843.8	1841.0	1838.2	1835.4
165°	1868.1	1870.1	1872.0	1871.6	1869.2	1866.6	1864.1	1861.5
167.5°	1886.8	1889.0	1891.3	1891.0	1888.2	1885.4	1882.5	1879.7
170°	1896.4	1898.9	1901.4	1901.3	1898.5	1895.6	1892.7	1889.9
172.5°	1903.8	1906.1	1908.4	1908.1	1905.3	1902.4	1899.6	1896.8
175°	1911.9	1914.5	1917.0	1916.8	1914.0	1911.2	1908.4	1905.5
177.5°	1915.3	1917.0	1918.8	1918.7	1916.7	1914.7	1912.6	1910.6
180°	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0	1914.0

(END OF REPORT)