

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333682-830

Luminaire Tested: **S125RDIW-S850D470U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333682-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S850D470U830-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 470 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4829.4 lumens
Efficiency: N/A
Efficacy: 128.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 37.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333682-830

CATALOG NUMBER: S125RDIW-S850D470U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

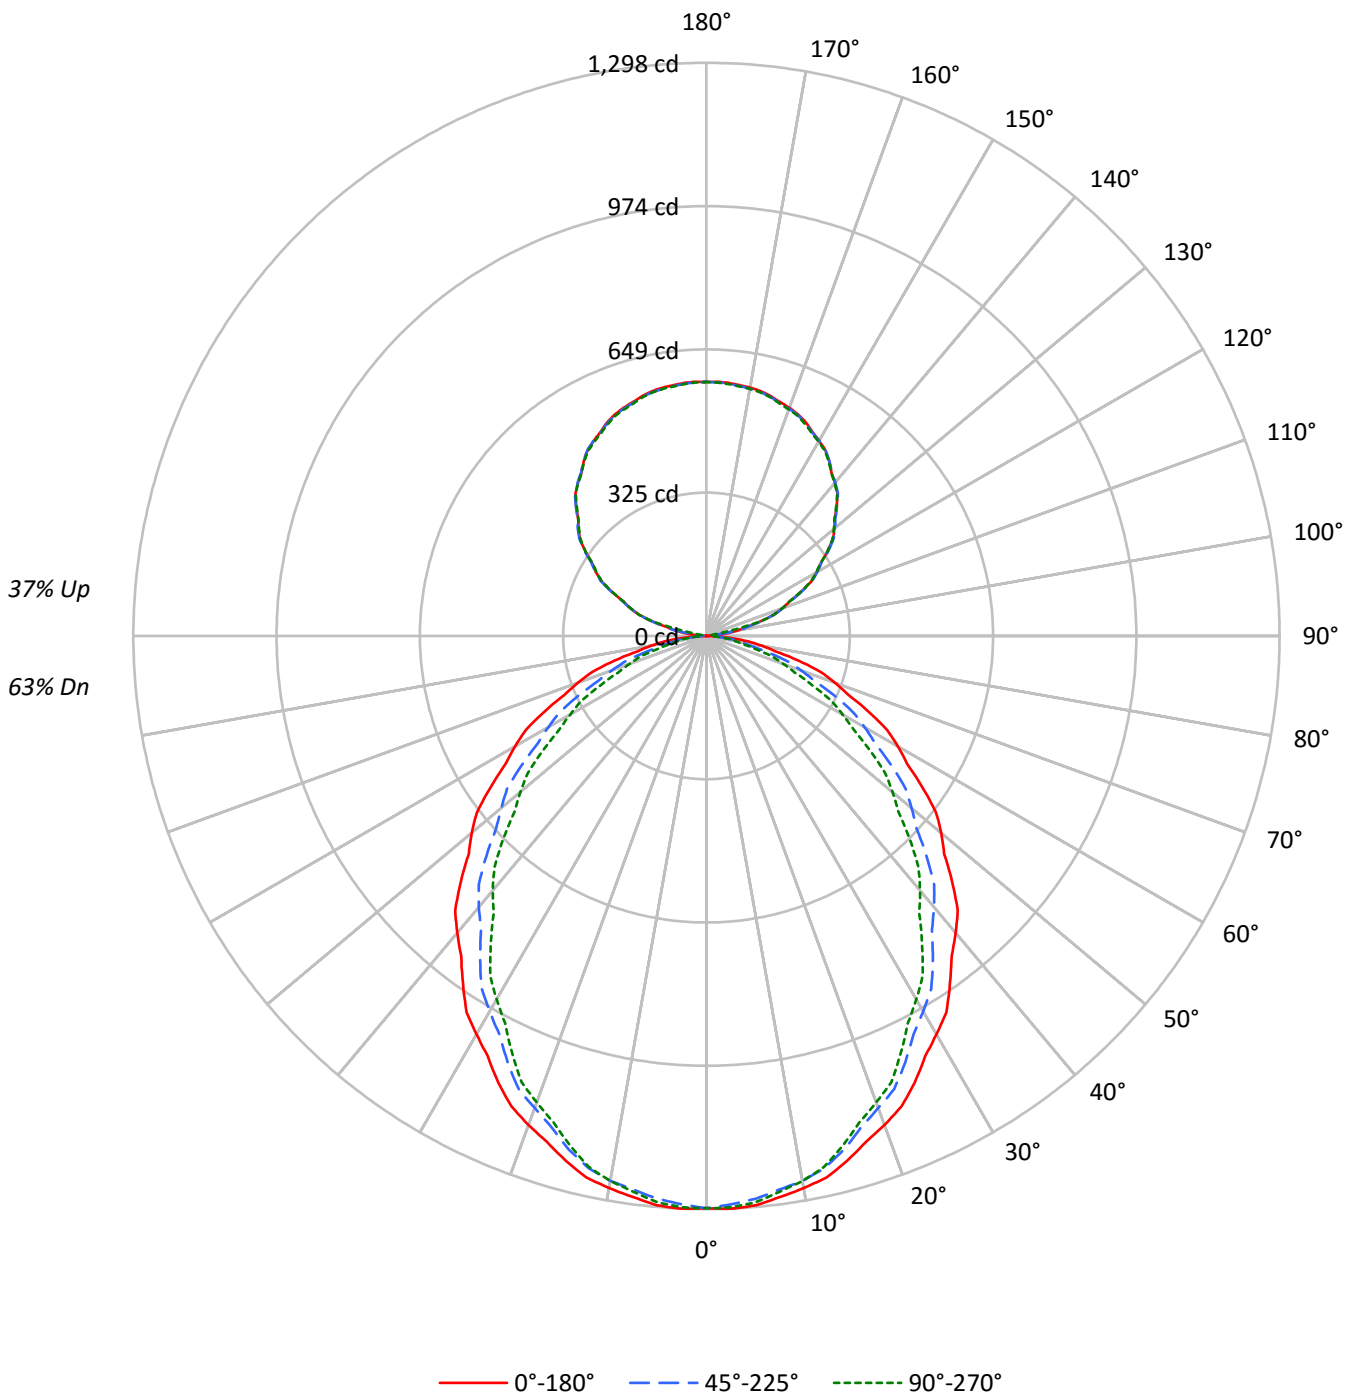



TEST NUMBER: P333682-830

CATALOG NUMBER: S125RDIW-S850D470U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	68	68	68	63
1	101	97	93	89	95	91	88	85	80	78	75	70	68	67	61	60	58	54
2	92	85	79	74	86	80	74	70	71	66	63	62	59	56	54	52	50	46
3	84	75	67	62	79	71	64	59	62	57	53	55	51	48	48	45	43	39
4	77	66	58	52	72	63	56	50	56	50	46	49	45	41	43	40	37	34
5	71	59	51	45	67	56	49	43	50	44	39	44	40	36	39	35	32	29
6	66	53	45	39	61	51	43	38	45	39	35	40	35	32	35	32	29	26
7	61	48	40	35	57	46	39	33	41	35	31	37	32	28	32	28	25	23
8	57	44	36	31	53	42	35	30	38	32	27	34	29	25	30	26	23	21
9	53	40	33	28	50	38	31	27	35	29	25	31	26	23	28	24	21	19
10	49	37	30	25	46	35	29	24	32	26	22	29	24	21	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8371	8371	8371
5°	8390	8294	8345
10°	8326	8217	8217
15°	8227	8050	7985
20°	8100	7818	7724
25°	7953	7590	7422
30°	7767	7322	7088
35°	7579	7046	6714
40°	7403	6759	6347
45°	7188	6437	5945
50°	6973	6089	5528
55°	6723	5754	5082
60°	6473	5349	4602
65°	6178	4876	4053
70°	5840	4288	3493
75°	5375	3616	2907
80°	4731	2838	2440
85°	3987	2319	2179



TEST NUMBER: P333682-830

CATALOG NUMBER: S125RDIW-S850D470U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.9	2.5
10°-20°	340.6	7.1
20°-30°	493.9	10.2
30°-40°	562.9	11.7
40°-50°	548.6	11.4
50°-60°	461.8	9.6
60°-70°	323.7	6.7
70°-80°	166.4	3.4
80°-90°	43.2	0.9
90°-100°	20.9	0.4
100°-110°	128.8	2.7
110°-120°	233.6	4.8
120°-130°	299.9	6.2
130°-140°	322.5	6.7
140°-150°	302.7	6.3
150°-160°	244.9	5.1
160°-170°	158.4	3.3
170°-180°	54.6	1.1
0°-30°	956.3	19.8
0°-40°	1519.2	31.5
0°-60°	2529.7	52.4
0°-90°	3063.0	63.4
90°-120°	383.4	7.9
90°-150°	1308.5	27.1
90°-180°	1766.0	36.6
0°-180°	4829.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1296	1296	1296	1296	1296	
5°	1294	1290	1279	1289	1287	123
15°	1230	1224	1204	1203	1194	347
25°	1116	1100	1065	1052	1042	513
35°	961	937	894	866	852	602
45°	787	757	705	667	651	607
55°	597	564	511	468	451	534
65°	404	370	319	281	265	400
75°	215	185	145	124	116	228
85°	54	37	31	30	29	60
90°	0	4	7	9	10	4
95°	24	22	7	9	9	31
105°	125	127	127	127	127	133
115°	235	237	238	236	234	233
125°	335	338	338	336	335	299
135°	418	420	419	418	416	322
145°	484	485	485	485	483	303
155°	533	531	531	532	529	245
165°	562	560	560	563	559	159
175°	575	573	573	576	573	55
180°	575	575	575	575	575	



TEST NUMBER: P333682-830

CATALOG NUMBER: S125RDIW-S850D470U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1298.4	1297.9	1297.3	1296.8	1296.3	1295.1	1293.5	1291.7	1290.0	1288.2	1290.0
5°	1294.1	1293.3	1292.3	1291.5	1290.6	1289.0	1286.6	1284.2	1281.8	1279.4	1281.6
7.5°	1281.4	1280.5	1279.7	1278.8	1278.1	1276.2	1273.4	1270.5	1267.6	1264.7	1266.2
10°	1269.6	1268.9	1268.3	1267.6	1267.0	1265.2	1262.2	1259.0	1256.0	1253.0	1253.6
12.5°	1256.3	1255.5	1254.6	1253.9	1253.0	1250.6	1246.4	1242.4	1238.3	1234.2	1234.6
15°	1230.5	1229.2	1227.9	1226.5	1225.2	1222.3	1217.8	1213.1	1208.6	1204.0	1203.8
17.5°	1201.3	1199.3	1197.3	1195.3	1193.3	1189.4	1183.6	1177.9	1172.1	1166.4	1165.4
20°	1178.6	1176.4	1174.2	1172.1	1169.9	1165.3	1158.4	1151.4	1144.4	1137.5	1136.4
22.5°	1153.5	1151.3	1149.1	1147.0	1144.8	1140.1	1132.7	1125.5	1118.1	1110.9	1108.7
25°	1116.0	1112.7	1109.4	1106.2	1102.9	1097.2	1089.2	1081.1	1073.1	1065.1	1062.2
27.5°	1072.9	1068.9	1065.0	1061.0	1057.1	1050.7	1042.2	1033.5	1024.9	1016.2	1012.3
30°	1041.5	1037.4	1033.3	1029.2	1025.0	1018.3	1009.3	1000.1	991.0	981.8	976.9
32.5°	1011.0	1006.2	1001.4	996.6	991.6	984.6	975.3	966.0	956.7	947.3	941.9
35°	961.3	956.0	950.8	945.6	940.4	932.8	923.1	913.3	903.5	893.7	887.4
37.5°	912.5	906.2	899.8	893.4	887.1	878.9	868.8	858.7	848.6	838.5	830.9
40°	878.1	871.6	865.0	858.5	852.0	843.5	833.0	822.6	812.2	801.7	793.4
42.5°	842.1	835.4	828.7	821.9	815.2	806.5	795.7	784.9	774.1	763.4	755.4
45°	787.0	780.7	774.4	768.1	761.8	752.6	740.6	728.8	716.8	704.8	696.1
47.5°	730.1	723.4	716.7	710.1	703.4	694.1	682.0	670.0	657.9	645.8	636.9
50°	694.0	686.8	679.7	672.5	665.3	655.5	643.1	630.7	618.3	606.0	596.8
52.5°	654.9	647.5	640.2	632.8	625.5	616.0	604.3	592.6	580.8	569.1	559.3
55°	597.1	590.1	583.2	576.3	569.3	559.7	547.5	535.4	523.2	511.0	501.1
57.5°	538.8	531.3	523.9	516.4	509.1	499.5	487.7	475.9	464.2	452.4	442.9
60°	501.1	493.6	486.0	478.3	470.7	461.1	449.3	437.5	425.8	414.1	404.5
62.5°	461.3	454.0	446.8	439.4	432.2	422.6	410.7	398.8	386.8	374.9	366.1
65°	404.3	396.9	389.5	382.1	374.7	365.2	353.7	342.1	330.6	319.1	310.4
67.5°	347.7	340.3	332.9	325.6	318.1	308.9	297.8	286.8	275.8	264.7	256.7
70°	309.3	301.9	294.5	287.1	279.7	270.6	259.8	248.8	238.0	227.1	220.4
72.5°	271.7	264.5	257.3	250.1	242.9	234.1	223.9	213.8	203.6	193.4	187.2
75°	215.4	208.9	202.3	195.8	189.3	181.4	172.3	163.2	154.0	144.9	140.1
77.5°	159.4	154.1	148.9	143.7	138.5	132.2	124.9	117.6	110.3	103.0	99.6
80°	127.2	122.1	116.8	111.6	106.4	100.8	94.6	88.5	82.5	76.3	74.4
82.5°	96.0	91.2	86.5	81.8	77.1	72.7	68.5	64.4	60.1	56.0	55.0
85°	53.8	50.0	46.0	42.1	38.2	35.6	34.6	33.5	32.4	31.3	31.1
87.5°	18.1	17.1	15.9	14.9	13.9	13.3	13.2	13.2	13.2	13.1	13.2
90°	0.5	1.2	2.0	2.7	3.5	4.1	4.8	5.5	6.1	6.8	7.3
92.5°	6.6	6.0	5.5	5.0	4.4	4.4	5.1	5.7	6.2	6.8	7.3
95°	24.3	24.0	23.8	23.5	23.2	21.2	17.6	14.0	10.5	6.8	7.3
97.5°	50.7	51.3	51.7	52.3	52.8	49.5	42.3	35.3	28.1	21.0	18.3
100°	71.2	71.5	71.8	72.1	72.4	72.7	73.0	73.4	73.8	74.2	60.0
102.5°	92.0	92.4	92.7	93.1	93.5	93.8	94.0	94.2	94.4	94.6	92.0
105°	125.4	125.7	126.1	126.5	126.9	127.1	127.1	127.1	127.1	127.1	127.1
107.5°	159.9	159.9	159.9	159.9	159.9	160.0	160.2	160.4	160.6	160.8	160.9
110°	182.5	182.5	182.5	182.5	182.5	182.6	182.8	182.9	183.1	183.3	183.0



TEST NUMBER: P333682-830

CATALOG NUMBER: S125RDIW-S850D470U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	203.7	203.9	204.1	204.3	204.5	204.7	204.8	205.0	205.1	205.2	204.8
115°	235.4	235.8	236.3	236.8	237.2	237.5	237.6	237.7	237.8	237.9	237.5
117.5°	268.2	268.2	268.2	268.2	268.2	268.3	268.6	269.0	269.4	269.8	269.3
120°	288.7	288.6	288.5	288.4	288.3	288.4	288.7	289.0	289.3	289.5	289.4
122.5°	306.8	307.1	307.5	307.8	308.2	308.4	308.6	308.7	308.9	309.0	308.8
125°	334.7	335.4	336.0	336.7	337.3	337.7	337.7	337.7	337.7	337.7	337.3
127.5°	361.4	361.9	362.4	362.9	363.4	363.5	363.4	363.4	363.4	363.3	363.1
130°	377.8	378.2	378.7	379.2	379.7	379.9	380.0	380.1	380.2	380.3	380.0
132.5°	394.2	394.7	395.3	395.8	396.3	396.5	396.3	396.2	395.9	395.7	395.7
135°	417.5	418.0	418.6	419.1	419.7	419.9	419.7	419.5	419.3	419.1	419.0
137.5°	438.8	439.3	439.8	440.4	440.8	441.0	440.8	440.6	440.5	440.3	440.4
140°	452.8	453.0	453.2	453.4	453.6	453.6	453.6	453.5	453.4	453.3	453.5
142.5°	465.4	465.6	465.7	465.8	465.9	466.0	466.2	466.3	466.5	466.6	466.6
145°	484.0	484.2	484.4	484.6	484.7	484.8	484.8	484.8	484.8	484.8	484.9
147.5°	500.2	500.1	500.1	500.0	500.0	500.0	500.2	500.3	500.4	500.5	500.6
150°	510.4	510.2	510.0	509.8	509.6	509.6	509.8	510.0	510.2	510.4	510.6
152.5°	520.3	519.9	519.4	519.1	518.6	518.5	518.7	518.9	519.1	519.2	519.4
155°	533.0	532.4	531.9	531.3	530.7	530.6	530.7	530.9	531.1	531.3	531.6
157.5°	542.8	542.4	542.2	541.8	541.4	541.3	541.3	541.3	541.3	541.4	541.7
160°	549.6	549.0	548.5	547.9	547.3	547.1	547.2	547.3	547.4	547.5	547.9
162.5°	555.1	554.5	553.9	553.4	552.8	552.6	552.7	552.8	552.9	553.0	553.5
165°	562.4	561.8	561.3	560.7	560.2	559.9	560.0	560.1	560.2	560.2	560.8
167.5°	567.9	567.3	566.8	566.1	565.5	565.2	565.3	565.4	565.5	565.6	566.4
170°	571.0	570.3	569.6	568.9	568.3	568.0	568.1	568.2	568.3	568.4	569.1
172.5°	573.0	572.3	571.7	571.0	570.3	570.1	570.2	570.4	570.6	570.8	571.5
175°	575.2	574.7	574.1	573.5	573.0	572.7	572.8	572.9	573.0	573.1	573.8
177.5°	576.3	575.8	575.3	574.9	574.4	574.2	574.3	574.4	574.5	574.6	575.0
180°	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2



TEST NUMBER: P333682-830

CATALOG NUMBER: S125RDIW-S850D470U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1291.7	1293.5	1295.1	1296.0	1295.8	1295.6	1295.4	1295.2
5°	1283.7	1285.9	1288.1	1289.0	1288.5	1288.1	1287.7	1287.2
7.5°	1267.8	1269.3	1270.8	1271.3	1270.8	1270.4	1269.9	1269.4
10°	1254.2	1254.9	1255.6	1255.6	1254.9	1254.2	1253.6	1253.0
12.5°	1235.1	1235.6	1236.1	1235.9	1234.8	1233.8	1232.8	1231.8
15°	1203.6	1203.3	1203.2	1202.1	1200.1	1198.2	1196.2	1194.2
17.5°	1164.2	1163.2	1162.1	1160.7	1159.1	1157.5	1155.9	1154.3
20°	1135.3	1134.2	1133.1	1131.6	1129.6	1127.7	1125.7	1123.8
22.5°	1106.5	1104.5	1102.3	1100.4	1098.8	1097.2	1095.6	1094.0
25°	1059.4	1056.6	1053.8	1051.1	1048.7	1046.3	1044.0	1041.5
27.5°	1008.3	1004.4	1000.4	997.3	995.0	992.7	990.4	988.1
30°	971.9	966.9	961.8	958.4	956.4	954.4	952.4	950.5
32.5°	936.3	930.8	925.3	921.2	918.8	916.3	913.8	911.3
35°	881.1	874.8	868.5	863.8	860.7	857.7	854.7	851.6
37.5°	823.4	815.8	808.2	803.0	800.0	797.0	794.1	791.2
40°	785.1	776.9	768.6	763.2	760.6	758.0	755.4	752.8
42.5°	747.5	739.6	731.7	725.8	722.0	718.1	714.3	710.5
45°	687.4	678.7	670.0	664.0	660.7	657.5	654.2	650.9
47.5°	627.9	619.0	610.0	603.7	600.1	596.5	592.9	589.3
50°	587.7	578.5	569.4	563.2	560.0	556.7	553.4	550.2
52.5°	549.5	539.6	529.8	523.2	520.0	516.7	513.5	510.2
55°	491.4	481.6	471.8	465.1	461.8	458.3	454.8	451.3
57.5°	433.3	423.8	414.2	407.8	404.7	401.6	398.6	395.5
60°	394.9	385.3	375.8	369.4	366.1	362.9	359.6	356.3
62.5°	357.1	348.3	339.4	333.4	330.1	326.8	323.6	320.3
65°	301.7	293.0	284.3	278.3	275.0	271.8	268.5	265.2
67.5°	248.7	240.8	232.8	227.5	225.0	222.3	219.7	217.2
70°	213.6	206.9	200.1	195.5	192.8	190.2	187.7	185.0
72.5°	181.0	174.7	168.5	164.6	162.8	161.1	159.4	157.6
75°	135.3	130.5	125.7	122.6	121.0	119.5	118.0	116.5
77.5°	96.2	92.9	89.5	87.4	86.2	85.1	84.0	82.8
80°	72.5	70.5	68.5	67.3	66.9	66.4	66.0	65.6
82.5°	54.2	53.3	52.3	51.7	51.5	51.3	51.0	50.7
85°	30.9	30.6	30.4	30.3	30.0	29.8	29.6	29.4
87.5°	13.3	13.4	13.5	13.5	13.4	13.3	13.1	13.0
90°	7.7	8.2	8.7	9.1	9.4	9.7	10.0	10.3
92.5°	7.7	8.2	8.7	9.0	9.1	9.3	9.4	9.5
95°	7.7	8.2	8.7	9.0	9.0	9.0	9.0	9.0
97.5°	15.6	13.0	10.3	9.0	9.0	9.0	9.0	9.0
100°	46.0	31.9	17.7	10.5	10.1	9.7	9.3	9.0
102.5°	89.4	86.6	84.0	79.5	73.0	66.5	60.0	53.6
105°	127.1	127.1	127.1	127.1	127.0	126.9	126.8	126.7
107.5°	160.9	160.9	160.9	160.8	160.5	160.2	159.9	159.7
110°	182.8	182.5	182.2	182.1	182.2	182.3	182.4	182.5



TEST NUMBER: P333682-830

CATALOG NUMBER: S125RDIW-S850D470U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	204.4	204.1	203.8	203.5	203.4	203.2	203.1	202.9
115°	237.1	236.8	236.4	235.9	235.4	234.8	234.2	233.7
117.5°	268.7	268.2	267.8	267.4	267.1	266.9	266.6	266.5
120°	289.2	289.0	288.8	288.4	287.9	287.5	287.0	286.5
122.5°	308.6	308.4	308.2	307.8	307.3	306.7	306.2	305.7
125°	337.0	336.6	336.2	335.8	335.5	335.3	335.0	334.7
127.5°	362.9	362.7	362.5	362.0	361.3	360.6	359.9	359.2
130°	379.8	379.5	379.2	378.8	378.3	377.9	377.4	376.9
132.5°	395.6	395.5	395.5	395.2	394.7	394.3	393.8	393.3
135°	418.8	418.6	418.4	418.0	417.5	416.9	416.3	415.8
137.5°	440.4	440.5	440.5	440.3	439.7	439.2	438.8	438.3
140°	453.6	453.8	454.0	453.8	453.3	452.7	452.1	451.6
142.5°	466.7	466.7	466.7	466.5	465.9	465.3	464.8	464.2
145°	485.0	485.1	485.2	484.9	484.4	483.8	483.2	482.7
147.5°	500.8	500.9	501.0	500.7	500.0	499.4	498.6	497.9
150°	510.8	511.0	511.1	510.9	510.1	509.3	508.6	507.8
152.5°	519.6	519.8	520.0	519.8	519.1	518.4	517.7	517.1
155°	531.9	532.2	532.4	532.2	531.4	530.7	529.9	529.1
157.5°	542.0	542.2	542.5	542.3	541.6	540.8	540.1	539.3
160°	548.3	548.7	549.0	548.8	548.1	547.3	546.6	545.8
162.5°	554.0	554.6	555.1	555.0	554.1	553.3	552.4	551.6
165°	561.5	562.0	562.6	562.5	561.8	560.9	560.2	559.4
167.5°	567.0	567.7	568.4	568.4	567.4	566.6	565.7	564.9
170°	569.9	570.7	571.5	571.4	570.5	569.7	568.8	568.0
172.5°	572.1	572.8	573.5	573.4	572.6	571.7	570.9	570.0
175°	574.6	575.3	576.1	576.1	575.2	574.4	573.5	572.7
177.5°	575.6	576.1	576.6	576.6	576.0	575.4	574.8	574.2
180°	575.2	575.2	575.2	575.2	575.2	575.2	575.2	575.2

(END OF REPORT)