

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333441-930

Luminaire Tested: **S125DIW-S1090D770U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333441-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1090D770U930-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5792.0 lumens
Efficiency: N/A
Efficacy: 108.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 53.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333441-930

CATALOG NUMBER: S125DIW-S1090D770U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

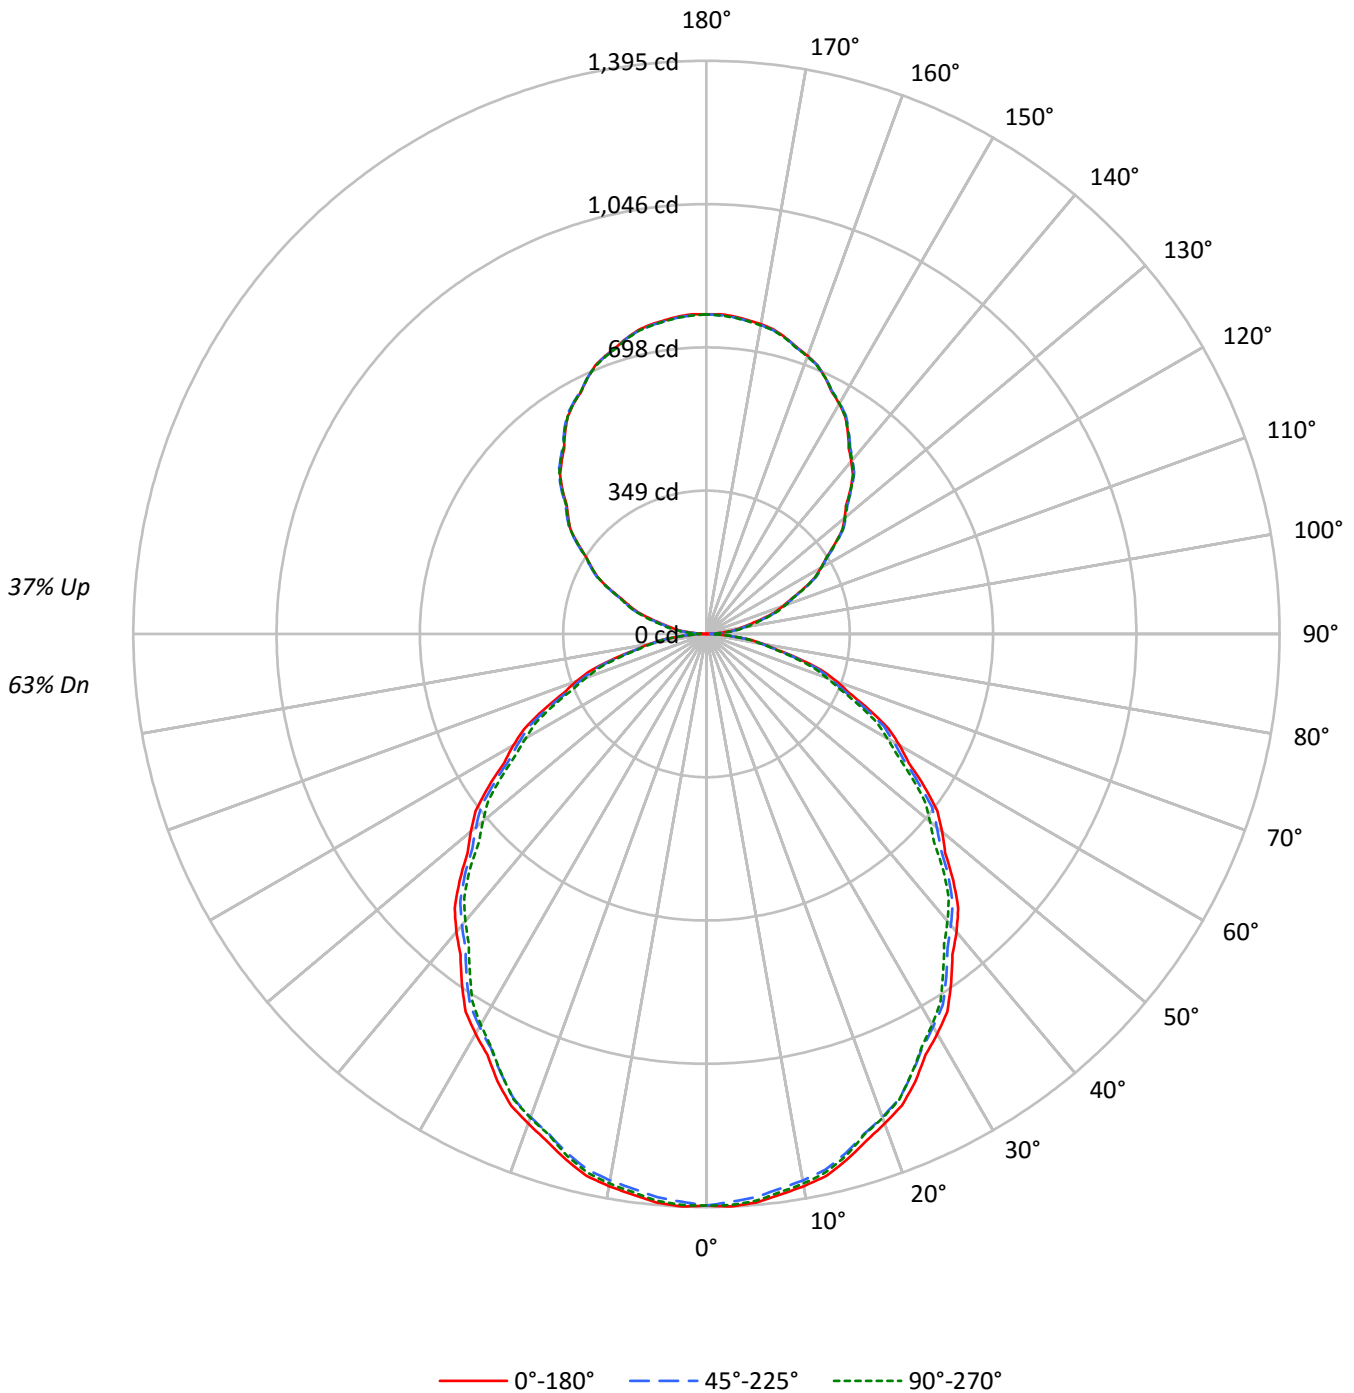



TEST NUMBER: P333441-930

CATALOG NUMBER: S125DIW-S1090D770U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	68	68	68	63
1	101	96	92	88	94	90	87	84	79	77	74	69	67	65	60	58	57	53
2	92	84	78	72	85	79	73	69	69	65	61	61	57	54	52	50	48	44
3	83	74	66	60	78	69	63	57	61	56	52	54	49	46	46	43	41	37
4	76	65	57	51	71	62	54	49	54	49	44	48	43	39	42	38	35	32
5	70	58	50	44	65	55	47	42	49	43	38	43	38	34	37	34	31	28
6	65	52	44	38	60	49	42	36	44	38	33	39	34	30	34	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29	35	30	27	31	27	24	22
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	29	24	21	19
9	52	39	32	26	49	37	30	25	33	28	23	30	25	21	26	22	19	17
10	48	36	29	24	45	34	28	23	31	25	21	28	23	19	24	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8985	8985	8985
5°	9005	8919	8976
10°	8950	8857	8907
15°	8852	8750	8787
20°	8715	8601	8616
25°	8565	8424	8416
30°	8380	8232	8192
35°	8183	8027	7914
40°	7981	7804	7692
45°	7761	7600	7448
50°	7519	7354	7133
55°	7287	7076	6877
60°	7009	6795	6554
65°	6677	6460	6240
70°	6360	6069	5861
75°	5794	5602	5410
80°	5159	5077	4950
85°	4483	4565	4320



TEST NUMBER: P333441-930

CATALOG NUMBER: S125DIW-S1090D770U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	131.2	2.3
10°-20°	370.5	6.4
20°-30°	547.1	9.4
30°-40°	638.4	11.0
40°-50°	641.2	11.1
50°-60°	562.8	9.7
60°-70°	419.4	7.2
70°-80°	239.8	4.1
80°-90°	71.5	1.2
90°-100°	52.1	0.9
100°-110°	153.8	2.7
110°-120°	260.5	4.5
120°-130°	342.9	5.9
130°-140°	384.2	6.6
140°-150°	376.6	6.5
150°-160°	316.3	5.5
160°-170°	210.2	3.6
170°-180°	73.6	1.3
0°-30°	1048.8	18.1
0°-40°	1687.2	29.1
0°-60°	2891.2	49.9
0°-90°	3621.8	62.5
90°-120°	466.4	8.1
90°-150°	1570.1	27.1
90°-180°	2170.0	37.5
0°-180°	5792.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1391	1391	1391	1391	1391	
5°	1389	1386	1376	1385	1385	132
15°	1324	1320	1309	1314	1314	373
25°	1202	1196	1182	1184	1181	553
35°	1038	1033	1018	1012	1004	649
45°	850	845	832	819	816	655
55°	647	643	628	619	611	578
65°	437	434	423	413	408	433
75°	232	230	224	221	217	248
85°	60	62	62	60	58	68
90°	1	5	10	13	14	5
95°	39	41	47	51	52	42
105°	138	141	145	148	150	147
115°	261	263	264	264	263	258
125°	381	384	385	384	383	341
135°	495	499	499	499	497	381
145°	600	602	604	604	602	375
155°	686	686	687	689	686	316
165°	746	745	746	748	744	210
175°	776	774	774	777	773	74
180°	778	778	778	778	778	



TEST NUMBER: P333441-930

CATALOG NUMBER: S125DIW-S1090D770U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2
2.5°	1394.7	1394.2	1393.5	1392.9	1392.4	1391.1	1389.1	1387.2	1385.2	1383.2	1385.2
5°	1389.0	1388.5	1388.0	1387.6	1387.1	1385.6	1383.2	1380.7	1378.3	1375.8	1378.0
7.5°	1376.2	1375.7	1375.2	1374.8	1374.3	1372.6	1369.9	1367.3	1364.6	1361.9	1364.1
10°	1364.8	1364.3	1363.8	1363.3	1362.9	1361.2	1358.5	1355.8	1353.2	1350.5	1352.4
12.5°	1350.7	1349.8	1348.9	1348.0	1347.2	1345.5	1343.0	1340.5	1338.0	1335.5	1337.1
15°	1324.0	1323.3	1322.6	1321.8	1321.1	1319.4	1316.7	1314.0	1311.3	1308.6	1309.9
17.5°	1293.5	1292.4	1291.3	1290.2	1289.2	1287.2	1284.4	1281.7	1278.9	1276.0	1277.6
20°	1268.0	1267.5	1267.0	1266.5	1266.0	1264.1	1260.9	1257.8	1254.6	1251.4	1253.1
22.5°	1242.4	1241.5	1240.6	1239.7	1238.8	1236.9	1234.0	1230.9	1228.0	1225.0	1226.1
25°	1201.9	1200.7	1199.5	1198.2	1197.0	1194.8	1191.6	1188.5	1185.3	1182.1	1182.6
27.5°	1154.5	1153.8	1153.1	1152.3	1151.6	1149.7	1146.3	1143.0	1139.8	1136.5	1136.6
30°	1123.7	1123.0	1122.3	1121.5	1120.8	1118.6	1114.9	1111.3	1107.6	1103.9	1103.4
32.5°	1090.3	1089.2	1088.0	1086.9	1085.8	1083.6	1080.3	1077.0	1073.7	1070.5	1069.6
35°	1037.9	1036.9	1035.9	1034.9	1034.0	1031.8	1028.3	1024.9	1021.5	1018.1	1016.8
37.5°	983.5	982.3	981.0	979.8	978.6	976.4	973.1	970.0	966.7	963.5	961.6
40°	946.6	945.3	944.1	942.9	941.7	939.3	935.9	932.5	929.0	925.6	923.4
42.5°	906.9	905.9	904.9	903.8	902.8	900.6	897.2	893.7	890.3	886.9	884.8
45°	849.7	848.7	847.7	846.8	845.8	843.8	840.9	838.0	835.0	832.1	829.2
47.5°	788.1	788.1	788.1	788.2	788.2	786.5	783.0	779.4	775.9	772.4	769.4
50°	748.4	747.7	747.0	746.2	745.5	743.6	740.7	737.8	734.8	731.9	728.7
52.5°	707.9	707.4	706.9	706.3	705.8	703.9	700.8	697.7	694.6	691.4	688.6
55°	647.2	646.5	645.7	645.0	644.2	642.1	638.7	635.3	631.9	628.4	626.2
57.5°	583.1	582.7	582.4	582.0	581.6	579.9	577.0	574.1	571.3	568.3	565.5
60°	542.6	541.6	540.6	539.6	538.7	536.9	534.2	531.5	528.8	526.1	523.7
62.5°	500.3	499.5	498.8	498.0	497.3	495.7	493.3	491.1	488.8	486.5	483.8
65°	436.9	436.4	435.9	435.5	435.0	433.4	430.7	428.0	425.3	422.7	420.4
67.5°	375.5	374.5	373.5	372.4	371.5	369.9	367.9	365.9	363.9	361.9	360.0
70°	336.8	335.6	334.4	333.1	331.9	330.2	328.0	325.8	323.6	321.4	319.9
72.5°	294.6	293.7	292.9	292.0	291.2	290.1	288.7	287.2	285.8	284.4	282.7
75°	232.2	231.7	231.2	230.7	230.2	229.4	228.2	227.0	225.8	224.5	223.8
77.5°	174.8	174.6	174.4	174.2	174.0	173.6	172.8	172.2	171.5	170.8	170.4
80°	138.7	138.7	138.7	138.7	138.7	138.4	137.9	137.5	137.0	136.5	136.2
82.5°	107.0	106.6	106.2	105.8	105.4	105.2	105.1	105.0	104.8	104.8	104.4
85°	60.5	60.7	61.0	61.2	61.5	61.6	61.6	61.6	61.6	61.6	61.4
87.5°	23.9	24.1	24.3	24.5	24.8	24.9	24.9	24.9	24.9	24.9	24.9
90°	0.6	1.7	2.8	3.8	4.9	6.0	6.8	7.8	8.7	9.7	10.4
92.5°	14.7	15.4	16.1	16.9	17.7	18.6	19.8	21.0	22.1	23.2	24.1
95°	39.4	39.6	39.9	40.1	40.4	41.3	42.6	43.9	45.2	46.6	47.5
97.5°	65.4	65.5	65.6	65.7	65.8	66.8	68.6	70.5	72.3	74.2	75.1
100°	84.7	84.7	84.7	84.7	84.7	85.6	87.3	89.1	90.8	92.6	93.8
102.5°	105.6	106.1	106.6	107.1	107.7	108.4	109.3	110.2	111.0	111.9	113.3
105°	138.0	138.7	139.3	140.0	140.7	141.5	142.3	143.0	143.8	144.6	145.4
107.5°	173.8	174.5	175.2	175.9	176.5	177.2	177.8	178.4	179.0	179.6	180.0
110°	198.5	199.2	199.8	200.6	201.2	201.7	202.1	202.5	202.9	203.3	203.7



TEST NUMBER: P333441-930

CATALOG NUMBER: S125DIW-S1090D770U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	223.7	224.0	224.4	224.8	225.1	225.5	226.0	226.6	227.1	227.6	227.8
115°	260.9	261.4	262.0	262.4	263.0	263.4	263.7	263.9	264.2	264.5	264.3
117.5°	298.2	298.4	298.6	298.9	299.1	299.4	299.6	299.9	300.1	300.4	300.4
120°	321.4	322.0	322.7	323.4	324.1	324.5	324.6	324.7	324.9	325.0	325.0
122.5°	346.6	346.8	347.1	347.3	347.6	347.8	348.1	348.5	348.9	349.2	349.1
125°	380.7	381.5	382.3	383.1	383.9	384.4	384.5	384.7	384.8	384.9	384.7
127.5°	417.0	417.4	417.9	418.4	418.8	419.1	419.3	419.5	419.6	419.8	419.6
130°	438.8	439.4	440.2	440.8	441.5	442.0	442.2	442.5	442.8	443.0	442.9
132.5°	460.6	461.7	462.8	463.9	465.0	465.5	465.5	465.4	465.4	465.3	465.2
135°	495.0	495.9	496.7	497.5	498.3	498.8	498.9	499.0	499.2	499.3	499.3
137.5°	527.5	528.3	529.0	529.9	530.7	531.2	531.5	531.7	532.1	532.4	532.6
140°	548.4	549.0	549.7	550.3	551.1	551.5	552.0	552.4	552.8	553.2	553.4
142.5°	569.2	569.7	570.3	570.9	571.4	571.9	572.5	573.0	573.5	574.0	574.1
145°	599.8	600.3	600.9	601.4	601.9	602.4	602.8	603.2	603.6	604.1	604.1
147.5°	628.1	628.4	628.7	629.0	629.3	629.6	629.9	630.2	630.6	630.9	631.2
150°	647.0	646.9	646.7	646.6	646.5	646.7	647.2	647.8	648.2	648.8	648.8
152.5°	662.5	662.7	662.8	663.1	663.2	663.4	663.7	663.9	664.1	664.3	664.6
155°	686.3	686.3	686.3	686.3	686.3	686.4	686.6	686.6	686.8	687.0	687.5
157.5°	707.7	707.4	707.0	706.8	706.5	706.4	706.5	706.6	706.8	706.9	707.4
160°	720.2	719.8	719.4	719.0	718.6	718.4	718.6	718.8	718.8	719.0	719.6
162.5°	731.4	731.1	730.8	730.5	730.2	730.0	730.1	730.1	730.1	730.2	730.8
165°	746.2	746.0	745.8	745.4	745.2	745.1	745.3	745.3	745.5	745.7	746.2
167.5°	758.9	758.3	757.7	757.2	756.7	756.4	756.4	756.4	756.4	756.4	757.2
170°	765.6	765.1	764.5	764.0	763.4	763.2	763.2	763.2	763.2	763.2	764.0
172.5°	770.5	769.9	769.4	768.8	768.3	768.0	768.0	768.0	768.0	768.0	768.8
175°	775.9	775.3	774.9	774.3	773.7	773.5	773.5	773.5	773.5	773.5	774.3
177.5°	778.7	778.3	777.8	777.4	777.0	776.7	776.6	776.5	776.4	776.2	776.9
180°	777.7	777.7	777.7	777.7	777.7	777.7	777.7	777.7	777.7	777.7	777.7



TEST NUMBER: P333441-930

CATALOG NUMBER: S125DIW-S1090D770U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2
2.5°	1387.2	1389.1	1391.1	1392.0	1391.8	1391.6	1391.4	1391.2
5°	1380.2	1382.4	1384.6	1385.6	1385.4	1385.1	1384.9	1384.6
7.5°	1366.2	1368.4	1370.5	1371.5	1371.3	1371.0	1370.8	1370.5
10°	1354.4	1356.3	1358.3	1359.2	1358.9	1358.7	1358.5	1358.2
12.5°	1338.6	1340.2	1341.7	1342.6	1342.5	1342.4	1342.4	1342.3
15°	1311.1	1312.3	1313.5	1314.2	1314.2	1314.2	1314.2	1314.2
17.5°	1279.1	1280.6	1282.1	1282.3	1281.1	1279.9	1278.6	1277.4
20°	1254.8	1256.5	1258.3	1258.5	1257.3	1256.1	1254.8	1253.6
22.5°	1227.3	1228.4	1229.5	1229.6	1228.8	1228.0	1227.2	1226.3
25°	1183.1	1183.6	1184.1	1183.9	1183.2	1182.4	1181.7	1181.0
27.5°	1136.7	1136.8	1136.9	1136.6	1135.9	1135.1	1134.4	1133.7
30°	1102.9	1102.4	1102.0	1101.4	1100.7	1099.9	1099.2	1098.5
32.5°	1068.7	1067.8	1067.0	1065.8	1064.5	1063.2	1061.8	1060.5
35°	1015.6	1014.4	1013.2	1011.6	1009.7	1007.7	1005.8	1003.8
37.5°	959.9	958.1	956.3	954.8	953.7	952.5	951.4	950.3
40°	921.2	919.0	916.8	915.3	914.6	913.9	913.1	912.4
42.5°	882.9	880.8	878.9	877.3	876.2	875.1	873.9	872.8
45°	826.2	823.3	820.4	818.5	817.7	817.0	816.3	815.5
47.5°	766.5	763.4	760.5	758.1	756.4	754.7	753.0	751.3
50°	725.5	722.4	719.2	716.7	715.0	713.3	711.6	709.9
52.5°	685.8	683.1	680.3	677.9	676.0	674.1	672.2	670.3
55°	624.0	621.8	619.6	617.7	616.0	614.2	612.5	610.8
57.5°	562.7	559.9	557.0	555.1	554.2	553.3	552.4	551.4
60°	521.2	518.8	516.3	514.2	512.5	510.8	509.1	507.4
62.5°	481.2	478.6	475.9	473.9	472.6	471.3	469.9	468.6
65°	418.2	416.0	413.8	412.2	411.2	410.3	409.3	408.3
67.5°	358.2	356.3	354.4	353.2	352.6	352.0	351.5	350.9
70°	318.5	317.0	315.5	314.3	313.3	312.3	311.4	310.4
72.5°	281.1	279.4	277.8	276.5	275.5	274.5	273.5	272.6
75°	223.1	222.3	221.6	220.7	219.7	218.7	217.8	216.8
77.5°	169.9	169.5	169.1	168.5	167.8	167.1	166.4	165.8
80°	136.0	135.7	135.5	135.1	134.6	134.1	133.6	133.1
82.5°	103.9	103.5	103.1	102.7	102.6	102.6	102.5	102.3
85°	61.1	60.9	60.7	60.3	59.8	59.3	58.8	58.3
87.5°	25.1	25.2	25.4	25.3	24.9	24.6	24.4	24.1
90°	11.0	11.7	12.4	12.9	13.3	13.7	14.1	14.5
92.5°	25.0	25.9	26.8	27.4	27.7	28.0	28.3	28.5
95°	48.5	49.4	50.4	51.0	51.3	51.5	51.8	52.0
97.5°	76.0	76.9	77.8	78.3	78.4	78.6	78.8	78.9
100°	95.0	96.2	97.4	98.2	98.5	98.7	99.0	99.2
102.5°	114.6	115.9	117.2	118.1	118.5	118.9	119.2	119.6
105°	146.3	147.1	147.9	148.5	148.9	149.3	149.7	150.1
107.5°	180.4	180.8	181.2	181.4	181.4	181.4	181.3	181.3
110°	204.2	204.6	205.0	205.1	205.0	204.8	204.7	204.6



TEST NUMBER: P333441-930

CATALOG NUMBER: S125DIW-S1090D770U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	228.0	228.1	228.3	228.3	228.0	227.8	227.6	227.3
115°	264.2	264.1	263.9	263.8	263.7	263.6	263.4	263.3
117.5°	300.5	300.6	300.8	300.5	300.0	299.5	298.9	298.4
120°	325.0	325.0	325.0	324.7	324.2	323.7	323.1	322.6
122.5°	349.0	348.9	348.8	348.5	348.1	347.6	347.2	346.8
125°	384.4	384.1	383.8	383.7	383.5	383.4	383.3	383.1
127.5°	419.6	419.4	419.2	419.1	418.8	418.5	418.2	418.0
130°	442.8	442.6	442.5	442.3	442.1	441.7	441.5	441.2
132.5°	465.0	464.9	464.8	464.5	464.1	463.7	463.4	463.0
135°	499.3	499.3	499.3	499.0	498.5	498.0	497.4	496.9
137.5°	532.7	532.9	533.0	532.7	532.1	531.4	530.8	530.0
140°	553.8	554.0	554.2	554.1	553.4	552.7	552.0	551.4
142.5°	574.3	574.5	574.6	574.4	573.7	573.1	572.3	571.7
145°	604.1	604.1	604.1	603.8	603.4	603.0	602.6	602.2
147.5°	631.5	631.9	632.2	631.9	631.0	630.1	629.2	628.3
150°	648.8	648.8	648.8	648.7	648.4	648.2	647.8	647.6
152.5°	665.0	665.3	665.6	665.5	665.0	664.6	664.1	663.6
155°	688.0	688.5	689.1	689.0	688.4	687.7	687.0	686.3
157.5°	708.0	708.5	709.1	708.9	708.0	707.1	706.2	705.3
160°	720.1	720.6	721.1	721.1	720.4	719.7	719.1	718.4
162.5°	731.5	732.1	732.7	732.7	731.9	731.1	730.3	729.5
165°	746.7	747.3	747.8	747.6	746.9	746.1	745.3	744.4
167.5°	758.1	758.9	759.6	759.6	758.8	758.0	757.2	756.3
170°	764.8	765.6	766.5	766.4	765.4	764.5	763.5	762.6
172.5°	769.6	770.5	771.3	771.3	770.5	769.6	768.7	767.9
175°	775.1	775.9	776.7	776.7	775.7	774.8	773.8	772.9
177.5°	777.6	778.2	778.9	778.8	778.0	777.3	776.6	775.8
180°	777.7	777.7	777.7	777.7	777.7	777.7	777.7	777.7

(END OF REPORT)