

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333488-930

Luminaire Tested: **S125DIW-S1270D1560U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333488-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1270D1560U930-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9268.6 lumens
Efficiency: N/A
Efficacy: 111.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333488-930

CATALOG NUMBER: S125DIW-S1270D1560U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

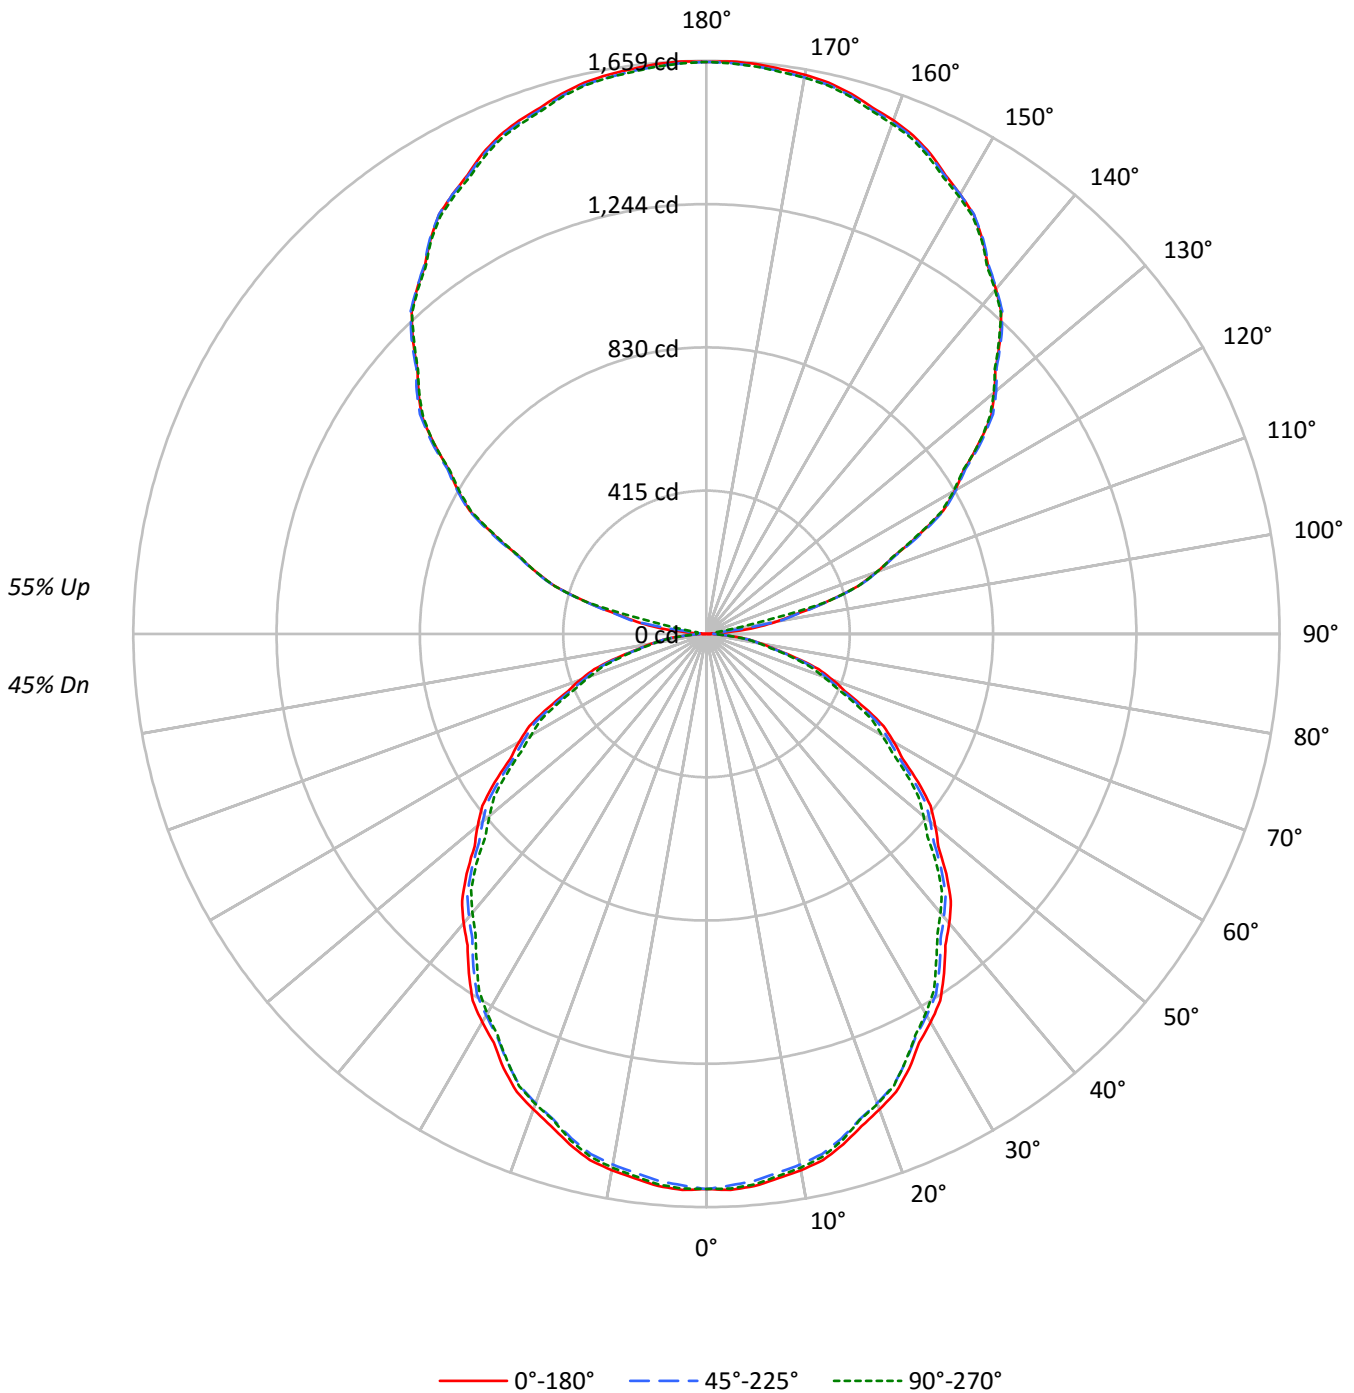



TEST NUMBER: P333488-930

CATALOG NUMBER: S125DIW-S1270D1560U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	45
1	97	92	88	85	88	85	81	78	71	68	66	58	56	54	46	44	43	38
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	37	32
3	80	71	63	58	73	65	59	54	54	50	46	45	41	38	35	33	31	27
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	29	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	21	18
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	20	25	20	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10377	10377	10377
5°	10400	10301	10367
10°	10337	10228	10287
15°	10224	10105	10148
20°	10065	9933	9950
25°	9892	9728	9719
30°	9679	9508	9461
35°	9451	9270	9140
40°	9217	9012	8884
45°	8963	8777	8603
50°	8685	8493	8238
55°	8417	8173	7944
60°	8094	7848	7569
65°	7713	7459	7207
70°	7345	7009	6770
75°	6692	6470	6248
80°	5954	5861	5720
85°	5187	5276	4987



TEST NUMBER: P333488-930

CATALOG NUMBER: S125DIW-S1270D1560U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.5	1.6
10°-20°	427.9	4.6
20°-30°	631.9	6.8
30°-40°	737.3	8.0
40°-50°	740.5	8.0
50°-60°	650.0	7.0
60°-70°	484.3	5.2
70°-80°	276.9	3.0
80°-90°	84.0	0.9
90°-100°	60.2	0.6
100°-110°	370.8	4.0
110°-120°	672.5	7.3
120°-130°	863.1	9.3
130°-140°	928.3	10.0
140°-150°	871.4	9.4
150°-160°	704.9	7.6
160°-170°	455.9	4.9
170°-180°	157.2	1.7
0°-30°	1211.3	13.1
0°-40°	1948.6	21.0
0°-60°	3339.1	36.0
0°-90°	4184.4	45.1
90°-120°	1103.5	11.9
90°-150°	3766.2	40.6
90°-180°	5084.0	54.9
0°-180°	9268.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1607	1607	1607	1607	1607	
5°	1604	1601	1589	1600	1599	152
15°	1529	1525	1511	1517	1518	431
25°	1388	1381	1365	1367	1364	638
35°	1199	1193	1176	1169	1159	749
45°	981	976	961	946	942	756
55°	748	743	726	715	706	667
65°	505	501	488	477	472	501
75°	268	266	259	255	250	286
85°	70	71	71	70	67	78
90°	1	11	20	26	29	7
95°	70	64	20	25	26	89
105°	361	365	366	366	364	383
115°	678	683	685	680	672	671
125°	963	972	972	967	963	860
135°	1202	1208	1206	1204	1197	926
145°	1393	1395	1396	1396	1389	871
155°	1534	1527	1529	1532	1523	707
165°	1619	1612	1613	1619	1610	457
175°	1656	1649	1650	1658	1648	158
180°	1656	1656	1656	1656	1656	



TEST NUMBER: P333488-930

CATALOG NUMBER: S125DIW-S1270D1560U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7
2.5°	1610.8	1610.1	1609.5	1608.7	1608.1	1606.6	1604.3	1602.1	1599.9	1597.6	1599.9
5°	1604.2	1603.6	1603.0	1602.5	1601.9	1600.3	1597.4	1594.6	1591.8	1588.9	1591.5
7.5°	1589.4	1588.9	1588.3	1587.7	1587.1	1585.3	1582.3	1579.2	1576.1	1573.0	1575.4
10°	1576.2	1575.6	1575.1	1574.5	1573.9	1572.1	1569.0	1565.9	1562.8	1559.7	1562.0
12.5°	1559.9	1558.9	1558.0	1556.9	1555.9	1554.0	1551.0	1548.2	1545.3	1542.4	1544.3
15°	1529.2	1528.4	1527.5	1526.6	1525.8	1523.8	1520.7	1517.6	1514.5	1511.4	1512.8
17.5°	1493.9	1492.6	1491.3	1490.1	1488.9	1486.6	1483.4	1480.2	1477.0	1473.7	1475.5
20°	1464.4	1463.8	1463.2	1462.6	1462.1	1460.0	1456.3	1452.6	1448.9	1445.3	1447.2
22.5°	1434.8	1433.9	1432.8	1431.8	1430.8	1428.6	1425.1	1421.7	1418.2	1414.8	1416.1
25°	1388.1	1386.7	1385.3	1383.9	1382.4	1379.9	1376.2	1372.6	1368.9	1365.2	1365.8
27.5°	1333.4	1332.6	1331.7	1330.9	1330.1	1327.7	1324.0	1320.1	1316.4	1312.6	1312.7
30°	1297.9	1297.0	1296.2	1295.3	1294.5	1291.9	1287.7	1283.4	1279.2	1275.0	1274.4
32.5°	1259.2	1257.9	1256.6	1255.3	1254.0	1251.5	1247.7	1243.9	1240.1	1236.3	1235.3
35°	1198.7	1197.6	1196.5	1195.3	1194.2	1191.6	1187.6	1183.7	1179.7	1175.8	1174.4
37.5°	1135.9	1134.5	1133.1	1131.6	1130.2	1127.6	1124.0	1120.2	1116.5	1112.8	1110.7
40°	1093.2	1091.8	1090.4	1088.9	1087.5	1084.8	1080.9	1076.9	1073.0	1069.0	1066.5
42.5°	1047.4	1046.3	1045.1	1043.8	1042.7	1040.1	1036.2	1032.2	1028.3	1024.3	1022.0
45°	981.3	980.2	979.1	978.0	976.8	974.5	971.2	967.8	964.4	961.0	957.6
47.5°	910.1	910.2	910.3	910.3	910.4	908.3	904.3	900.3	896.2	892.1	888.7
50°	864.4	863.6	862.7	861.9	861.0	858.8	855.5	852.1	848.7	845.3	841.6
52.5°	817.6	817.0	816.4	815.7	815.1	813.0	809.3	805.8	802.2	798.5	795.3
55°	747.5	746.6	745.8	744.9	744.0	741.7	737.7	733.8	729.8	725.9	723.3
57.5°	673.4	673.0	672.5	672.1	671.6	669.8	666.4	663.1	659.7	656.4	653.1
60°	626.6	625.6	624.4	623.3	622.2	620.0	616.9	613.8	610.7	607.6	604.8
62.5°	577.9	577.0	576.1	575.1	574.2	572.5	569.8	567.1	564.5	561.8	558.8
65°	504.7	504.1	503.5	503.0	502.4	500.5	497.4	494.3	491.2	488.1	485.6
67.5°	433.7	432.5	431.4	430.2	429.0	427.2	424.9	422.6	420.3	417.9	415.8
70°	389.0	387.6	386.1	384.7	383.4	381.3	378.8	376.3	373.7	371.2	369.5
72.5°	340.1	339.2	338.3	337.3	336.3	335.0	333.4	331.7	330.1	328.5	326.5
75°	268.2	267.7	267.1	266.5	266.0	265.0	263.6	262.1	260.7	259.3	258.4
77.5°	201.9	201.6	201.4	201.2	201.0	200.5	199.7	198.9	198.0	197.3	196.8
80°	160.1	160.1	160.1	160.1	160.1	159.9	159.3	158.7	158.2	157.6	157.4
82.5°	123.5	123.1	122.6	122.2	121.7	121.5	121.3	121.2	121.2	121.0	120.5
85°	70.0	70.2	70.4	70.8	71.0	71.2	71.2	71.2	71.2	71.2	70.9
87.5°	27.7	28.1	28.5	29.0	29.4	29.8	29.9	30.1	30.2	30.3	30.7
90°	1.2	3.4	5.6	7.7	9.9	12.0	13.9	15.8	17.7	19.6	21.0
92.5°	18.9	17.4	15.8	14.3	12.8	12.9	14.6	16.2	17.9	19.6	21.0
95°	70.0	69.1	68.3	67.5	66.7	61.1	50.7	40.4	30.0	19.6	21.0
97.5°	146.0	147.5	149.0	150.5	152.0	142.4	121.9	101.4	80.9	60.4	52.7
100°	205.0	205.8	206.6	207.4	208.2	209.2	210.3	211.4	212.5	213.5	172.9
102.5°	264.9	265.9	266.9	268.0	269.0	269.9	270.5	271.2	271.8	272.5	264.8
105°	360.9	361.9	363.1	364.1	365.2	365.7	365.7	365.7	365.7	365.7	365.7
107.5°	460.5	460.5	460.5	460.5	460.5	460.7	461.3	461.9	462.4	462.9	463.0
110°	525.3	525.3	525.3	525.3	525.3	525.5	526.1	526.7	527.2	527.7	526.9



TEST NUMBER: P333488-930

CATALOG NUMBER: S125DIW-S1270D1560U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	586.2	586.9	587.5	588.2	588.8	589.3	589.6	590.0	590.3	590.6	589.5
115°	677.5	678.8	680.2	681.6	682.9	683.7	684.0	684.3	684.6	684.9	683.7
117.5°	772.0	771.9	771.8	771.8	771.8	772.3	773.3	774.3	775.3	776.4	774.9
120°	830.9	830.6	830.4	830.1	829.8	830.1	830.9	831.7	832.5	833.3	832.8
122.5°	883.0	883.9	885.0	886.1	887.0	887.8	888.2	888.5	888.9	889.3	888.8
125°	963.4	965.3	967.3	969.1	971.1	972.0	972.0	972.0	972.0	972.0	970.9
127.5°	1040.2	1041.6	1043.0	1044.4	1045.7	1046.4	1046.2	1046.0	1045.9	1045.7	1045.1
130°	1087.4	1088.8	1090.1	1091.5	1092.8	1093.6	1094.0	1094.2	1094.5	1094.8	1094.0
132.5°	1134.5	1136.1	1137.7	1139.3	1140.8	1141.3	1140.8	1140.1	1139.5	1139.0	1138.8
135°	1201.5	1203.1	1204.8	1206.5	1208.1	1208.6	1208.1	1207.5	1207.0	1206.5	1205.9
137.5°	1263.1	1264.5	1266.0	1267.4	1268.9	1269.3	1268.8	1268.3	1267.8	1267.3	1267.5
140°	1303.4	1304.0	1304.5	1305.0	1305.6	1305.7	1305.5	1305.2	1304.9	1304.6	1305.2
142.5°	1339.7	1340.0	1340.4	1340.7	1341.0	1341.4	1341.8	1342.1	1342.6	1343.0	1343.0
145°	1393.0	1393.5	1394.1	1394.7	1395.2	1395.5	1395.5	1395.5	1395.5	1395.5	1395.7
147.5°	1439.7	1439.5	1439.4	1439.3	1439.2	1439.3	1439.7	1440.0	1440.3	1440.6	1441.0
150°	1469.1	1468.5	1468.0	1467.5	1466.9	1466.9	1467.5	1468.0	1468.5	1469.1	1469.7
152.5°	1497.5	1496.4	1495.2	1494.0	1492.7	1492.4	1493.0	1493.5	1494.1	1494.6	1495.2
155°	1534.1	1532.5	1530.9	1529.3	1527.6	1527.1	1527.6	1528.1	1528.7	1529.3	1530.1
157.5°	1562.4	1561.4	1560.4	1559.4	1558.4	1558.0	1558.0	1558.1	1558.1	1558.2	1559.1
160°	1582.0	1580.4	1578.7	1577.1	1575.5	1574.8	1575.1	1575.3	1575.6	1575.9	1577.0
162.5°	1597.7	1596.1	1594.5	1592.8	1591.1	1590.5	1590.7	1591.1	1591.3	1591.5	1593.1
165°	1618.9	1617.2	1615.5	1613.9	1612.3	1611.6	1611.8	1612.2	1612.4	1612.7	1614.3
167.5°	1634.5	1632.9	1631.2	1629.5	1627.7	1627.1	1627.3	1627.6	1627.9	1628.2	1630.1
170°	1643.4	1641.4	1639.6	1637.6	1635.7	1634.9	1635.2	1635.5	1635.7	1636.0	1638.2
172.5°	1649.3	1647.4	1645.4	1643.6	1641.6	1641.0	1641.4	1641.9	1642.4	1642.9	1644.9
175°	1655.6	1654.0	1652.4	1650.7	1649.1	1648.5	1648.7	1648.9	1649.3	1649.5	1651.7
177.5°	1658.6	1657.3	1656.0	1654.6	1653.3	1652.8	1653.0	1653.3	1653.4	1653.7	1655.2
180°	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6



TEST NUMBER: P333488-930

CATALOG NUMBER: S125DIW-S1270D1560U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7
2.5°	1602.1	1604.3	1606.6	1607.6	1607.4	1607.2	1607.0	1606.7
5°	1594.0	1596.6	1599.1	1600.3	1599.9	1599.7	1599.4	1599.1
7.5°	1577.8	1580.4	1582.8	1584.0	1583.7	1583.4	1583.1	1582.8
10°	1564.2	1566.5	1568.7	1569.7	1569.5	1569.1	1568.9	1568.6
12.5°	1546.1	1547.8	1549.6	1550.5	1550.5	1550.4	1550.4	1550.3
15°	1514.3	1515.6	1517.0	1517.8	1517.8	1517.8	1517.8	1517.8
17.5°	1477.2	1479.0	1480.7	1480.9	1479.5	1478.1	1476.7	1475.3
20°	1449.3	1451.2	1453.2	1453.5	1452.0	1450.7	1449.3	1447.8
22.5°	1417.4	1418.7	1420.0	1420.2	1419.2	1418.2	1417.2	1416.3
25°	1366.4	1366.9	1367.5	1367.3	1366.5	1365.6	1364.8	1363.9
27.5°	1312.8	1313.0	1313.0	1312.6	1311.8	1311.0	1310.1	1309.3
30°	1273.8	1273.3	1272.7	1272.0	1271.1	1270.3	1269.4	1268.6
32.5°	1234.3	1233.3	1232.2	1230.9	1229.5	1227.9	1226.4	1224.9
35°	1173.0	1171.6	1170.2	1168.3	1166.0	1163.8	1161.6	1159.3
37.5°	1108.6	1106.5	1104.4	1102.7	1101.4	1100.1	1098.8	1097.5
40°	1064.0	1061.4	1058.8	1057.2	1056.3	1055.5	1054.6	1053.8
42.5°	1019.7	1017.3	1015.0	1013.3	1011.9	1010.6	1009.3	1008.0
45°	954.2	950.8	947.5	945.3	944.4	943.6	942.7	941.9
47.5°	885.2	881.7	878.3	875.6	873.6	871.6	869.7	867.7
50°	838.0	834.3	830.6	827.8	825.8	823.9	821.9	819.9
52.5°	792.1	788.9	785.6	782.9	780.7	778.5	776.3	774.1
55°	720.7	718.2	715.7	713.4	711.4	709.5	707.4	705.5
57.5°	649.9	646.6	643.4	641.2	640.1	639.0	637.9	636.8
60°	601.9	599.2	596.3	593.9	591.9	590.0	588.0	586.0
62.5°	555.7	552.7	549.7	547.4	545.8	544.3	542.7	541.3
65°	483.1	480.5	477.9	476.1	475.0	473.9	472.7	471.6
67.5°	413.7	411.5	409.4	408.0	407.2	406.6	405.9	405.2
70°	367.8	366.1	364.4	363.0	361.8	360.7	359.6	358.5
72.5°	324.7	322.7	320.8	319.3	318.1	317.0	315.8	314.7
75°	257.6	256.7	255.9	254.9	253.8	252.7	251.5	250.4
77.5°	196.2	195.8	195.3	194.6	193.8	193.0	192.2	191.4
80°	157.0	156.8	156.5	156.0	155.5	154.9	154.3	153.8
82.5°	120.0	119.5	119.0	118.7	118.5	118.5	118.3	118.2
85°	70.6	70.4	70.0	69.6	69.1	68.5	67.9	67.3
87.5°	30.9	31.2	31.5	31.5	31.1	30.9	30.6	30.3
90°	22.3	23.7	25.1	26.2	27.0	27.8	28.6	29.4
92.5°	22.3	23.7	25.1	25.9	26.3	26.7	27.1	27.5
95°	22.3	23.7	25.1	25.8	25.8	25.8	25.8	25.8
97.5°	45.0	37.3	29.6	25.8	25.8	25.8	25.8	25.8
100°	132.2	91.6	51.0	30.2	29.0	28.0	26.9	25.8
102.5°	257.1	249.4	241.7	228.6	210.0	191.5	172.9	154.4
105°	365.7	365.7	365.7	365.6	365.3	365.1	364.8	364.5
107.5°	463.1	463.1	463.2	462.8	461.9	461.1	460.3	459.5
110°	526.1	525.3	524.5	524.2	524.5	524.7	525.1	525.3



TEST NUMBER: P333488-930

CATALOG NUMBER: S125DIW-S1270D1560U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	588.5	587.5	586.4	585.7	585.4	585.0	584.6	584.2
115°	682.7	681.6	680.4	679.1	677.5	675.8	674.2	672.5
117.5°	773.6	772.2	770.7	769.6	769.0	768.3	767.5	766.8
120°	832.3	831.7	831.2	830.2	828.8	827.4	826.1	824.8
122.5°	888.2	887.7	887.1	886.1	884.5	882.9	881.3	879.7
125°	969.9	968.7	967.7	966.7	965.9	965.1	964.3	963.4
127.5°	1044.5	1043.9	1043.3	1042.0	1039.9	1038.0	1035.9	1033.9
130°	1093.2	1092.3	1091.5	1090.4	1089.1	1087.7	1086.3	1084.9
132.5°	1138.6	1138.5	1138.3	1137.5	1136.2	1134.8	1133.4	1132.0
135°	1205.3	1204.8	1204.3	1203.1	1201.5	1199.9	1198.2	1196.6
137.5°	1267.5	1267.6	1267.8	1267.1	1265.7	1264.3	1262.8	1261.4
140°	1305.7	1306.3	1306.8	1306.3	1304.6	1303.0	1301.4	1299.8
142.5°	1343.1	1343.3	1343.4	1342.6	1340.9	1339.3	1337.7	1336.0
145°	1396.0	1396.3	1396.5	1395.9	1394.2	1392.6	1391.0	1389.4
147.5°	1441.3	1441.6	1441.9	1441.1	1439.2	1437.2	1435.3	1433.3
150°	1470.1	1470.7	1471.3	1470.5	1468.3	1466.1	1464.0	1461.8
152.5°	1495.7	1496.2	1496.8	1496.1	1494.1	1492.2	1490.2	1488.2
155°	1530.9	1531.7	1532.5	1531.8	1529.7	1527.5	1525.3	1523.1
157.5°	1559.9	1560.8	1561.7	1561.1	1558.9	1556.7	1554.4	1552.3
160°	1578.0	1579.2	1580.2	1579.7	1577.5	1575.3	1573.1	1571.0
162.5°	1594.6	1596.2	1597.7	1597.3	1594.9	1592.4	1590.1	1587.6
165°	1615.9	1617.6	1619.3	1618.9	1616.8	1614.6	1612.4	1610.2
167.5°	1632.1	1634.0	1636.0	1635.7	1633.3	1630.8	1628.4	1626.0
170°	1640.4	1642.6	1644.7	1644.6	1642.2	1639.7	1637.2	1634.8
172.5°	1646.8	1648.8	1650.7	1650.5	1648.0	1645.6	1643.2	1640.7
175°	1653.8	1656.0	1658.2	1658.1	1655.6	1653.2	1650.7	1648.3
177.5°	1656.8	1658.2	1659.8	1659.7	1657.9	1656.2	1654.4	1652.7
180°	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6

(END OF REPORT)