

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333398-930

Luminaire Tested: **S125DIW-S610D1560U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333398-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIW-S610D1560U930-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1560 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7125.1 lumens  
Efficiency: N/A  
Efficacy: 117.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 60.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333398-930

CATALOG NUMBER: S125DIW-S610D1560U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

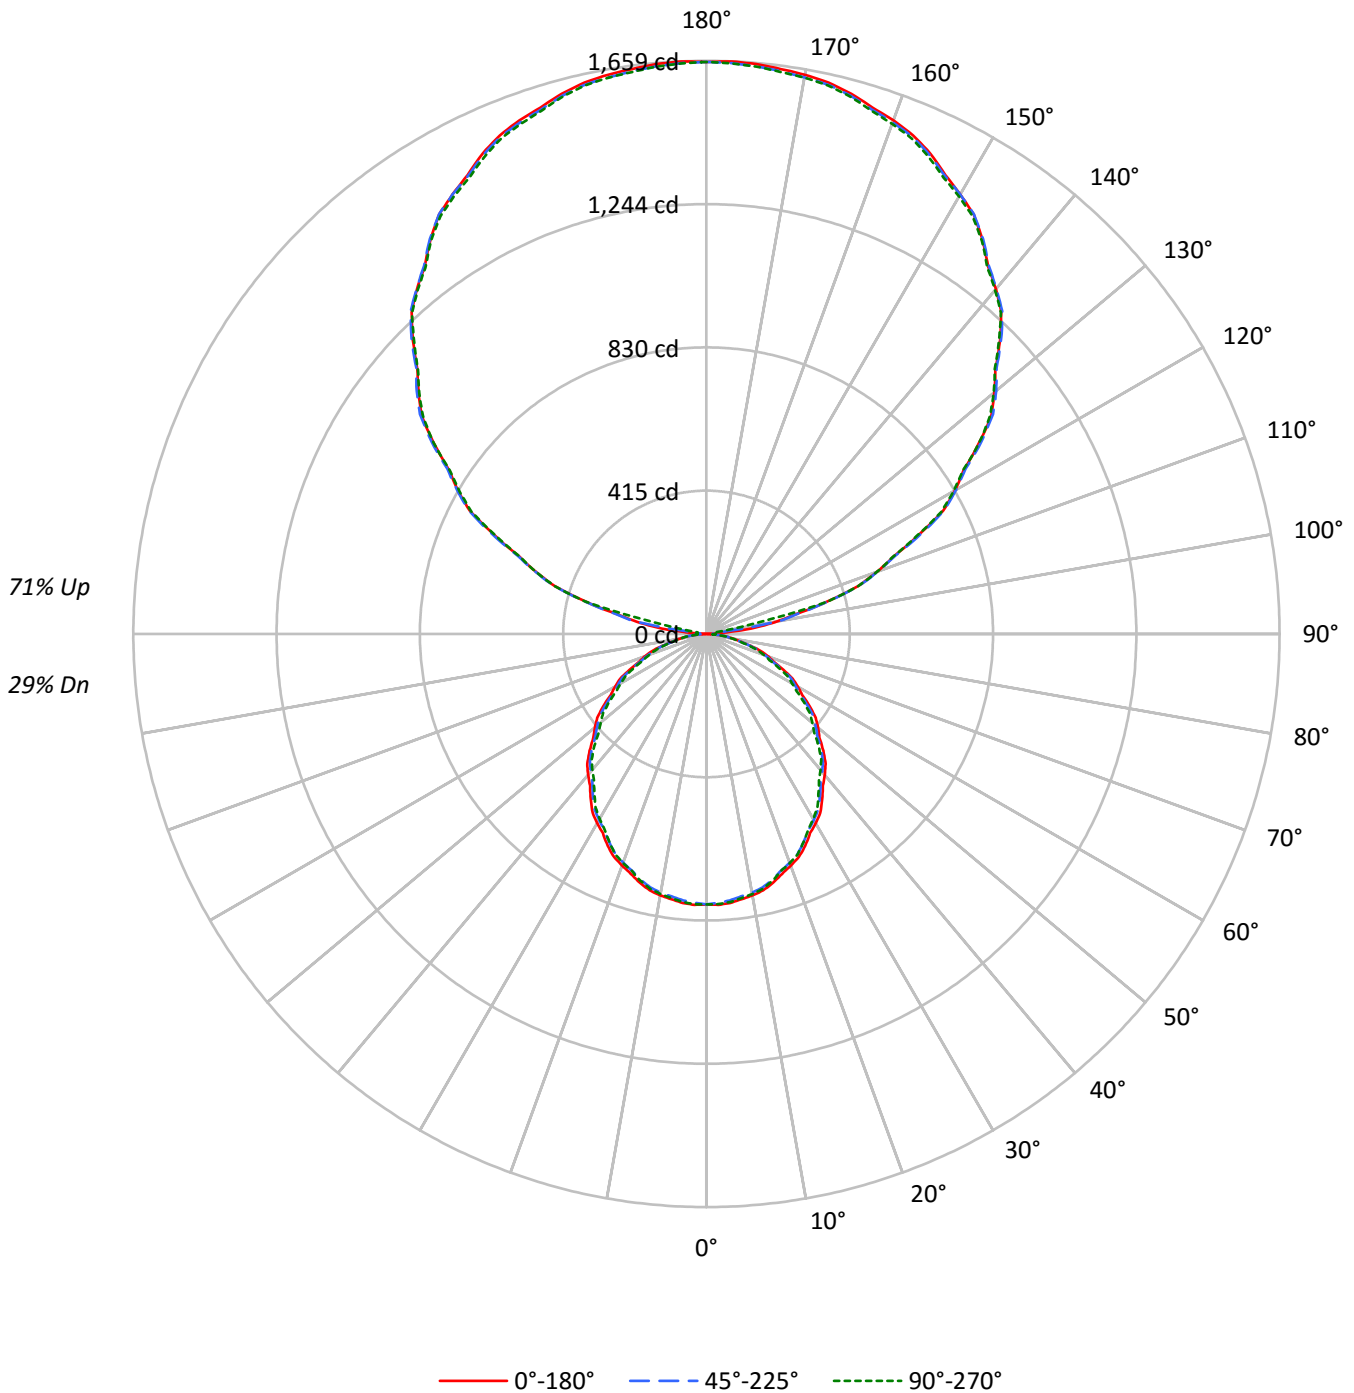



TEST NUMBER: P333398-930

CATALOG NUMBER: S125DIW-S610D1560U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	37	37	37	29
1	93	89	85	82	83	80	76	74	62	60	58	47	45	44	32	31	31	24
2	85	77	71	67	75	70	65	60	55	51	48	41	39	37	28	27	26	20
3	77	68	61	55	69	61	55	50	48	44	40	36	33	31	25	23	22	17
4	70	60	52	47	63	54	48	42	43	38	34	32	29	26	22	20	19	15
5	65	53	46	40	58	48	41	36	38	33	29	29	25	23	20	18	16	13
6	59	48	40	34	53	43	36	31	34	29	26	26	23	20	18	16	14	11
7	55	43	35	30	49	39	32	27	31	26	22	23	20	18	17	14	13	10
8	51	39	31	26	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	35	28	23	42	32	26	21	26	21	18	20	16	14	14	12	10	8
10	44	32	25	21	39	29	23	19	24	19	16	18	15	12	13	11	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5057	5057	5057
5°	5068	5020	5052
10°	5037	4985	5013
15°	4983	4924	4945
20°	4904	4841	4849
25°	4821	4741	4737
30°	4716	4633	4610
35°	4606	4518	4454
40°	4491	4392	4330
45°	4369	4277	4192
50°	4233	4140	4015
55°	4102	3983	3871
60°	3945	3825	3689
65°	3758	3636	3512
70°	3580	3416	3299
75°	3261	3154	3047
80°	2901	2856	2786
85°	2527	2571	2438



TEST NUMBER: P333398-930

CATALOG NUMBER: S125DIW-S610D1560U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	73.8	1.0
10°-20°	208.5	2.9
20°-30°	307.9	4.3
30°-40°	359.3	5.0
40°-50°	360.9	5.1
50°-60°	316.8	4.4
60°-70°	236.0	3.3
70°-80°	135.0	1.9
80°-90°	42.7	0.6
90°-100°	60.2	0.8
100°-110°	370.8	5.2
110°-120°	672.5	9.4
120°-130°	863.1	12.1
130°-140°	928.3	13.0
140°-150°	871.4	12.2
150°-160°	704.9	9.9
160°-170°	455.9	6.4
170°-180°	157.2	2.2
0°-30°	590.3	8.3
0°-40°	949.6	13.3
0°-60°	1627.2	22.8
0°-90°	2040.9	28.6
90°-120°	1103.5	15.5
90°-150°	3766.2	52.9
90°-180°	5084.0	71.4
0°-180°	7125.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	783	783	783	783	783	
5°	782	780	774	780	779	74
15°	745	743	736	739	740	210
25°	676	673	665	666	665	311
35°	584	581	573	570	565	365
45°	478	476	468	461	459	368
55°	364	362	354	348	344	325
65°	246	244	238	232	230	244
75°	131	129	126	124	122	139
85°	34	35	35	34	33	38
90°	1	11	20	26	29	5
95°	70	64	20	25	26	89
105°	361	365	366	366	364	383
115°	678	683	685	680	672	671
125°	963	972	972	967	963	860
135°	1202	1208	1206	1204	1197	926
145°	1393	1395	1396	1396	1389	871
155°	1534	1527	1529	1532	1523	707
165°	1619	1612	1613	1619	1610	457
175°	1656	1649	1650	1658	1648	158
180°	1656	1656	1656	1656	1656	



TEST NUMBER: P333398-930

CATALOG NUMBER: S125DIW-S610D1560U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0
2.5°	785.0	784.6	784.3	784.0	783.7	782.9	781.9	780.7	779.7	778.5	779.7
5°	781.8	781.5	781.2	780.9	780.6	779.8	778.4	777.1	775.7	774.3	775.6
7.5°	774.5	774.3	774.0	773.7	773.5	772.6	771.0	769.6	768.0	766.5	767.7
10°	768.1	767.8	767.6	767.3	767.0	766.1	764.6	763.1	761.6	760.1	761.2
12.5°	760.2	759.7	759.2	758.7	758.2	757.2	755.9	754.5	753.0	751.6	752.5
15°	745.2	744.8	744.4	744.0	743.6	742.6	741.1	739.6	738.0	736.5	737.2
17.5°	728.0	727.4	726.8	726.2	725.5	724.5	722.9	721.3	719.7	718.2	719.0
20°	713.6	713.3	713.1	712.8	712.5	711.5	709.7	707.9	706.1	704.3	705.3
22.5°	699.2	698.7	698.2	697.7	697.2	696.2	694.5	692.8	691.1	689.4	690.1
25°	676.5	675.7	675.1	674.4	673.7	672.5	670.7	668.9	667.1	665.3	665.6
27.5°	649.8	649.4	649.0	648.6	648.2	647.0	645.1	643.4	641.5	639.7	639.7
30°	632.4	632.0	631.6	631.2	630.8	629.6	627.5	625.4	623.4	621.3	621.0
32.5°	613.6	613.0	612.4	611.7	611.1	609.8	608.1	606.2	604.3	602.5	602.0
35°	584.2	583.6	583.0	582.5	582.0	580.7	578.8	576.8	574.9	573.0	572.3
37.5°	553.5	552.9	552.2	551.5	550.8	549.5	547.7	545.9	544.0	542.3	541.3
40°	532.7	532.1	531.3	530.7	529.9	528.6	526.8	524.8	522.9	521.0	519.8
42.5°	510.5	509.9	509.2	508.7	508.1	506.9	504.9	503.0	501.1	499.1	498.1
45°	478.3	477.7	477.1	476.5	476.1	474.9	473.3	471.7	469.9	468.3	466.7
47.5°	443.5	443.5	443.6	443.6	443.6	442.6	440.7	438.7	436.8	434.7	433.1
50°	421.3	420.8	420.4	420.0	419.6	418.6	416.9	415.2	413.6	412.0	410.2
52.5°	398.4	398.1	397.9	397.5	397.2	396.2	394.4	392.6	390.9	389.1	387.6
55°	364.3	363.8	363.4	363.0	362.6	361.4	359.5	357.6	355.6	353.7	352.5
57.5°	328.2	328.0	327.8	327.5	327.3	326.4	324.7	323.1	321.5	319.9	318.3
60°	305.4	304.8	304.3	303.7	303.2	302.1	300.7	299.1	297.6	296.1	294.7
62.5°	281.6	281.2	280.7	280.3	279.8	279.0	277.7	276.4	275.1	273.8	272.3
65°	245.9	245.6	245.4	245.1	244.8	243.9	242.4	240.9	239.4	237.9	236.6
67.5°	211.3	210.8	210.2	209.6	209.0	208.2	207.1	205.9	204.8	203.7	202.6
70°	189.6	188.9	188.2	187.5	186.8	185.8	184.6	183.4	182.1	180.9	180.0
72.5°	165.8	165.3	164.9	164.4	163.9	163.2	162.5	161.7	160.9	160.0	159.1
75°	130.7	130.4	130.1	129.9	129.6	129.1	128.4	127.8	127.0	126.4	126.0
77.5°	98.4	98.2	98.2	98.0	97.9	97.7	97.3	96.9	96.5	96.1	95.9
80°	78.0	78.0	78.0	78.0	78.0	77.9	77.6	77.4	77.1	76.8	76.6
82.5°	60.3	60.0	59.8	59.5	59.4	59.2	59.1	59.1	59.0	58.9	58.7
85°	34.1	34.2	34.3	34.5	34.7	34.7	34.7	34.7	34.7	34.7	34.6
87.5°	13.6	14.0	14.5	14.9	15.4	15.7	16.0	16.3	16.6	16.8	17.1
90°	1.2	3.4	5.6	7.7	9.9	12.0	13.9	15.8	17.7	19.6	21.0
92.5°	18.9	17.4	15.8	14.3	12.8	12.9	14.6	16.2	17.9	19.6	21.0
95°	70.0	69.1	68.3	67.5	66.7	61.1	50.7	40.4	30.0	19.6	21.0
97.5°	146.0	147.5	149.0	150.5	152.0	142.4	121.9	101.4	80.9	60.4	52.7
100°	205.0	205.8	206.6	207.4	208.2	209.2	210.3	211.4	212.5	213.5	172.9
102.5°	264.9	265.9	266.9	268.0	269.0	269.9	270.5	271.2	271.8	272.5	264.8
105°	360.9	361.9	363.1	364.1	365.2	365.7	365.7	365.7	365.7	365.7	365.7
107.5°	460.5	460.5	460.5	460.5	460.5	460.7	461.3	461.9	462.4	462.9	463.0
110°	525.3	525.3	525.3	525.3	525.3	525.5	526.1	526.7	527.2	527.7	526.9



TEST NUMBER: P333398-930

CATALOG NUMBER: S125DIW-S610D1560U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	586.2	586.9	587.5	588.2	588.8	589.3	589.6	590.0	590.3	590.6	589.5
115°	677.5	678.8	680.2	681.6	682.9	683.7	684.0	684.3	684.6	684.9	683.7
117.5°	772.0	771.9	771.8	771.8	771.8	772.3	773.3	774.3	775.3	776.4	774.9
120°	830.9	830.6	830.4	830.1	829.8	830.1	830.9	831.7	832.5	833.3	832.8
122.5°	883.0	883.9	885.0	886.1	887.0	887.8	888.2	888.5	888.9	889.3	888.8
125°	963.4	965.3	967.3	969.1	971.1	972.0	972.0	972.0	972.0	972.0	970.9
127.5°	1040.2	1041.6	1043.0	1044.4	1045.7	1046.4	1046.2	1046.0	1045.9	1045.7	1045.1
130°	1087.4	1088.8	1090.1	1091.5	1092.8	1093.6	1094.0	1094.2	1094.5	1094.8	1094.0
132.5°	1134.5	1136.1	1137.7	1139.3	1140.8	1141.3	1140.8	1140.1	1139.5	1139.0	1138.8
135°	1201.5	1203.1	1204.8	1206.5	1208.1	1208.6	1208.1	1207.5	1207.0	1206.5	1205.9
137.5°	1263.1	1264.5	1266.0	1267.4	1268.9	1269.3	1268.8	1268.3	1267.8	1267.3	1267.5
140°	1303.4	1304.0	1304.5	1305.0	1305.6	1305.7	1305.5	1305.2	1304.9	1304.6	1305.2
142.5°	1339.7	1340.0	1340.4	1340.7	1341.0	1341.4	1341.8	1342.1	1342.6	1343.0	1343.0
145°	1393.0	1393.5	1394.1	1394.7	1395.2	1395.5	1395.5	1395.5	1395.5	1395.5	1395.7
147.5°	1439.7	1439.5	1439.4	1439.3	1439.2	1439.3	1439.7	1440.0	1440.3	1440.6	1441.0
150°	1469.1	1468.5	1468.0	1467.5	1466.9	1466.9	1467.5	1468.0	1468.5	1469.1	1469.7
152.5°	1497.5	1496.4	1495.2	1494.0	1492.7	1492.4	1493.0	1493.5	1494.1	1494.6	1495.2
155°	1534.1	1532.5	1530.9	1529.3	1527.6	1527.1	1527.6	1528.1	1528.7	1529.3	1530.1
157.5°	1562.4	1561.4	1560.4	1559.4	1558.4	1558.0	1558.0	1558.1	1558.1	1558.2	1559.1
160°	1582.0	1580.4	1578.7	1577.1	1575.5	1574.8	1575.1	1575.3	1575.6	1575.9	1577.0
162.5°	1597.7	1596.1	1594.5	1592.8	1591.1	1590.5	1590.7	1591.1	1591.3	1591.5	1593.1
165°	1618.9	1617.2	1615.5	1613.9	1612.3	1611.6	1611.8	1612.2	1612.4	1612.7	1614.3
167.5°	1634.5	1632.9	1631.2	1629.5	1627.7	1627.1	1627.3	1627.6	1627.9	1628.2	1630.1
170°	1643.4	1641.4	1639.6	1637.6	1635.7	1634.9	1635.2	1635.5	1635.7	1636.0	1638.2
172.5°	1649.3	1647.4	1645.4	1643.6	1641.6	1641.0	1641.4	1641.9	1642.4	1642.9	1644.9
175°	1655.6	1654.0	1652.4	1650.7	1649.1	1648.5	1648.7	1648.9	1649.3	1649.5	1651.7
177.5°	1658.6	1657.3	1656.0	1654.6	1653.3	1652.8	1653.0	1653.3	1653.4	1653.7	1655.2
180°	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6



TEST NUMBER: P333398-930

CATALOG NUMBER: S125DIW-S610D1560U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0
2.5°	780.7	781.9	782.9	783.4	783.3	783.2	783.1	783.0
5°	776.8	778.0	779.3	779.8	779.7	779.6	779.4	779.3
7.5°	768.9	770.1	771.4	771.9	771.8	771.6	771.5	771.4
10°	762.3	763.4	764.5	765.0	764.8	764.7	764.5	764.4
12.5°	753.4	754.3	755.1	755.6	755.5	755.5	755.5	755.5
15°	737.9	738.6	739.3	739.6	739.6	739.6	739.6	739.6
17.5°	719.9	720.7	721.6	721.7	721.0	720.3	719.7	718.9
20°	706.2	707.2	708.2	708.3	707.6	706.9	706.2	705.6
22.5°	690.7	691.4	692.0	692.1	691.6	691.1	690.6	690.2
25°	665.9	666.1	666.4	666.3	665.9	665.5	665.1	664.7
27.5°	639.8	639.8	639.8	639.7	639.3	638.9	638.5	638.1
30°	620.8	620.5	620.2	619.9	619.5	619.1	618.6	618.2
32.5°	601.5	601.0	600.5	599.9	599.2	598.4	597.6	596.9
35°	571.6	571.0	570.2	569.3	568.3	567.1	566.1	564.9
37.5°	540.2	539.2	538.2	537.4	536.7	536.1	535.5	534.8
40°	518.4	517.2	516.0	515.2	514.8	514.4	514.0	513.6
42.5°	496.9	495.8	494.6	493.7	493.1	492.5	491.9	491.2
45°	465.0	463.3	461.7	460.6	460.2	459.8	459.4	459.0
47.5°	431.4	429.7	428.0	426.7	425.7	424.8	423.8	422.8
50°	408.4	406.6	404.8	403.4	402.4	401.5	400.5	399.6
52.5°	386.0	384.4	382.9	381.6	380.5	379.4	378.3	377.2
55°	351.2	350.0	348.8	347.6	346.7	345.7	344.8	343.8
57.5°	316.7	315.1	313.5	312.4	311.9	311.4	310.9	310.4
60°	293.3	292.0	290.6	289.4	288.5	287.5	286.5	285.6
62.5°	270.8	269.4	267.8	266.8	266.0	265.2	264.5	263.7
65°	235.4	234.2	232.9	232.0	231.5	230.9	230.4	229.8
67.5°	201.6	200.6	199.5	198.8	198.4	198.1	197.8	197.5
70°	179.2	178.4	177.6	176.9	176.3	175.8	175.2	174.7
72.5°	158.2	157.3	156.3	155.6	155.0	154.5	153.9	153.4
75°	125.6	125.1	124.7	124.3	123.7	123.1	122.6	122.1
77.5°	95.6	95.4	95.1	94.8	94.4	94.1	93.7	93.3
80°	76.6	76.4	76.2	76.1	75.7	75.5	75.3	74.9
82.5°	58.5	58.2	58.0	57.8	57.8	57.7	57.6	57.6
85°	34.4	34.2	34.2	33.9	33.7	33.3	33.1	32.9
87.5°	17.4	17.6	17.9	18.0	17.9	17.9	17.9	17.8
90°	22.3	23.7	25.1	26.2	27.0	27.8	28.6	29.4
92.5°	22.3	23.7	25.1	25.9	26.3	26.7	27.1	27.5
95°	22.3	23.7	25.1	25.8	25.8	25.8	25.8	25.8
97.5°	45.0	37.3	29.6	25.8	25.8	25.8	25.8	25.8
100°	132.2	91.6	51.0	30.2	29.0	28.0	26.9	25.8
102.5°	257.1	249.4	241.7	228.6	210.0	191.5	172.9	154.4
105°	365.7	365.7	365.7	365.6	365.3	365.1	364.8	364.5
107.5°	463.1	463.1	463.2	462.8	461.9	461.1	460.3	459.5
110°	526.1	525.3	524.5	524.2	524.5	524.7	525.1	525.3





TEST NUMBER: P333398-930

CATALOG NUMBER: S125DIW-S610D1560U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	588.5	587.5	586.4	585.7	585.4	585.0	584.6	584.2
115°	682.7	681.6	680.4	679.1	677.5	675.8	674.2	672.5
117.5°	773.6	772.2	770.7	769.6	769.0	768.3	767.5	766.8
120°	832.3	831.7	831.2	830.2	828.8	827.4	826.1	824.8
122.5°	888.2	887.7	887.1	886.1	884.5	882.9	881.3	879.7
125°	969.9	968.7	967.7	966.7	965.9	965.1	964.3	963.4
127.5°	1044.5	1043.9	1043.3	1042.0	1039.9	1038.0	1035.9	1033.9
130°	1093.2	1092.3	1091.5	1090.4	1089.1	1087.7	1086.3	1084.9
132.5°	1138.6	1138.5	1138.3	1137.5	1136.2	1134.8	1133.4	1132.0
135°	1205.3	1204.8	1204.3	1203.1	1201.5	1199.9	1198.2	1196.6
137.5°	1267.5	1267.6	1267.8	1267.1	1265.7	1264.3	1262.8	1261.4
140°	1305.7	1306.3	1306.8	1306.3	1304.6	1303.0	1301.4	1299.8
142.5°	1343.1	1343.3	1343.4	1342.6	1340.9	1339.3	1337.7	1336.0
145°	1396.0	1396.3	1396.5	1395.9	1394.2	1392.6	1391.0	1389.4
147.5°	1441.3	1441.6	1441.9	1441.1	1439.2	1437.2	1435.3	1433.3
150°	1470.1	1470.7	1471.3	1470.5	1468.3	1466.1	1464.0	1461.8
152.5°	1495.7	1496.2	1496.8	1496.1	1494.1	1492.2	1490.2	1488.2
155°	1530.9	1531.7	1532.5	1531.8	1529.7	1527.5	1525.3	1523.1
157.5°	1559.9	1560.8	1561.7	1561.1	1558.9	1556.7	1554.4	1552.3
160°	1578.0	1579.2	1580.2	1579.7	1577.5	1575.3	1573.1	1571.0
162.5°	1594.6	1596.2	1597.7	1597.3	1594.9	1592.4	1590.1	1587.6
165°	1615.9	1617.6	1619.3	1618.9	1616.8	1614.6	1612.4	1610.2
167.5°	1632.1	1634.0	1636.0	1635.7	1633.3	1630.8	1628.4	1626.0
170°	1640.4	1642.6	1644.7	1644.6	1642.2	1639.7	1637.2	1634.8
172.5°	1646.8	1648.8	1650.7	1650.5	1648.0	1645.6	1643.2	1640.7
175°	1653.8	1656.0	1658.2	1658.1	1655.6	1653.2	1650.7	1648.3
177.5°	1656.8	1658.2	1659.8	1659.7	1657.9	1656.2	1654.4	1652.7
180°	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6	1655.6

(END OF REPORT)