

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333422-930

Luminaire Tested: **S125DIW-S850D1340U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333422-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIW-S850D1340U930-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1340 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7160.9 lumens  
Efficiency: N/A  
Efficacy: 116.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 61.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333422-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

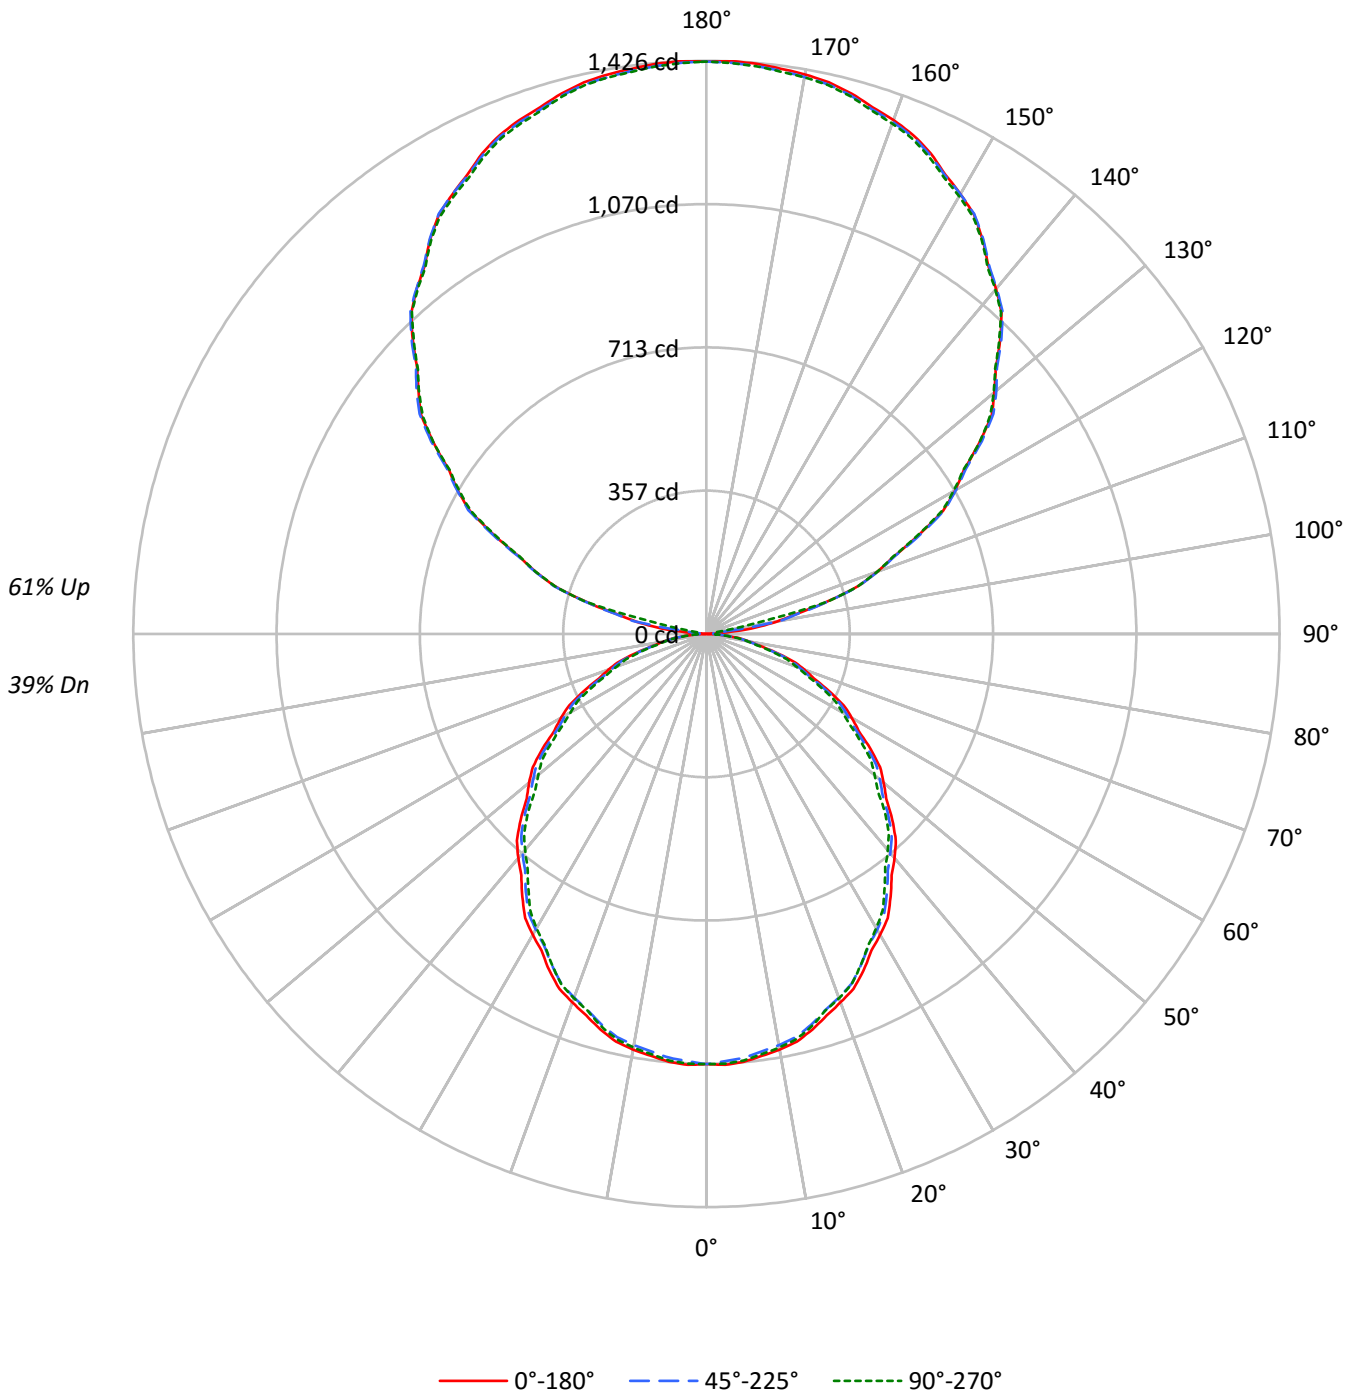



TEST NUMBER: P333422-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	95	91	87	84	86	83	80	77	68	65	63	53	52	51	41	40	39	33
2	87	79	73	68	79	72	67	63	59	55	52	47	44	42	36	34	33	27
3	79	70	63	57	72	64	57	52	52	48	44	41	38	36	32	29	28	23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	30	28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	56	44	36	31	51	41	34	29	34	28	24	27	23	20	21	18	16	13
8	52	40	32	27	47	37	30	25	31	25	22	25	21	18	19	16	14	12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11
10	45	33	26	22	41	31	24	20	26	21	17	21	17	15	16	14	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6912	6912	6912
5°	6928	6862	6906
10°	6885	6813	6852
15°	6811	6731	6760
20°	6704	6616	6628
25°	6589	6480	6475
30°	6447	6334	6302
35°	6296	6176	6089
40°	6139	6004	5918
45°	5971	5847	5731
50°	5785	5657	5488
55°	5606	5444	5291
60°	5391	5227	5043
65°	5136	4968	4800
70°	4893	4670	4509
75°	4457	4312	4162
80°	3968	3905	3812
85°	3453	3520	3320



TEST NUMBER: P333422-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	100.9	1.4
10°-20°	285.1	4.0
20°-30°	420.9	5.9
30°-40°	491.1	6.9
40°-50°	493.3	6.9
50°-60°	433.0	6.0
60°-70°	322.6	4.5
70°-80°	184.5	2.6
80°-90°	56.6	0.8
90°-100°	51.7	0.7
100°-110°	318.9	4.5
110°-120°	578.4	8.1
120°-130°	742.3	10.4
130°-140°	798.4	11.2
140°-150°	749.4	10.5
150°-160°	606.3	8.5
160°-170°	392.1	5.5
170°-180°	135.2	1.9
0°-30°	806.9	11.3
0°-40°	1298.0	18.1
0°-60°	2224.3	31.1
0°-90°	2788.0	38.9
90°-120°	949.1	13.3
90°-150°	3239.3	45.2
90°-180°	4373.0	61.1
0°-180°	7160.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1070	1070	1070	1070	1070	
5°	1069	1066	1058	1066	1065	101
15°	1019	1016	1007	1011	1011	287
25°	925	920	909	911	909	425
35°	798	795	783	779	772	499
45°	654	650	640	630	628	504
55°	498	495	484	476	470	444
65°	336	334	325	318	314	333
75°	179	177	173	170	167	190
85°	47	47	48	46	45	52
90°	1	10	17	22	25	5
95°	60	55	17	22	22	77
105°	310	314	314	314	314	329
115°	583	588	589	585	578	577
125°	829	836	836	832	829	740
135°	1034	1039	1038	1035	1029	796
145°	1198	1200	1200	1201	1195	749
155°	1320	1314	1315	1318	1310	608
165°	1392	1386	1387	1393	1385	393
175°	1424	1418	1419	1426	1418	136
180°	1424	1424	1424	1424	1424	



TEST NUMBER: P333422-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2
2.5°	1073.0	1072.5	1072.1	1071.6	1071.1	1070.2	1068.7	1067.2	1065.7	1064.2	1065.7
5°	1068.6	1068.2	1067.8	1067.5	1067.1	1065.9	1064.0	1062.2	1060.3	1058.4	1060.1
7.5°	1058.7	1058.4	1058.0	1057.6	1057.3	1056.1	1053.9	1051.9	1049.9	1047.7	1049.4
10°	1049.9	1049.6	1049.2	1048.8	1048.5	1047.3	1045.1	1043.1	1041.1	1038.9	1040.5
12.5°	1039.1	1038.4	1037.8	1037.1	1036.4	1035.1	1033.2	1031.3	1029.3	1027.4	1028.7
15°	1018.6	1018.1	1017.5	1016.9	1016.4	1015.0	1013.0	1010.9	1008.9	1006.7	1007.7
17.5°	995.1	994.3	993.4	992.6	991.8	990.3	988.1	986.0	983.8	981.7	982.8
20°	975.4	975.1	974.7	974.3	974.0	972.5	970.0	967.6	965.2	962.7	964.1
22.5°	955.8	955.1	954.5	953.7	953.1	951.6	949.3	947.0	944.7	942.4	943.3
25°	924.6	923.7	922.8	921.8	920.9	919.2	916.7	914.3	911.8	909.4	909.8
27.5°	888.2	887.7	887.1	886.6	886.0	884.4	881.9	879.4	876.9	874.3	874.4
30°	864.5	864.0	863.4	862.8	862.3	860.5	857.8	854.9	852.1	849.3	848.9
32.5°	838.8	837.9	837.1	836.2	835.4	833.6	831.1	828.6	826.1	823.5	822.9
35°	798.5	797.7	797.0	796.2	795.5	793.8	791.2	788.5	785.9	783.3	782.3
37.5°	756.7	755.7	754.7	753.8	752.8	751.1	748.7	746.2	743.7	741.3	739.8
40°	728.2	727.2	726.4	725.4	724.4	722.7	720.0	717.4	714.8	712.1	710.5
42.5°	697.7	696.9	696.1	695.4	694.6	692.8	690.2	687.5	684.9	682.3	680.8
45°	653.7	652.9	652.2	651.4	650.7	649.1	646.9	644.7	642.4	640.2	637.9
47.5°	606.3	606.3	606.3	606.3	606.4	605.1	602.3	599.7	597.0	594.3	591.9
50°	575.8	575.2	574.6	574.1	573.6	572.1	569.9	567.6	565.3	563.0	560.6
52.5°	544.6	544.2	543.8	543.4	543.0	541.5	539.2	536.7	534.3	531.9	529.8
55°	497.9	497.3	496.8	496.2	495.6	494.0	491.4	488.8	486.1	483.5	481.8
57.5°	448.6	448.3	448.0	447.7	447.4	446.1	443.9	441.7	439.4	437.2	435.0
60°	417.4	416.7	416.0	415.2	414.4	413.0	410.9	408.9	406.8	404.7	402.8
62.5°	384.9	384.3	383.8	383.1	382.5	381.3	379.6	377.8	376.0	374.2	372.3
65°	336.1	335.7	335.4	335.0	334.7	333.5	331.3	329.3	327.2	325.1	323.4
67.5°	288.9	288.1	287.3	286.5	285.8	284.5	283.1	281.5	280.0	278.4	277.0
70°	259.1	258.1	257.2	256.2	255.4	254.0	252.3	250.6	248.9	247.3	246.1
72.5°	226.6	225.9	225.3	224.7	224.0	223.1	222.1	220.9	219.9	218.8	217.5
75°	178.6	178.3	177.9	177.6	177.2	176.5	175.5	174.6	173.7	172.8	172.2
77.5°	134.4	134.3	134.2	134.0	133.9	133.5	133.0	132.5	131.9	131.4	131.1
80°	106.7	106.7	106.7	106.7	106.7	106.5	106.2	105.7	105.3	105.0	104.8
82.5°	82.3	82.0	81.7	81.4	81.1	80.9	80.8	80.8	80.7	80.6	80.3
85°	46.6	46.8	47.0	47.1	47.3	47.5	47.5	47.5	47.5	47.5	47.2
87.5°	18.5	18.9	19.2	19.6	20.0	20.3	20.5	20.6	20.8	21.0	21.2
90°	1.1	2.9	4.8	6.7	8.6	10.4	12.0	13.6	15.2	16.9	18.1
92.5°	16.2	14.9	13.6	12.3	11.0	11.1	12.6	13.9	15.4	16.9	18.1
95°	60.2	59.4	58.8	58.0	57.3	52.5	43.6	34.7	25.8	16.9	18.1
97.5°	125.6	126.9	128.2	129.4	130.7	122.5	104.8	87.2	69.5	51.9	45.3
100°	176.3	177.0	177.7	178.4	179.1	179.9	180.8	181.8	182.7	183.7	148.7
102.5°	227.8	228.7	229.6	230.5	231.4	232.1	232.7	233.3	233.7	234.3	227.7
105°	310.4	311.3	312.3	313.2	314.1	314.5	314.5	314.5	314.5	314.5	314.5
107.5°	396.1	396.1	396.1	396.1	396.1	396.3	396.8	397.2	397.7	398.2	398.2
110°	451.8	451.8	451.8	451.8	451.8	452.0	452.5	453.0	453.5	453.9	453.2



TEST NUMBER: P333422-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	504.2	504.8	505.3	505.8	506.4	506.9	507.1	507.4	507.7	507.9	507.0
115°	582.7	583.8	585.1	586.2	587.4	588.1	588.3	588.6	588.8	589.1	588.1
117.5°	664.0	663.9	663.9	663.8	663.8	664.2	665.1	666.0	666.9	667.8	666.6
120°	714.6	714.4	714.2	714.0	713.7	714.0	714.6	715.3	716.1	716.7	716.3
122.5°	759.4	760.3	761.2	762.1	763.0	763.6	763.9	764.3	764.6	764.9	764.4
125°	828.7	830.3	831.9	833.6	835.2	836.0	836.0	836.0	836.0	836.0	835.1
127.5°	894.7	895.9	897.1	898.2	899.4	899.9	899.8	899.7	899.5	899.4	898.9
130°	935.2	936.5	937.6	938.8	940.0	940.7	940.9	941.1	941.3	941.6	940.9
132.5°	975.8	977.1	978.5	979.9	981.2	981.7	981.1	980.6	980.2	979.6	979.5
135°	1033.5	1034.9	1036.2	1037.6	1039.1	1039.5	1039.1	1038.6	1038.1	1037.6	1037.2
137.5°	1086.5	1087.6	1088.8	1090.1	1091.3	1091.7	1091.3	1090.9	1090.5	1090.1	1090.1
140°	1121.0	1121.5	1122.0	1122.4	1122.9	1123.1	1122.8	1122.6	1122.3	1122.1	1122.6
142.5°	1152.3	1152.6	1152.8	1153.2	1153.4	1153.7	1154.1	1154.4	1154.7	1155.0	1155.1
145°	1198.1	1198.6	1199.1	1199.5	1200.0	1200.2	1200.2	1200.2	1200.2	1200.2	1200.4
147.5°	1238.2	1238.1	1238.0	1238.0	1237.9	1238.0	1238.2	1238.5	1238.8	1239.1	1239.3
150°	1263.6	1263.1	1262.7	1262.2	1261.7	1261.7	1262.2	1262.7	1263.1	1263.6	1264.0
152.5°	1288.0	1287.0	1286.0	1285.0	1283.9	1283.6	1284.1	1284.6	1285.1	1285.5	1286.0
155°	1319.5	1318.1	1316.7	1315.3	1313.9	1313.4	1313.9	1314.3	1314.8	1315.3	1316.0
157.5°	1343.8	1343.0	1342.1	1341.2	1340.4	1340.0	1340.0	1340.1	1340.2	1340.2	1340.9
160°	1360.7	1359.3	1357.9	1356.4	1355.0	1354.5	1354.7	1354.9	1355.2	1355.4	1356.3
162.5°	1374.2	1372.8	1371.3	1369.9	1368.6	1368.0	1368.2	1368.5	1368.6	1368.9	1370.2
165°	1392.4	1390.9	1389.5	1388.1	1386.7	1386.1	1386.3	1386.6	1386.8	1387.1	1388.5
167.5°	1405.8	1404.4	1403.0	1401.5	1400.0	1399.5	1399.6	1399.9	1400.1	1400.4	1402.1
170°	1413.5	1411.9	1410.1	1408.5	1406.9	1406.1	1406.4	1406.6	1406.9	1407.1	1409.0
172.5°	1418.5	1416.9	1415.3	1413.6	1411.9	1411.4	1411.8	1412.2	1412.6	1413.0	1414.7
175°	1424.0	1422.6	1421.2	1419.8	1418.4	1417.8	1418.1	1418.3	1418.5	1418.7	1420.6
177.5°	1426.5	1425.4	1424.3	1423.2	1422.0	1421.6	1421.8	1422.0	1422.1	1422.3	1423.7
180°	1424.0	1424.0	1424.0	1424.0	1424.0	1424.0	1424.0	1424.0	1424.0	1424.0	1424.0



TEST NUMBER: P333422-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2
2.5°	1067.2	1068.7	1070.2	1070.9	1070.7	1070.6	1070.4	1070.2
5°	1061.8	1063.5	1065.2	1065.9	1065.8	1065.6	1065.4	1065.2
7.5°	1051.1	1052.7	1054.3	1055.1	1054.9	1054.8	1054.5	1054.3
10°	1042.0	1043.5	1045.0	1045.6	1045.5	1045.2	1045.1	1044.9
12.5°	1029.8	1031.0	1032.3	1032.8	1032.8	1032.7	1032.7	1032.7
15°	1008.7	1009.6	1010.6	1011.0	1011.0	1011.0	1011.0	1011.0
17.5°	984.1	985.2	986.3	986.5	985.5	984.6	983.7	982.8
20°	965.4	966.7	968.0	968.2	967.3	966.3	965.4	964.4
22.5°	944.1	945.0	945.9	946.0	945.3	944.7	944.0	943.5
25°	910.1	910.5	910.9	910.8	910.3	909.7	909.1	908.6
27.5°	874.5	874.6	874.7	874.4	873.8	873.3	872.7	872.1
30°	848.6	848.2	847.7	847.3	846.8	846.2	845.6	845.1
32.5°	822.1	821.5	820.8	819.9	819.0	817.9	816.9	816.0
35°	781.4	780.4	779.5	778.3	776.7	775.3	773.7	772.3
37.5°	738.4	737.0	735.6	734.5	733.7	732.8	732.0	731.1
40°	708.7	707.0	705.3	704.2	703.6	703.1	702.5	702.0
42.5°	679.2	677.7	676.1	674.9	674.1	673.2	672.3	671.5
45°	635.6	633.3	631.1	629.7	629.2	628.6	628.0	627.5
47.5°	589.6	587.3	585.1	583.3	582.0	580.7	579.3	578.0
50°	558.2	555.7	553.3	551.4	550.1	548.8	547.5	546.2
52.5°	527.7	525.5	523.3	521.5	520.1	518.6	517.1	515.7
55°	480.1	478.4	476.7	475.2	473.9	472.5	471.2	469.9
57.5°	432.9	430.7	428.5	427.1	426.3	425.7	424.9	424.2
60°	401.0	399.1	397.2	395.6	394.3	393.0	391.7	390.4
62.5°	370.2	368.2	366.2	364.6	363.6	362.6	361.6	360.5
65°	321.8	320.1	318.4	317.2	316.4	315.7	314.9	314.1
67.5°	275.6	274.1	272.7	271.7	271.3	270.8	270.4	269.9
70°	245.0	243.9	242.7	241.8	241.0	240.3	239.5	238.8
72.5°	216.2	215.0	213.7	212.6	211.9	211.2	210.4	209.6
75°	171.6	171.0	170.5	169.8	169.1	168.3	167.5	166.8
77.5°	130.8	130.4	130.0	129.6	129.1	128.6	128.1	127.5
80°	104.6	104.4	104.3	104.0	103.6	103.2	102.8	102.5
82.5°	79.9	79.6	79.2	79.1	79.0	78.9	78.8	78.8
85°	47.0	46.9	46.6	46.4	46.0	45.7	45.2	44.8
87.5°	21.4	21.7	21.9	21.9	21.8	21.6	21.5	21.4
90°	19.2	20.4	21.6	22.5	23.2	23.9	24.6	25.4
92.5°	19.2	20.4	21.6	22.3	22.7	23.0	23.3	23.6
95°	19.2	20.4	21.6	22.2	22.2	22.2	22.2	22.2
97.5°	38.7	32.1	25.4	22.2	22.2	22.2	22.2	22.2
100°	113.7	78.8	43.9	25.9	24.9	24.1	23.1	22.2
102.5°	221.1	214.5	207.9	196.6	180.7	164.7	148.7	132.8
105°	314.5	314.5	314.5	314.5	314.2	314.0	313.7	313.5
107.5°	398.3	398.4	398.4	398.0	397.3	396.6	395.9	395.3
110°	452.5	451.8	451.1	450.9	451.1	451.3	451.6	451.8





TEST NUMBER: P333422-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	506.1	505.3	504.4	503.8	503.4	503.1	502.8	502.5
115°	587.2	586.2	585.3	584.1	582.7	581.3	579.8	578.5
117.5°	665.4	664.1	662.9	661.9	661.4	660.8	660.1	659.6
120°	715.8	715.3	714.9	714.0	712.9	711.7	710.5	709.4
122.5°	763.9	763.4	763.0	762.1	760.8	759.4	758.0	756.7
125°	834.1	833.2	832.3	831.4	830.8	830.1	829.3	828.7
127.5°	898.4	897.8	897.3	896.2	894.5	892.8	891.0	889.2
130°	940.2	939.5	938.8	937.8	936.7	935.5	934.3	933.2
132.5°	979.3	979.2	979.0	978.4	977.2	976.1	974.9	973.7
135°	1036.7	1036.2	1035.8	1034.9	1033.5	1032.0	1030.6	1029.2
137.5°	1090.2	1090.3	1090.4	1089.8	1088.6	1087.4	1086.1	1084.9
140°	1123.1	1123.5	1124.0	1123.5	1122.1	1120.7	1119.3	1117.9
142.5°	1155.2	1155.4	1155.4	1154.8	1153.3	1151.9	1150.6	1149.2
145°	1200.7	1200.9	1201.2	1200.6	1199.1	1197.8	1196.4	1195.0
147.5°	1239.7	1239.9	1240.2	1239.5	1237.8	1236.1	1234.4	1232.7
150°	1264.5	1264.9	1265.4	1264.7	1262.8	1260.9	1259.1	1257.2
152.5°	1286.5	1286.9	1287.4	1286.8	1285.1	1283.4	1281.7	1280.0
155°	1316.7	1317.4	1318.1	1317.5	1315.6	1313.8	1311.9	1310.0
157.5°	1341.7	1342.5	1343.2	1342.6	1340.8	1338.9	1337.0	1335.1
160°	1357.3	1358.2	1359.2	1358.7	1356.8	1354.9	1353.1	1351.2
162.5°	1371.5	1372.9	1374.2	1373.8	1371.7	1369.6	1367.6	1365.5
165°	1389.8	1391.3	1392.7	1392.4	1390.6	1388.7	1386.8	1384.9
167.5°	1403.8	1405.4	1407.1	1406.9	1404.8	1402.7	1400.6	1398.5
170°	1410.9	1412.8	1414.6	1414.5	1412.4	1410.3	1408.2	1406.1
172.5°	1416.4	1418.1	1419.8	1419.6	1417.5	1415.4	1413.2	1411.1
175°	1422.5	1424.3	1426.2	1426.1	1424.0	1421.9	1419.8	1417.6
177.5°	1425.0	1426.3	1427.6	1427.5	1426.0	1424.5	1422.9	1421.5
180°	1424.0	1424.0	1424.0	1424.0	1424.0	1424.0	1424.0	1424.0

(END OF REPORT)