

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333423-930

Luminaire Tested: **S125DIW-S850D1340U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333423-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S850D1340U930-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6580.2 lumens
Efficiency: N/A
Efficacy: 107.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333423-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

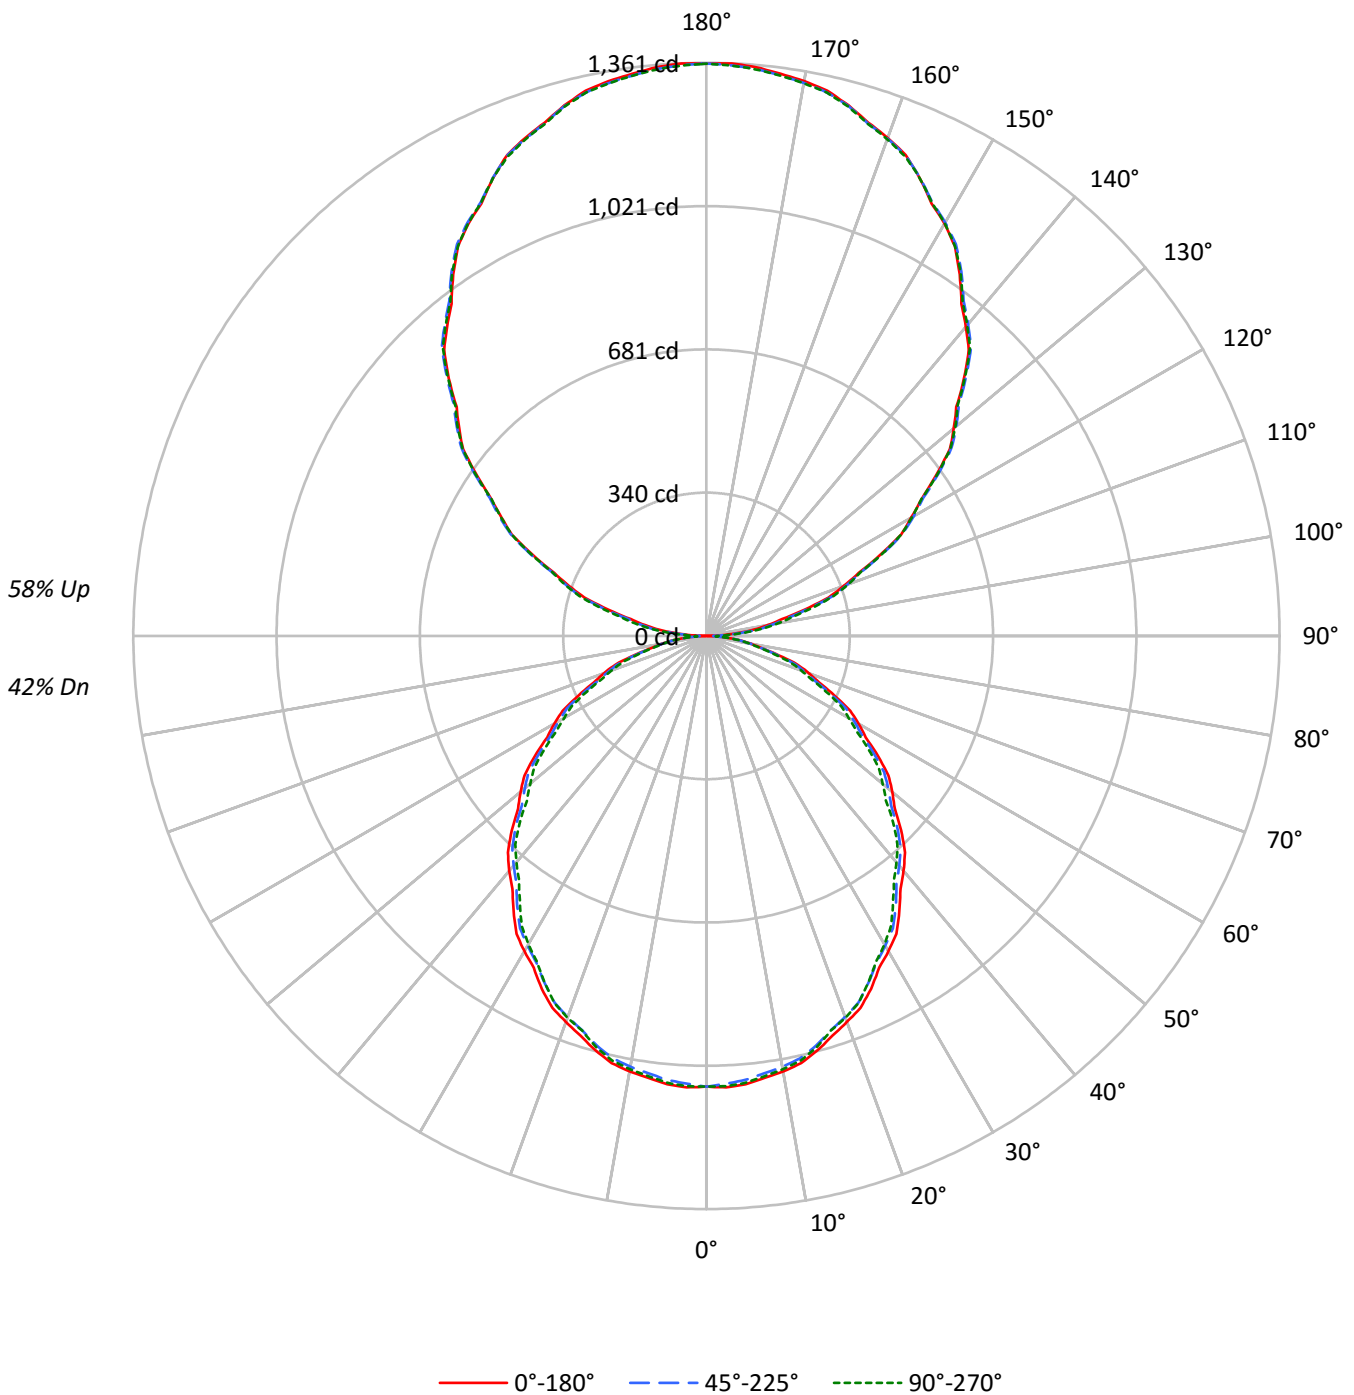



TEST NUMBER: P333423-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	96	92	88	84	88	84	81	78	69	67	65	56	54	53	43	42	41	36
2	87	80	74	69	80	73	68	64	61	57	54	49	46	44	38	36	35	30
3	80	70	63	57	72	64	58	53	53	49	45	43	40	37	34	31	30	25
4	73	62	54	48	66	57	50	45	47	42	38	38	35	32	30	28	25	22
5	67	55	47	41	61	51	44	39	42	37	33	34	31	27	27	24	22	19
6	62	50	42	36	56	46	39	33	38	33	29	31	27	24	25	22	19	16
7	57	45	37	31	52	41	34	29	35	29	25	28	24	21	22	20	17	15
8	53	41	33	28	48	37	31	26	31	26	22	26	22	19	21	18	15	13
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12
10	46	34	27	22	42	31	25	21	26	21	18	22	18	15	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6912	6912	6912
5°	6928	6862	6906
10°	6885	6813	6852
15°	6811	6731	6760
20°	6704	6616	6628
25°	6589	6480	6475
30°	6447	6334	6302
35°	6296	6176	6089
40°	6139	6004	5918
45°	5971	5847	5731
50°	5785	5657	5488
55°	5606	5444	5291
60°	5391	5227	5043
65°	5136	4968	4800
70°	4893	4670	4509
75°	4457	4312	4162
80°	3968	3905	3812
85°	3453	3520	3320



TEST NUMBER: P333423-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	100.9	1.5
10°-20°	285.1	4.3
20°-30°	420.9	6.4
30°-40°	491.1	7.5
40°-50°	493.3	7.5
50°-60°	433.0	6.6
60°-70°	322.6	4.9
70°-80°	184.5	2.8
80°-90°	56.6	0.9
90°-100°	91.0	1.4
100°-110°	268.8	4.1
110°-120°	455.3	6.9
120°-130°	599.1	9.1
130°-140°	671.4	10.2
140°-150°	658.0	10.0
150°-160°	552.7	8.4
160°-170°	367.4	5.6
170°-180°	128.6	2.0
0°-30°	806.9	12.3
0°-40°	1298.0	19.7
0°-60°	2224.3	33.8
0°-90°	2788.0	42.4
90°-120°	815.1	12.4
90°-150°	2743.6	41.7
90°-180°	3792.0	57.6
0°-180°	6580.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1070	1070	1070	1070	1070	
5°	1069	1066	1058	1066	1065	101
15°	1019	1016	1007	1011	1011	287
25°	925	920	909	911	909	425
35°	798	795	783	779	772	499
45°	654	650	640	630	628	504
55°	498	495	484	476	470	444
65°	336	334	325	318	314	333
75°	179	177	173	170	167	190
85°	47	47	48	46	45	52
90°	1	10	17	22	25	6
95°	69	71	81	89	91	73
105°	241	246	253	259	262	258
115°	456	460	462	461	460	451
125°	665	671	673	671	669	596
135°	865	871	872	872	868	667
145°	1048	1052	1056	1055	1052	655
155°	1199	1199	1200	1204	1199	552
165°	1304	1302	1303	1307	1301	368
175°	1356	1352	1352	1357	1350	129
180°	1359	1359	1359	1359	1359	



TEST NUMBER: P333423-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2
2.5°	1073.0	1072.5	1072.1	1071.6	1071.1	1070.2	1068.7	1067.2	1065.7	1064.2	1065.7
5°	1068.6	1068.2	1067.8	1067.5	1067.1	1065.9	1064.0	1062.2	1060.3	1058.4	1060.1
7.5°	1058.7	1058.4	1058.0	1057.6	1057.3	1056.1	1053.9	1051.9	1049.9	1047.7	1049.4
10°	1049.9	1049.6	1049.2	1048.8	1048.5	1047.3	1045.1	1043.1	1041.1	1038.9	1040.5
12.5°	1039.1	1038.4	1037.8	1037.1	1036.4	1035.1	1033.2	1031.3	1029.3	1027.4	1028.7
15°	1018.6	1018.1	1017.5	1016.9	1016.4	1015.0	1013.0	1010.9	1008.9	1006.7	1007.7
17.5°	995.1	994.3	993.4	992.6	991.8	990.3	988.1	986.0	983.8	981.7	982.8
20°	975.4	975.1	974.7	974.3	974.0	972.5	970.0	967.6	965.2	962.7	964.1
22.5°	955.8	955.1	954.5	953.7	953.1	951.6	949.3	947.0	944.7	942.4	943.3
25°	924.6	923.7	922.8	921.8	920.9	919.2	916.7	914.3	911.8	909.4	909.8
27.5°	888.2	887.7	887.1	886.6	886.0	884.4	881.9	879.4	876.9	874.3	874.4
30°	864.5	864.0	863.4	862.8	862.3	860.5	857.8	854.9	852.1	849.3	848.9
32.5°	838.8	837.9	837.1	836.2	835.4	833.6	831.1	828.6	826.1	823.5	822.9
35°	798.5	797.7	797.0	796.2	795.5	793.8	791.2	788.5	785.9	783.3	782.3
37.5°	756.7	755.7	754.7	753.8	752.8	751.1	748.7	746.2	743.7	741.3	739.8
40°	728.2	727.2	726.4	725.4	724.4	722.7	720.0	717.4	714.8	712.1	710.5
42.5°	697.7	696.9	696.1	695.4	694.6	692.8	690.2	687.5	684.9	682.3	680.8
45°	653.7	652.9	652.2	651.4	650.7	649.1	646.9	644.7	642.4	640.2	637.9
47.5°	606.3	606.3	606.3	606.3	606.4	605.1	602.3	599.7	597.0	594.3	591.9
50°	575.8	575.2	574.6	574.1	573.6	572.1	569.9	567.6	565.3	563.0	560.6
52.5°	544.6	544.2	543.8	543.4	543.0	541.5	539.2	536.7	534.3	531.9	529.8
55°	497.9	497.3	496.8	496.2	495.6	494.0	491.4	488.8	486.1	483.5	481.8
57.5°	448.6	448.3	448.0	447.7	447.4	446.1	443.9	441.7	439.4	437.2	435.0
60°	417.4	416.7	416.0	415.2	414.4	413.0	410.9	408.9	406.8	404.7	402.8
62.5°	384.9	384.3	383.8	383.1	382.5	381.3	379.6	377.8	376.0	374.2	372.3
65°	336.1	335.7	335.4	335.0	334.7	333.5	331.3	329.3	327.2	325.1	323.4
67.5°	288.9	288.1	287.3	286.5	285.8	284.5	283.1	281.5	280.0	278.4	277.0
70°	259.1	258.1	257.2	256.2	255.4	254.0	252.3	250.6	248.9	247.3	246.1
72.5°	226.6	225.9	225.3	224.7	224.0	223.1	222.1	220.9	219.9	218.8	217.5
75°	178.6	178.3	177.9	177.6	177.2	176.5	175.5	174.6	173.7	172.8	172.2
77.5°	134.4	134.3	134.2	134.0	133.9	133.5	133.0	132.5	131.9	131.4	131.1
80°	106.7	106.7	106.7	106.7	106.7	106.5	106.2	105.7	105.3	105.0	104.8
82.5°	82.3	82.0	81.7	81.4	81.1	80.9	80.8	80.8	80.7	80.6	80.3
85°	46.6	46.8	47.0	47.1	47.3	47.5	47.5	47.5	47.5	47.5	47.2
87.5°	18.5	18.9	19.2	19.6	20.0	20.3	20.5	20.6	20.8	21.0	21.2
90°	1.1	2.9	4.8	6.7	8.6	10.4	12.0	13.6	15.2	17.0	18.1
92.5°	25.6	26.9	28.2	29.5	30.8	32.5	34.6	36.6	38.6	40.6	42.2
95°	68.7	69.2	69.7	70.1	70.6	72.1	74.4	76.7	79.1	81.4	83.1
97.5°	114.2	114.4	114.6	114.8	115.0	116.7	119.9	123.2	126.5	129.6	131.2
100°	148.1	148.1	148.1	148.1	148.1	149.6	152.6	155.7	158.7	161.8	164.0
102.5°	184.4	185.4	186.3	187.3	188.2	189.5	191.0	192.6	194.1	195.7	198.0
105°	241.2	242.3	243.4	244.7	245.8	247.1	248.5	250.0	251.4	252.7	254.2
107.5°	303.7	304.9	306.1	307.3	308.4	309.6	310.6	311.7	312.8	313.9	314.6
110°	346.9	348.1	349.3	350.4	351.6	352.5	353.3	353.9	354.7	355.3	356.0



TEST NUMBER: P333423-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	390.9	391.5	392.1	392.7	393.3	394.1	394.9	395.8	396.7	397.6	397.9
115°	455.8	456.7	457.7	458.6	459.6	460.3	460.7	461.2	461.7	462.2	461.9
117.5°	521.0	521.4	521.8	522.2	522.7	523.1	523.5	523.9	524.3	524.8	525.0
120°	561.6	562.7	563.9	565.1	566.3	567.0	567.2	567.4	567.7	567.9	567.9
122.5°	605.6	606.0	606.4	606.8	607.2	607.8	608.4	609.0	609.6	610.3	610.0
125°	665.2	666.6	668.1	669.4	670.8	671.6	671.9	672.1	672.4	672.6	672.1
127.5°	728.6	729.4	730.3	731.1	731.9	732.4	732.7	733.0	733.3	733.5	733.3
130°	766.7	767.9	769.1	770.3	771.4	772.3	772.7	773.2	773.6	774.1	773.9
132.5°	804.8	806.7	808.7	810.6	812.5	813.4	813.3	813.3	813.2	813.1	812.9
135°	865.1	866.5	867.9	869.4	870.7	871.6	871.8	872.0	872.3	872.5	872.5
137.5°	921.8	923.2	924.5	925.9	927.2	928.1	928.7	929.2	929.8	930.3	930.5
140°	958.1	959.4	960.5	961.7	962.9	963.8	964.5	965.2	965.9	966.6	967.1
142.5°	994.6	995.6	996.5	997.5	998.5	999.4	1000.3	1001.2	1002.1	1003.0	1003.3
145°	1048.1	1049.0	1049.9	1050.8	1051.8	1052.6	1053.4	1054.0	1054.8	1055.5	1055.5
147.5°	1097.6	1098.0	1098.6	1099.1	1099.6	1100.2	1100.7	1101.3	1101.9	1102.4	1103.0
150°	1130.6	1130.3	1130.1	1129.8	1129.6	1129.9	1130.9	1131.9	1132.8	1133.8	1133.8
152.5°	1157.6	1158.0	1158.3	1158.6	1158.9	1159.3	1159.7	1160.0	1160.4	1160.8	1161.4
155°	1199.3	1199.3	1199.3	1199.3	1199.3	1199.4	1199.6	1199.9	1200.1	1200.4	1201.3
157.5°	1236.5	1236.0	1235.5	1234.9	1234.4	1234.3	1234.5	1234.8	1235.0	1235.3	1236.2
160°	1258.5	1257.8	1257.1	1256.4	1255.7	1255.5	1255.7	1256.0	1256.1	1256.4	1257.4
162.5°	1278.0	1277.5	1276.9	1276.4	1275.9	1275.7	1275.7	1275.8	1275.8	1275.9	1277.0
165°	1304.0	1303.5	1303.0	1302.6	1302.1	1302.0	1302.2	1302.4	1302.7	1302.9	1303.9
167.5°	1326.0	1325.0	1324.1	1323.1	1322.3	1321.8	1321.8	1321.8	1321.8	1321.8	1323.1
170°	1337.8	1336.9	1335.9	1335.1	1334.1	1333.6	1333.6	1333.6	1333.6	1333.6	1335.1
172.5°	1346.3	1345.3	1344.4	1343.5	1342.6	1342.1	1342.1	1342.1	1342.1	1342.1	1343.5
175°	1355.8	1354.9	1354.0	1353.0	1352.1	1351.6	1351.6	1351.6	1351.6	1351.6	1353.0
177.5°	1360.7	1359.9	1359.2	1358.5	1357.6	1357.2	1357.0	1356.8	1356.7	1356.4	1357.6
180°	1359.0	1359.0	1359.0	1359.0	1359.0	1359.0	1359.0	1359.0	1359.0	1359.0	1359.0



TEST NUMBER: P333423-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2	1070.2
2.5°	1067.2	1068.7	1070.2	1070.9	1070.7	1070.6	1070.4	1070.2
5°	1061.8	1063.5	1065.2	1065.9	1065.8	1065.6	1065.4	1065.2
7.5°	1051.1	1052.7	1054.3	1055.1	1054.9	1054.8	1054.5	1054.3
10°	1042.0	1043.5	1045.0	1045.6	1045.5	1045.2	1045.1	1044.9
12.5°	1029.8	1031.0	1032.3	1032.8	1032.8	1032.7	1032.7	1032.7
15°	1008.7	1009.6	1010.6	1011.0	1011.0	1011.0	1011.0	1011.0
17.5°	984.1	985.2	986.3	986.5	985.5	984.6	983.7	982.8
20°	965.4	966.7	968.0	968.2	967.3	966.3	965.4	964.4
22.5°	944.1	945.0	945.9	946.0	945.3	944.7	944.0	943.5
25°	910.1	910.5	910.9	910.8	910.3	909.7	909.1	908.6
27.5°	874.5	874.6	874.7	874.4	873.8	873.3	872.7	872.1
30°	848.6	848.2	847.7	847.3	846.8	846.2	845.6	845.1
32.5°	822.1	821.5	820.8	819.9	819.0	817.9	816.9	816.0
35°	781.4	780.4	779.5	778.3	776.7	775.3	773.7	772.3
37.5°	738.4	737.0	735.6	734.5	733.7	732.8	732.0	731.1
40°	708.7	707.0	705.3	704.2	703.6	703.1	702.5	702.0
42.5°	679.2	677.7	676.1	674.9	674.1	673.2	672.3	671.5
45°	635.6	633.3	631.1	629.7	629.2	628.6	628.0	627.5
47.5°	589.6	587.3	585.1	583.3	582.0	580.7	579.3	578.0
50°	558.2	555.7	553.3	551.4	550.1	548.8	547.5	546.2
52.5°	527.7	525.5	523.3	521.5	520.1	518.6	517.1	515.7
55°	480.1	478.4	476.7	475.2	473.9	472.5	471.2	469.9
57.5°	432.9	430.7	428.5	427.1	426.3	425.7	424.9	424.2
60°	401.0	399.1	397.2	395.6	394.3	393.0	391.7	390.4
62.5°	370.2	368.2	366.2	364.6	363.6	362.6	361.6	360.5
65°	321.8	320.1	318.4	317.2	316.4	315.7	314.9	314.1
67.5°	275.6	274.1	272.7	271.7	271.3	270.8	270.4	269.9
70°	245.0	243.9	242.7	241.8	241.0	240.3	239.5	238.8
72.5°	216.2	215.0	213.7	212.6	211.9	211.2	210.4	209.6
75°	171.6	171.0	170.5	169.8	169.1	168.3	167.5	166.8
77.5°	130.8	130.4	130.0	129.6	129.1	128.6	128.1	127.5
80°	104.6	104.4	104.3	104.0	103.6	103.2	102.8	102.5
82.5°	79.9	79.6	79.2	79.1	79.0	78.9	78.8	78.8
85°	47.0	46.9	46.6	46.4	46.0	45.7	45.2	44.8
87.5°	21.4	21.7	21.9	22.0	21.9	21.7	21.5	21.4
90°	19.2	20.5	21.6	22.6	23.2	24.0	24.7	25.4
92.5°	43.7	45.2	46.8	47.9	48.3	48.9	49.4	49.9
95°	84.7	86.3	88.1	89.0	89.5	90.0	90.5	91.0
97.5°	132.7	134.3	135.8	136.8	137.1	137.4	137.6	137.9
100°	166.1	168.1	170.2	171.5	172.0	172.5	173.0	173.4
102.5°	200.2	202.5	204.9	206.4	207.0	207.7	208.3	209.0
105°	255.6	257.0	258.4	259.4	260.2	260.9	261.5	262.3
107.5°	315.3	316.0	316.7	317.1	317.0	316.9	316.9	316.8
110°	356.8	357.4	358.2	358.4	358.2	357.9	357.7	357.4



TEST NUMBER: P333423-930

CATALOG NUMBER: S125DIW-S850D1340U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	398.3	398.6	398.9	398.9	398.5	398.1	397.6	397.2
115°	461.7	461.5	461.2	461.0	460.7	460.5	460.3	460.1
117.5°	525.1	525.3	525.5	525.1	524.2	523.3	522.4	521.4
120°	567.9	567.9	567.9	567.4	566.5	565.6	564.6	563.7
122.5°	609.8	609.7	609.4	609.0	608.2	607.5	606.7	606.0
125°	671.6	671.2	670.7	670.4	670.2	669.9	669.7	669.4
127.5°	733.0	732.8	732.6	732.2	731.8	731.3	730.8	730.3
130°	773.6	773.5	773.2	772.8	772.4	771.9	771.4	770.9
132.5°	812.6	812.4	812.1	811.7	811.1	810.3	809.7	809.0
135°	872.5	872.5	872.5	872.0	871.1	870.2	869.2	868.3
137.5°	930.8	931.1	931.4	930.9	929.8	928.5	927.4	926.3
140°	967.6	968.0	968.5	968.2	966.9	965.8	964.7	963.4
142.5°	1003.6	1003.9	1004.1	1003.7	1002.5	1001.4	1000.1	999.0
145°	1055.5	1055.5	1055.5	1055.1	1054.4	1053.7	1053.0	1052.3
147.5°	1103.5	1104.1	1104.6	1104.2	1102.5	1101.0	1099.3	1097.8
150°	1133.8	1133.8	1133.8	1133.5	1133.0	1132.5	1132.0	1131.6
152.5°	1161.9	1162.5	1163.0	1162.9	1162.0	1161.2	1160.3	1159.5
155°	1202.2	1203.1	1204.1	1204.0	1202.8	1201.7	1200.4	1199.3
157.5°	1237.1	1238.0	1239.0	1238.7	1237.1	1235.6	1234.0	1232.5
160°	1258.3	1259.2	1260.1	1260.0	1258.9	1257.7	1256.5	1255.3
162.5°	1278.1	1279.2	1280.3	1280.3	1278.9	1277.5	1276.2	1274.8
165°	1304.8	1305.8	1306.7	1306.4	1305.0	1303.7	1302.2	1300.8
167.5°	1324.6	1326.0	1327.4	1327.4	1325.9	1324.5	1323.0	1321.5
170°	1336.4	1337.8	1339.2	1339.1	1337.5	1335.9	1334.2	1332.5
172.5°	1344.9	1346.3	1347.7	1347.7	1346.2	1344.8	1343.3	1341.8
175°	1354.4	1355.8	1357.2	1357.1	1355.4	1353.8	1352.2	1350.5
177.5°	1358.7	1359.8	1361.0	1360.9	1359.5	1358.2	1356.9	1355.6
180°	1359.0	1359.0	1359.0	1359.0	1359.0	1359.0	1359.0	1359.0

(END OF REPORT)