

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333446

Luminaire Tested: **S125DIW-S1090D1050U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333446
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1090D1050U835-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8632.7 lumens
Efficiency: N/A
Efficacy: 141.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333446

CATALOG NUMBER: S125DIW-S1090D1050U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

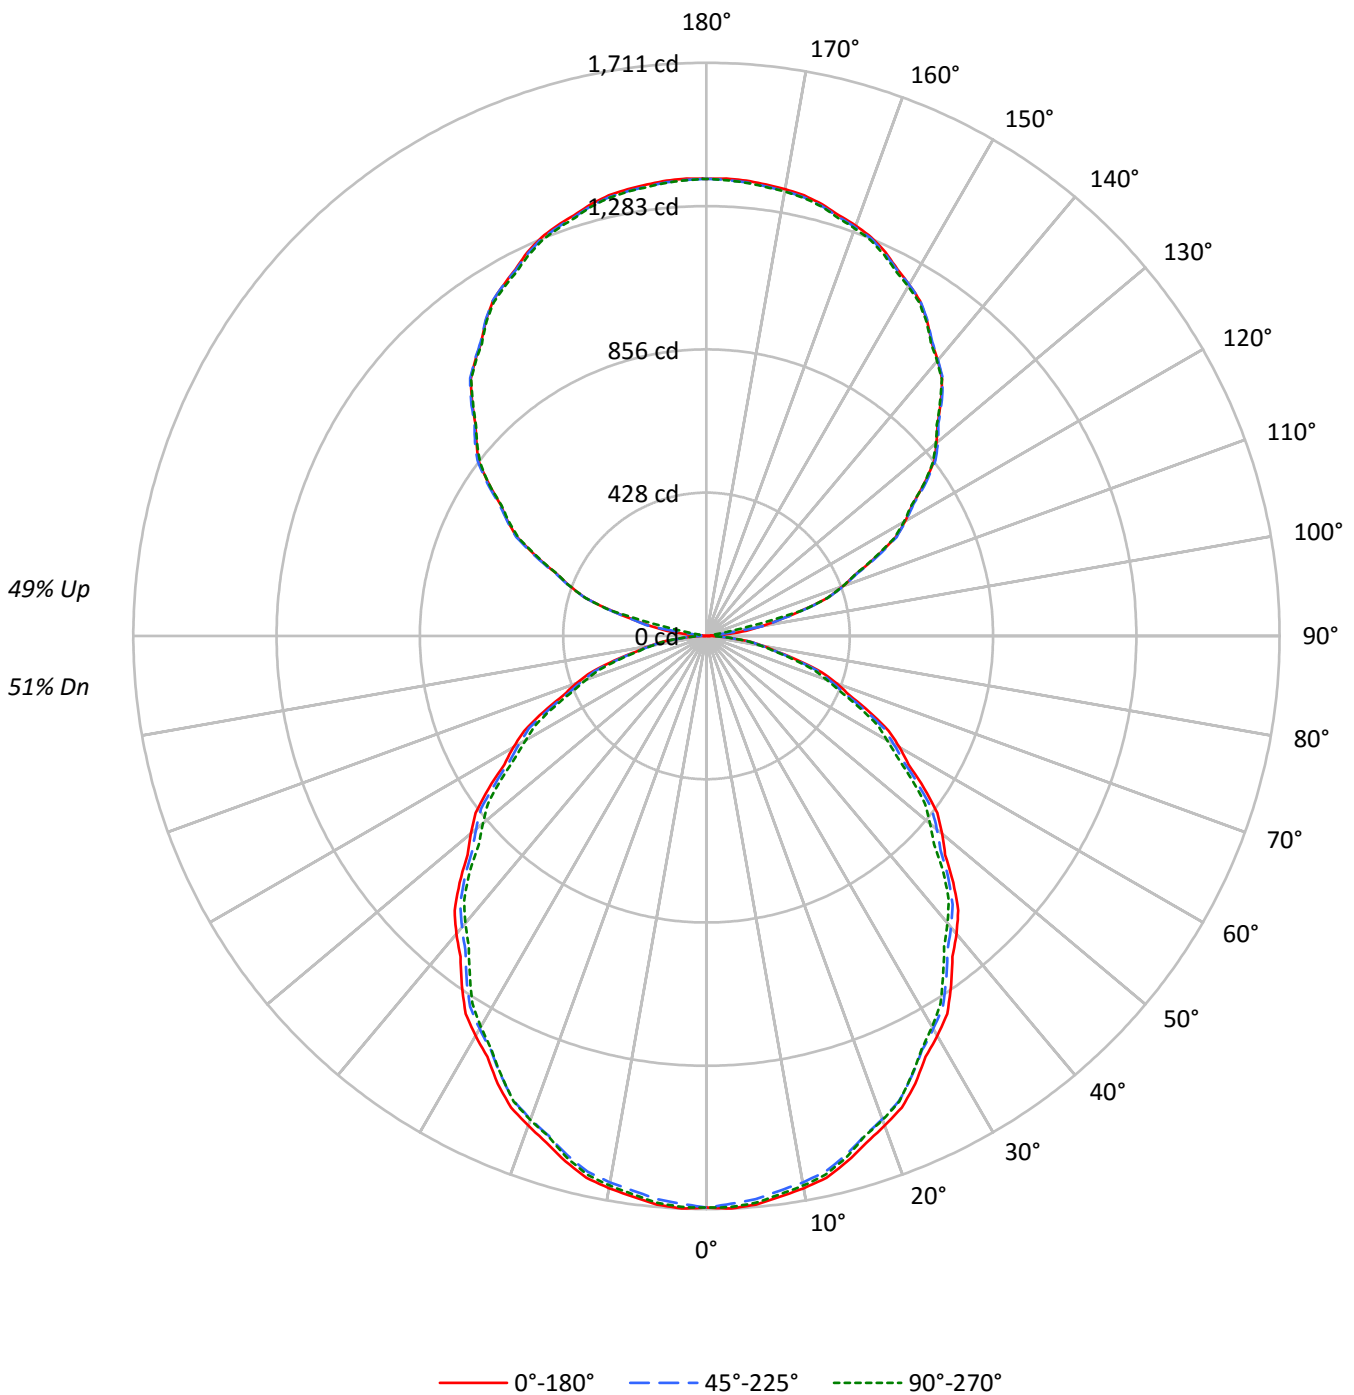



TEST NUMBER: P333446

CATALOG NUMBER: S125DIW-S1090D1050U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	94	90	86	90	87	83	80	74	71	69	62	60	58	51	50	48	43
2	89	82	76	70	82	76	70	66	65	61	57	54	51	49	45	43	41	36
3	81	72	64	59	75	67	60	55	57	52	48	48	44	41	39	37	35	31
4	74	64	56	50	69	59	52	47	51	45	41	43	39	35	35	32	30	26
5	68	57	48	42	63	53	45	40	45	40	35	38	34	31	32	29	26	23
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	25	23	20
7	58	46	38	32	54	43	36	31	37	31	27	31	27	24	26	23	20	18
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16
9	50	38	30	25	46	36	29	24	31	25	22	26	22	19	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	21	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11021	11021	11021
5°	11045	10940	11010
10°	10978	10863	10925
15°	10858	10732	10777
20°	10689	10549	10568
25°	10505	10332	10322
30°	10279	10097	10047
35°	10037	9845	9707
40°	9788	9571	9435
45°	9519	9322	9136
50°	9224	9020	8748
55°	8938	8679	8436
60°	8596	8335	8038
65°	8189	7922	7653
70°	7801	7444	7189
75°	7107	6872	6635
80°	6326	6226	6073
85°	5498	5602	5298



TEST NUMBER: P333446

CATALOG NUMBER: S125DIW-S1090D1050U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.9	1.9
10°-20°	454.5	5.3
20°-30°	671.0	7.8
30°-40°	783.0	9.1
40°-50°	786.4	9.1
50°-60°	690.3	8.0
60°-70°	514.4	6.0
70°-80°	294.1	3.4
80°-90°	88.4	1.0
90°-100°	49.6	0.6
100°-110°	305.6	3.5
110°-120°	554.2	6.4
120°-130°	711.2	8.2
130°-140°	765.0	8.9
140°-150°	718.0	8.3
150°-160°	580.8	6.7
160°-170°	375.7	4.4
170°-180°	129.6	1.5
0°-30°	1286.4	14.9
0°-40°	2069.4	24.0
0°-60°	3546.2	41.1
0°-90°	4443.1	51.5
90°-120°	909.3	10.5
90°-150°	3103.6	36.0
90°-180°	4190.0	48.5
0°-180°	8632.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1706	1706	1706	1706	1706	
5°	1704	1700	1688	1699	1698	162
15°	1624	1619	1605	1612	1612	458
25°	1474	1467	1450	1452	1448	678
35°	1273	1267	1249	1242	1231	796
45°	1042	1036	1021	1005	1000	803
55°	794	789	771	759	749	708
65°	536	533	518	507	501	532
75°	285	282	275	271	266	304
85°	74	76	76	74	72	83
90°	1	9	16	21	24	6
95°	58	53	16	21	21	73
105°	297	301	301	301	300	315
115°	558	563	564	560	554	553
125°	794	801	801	797	794	709
135°	990	996	994	992	986	763
145°	1148	1150	1150	1151	1145	718
155°	1264	1259	1260	1263	1255	582
165°	1334	1328	1329	1334	1327	377
175°	1364	1359	1359	1366	1358	130
180°	1364	1364	1364	1364	1364	



TEST NUMBER: P333446

CATALOG NUMBER: S125DIW-S1090D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4
2.5°	1710.7	1710.0	1709.2	1708.5	1707.8	1706.2	1703.8	1701.4	1699.0	1696.6	1699.0
5°	1703.7	1703.1	1702.5	1701.9	1701.3	1699.5	1696.5	1693.5	1690.5	1687.5	1690.2
7.5°	1688.0	1687.4	1686.8	1686.2	1685.6	1683.6	1680.3	1677.0	1673.7	1670.4	1673.1
10°	1674.0	1673.4	1672.8	1672.2	1671.6	1669.6	1666.3	1663.0	1659.7	1656.4	1658.8
12.5°	1656.7	1655.6	1654.5	1653.4	1652.4	1650.3	1647.2	1644.2	1641.1	1638.0	1640.0
15°	1624.0	1623.1	1622.2	1621.3	1620.4	1618.3	1615.0	1611.7	1608.4	1605.1	1606.6
17.5°	1586.5	1585.2	1583.8	1582.5	1581.2	1578.8	1575.4	1572.0	1568.6	1565.1	1567.0
20°	1555.2	1554.6	1554.0	1553.4	1552.8	1550.5	1546.6	1542.7	1538.8	1534.9	1537.0
22.5°	1523.8	1522.8	1521.7	1520.6	1519.5	1517.1	1513.5	1509.8	1506.2	1502.5	1503.9
25°	1474.2	1472.7	1471.2	1469.7	1468.2	1465.5	1461.6	1457.7	1453.8	1449.9	1450.5
27.5°	1416.1	1415.2	1414.3	1413.4	1412.5	1410.1	1406.0	1402.0	1398.0	1394.0	1394.1
30°	1378.3	1377.4	1376.5	1375.6	1374.7	1372.0	1367.5	1363.0	1358.5	1354.0	1353.4
32.5°	1337.3	1335.9	1334.5	1333.1	1331.8	1329.1	1325.0	1321.0	1317.0	1313.0	1311.9
35°	1273.0	1271.8	1270.6	1269.4	1268.2	1265.5	1261.3	1257.1	1252.9	1248.7	1247.2
37.5°	1206.3	1204.8	1203.3	1201.8	1200.3	1197.6	1193.6	1189.7	1185.7	1181.8	1179.5
40°	1161.0	1159.5	1158.0	1156.5	1155.0	1152.1	1147.9	1143.7	1139.5	1135.3	1132.6
42.5°	1112.4	1111.1	1109.9	1108.6	1107.3	1104.6	1100.4	1096.2	1092.0	1087.8	1085.3
45°	1042.2	1041.0	1039.8	1038.6	1037.4	1035.0	1031.4	1027.8	1024.2	1020.6	1017.0
47.5°	966.6	966.6	966.7	966.8	966.8	964.7	960.4	956.0	951.7	947.4	943.7
50°	918.0	917.1	916.2	915.3	914.4	912.1	908.5	904.9	901.3	897.7	893.8
52.5°	868.3	867.6	867.0	866.3	865.7	863.4	859.6	855.7	851.9	848.0	844.6
55°	793.8	792.9	792.0	791.1	790.2	787.6	783.4	779.2	775.0	770.8	768.1
57.5°	715.2	714.7	714.3	713.8	713.3	711.3	707.7	704.2	700.7	697.1	693.6
60°	665.5	664.3	663.1	661.9	660.7	658.5	655.2	651.9	648.6	645.3	642.3
62.5°	613.7	612.7	611.8	610.8	609.9	608.0	605.1	602.3	599.5	596.7	593.4
65°	535.9	535.3	534.7	534.1	533.5	531.6	528.3	525.0	521.7	518.4	515.7
67.5°	460.6	459.3	458.1	456.8	455.6	453.7	451.2	448.8	446.3	443.9	441.6
70°	413.1	411.6	410.1	408.6	407.1	405.0	402.3	399.6	396.9	394.2	392.4
72.5°	361.3	360.2	359.2	358.2	357.2	355.8	354.1	352.3	350.6	348.8	346.8
75°	284.8	284.2	283.6	283.0	282.4	281.4	279.9	278.4	276.9	275.4	274.5
77.5°	214.4	214.1	213.9	213.7	213.4	212.9	212.0	211.2	210.4	209.5	209.0
80°	170.1	170.1	170.1	170.1	170.1	169.8	169.2	168.6	168.0	167.4	167.1
82.5°	131.2	130.7	130.3	129.8	129.3	129.0	128.9	128.8	128.6	128.5	128.0
85°	74.2	74.5	74.8	75.1	75.4	75.6	75.6	75.6	75.6	75.6	75.3
87.5°	29.4	29.7	30.1	30.4	30.8	31.0	31.1	31.2	31.2	31.3	31.5
90°	1.0	2.8	4.6	6.4	8.2	9.9	11.5	13.0	14.6	16.2	17.3
92.5°	15.6	14.3	13.1	11.8	10.5	10.6	12.0	13.4	14.8	16.2	17.3
95°	57.6	57.0	56.3	55.6	55.0	50.3	41.8	33.3	24.7	16.2	17.3
97.5°	120.4	121.6	122.8	124.0	125.2	117.4	100.5	83.6	66.7	49.8	43.4
100°	168.9	169.6	170.2	170.9	171.6	172.4	173.3	174.2	175.1	176.0	142.5
102.5°	218.3	219.1	220.0	220.8	221.7	222.4	222.9	223.4	224.0	224.5	218.2
105°	297.3	298.2	299.1	300.0	300.9	301.4	301.4	301.4	301.4	301.4	301.4
107.5°	379.5	379.5	379.5	379.5	379.5	379.7	380.1	380.6	381.0	381.5	381.5
110°	432.9	432.9	432.9	432.9	432.9	433.1	433.5	434.0	434.4	434.9	434.2



TEST NUMBER: P333446

CATALOG NUMBER: S125DIW-S1090D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	483.0	483.6	484.1	484.6	485.2	485.6	485.9	486.1	486.4	486.7	485.8
115°	558.3	559.4	560.5	561.6	562.8	563.4	563.7	563.9	564.1	564.3	563.4
117.5°	636.2	636.1	636.1	636.0	636.0	636.4	637.2	638.1	638.9	639.8	638.6
120°	684.7	684.5	684.2	684.0	683.8	684.0	684.7	685.4	686.0	686.7	686.3
122.5°	727.6	728.4	729.3	730.1	731.0	731.6	731.9	732.2	732.5	732.8	732.4
125°	793.9	795.5	797.1	798.6	800.2	801.0	801.0	801.0	801.0	801.0	800.1
127.5°	857.2	858.4	859.5	860.6	861.7	862.2	862.1	862.0	861.8	861.7	861.2
130°	896.1	897.2	898.3	899.4	900.6	901.2	901.5	901.7	901.9	902.1	901.5
132.5°	934.9	936.2	937.5	938.8	940.1	940.5	940.0	939.5	939.0	938.6	938.4
135°	990.1	991.5	992.8	994.2	995.5	996.0	995.5	995.1	994.6	994.2	993.7
137.5°	1040.9	1042.1	1043.2	1044.4	1045.6	1046.0	1045.6	1045.2	1044.7	1044.3	1044.4
140°	1074.1	1074.5	1075.0	1075.4	1075.9	1076.0	1075.8	1075.5	1075.3	1075.1	1075.5
142.5°	1104.0	1104.3	1104.6	1104.8	1105.1	1105.4	1105.7	1106.0	1106.3	1106.6	1106.7
145°	1147.9	1148.4	1148.8	1149.3	1149.7	1149.9	1149.9	1149.9	1149.9	1149.9	1150.2
147.5°	1186.3	1186.3	1186.2	1186.1	1186.0	1186.1	1186.3	1186.6	1186.9	1187.1	1187.4
150°	1210.6	1210.2	1209.7	1209.3	1208.8	1208.8	1209.3	1209.7	1210.2	1210.6	1211.1
152.5°	1234.1	1233.1	1232.1	1231.1	1230.1	1229.9	1230.3	1230.8	1231.2	1231.6	1232.1
155°	1264.2	1262.9	1261.5	1260.2	1258.8	1258.4	1258.8	1259.3	1259.7	1260.2	1260.8
157.5°	1287.5	1286.7	1285.9	1285.1	1284.2	1283.9	1283.9	1283.9	1284.0	1284.0	1284.8
160°	1303.7	1302.3	1301.0	1299.6	1298.3	1297.7	1297.9	1298.2	1298.4	1298.6	1299.5
162.5°	1316.6	1315.3	1313.9	1312.6	1311.2	1310.6	1310.9	1311.1	1311.3	1311.5	1312.8
165°	1334.0	1332.7	1331.3	1330.0	1328.6	1328.0	1328.3	1328.5	1328.7	1328.9	1330.3
167.5°	1346.9	1345.6	1344.2	1342.8	1341.4	1340.8	1341.0	1341.2	1341.5	1341.7	1343.3
170°	1354.2	1352.7	1351.1	1349.5	1347.9	1347.3	1347.5	1347.7	1347.9	1348.2	1350.0
172.5°	1359.1	1357.5	1355.9	1354.4	1352.8	1352.2	1352.6	1353.0	1353.4	1353.8	1355.4
175°	1364.3	1363.0	1361.6	1360.3	1358.9	1358.4	1358.6	1358.8	1359.1	1359.3	1361.1
177.5°	1366.8	1365.7	1364.6	1363.5	1362.5	1362.0	1362.2	1362.4	1362.5	1362.7	1364.0
180°	1364.3	1364.3	1364.3	1364.3	1364.3	1364.3	1364.3	1364.3	1364.3	1364.3	1364.3



TEST NUMBER: P333446

CATALOG NUMBER: S125DIW-S1090D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4
2.5°	1701.4	1703.8	1706.2	1707.3	1707.1	1706.8	1706.6	1706.4
5°	1692.9	1695.6	1698.3	1699.5	1699.2	1698.9	1698.6	1698.3
7.5°	1675.7	1678.4	1681.0	1682.2	1681.9	1681.6	1681.3	1681.0
10°	1661.2	1663.6	1666.0	1667.1	1666.8	1666.5	1666.2	1665.9
12.5°	1641.9	1643.8	1645.7	1646.7	1646.6	1646.5	1646.5	1646.4
15°	1608.1	1609.6	1611.1	1611.9	1611.9	1611.9	1611.9	1611.9
17.5°	1568.9	1570.7	1572.6	1572.8	1571.3	1569.8	1568.3	1566.8
20°	1539.1	1541.2	1543.3	1543.6	1542.1	1540.6	1539.1	1537.6
22.5°	1505.3	1506.7	1508.0	1508.2	1507.2	1506.2	1505.2	1504.1
25°	1451.1	1451.7	1452.3	1452.1	1451.2	1450.3	1449.4	1448.5
27.5°	1394.2	1394.3	1394.5	1394.1	1393.2	1392.3	1391.4	1390.5
30°	1352.8	1352.2	1351.6	1350.9	1350.0	1349.1	1348.2	1347.3
32.5°	1310.8	1309.7	1308.7	1307.3	1305.7	1304.1	1302.4	1300.8
35°	1245.7	1244.2	1242.7	1240.8	1238.4	1236.0	1233.6	1231.2
37.5°	1177.3	1175.1	1172.9	1171.1	1169.7	1168.3	1166.9	1165.6
40°	1129.9	1127.2	1124.5	1122.7	1121.8	1120.9	1120.0	1119.1
42.5°	1082.9	1080.4	1078.0	1076.0	1074.7	1073.3	1071.9	1070.5
45°	1013.4	1009.8	1006.2	1003.9	1003.0	1002.1	1001.2	1000.3
47.5°	940.1	936.4	932.8	929.9	927.8	925.7	923.6	921.5
50°	889.9	886.0	882.1	879.1	877.0	874.9	872.8	870.7
52.5°	841.2	837.8	834.4	831.5	829.1	826.8	824.5	822.1
55°	765.4	762.7	760.0	757.6	755.5	753.4	751.3	749.2
57.5°	690.2	686.7	683.2	680.9	679.8	678.6	677.5	676.3
60°	639.3	636.3	633.3	630.7	628.6	626.5	624.4	622.3
62.5°	590.2	587.0	583.7	581.3	579.7	578.1	576.4	574.8
65°	513.0	510.3	507.6	505.6	504.4	503.2	502.0	500.8
67.5°	439.3	437.0	434.7	433.2	432.5	431.8	431.1	430.4
70°	390.6	388.8	387.0	385.5	384.3	383.1	381.9	380.7
72.5°	344.8	342.7	340.7	339.1	337.9	336.7	335.5	334.3
75°	273.6	272.7	271.8	270.7	269.5	268.3	267.1	265.9
77.5°	208.4	207.9	207.4	206.7	205.8	205.0	204.1	203.3
80°	166.8	166.5	166.2	165.7	165.1	164.5	163.9	163.3
82.5°	127.4	126.9	126.4	126.0	125.9	125.8	125.7	125.5
85°	75.0	74.7	74.4	73.9	73.3	72.7	72.1	71.5
87.5°	31.8	32.0	32.2	32.2	31.8	31.5	31.1	30.8
90°	18.4	19.6	20.7	21.6	22.3	22.9	23.6	24.3
92.5°	18.4	19.6	20.7	21.4	21.7	22.0	22.3	22.7
95°	18.4	19.6	20.7	21.2	21.2	21.2	21.2	21.2
97.5°	37.1	30.7	24.4	21.2	21.2	21.2	21.2	21.2
100°	109.0	75.5	42.0	24.8	23.9	23.0	22.1	21.2
102.5°	211.8	205.5	199.2	188.4	173.1	157.8	142.5	127.2
105°	301.4	301.4	301.4	301.3	301.1	300.8	300.6	300.4
107.5°	381.6	381.6	381.7	381.4	380.7	380.0	379.3	378.7
110°	433.5	432.9	432.2	432.0	432.2	432.4	432.6	432.9



TEST NUMBER: P333446

CATALOG NUMBER: S125DIW-S1090D1050U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	485.0	484.1	483.3	482.7	482.4	482.0	481.7	481.4
115°	562.5	561.6	560.7	559.6	558.3	556.9	555.6	554.2
117.5°	637.5	636.3	635.1	634.2	633.7	633.1	632.5	631.9
120°	685.8	685.4	684.9	684.1	683.0	681.9	680.8	679.6
122.5°	731.9	731.5	731.0	730.2	728.9	727.6	726.3	725.0
125°	799.2	798.3	797.4	796.6	796.0	795.3	794.6	793.9
127.5°	860.7	860.2	859.7	858.6	857.0	855.3	853.6	852.0
130°	900.8	900.1	899.4	898.5	897.4	896.3	895.2	894.1
132.5°	938.3	938.1	938.0	937.4	936.3	935.1	934.0	932.9
135°	993.3	992.8	992.4	991.5	990.1	988.8	987.4	986.1
137.5°	1044.5	1044.6	1044.7	1044.2	1043.0	1041.8	1040.7	1039.5
140°	1076.0	1076.4	1076.9	1076.4	1075.1	1073.7	1072.4	1071.0
142.5°	1106.8	1106.9	1107.0	1106.4	1105.0	1103.7	1102.3	1101.0
145°	1150.4	1150.6	1150.8	1150.3	1148.9	1147.6	1146.2	1144.9
147.5°	1187.7	1188.0	1188.2	1187.6	1185.9	1184.3	1182.7	1181.1
150°	1211.5	1212.0	1212.4	1211.7	1209.9	1208.1	1206.3	1204.5
152.5°	1232.5	1233.0	1233.4	1232.9	1231.2	1229.6	1228.0	1226.4
155°	1261.5	1262.2	1262.9	1262.3	1260.5	1258.7	1256.9	1255.1
157.5°	1285.5	1286.2	1286.9	1286.4	1284.6	1282.8	1281.0	1279.2
160°	1300.4	1301.3	1302.2	1301.7	1300.0	1298.2	1296.4	1294.6
162.5°	1314.1	1315.3	1316.6	1316.2	1314.2	1312.3	1310.3	1308.3
165°	1331.6	1333.0	1334.3	1334.1	1332.3	1330.5	1328.7	1326.9
167.5°	1344.9	1346.5	1348.2	1348.0	1345.9	1343.9	1341.9	1339.9
170°	1351.8	1353.6	1355.4	1355.2	1353.2	1351.2	1349.2	1347.1
172.5°	1357.1	1358.7	1360.3	1360.1	1358.1	1356.0	1354.0	1352.0
175°	1362.9	1364.7	1366.5	1366.4	1364.3	1362.3	1360.3	1358.3
177.5°	1365.2	1366.5	1367.8	1367.7	1366.2	1364.8	1363.4	1361.9
180°	1364.3	1364.3	1364.3	1364.3	1364.3	1364.3	1364.3	1364.3

(END OF REPORT)