

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333488

Luminaire Tested: **S125DIW-S1270D1560U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333488
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1270D1560U835-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11368.4 lumens
Efficiency: N/A
Efficacy: 137.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333488

CATALOG NUMBER: S125DIW-S1270D1560U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

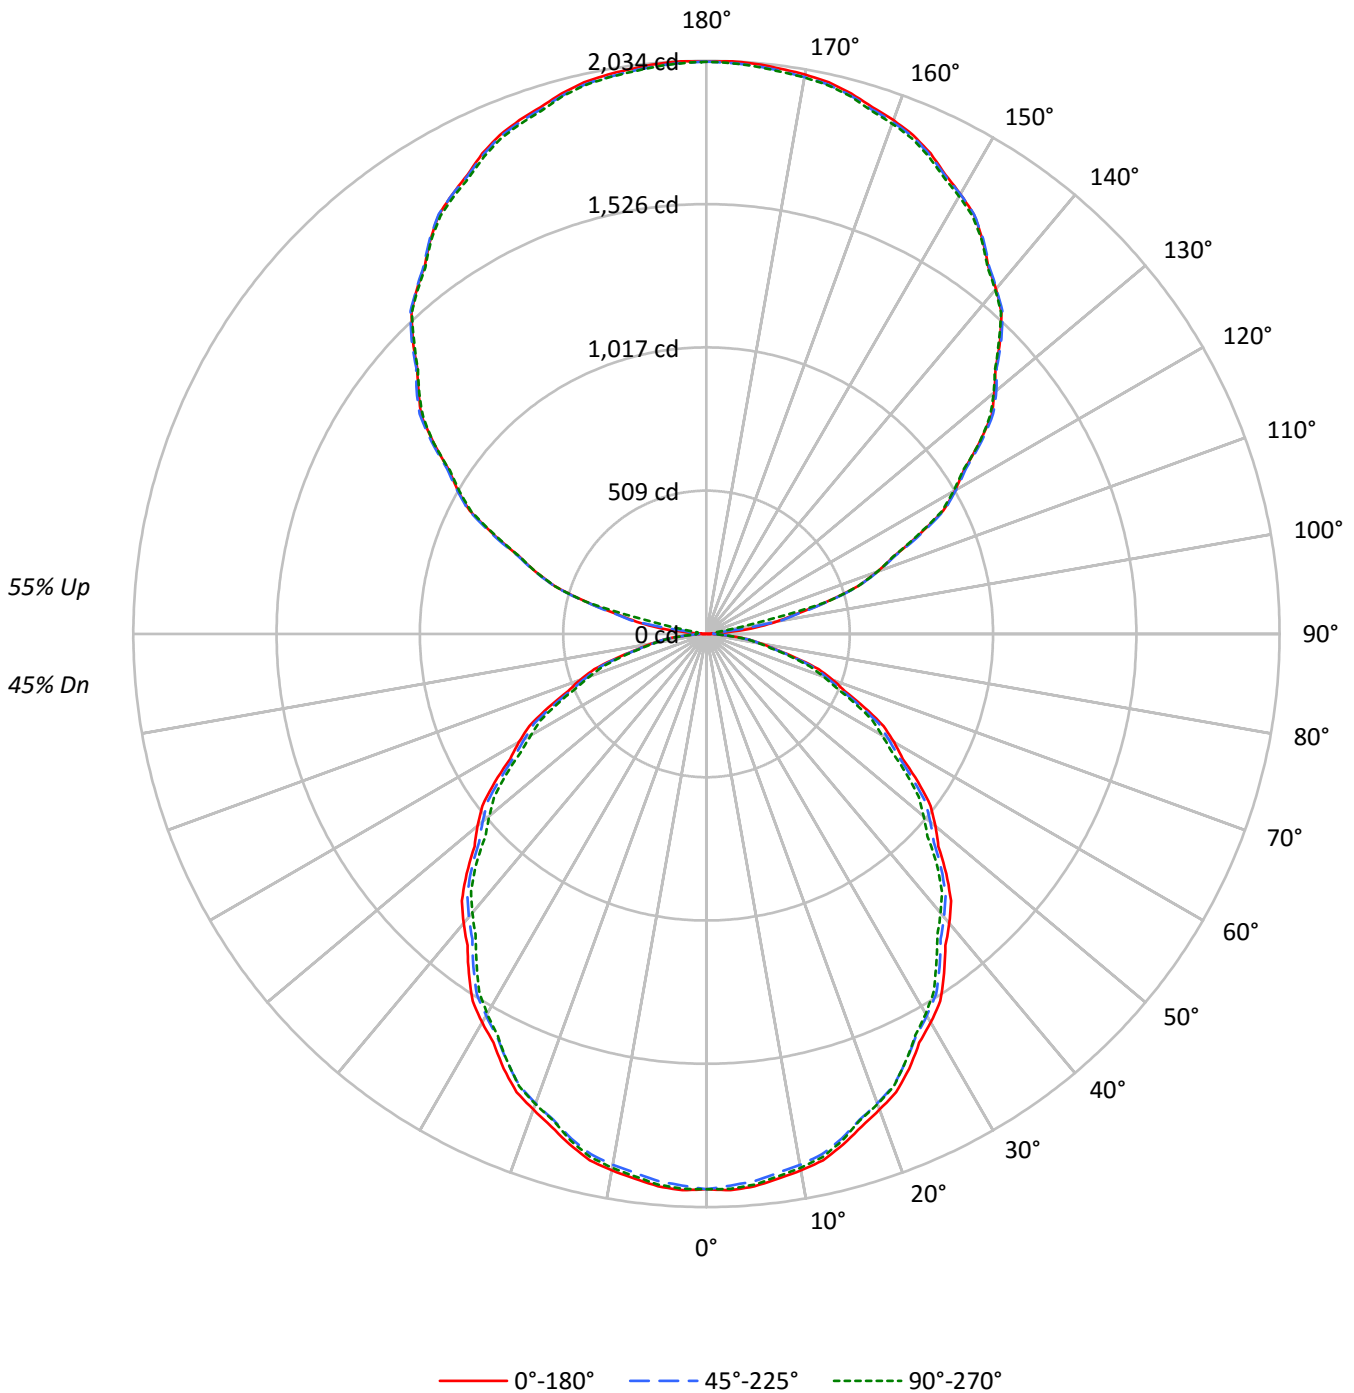



TEST NUMBER: P333488

CATALOG NUMBER: S125DIW-S1270D1560U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	45					45			
1	97	92	88	85	88	85	81	78	71	68	66	58	56	54	46	44	43	38					38			
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	37	32					32			
3	80	71	63	58	73	65	59	54	54	50	46	45	41	38	35	33	31	27					27			
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	32	29	27	23					23			
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	29	26	23	20					20			
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	21	18					18			
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	16					16			
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14					14			
9	49	37	30	25	45	35	28	23	29	24	20	25	20	18	20	17	15	13					13			
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11					11			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12727	12727	12727
5°	12756	12635	12716
10°	12679	12545	12618
15°	12541	12395	12447
20°	12344	12183	12205
25°	12133	11932	11921
30°	11872	11662	11604
35°	11591	11371	11211
40°	11304	11054	10897
45°	10993	10766	10552
50°	10652	10417	10104
55°	10323	10025	9743
60°	9928	9627	9285
65°	9459	9149	8839
70°	9009	8597	8303
75°	8210	7938	7663
80°	7305	7189	7018
85°	6358	6469	6121



TEST NUMBER: P333488

CATALOG NUMBER: S125DIW-S1270D1560U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	185.8	1.6
10°-20°	524.9	4.6
20°-30°	775.0	6.8
30°-40°	904.3	8.0
40°-50°	908.3	8.0
50°-60°	797.3	7.0
60°-70°	594.1	5.2
70°-80°	339.7	3.0
80°-90°	103.0	0.9
90°-100°	73.8	0.6
100°-110°	454.8	4.0
110°-120°	824.9	7.3
120°-130°	1058.6	9.3
130°-140°	1138.6	10.0
140°-150°	1068.8	9.4
150°-160°	864.5	7.6
160°-170°	559.1	4.9
170°-180°	192.9	1.7
0°-30°	1485.7	13.1
0°-40°	2390.0	21.0
0°-60°	4095.6	36.0
0°-90°	5132.4	45.1
90°-120°	1353.5	11.9
90°-150°	4619.5	40.6
90°-180°	6236.0	54.9
0°-180°	11368.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1971	1971	1971	1971	1971	
5°	1968	1964	1949	1962	1961	187
15°	1876	1870	1854	1861	1862	528
25°	1703	1694	1674	1677	1673	783
35°	1470	1463	1442	1434	1422	919
45°	1204	1197	1179	1161	1155	927
55°	917	911	890	876	865	818
65°	619	615	599	585	578	614
75°	329	326	318	313	307	351
85°	86	87	87	86	83	96
90°	2	13	24	31	36	8
95°	86	78	24	31	32	109
105°	443	448	449	448	447	469
115°	831	838	840	834	825	823
125°	1182	1192	1192	1186	1182	1055
135°	1474	1482	1480	1476	1468	1136
145°	1709	1711	1712	1712	1704	1068
155°	1882	1873	1876	1879	1868	867
165°	1986	1977	1978	1986	1975	561
175°	2031	2022	2023	2034	2022	193
180°	2031	2031	2031	2031	2031	



TEST NUMBER: P333488

CATALOG NUMBER: S125DIW-S1270D1560U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1970.7	1970.7	1970.7	1970.7	1970.7	1970.7	1970.7	1970.7	1970.7	1970.7	1970.7
2.5°	1975.7	1974.9	1974.1	1973.2	1972.4	1970.6	1967.8	1965.0	1962.3	1959.5	1962.3
5°	1967.6	1966.9	1966.2	1965.5	1964.8	1962.8	1959.3	1955.8	1952.4	1948.9	1952.0
7.5°	1949.5	1948.8	1948.1	1947.4	1946.7	1944.5	1940.7	1936.9	1933.1	1929.3	1932.3
10°	1933.3	1932.6	1931.9	1931.2	1930.5	1928.3	1924.5	1920.7	1916.8	1913.0	1915.8
12.5°	1913.3	1912.1	1910.9	1909.6	1908.4	1906.0	1902.4	1898.9	1895.4	1891.8	1894.1
15°	1875.6	1874.6	1873.5	1872.5	1871.5	1869.0	1865.2	1861.4	1857.6	1853.8	1855.5
17.5°	1832.3	1830.8	1829.2	1827.7	1826.2	1823.4	1819.5	1815.5	1811.6	1807.6	1809.8
20°	1796.1	1795.4	1794.7	1794.0	1793.3	1790.7	1786.2	1781.7	1777.2	1772.7	1775.1
22.5°	1759.9	1758.7	1757.4	1756.2	1754.9	1752.2	1748.0	1743.8	1739.5	1735.3	1736.9
25°	1702.6	1700.8	1699.1	1697.4	1695.6	1692.5	1688.0	1683.5	1679.0	1674.5	1675.2
27.5°	1635.5	1634.5	1633.4	1632.4	1631.4	1628.5	1623.9	1619.2	1614.6	1609.9	1610.1
30°	1591.9	1590.8	1589.8	1588.7	1587.7	1584.6	1579.4	1574.2	1569.0	1563.8	1563.1
32.5°	1544.5	1542.9	1541.3	1539.7	1538.1	1535.0	1530.3	1525.7	1521.0	1516.4	1515.2
35°	1470.2	1468.9	1467.5	1466.1	1464.7	1461.6	1456.7	1451.9	1447.0	1442.2	1440.5
37.5°	1393.2	1391.5	1389.8	1388.0	1386.3	1383.1	1378.6	1374.0	1369.4	1364.9	1362.3
40°	1340.8	1339.1	1337.4	1335.6	1333.9	1330.6	1325.8	1320.9	1316.1	1311.2	1308.1
42.5°	1284.7	1283.3	1281.8	1280.3	1278.9	1275.7	1270.9	1266.0	1261.2	1256.3	1253.5
45°	1203.6	1202.3	1200.9	1199.5	1198.1	1195.3	1191.2	1187.0	1182.9	1178.7	1174.5
47.5°	1116.3	1116.4	1116.5	1116.5	1116.6	1114.1	1109.2	1104.2	1099.2	1094.2	1090.0
50°	1060.2	1059.2	1058.1	1057.1	1056.0	1053.4	1049.3	1045.1	1041.0	1036.8	1032.3
52.5°	1002.8	1002.1	1001.3	1000.5	999.8	997.2	992.7	988.3	983.9	979.4	975.5
55°	916.8	915.7	914.7	913.6	912.6	909.7	904.8	900.0	895.1	890.3	887.1
57.5°	826.0	825.5	824.9	824.4	823.8	821.5	817.4	813.3	809.2	805.1	801.1
60°	768.6	767.3	765.9	764.5	763.1	760.5	756.7	752.9	749.1	745.3	741.8
62.5°	708.8	707.7	706.6	705.4	704.3	702.2	698.9	695.6	692.4	689.1	685.4
65°	619.0	618.3	617.6	616.9	616.2	613.9	610.1	606.3	602.5	598.7	595.6
67.5°	532.0	530.5	529.1	527.6	526.2	524.0	521.2	518.3	515.5	512.6	510.0
70°	477.1	475.4	473.6	471.9	470.2	467.7	464.6	461.5	458.4	455.3	453.2
72.5°	417.2	416.0	414.9	413.7	412.5	410.9	408.9	406.9	404.9	402.9	400.5
75°	329.0	328.3	327.6	326.9	326.2	325.0	323.3	321.5	319.8	318.1	317.0
77.5°	247.6	247.3	247.0	246.8	246.5	245.9	244.9	243.9	242.9	242.0	241.4
80°	196.4	196.4	196.4	196.4	196.4	196.1	195.4	194.7	194.0	193.3	193.0
82.5°	151.5	151.0	150.4	149.9	149.3	149.0	148.8	148.7	148.6	148.4	147.8
85°	85.8	86.1	86.4	86.8	87.1	87.3	87.3	87.3	87.3	87.3	87.0
87.5°	34.0	34.5	35.0	35.6	36.1	36.5	36.7	36.9	37.1	37.2	37.6
90°	1.5	4.2	6.9	9.5	12.2	14.7	17.1	19.4	21.7	24.1	25.8
92.5°	23.2	21.3	19.4	17.6	15.7	15.8	17.9	19.9	22.0	24.1	25.8
95°	85.8	84.8	83.8	82.8	81.8	74.9	62.2	49.5	36.8	24.1	25.8
97.5°	179.1	180.9	182.7	184.6	186.4	174.7	149.5	124.4	99.2	74.1	64.6
100°	251.4	252.4	253.4	254.4	255.4	256.6	257.9	259.3	260.6	261.9	212.1
102.5°	324.9	326.1	327.4	328.7	329.9	331.0	331.8	332.6	333.4	334.2	324.8
105°	442.6	443.9	445.3	446.6	447.9	448.6	448.6	448.6	448.6	448.6	448.6
107.5°	564.8	564.8	564.8	564.8	564.8	565.1	565.8	566.5	567.2	567.8	567.9
110°	644.3	644.3	644.3	644.3	644.3	644.6	645.3	646.0	646.6	647.3	646.3



TEST NUMBER: P333488

CATALOG NUMBER: S125DIW-S1270D1560U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	719.0	719.8	720.6	721.4	722.2	722.8	723.2	723.6	724.0	724.4	723.1
115°	831.0	832.6	834.3	836.0	837.6	838.6	839.0	839.3	839.7	840.0	838.6
117.5°	946.9	946.8	946.7	946.7	946.6	947.2	948.5	949.7	951.0	952.3	950.5
120°	1019.1	1018.8	1018.5	1018.1	1017.8	1018.1	1019.1	1020.1	1021.1	1022.1	1021.5
122.5°	1083.0	1084.2	1085.5	1086.8	1088.0	1088.9	1089.4	1089.8	1090.3	1090.8	1090.1
125°	1181.7	1184.0	1186.4	1188.7	1191.1	1192.2	1192.2	1192.2	1192.2	1192.2	1190.9
127.5°	1275.9	1277.6	1279.3	1281.0	1282.6	1283.4	1283.2	1283.0	1282.8	1282.6	1281.8
130°	1333.7	1335.4	1337.1	1338.8	1340.4	1341.4	1341.8	1342.1	1342.4	1342.8	1341.8
132.5°	1391.5	1393.5	1395.4	1397.4	1399.3	1399.9	1399.2	1398.4	1397.7	1397.0	1396.8
135°	1473.7	1475.7	1477.8	1479.8	1481.8	1482.4	1481.8	1481.1	1480.4	1479.8	1479.1
137.5°	1549.3	1551.0	1552.8	1554.5	1556.3	1556.8	1556.2	1555.6	1555.0	1554.4	1554.6
140°	1598.7	1599.4	1600.0	1600.7	1601.4	1601.5	1601.2	1600.9	1600.5	1600.2	1600.9
142.5°	1643.2	1643.6	1644.0	1644.4	1644.8	1645.3	1645.8	1646.2	1646.7	1647.2	1647.3
145°	1708.6	1709.2	1709.9	1710.6	1711.3	1711.6	1711.6	1711.6	1711.6	1711.6	1711.9
147.5°	1765.8	1765.6	1765.5	1765.4	1765.2	1765.4	1765.8	1766.2	1766.6	1767.0	1767.4
150°	1801.9	1801.2	1800.6	1799.9	1799.2	1799.2	1799.9	1800.6	1801.2	1801.9	1802.6
152.5°	1836.8	1835.4	1833.9	1832.4	1830.9	1830.5	1831.2	1831.9	1832.6	1833.2	1833.9
155°	1881.7	1879.7	1877.7	1875.7	1873.7	1873.0	1873.7	1874.3	1875.0	1875.7	1876.7
157.5°	1916.3	1915.1	1913.9	1912.7	1911.5	1910.9	1911.0	1911.1	1911.1	1911.2	1912.3
160°	1940.4	1938.4	1936.4	1934.4	1932.4	1931.5	1931.9	1932.2	1932.5	1932.9	1934.2
162.5°	1959.7	1957.7	1955.7	1953.6	1951.6	1950.8	1951.1	1951.5	1951.8	1952.1	1954.0
165°	1985.6	1983.6	1981.5	1979.5	1977.5	1976.7	1977.0	1977.4	1977.7	1978.0	1980.0
167.5°	2004.8	2002.8	2000.7	1998.6	1996.5	1995.7	1996.0	1996.3	1996.7	1997.0	1999.4
170°	2015.7	2013.3	2011.0	2008.6	2006.3	2005.3	2005.6	2006.0	2006.3	2006.6	2009.3
172.5°	2022.9	2020.6	2018.2	2015.9	2013.5	2012.7	2013.3	2013.9	2014.5	2015.1	2017.5
175°	2030.7	2028.7	2026.7	2024.7	2022.7	2021.9	2022.2	2022.5	2022.9	2023.2	2025.9
177.5°	2034.3	2032.7	2031.1	2029.5	2027.9	2027.2	2027.5	2027.8	2028.0	2028.3	2030.2
180°	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7



TEST NUMBER: P333488

CATALOG NUMBER: S125DIW-S1270D1560U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1970.7	1970.7	1970.7	1970.7	1970.7	1970.7	1970.7	1970.7
2.5°	1965.0	1967.8	1970.6	1971.8	1971.6	1971.3	1971.0	1970.7
5°	1955.1	1958.3	1961.4	1962.8	1962.4	1962.1	1961.7	1961.4
7.5°	1935.3	1938.4	1941.4	1942.8	1942.5	1942.1	1941.8	1941.4
10°	1918.6	1921.4	1924.1	1925.3	1925.0	1924.6	1924.3	1924.0
12.5°	1896.3	1898.5	1900.7	1901.8	1901.7	1901.6	1901.6	1901.5
15°	1857.3	1859.0	1860.7	1861.6	1861.6	1861.6	1861.6	1861.6
17.5°	1811.9	1814.1	1816.2	1816.4	1814.7	1813.0	1811.2	1809.5
20°	1777.6	1780.0	1782.4	1782.8	1781.0	1779.3	1777.6	1775.8
22.5°	1738.5	1740.1	1741.7	1741.9	1740.7	1739.5	1738.3	1737.2
25°	1675.9	1676.6	1677.3	1677.1	1676.1	1675.0	1674.0	1672.9
27.5°	1610.2	1610.4	1610.5	1610.0	1609.0	1608.0	1606.9	1605.9
30°	1562.4	1561.7	1561.0	1560.2	1559.1	1558.1	1557.0	1556.0
32.5°	1513.9	1512.7	1511.4	1509.8	1508.0	1506.1	1504.2	1502.4
35°	1438.7	1437.0	1435.3	1433.0	1430.2	1427.5	1424.7	1421.9
37.5°	1359.7	1357.2	1354.6	1352.5	1350.9	1349.3	1347.7	1346.1
40°	1305.0	1301.9	1298.7	1296.7	1295.6	1294.6	1293.5	1292.5
42.5°	1250.7	1247.8	1245.0	1242.8	1241.2	1239.6	1238.0	1236.4
45°	1170.4	1166.2	1162.1	1159.5	1158.4	1157.4	1156.3	1155.3
47.5°	1085.7	1081.5	1077.3	1074.0	1071.5	1069.1	1066.7	1064.3
50°	1027.8	1023.3	1018.8	1015.3	1012.9	1010.5	1008.1	1005.6
52.5°	971.5	967.6	963.6	960.3	957.6	954.9	952.2	949.5
55°	884.0	880.9	877.8	875.0	872.6	870.2	867.7	865.3
57.5°	797.1	793.1	789.1	786.4	785.1	783.8	782.4	781.1
60°	738.3	734.9	731.4	728.5	726.0	723.6	721.2	718.8
62.5°	681.6	677.9	674.2	671.4	669.5	667.6	665.7	663.9
65°	592.5	589.3	586.2	584.0	582.6	581.2	579.8	578.4
67.5°	507.4	504.7	502.1	500.4	499.5	498.7	497.9	497.0
70°	451.1	449.0	446.9	445.2	443.8	442.4	441.1	439.7
72.5°	398.2	395.8	393.5	391.6	390.2	388.8	387.4	386.0
75°	316.0	314.9	313.9	312.7	311.3	309.9	308.5	307.1
77.5°	240.7	240.1	239.5	238.7	237.7	236.7	235.8	234.8
80°	192.6	192.3	191.9	191.4	190.7	190.0	189.3	188.7
82.5°	147.2	146.6	145.9	145.6	145.4	145.3	145.1	145.0
85°	86.6	86.3	85.9	85.4	84.7	84.0	83.3	82.6
87.5°	37.9	38.3	38.6	38.6	38.2	37.9	37.5	37.2
90°	27.4	29.1	30.8	32.1	33.1	34.1	35.1	36.1
92.5°	27.4	29.1	30.8	31.8	32.3	32.8	33.3	33.7
95°	27.4	29.1	30.8	31.6	31.6	31.6	31.6	31.6
97.5°	55.2	45.8	36.3	31.6	31.6	31.6	31.6	31.6
100°	162.2	112.4	62.6	37.0	35.6	34.3	33.0	31.6
102.5°	315.3	305.9	296.5	280.4	257.6	234.9	212.1	189.4
105°	448.6	448.6	448.6	448.4	448.1	447.8	447.4	447.1
107.5°	568.0	568.0	568.1	567.6	566.6	565.6	564.6	563.6
110°	645.3	644.3	643.3	643.0	643.3	643.6	644.0	644.3



TEST NUMBER: P333488

CATALOG NUMBER: S125DIW-S1270D1560U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	721.8	720.6	719.3	718.4	718.0	717.5	717.0	716.5
115°	837.3	836.0	834.6	833.0	831.0	828.9	826.9	824.9
117.5°	948.8	947.1	945.3	944.0	943.2	942.3	941.4	940.5
120°	1020.8	1020.1	1019.5	1018.3	1016.6	1014.9	1013.3	1011.6
122.5°	1089.4	1088.8	1088.1	1086.8	1084.9	1082.9	1081.0	1079.0
125°	1189.6	1188.2	1186.9	1185.7	1184.7	1183.7	1182.7	1181.7
127.5°	1281.1	1280.4	1279.6	1278.0	1275.5	1273.1	1270.6	1268.1
130°	1340.8	1339.8	1338.8	1337.4	1335.8	1334.1	1332.4	1330.7
132.5°	1396.6	1396.4	1396.2	1395.2	1393.6	1391.9	1390.2	1388.5
135°	1478.4	1477.8	1477.1	1475.7	1473.7	1471.7	1469.7	1467.7
137.5°	1554.7	1554.8	1555.0	1554.2	1552.4	1550.7	1548.9	1547.2
140°	1601.5	1602.2	1602.9	1602.2	1600.2	1598.2	1596.2	1594.2
142.5°	1647.4	1647.6	1647.7	1646.8	1644.7	1642.7	1640.7	1638.7
145°	1712.3	1712.6	1712.9	1712.1	1710.1	1708.1	1706.1	1704.1
147.5°	1767.8	1768.2	1768.6	1767.6	1765.2	1762.8	1760.4	1758.0
150°	1803.2	1803.9	1804.6	1803.6	1800.9	1798.2	1795.6	1792.9
152.5°	1834.6	1835.2	1835.9	1835.0	1832.6	1830.2	1827.8	1825.4
155°	1877.7	1878.7	1879.7	1878.8	1876.2	1873.5	1870.8	1868.1
157.5°	1913.3	1914.4	1915.5	1914.7	1912.0	1909.3	1906.6	1904.0
160°	1935.5	1936.9	1938.2	1937.6	1934.9	1932.2	1929.5	1926.9
162.5°	1955.9	1957.8	1959.6	1959.1	1956.2	1953.2	1950.3	1947.3
165°	1982.0	1984.1	1986.1	1985.7	1983.1	1980.4	1977.7	1975.0
167.5°	2001.8	2004.2	2006.6	2006.3	2003.3	2000.3	1997.3	1994.3
170°	2012.0	2014.7	2017.3	2017.2	2014.2	2011.2	2008.1	2005.1
172.5°	2019.9	2022.3	2024.7	2024.4	2021.4	2018.4	2015.4	2012.4
175°	2028.5	2031.2	2033.9	2033.7	2030.7	2027.7	2024.7	2021.7
177.5°	2032.1	2033.9	2035.8	2035.7	2033.5	2031.4	2029.2	2027.1
180°	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7

(END OF REPORT)