

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333388

Luminaire Tested: **S125DIW-S610D1340U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333388
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S610D1340U835-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7892.7 lumens
Efficiency: N/A
Efficacy: 146.7 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

Luminous Intensity Polar Plot

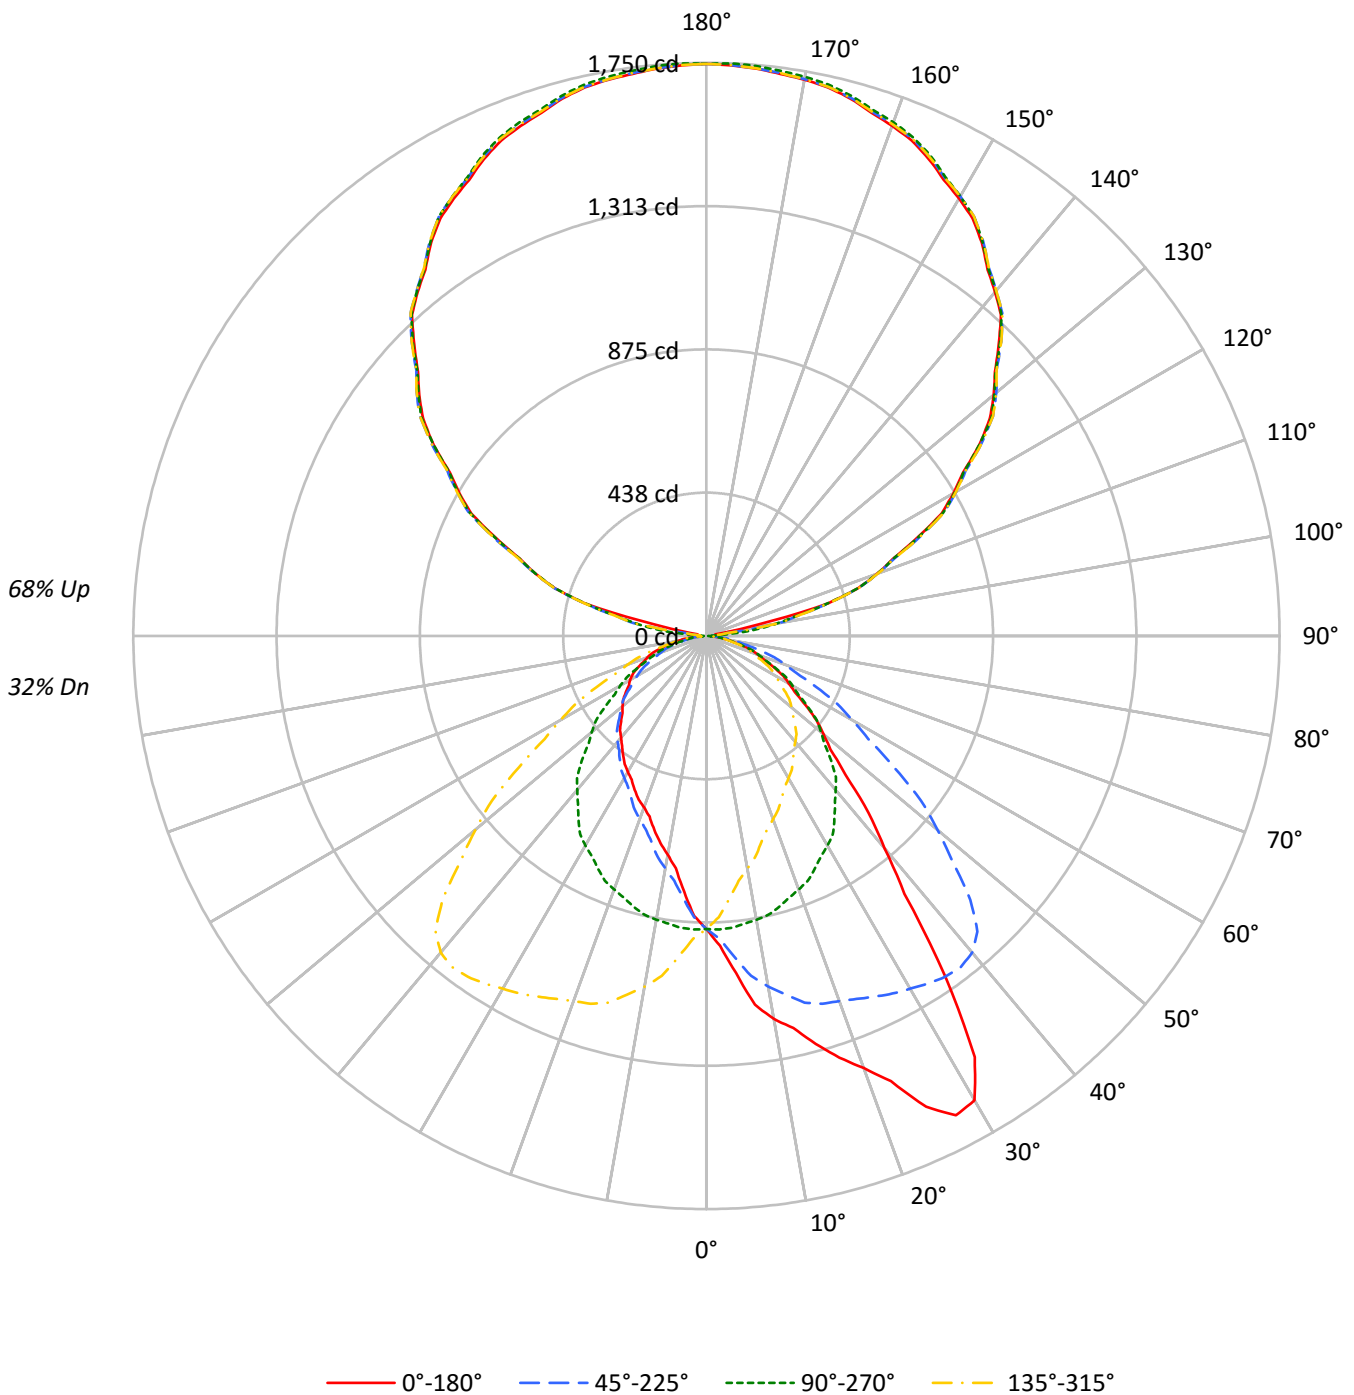



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	73	73	73	56	56	56	40	40	40	32
1	94	90	86	83	84	81	78	75	64	62	60	49	48	47	35	34	34	27
2	86	78	73	68	77	71	66	62	57	53	50	43	41	39	31	30	29	23
3	78	69	62	56	70	62	56	52	50	46	42	38	36	33	28	26	24	20
4	71	61	53	48	64	55	49	44	44	40	36	34	31	28	25	23	21	17
5	65	54	46	41	59	49	42	37	40	35	31	31	27	25	22	20	18	15
6	60	49	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16	13
7	56	44	36	31	50	40	33	28	32	27	24	25	22	19	18	16	14	12
8	51	40	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13	10
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12	9
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	5780	5780	5780	5780
5°	6694	5800	5078	5800
10°	7788	5770	4450	5770
15°	8620	5727	4105	5727
20°	9649	5660	3827	5660
25°	11305	5585	3693	5585
30°	12210	5510	3575	5510
35°	10039	5370	3498	5370
40°	7136	5176	3414	5176
45°	5482	4913	3366	4913
50°	4679	4588	3359	4588
55°	4166	4269	3388	4269
60°	3759	3920	3475	3920
65°	3472	3570	3564	3570
70°	3155	3206	3616	3206
75°	2787	2825	3583	2825
80°	2347	2302	3277	2302
85°	1860	1660	2645	1660



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.2	1.1
10°-20°	256.5	3.3
20°-30°	416.6	5.3
30°-40°	508.1	6.4
40°-50°	462.2	5.9
50°-60°	368.2	4.7
60°-70°	256.4	3.2
70°-80°	136.8	1.7
80°-90°	38.1	0.5
90°-100°	63.5	0.8
100°-110°	391.2	5.0
110°-120°	709.5	9.0
120°-130°	910.5	11.5
130°-140°	979.3	12.4
140°-150°	919.2	11.6
150°-160°	743.6	9.4
160°-170°	480.9	6.1
170°-180°	165.9	2.1
0°-30°	759.2	9.6
0°-40°	1267.4	16.1
0°-60°	2097.8	26.6
0°-90°	2529.1	32.0
90°-120°	1164.1	14.7
90°-150°	3973.2	50.3
90°-180°	5364.0	68.0
0°-180°	7892.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	895	895	895	895	895	
5°	1032	895	783	895	1032	104
15°	1289	857	614	857	1289	369
25°	1586	784	518	784	1586	725
35°	1273	681	444	681	1273	779
45°	600	538	368	538	600	480
55°	370	379	301	379	370	333
65°	227	234	233	234	227	225
75°	112	113	144	113	112	120
85°	25	22	36	22	25	30
90°	31	1	31	1	31	14
95°	27	74	27	74	27	22
105°	384	381	384	381	384	348
115°	710	715	710	715	710	704
125°	1016	1016	1016	1016	1016	904
135°	1262	1268	1262	1268	1262	974
145°	1466	1470	1466	1470	1466	916
155°	1607	1618	1607	1618	1607	741
165°	1699	1708	1699	1708	1699	479
175°	1739	1747	1739	1747	1739	165
180°	1747	1747	1747	1747	1747	



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0
2.5°	946.7	945.4	944.2	941.8	943.6	938.4	936.0	931.8	926.6	924.8	922.6
5°	1032.5	1034.4	1036.3	1028.3	1029.1	1023.8	1011.6	1001.7	993.8	983.5	976.3
7.5°	1135.8	1131.3	1131.0	1125.8	1116.9	1109.8	1097.0	1080.7	1065.0	1047.1	1032.3
10°	1187.5	1187.9	1184.5	1178.4	1168.9	1162.0	1145.3	1129.4	1110.0	1087.2	1070.9
12.5°	1226.4	1228.0	1223.7	1215.5	1210.8	1195.5	1182.4	1163.4	1140.4	1122.2	1097.3
15°	1289.3	1285.1	1282.1	1271.8	1263.8	1247.9	1227.0	1207.2	1182.2	1159.0	1135.8
17.5°	1349.9	1353.3	1347.6	1338.2	1313.5	1294.8	1266.8	1239.8	1208.5	1177.5	1149.8
20°	1404.0	1407.1	1398.3	1382.0	1352.4	1333.7	1296.9	1261.9	1225.9	1186.0	1155.6
22.5°	1471.5	1469.1	1457.3	1432.4	1406.8	1372.3	1332.5	1289.9	1244.7	1199.6	1159.2
25°	1586.4	1570.4	1563.2	1532.4	1498.6	1448.1	1393.4	1331.1	1274.9	1215.2	1163.6
27.5°	1650.0	1645.0	1637.0	1615.5	1580.0	1526.0	1461.5	1385.6	1306.2	1231.0	1163.3
30°	1637.3	1638.0	1638.8	1631.9	1609.2	1568.5	1504.3	1422.6	1328.4	1243.7	1165.5
32.5°	1524.2	1538.0	1551.3	1566.9	1573.3	1565.5	1525.3	1451.5	1354.6	1258.3	1164.2
35°	1273.3	1277.5	1320.5	1363.0	1420.7	1465.6	1495.6	1462.9	1381.2	1270.7	1162.8
37.5°	992.8	1013.4	1043.1	1091.2	1174.5	1249.1	1345.1	1389.2	1362.8	1274.7	1160.1
40°	846.4	865.4	884.7	933.7	1004.0	1094.4	1203.4	1296.5	1318.2	1261.9	1151.0
42.5°	733.3	748.4	769.9	806.7	865.4	945.5	1049.7	1171.3	1246.1	1224.9	1131.9
45°	600.2	609.7	626.4	655.7	698.2	760.9	852.8	985.8	1101.6	1140.0	1086.4
47.5°	513.7	513.7	526.7	546.9	577.6	630.8	698.8	803.0	926.7	1018.3	1014.0
50°	465.7	463.8	474.1	491.6	515.9	551.2	616.2	699.4	818.3	922.0	950.8
52.5°	424.4	424.6	430.9	443.8	464.2	494.4	542.9	617.9	719.5	825.9	880.3
55°	370.0	368.5	375.7	384.4	399.3	419.0	454.0	511.3	593.7	698.6	769.2
57.5°	320.2	324.3	327.2	333.3	345.6	358.8	388.3	430.4	495.8	585.8	660.5
60°	291.0	295.2	297.4	303.5	313.4	324.8	347.6	381.8	436.9	514.4	588.4
62.5°	264.8	268.1	268.9	274.3	282.4	293.5	311.4	340.1	383.7	451.4	524.0
65°	227.2	227.2	228.7	234.4	238.2	248.1	261.7	282.6	317.6	370.4	432.3
67.5°	190.8	192.7	192.3	194.8	198.3	206.0	215.8	233.0	258.9	297.4	347.0
70°	167.1	168.7	168.3	170.2	174.0	178.9	186.9	203.2	221.8	254.9	297.4
72.5°	145.9	146.5	145.5	148.0	150.3	154.6	163.5	172.2	189.6	217.5	252.5
75°	111.7	112.4	113.2	114.7	117.0	119.3	123.8	132.6	144.0	164.9	187.3
77.5°	83.7	82.3	84.1	83.9	85.2	86.9	90.9	95.6	104.9	118.1	135.5
80°	63.1	63.4	63.4	63.8	65.7	66.9	70.3	73.7	80.9	90.8	102.9
82.5°	46.0	47.0	46.4	47.1	48.7	49.5	51.4	54.2	58.4	66.2	75.0
85°	25.1	23.2	23.9	24.7	24.7	25.1	26.6	27.7	30.0	33.0	36.5
87.5°	13.5	13.9	14.1	13.9	14.0	13.8	14.7	14.4	15.1	15.7	16.5
90°	31.1	30.2	29.3	28.5	27.6	26.5	25.0	23.6	22.2	20.7	18.7
92.5°	29.0	28.6	28.2	27.8	27.4	26.5	25.0	23.6	22.2	20.7	18.9
95°	27.2	27.2	27.2	27.2	27.2	26.5	25.0	23.6	22.2	20.7	31.6
97.5°	27.2	27.2	27.2	27.2	27.2	31.2	39.4	47.5	55.6	63.7	85.3
100°	27.2	28.3	29.5	30.6	31.8	53.8	96.7	139.5	182.4	225.3	224.1
102.5°	162.9	182.4	202.0	221.6	241.1	255.0	263.1	271.2	279.3	287.4	286.7
105°	384.5	384.8	385.1	385.4	385.7	385.8	385.8	385.8	385.8	385.8	385.8
107.5°	484.8	485.6	486.5	487.3	488.2	488.6	488.6	488.5	488.4	488.4	487.8
110°	554.2	553.9	553.6	553.3	553.0	553.3	554.2	555.0	555.9	556.7	556.2



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	616.3	616.7	617.1	617.5	617.9	618.7	619.8	620.8	621.9	623.0	622.7
115°	709.5	711.2	713.0	714.7	716.4	717.9	719.0	720.2	721.3	722.5	722.2
117.5°	809.0	809.7	810.5	811.2	811.9	813.1	814.6	816.1	817.6	819.1	818.0
120°	870.1	871.5	872.9	874.4	875.8	876.8	877.4	878.0	878.6	879.1	878.3
122.5°	928.1	929.7	931.4	933.1	934.7	935.9	936.4	937.0	937.6	938.2	937.8
125°	1016.4	1017.2	1018.1	1019.0	1019.8	1020.8	1022.0	1023.1	1024.3	1025.4	1025.4
127.5°	1090.7	1092.8	1095.0	1097.1	1099.2	1100.6	1101.2	1101.9	1102.5	1103.1	1103.3
130°	1144.6	1146.0	1147.4	1148.9	1150.3	1151.5	1152.3	1153.2	1154.1	1154.9	1154.6
132.5°	1194.3	1195.7	1197.2	1198.6	1200.0	1200.8	1201.0	1201.2	1201.4	1201.5	1202.2
135°	1262.4	1264.1	1265.8	1267.6	1269.3	1270.4	1271.0	1271.6	1272.2	1272.7	1273.3
137.5°	1330.7	1332.2	1333.7	1335.2	1336.7	1337.4	1337.3	1337.2	1337.1	1337.0	1337.5
140°	1371.1	1372.9	1374.6	1376.3	1378.0	1378.6	1378.0	1377.5	1376.9	1376.3	1376.6
142.5°	1409.5	1411.2	1412.9	1414.6	1416.4	1417.2	1417.1	1416.9	1416.8	1416.7	1416.3
145°	1465.7	1467.4	1469.1	1470.8	1472.6	1473.3	1473.0	1472.7	1472.4	1472.1	1472.1
147.5°	1512.0	1514.1	1516.1	1518.2	1520.3	1521.2	1520.8	1520.5	1520.1	1519.8	1519.4
150°	1542.0	1544.3	1546.6	1548.9	1551.2	1552.1	1551.5	1551.0	1550.4	1549.8	1549.2
152.5°	1570.0	1572.1	1574.2	1576.2	1578.3	1579.0	1578.5	1577.9	1577.3	1576.7	1576.2
155°	1606.8	1609.1	1611.4	1613.7	1616.0	1616.7	1615.8	1615.0	1614.1	1613.3	1612.7
157.5°	1637.6	1639.9	1642.2	1644.5	1646.8	1647.5	1646.6	1645.7	1644.7	1643.8	1643.8
160°	1657.3	1659.6	1661.9	1664.2	1666.5	1667.1	1665.9	1664.8	1663.6	1662.5	1662.2
162.5°	1674.9	1677.4	1679.9	1682.5	1685.0	1685.5	1683.9	1682.2	1680.6	1679.0	1678.7
165°	1698.7	1701.0	1703.3	1705.6	1707.9	1708.2	1706.5	1704.7	1703.0	1701.3	1701.0
167.5°	1715.3	1717.9	1720.5	1723.0	1725.6	1725.9	1723.8	1721.8	1719.7	1717.6	1717.3
170°	1724.6	1727.2	1729.8	1732.4	1735.0	1735.1	1732.8	1730.5	1728.2	1725.9	1725.6
172.5°	1730.8	1733.4	1736.0	1738.6	1741.2	1741.4	1739.4	1737.3	1735.2	1733.1	1732.6
175°	1738.8	1741.4	1744.0	1746.6	1749.2	1749.3	1747.0	1744.7	1742.4	1740.1	1739.9
177.5°	1743.5	1745.3	1747.2	1749.0	1750.9	1751.0	1749.4	1747.8	1746.2	1744.5	1744.3
180°	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0
2.5°	920.8	918.7	916.3	912.0	906.8	904.1	899.9	897.1	891.6	887.1	882.2
5°	967.5	957.7	948.6	936.8	923.9	915.5	905.6	894.6	883.2	871.4	858.5
7.5°	1015.9	998.5	979.5	959.0	939.1	920.7	903.1	885.9	869.8	850.3	833.8
10°	1048.5	1026.4	1002.9	975.1	948.2	924.6	900.7	879.8	858.5	835.7	815.6
12.5°	1081.0	1051.6	1018.4	987.9	955.5	927.1	898.9	872.2	845.5	820.2	796.8
15°	1103.9	1078.1	1047.3	1004.0	967.5	928.4	891.2	856.6	824.3	796.2	766.6
17.5°	1119.0	1085.8	1052.7	1011.2	963.4	919.6	877.4	837.9	801.5	765.8	737.3
20°	1121.8	1087.6	1053.0	1012.4	963.4	913.2	871.1	823.6	784.4	747.6	712.6
22.5°	1120.9	1082.1	1044.5	1002.6	954.9	908.7	857.7	809.3	766.8	730.6	694.1
25°	1112.3	1070.9	1023.8	981.6	934.5	885.5	833.8	783.7	740.4	699.0	662.9
27.5°	1105.1	1051.4	998.1	948.9	903.4	858.5	809.1	757.7	709.7	667.7	633.7
30°	1096.3	1037.4	977.4	926.1	879.4	835.7	789.0	738.9	688.7	647.7	611.2
32.5°	1088.4	1019.8	956.5	900.6	851.2	808.7	765.6	717.9	668.7	627.0	590.6
35°	1073.2	993.8	921.2	858.1	805.3	761.7	725.6	681.1	635.9	595.6	560.7
37.5°	1053.8	959.6	881.7	815.6	757.7	711.7	678.1	644.0	600.6	561.8	530.2
40°	1038.6	935.3	852.8	785.2	725.2	677.3	646.2	613.9	577.8	541.7	508.3
42.5°	1019.4	913.4	823.6	750.9	691.5	644.8	612.1	584.7	552.9	519.2	488.2
45°	984.3	873.7	776.5	698.2	638.2	592.2	558.4	537.9	514.0	482.1	455.9
47.5°	932.5	826.1	725.5	644.7	582.8	540.2	508.5	488.8	472.0	448.3	424.5
50°	886.6	790.5	688.7	608.6	546.6	503.7	474.5	456.6	442.2	423.9	403.8
52.5°	835.3	745.8	652.6	573.3	512.0	469.7	441.0	425.3	413.3	400.2	380.4
55°	753.7	677.7	591.1	515.9	459.3	417.9	392.8	379.1	369.2	359.4	347.2
57.5°	663.8	604.4	527.6	458.9	406.8	369.1	345.7	332.4	324.7	319.6	312.5
60°	600.6	549.7	483.6	420.9	370.0	336.6	313.8	303.5	297.1	292.9	287.6
62.5°	541.9	500.1	438.9	381.7	337.2	305.6	285.2	275.3	269.1	267.1	262.6
65°	455.5	423.2	372.7	325.2	287.2	260.2	243.1	233.6	229.8	227.5	227.9
67.5°	370.3	350.6	310.1	269.6	239.2	216.6	202.9	195.6	193.7	190.7	190.6
70°	318.3	303.5	269.3	234.0	207.0	189.6	177.4	169.8	167.9	166.4	166.0
72.5°	272.4	259.5	229.8	201.5	177.3	161.9	151.9	147.3	144.2	143.3	143.2
75°	204.8	197.5	174.0	151.6	134.9	124.2	117.4	113.2	110.9	110.5	110.9
77.5°	145.6	139.3	124.3	108.4	97.9	89.8	84.0	82.6	80.0	80.1	79.7
80°	109.4	105.2	95.7	83.2	74.5	67.6	64.6	61.9	61.2	60.0	61.2
82.5°	79.3	74.8	68.4	60.4	53.2	49.1	46.0	45.2	44.7	44.2	44.4
85°	39.1	39.5	35.7	29.6	26.6	24.3	22.4	22.4	22.0	21.7	22.0
87.5°	16.7	15.7	14.1	12.7	10.8	9.4	8.6	8.5	8.0	8.2	8.9
90°	16.7	14.7	12.7	10.5	8.2	5.9	3.6	1.3	3.6	5.9	8.2
92.5°	17.1	15.4	13.6	13.5	15.1	16.7	18.3	19.9	18.3	16.7	15.1
95°	42.6	53.5	64.4	70.3	71.2	72.1	72.9	73.8	72.9	72.1	71.2
97.5°	107.0	128.6	150.2	160.3	158.7	157.2	155.6	154.1	155.6	157.2	158.7
100°	223.0	221.8	220.7	219.7	218.8	217.9	217.1	216.2	217.1	217.9	218.8
102.5°	286.1	285.4	284.7	283.8	282.7	281.6	280.5	279.4	280.5	281.6	282.7
105°	385.8	385.8	385.8	385.3	384.1	383.0	381.8	380.7	381.8	383.0	384.1
107.5°	487.2	486.7	486.1	485.8	485.8	485.8	485.8	485.8	485.8	485.8	485.8
110°	555.6	555.0	554.4	554.2	554.2	554.2	554.2	554.2	554.2	554.2	554.2



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	622.3	622.0	621.7	621.1	620.4	619.8	619.1	618.4	619.1	619.8	620.4
115°	721.9	721.6	721.3	720.5	719.0	717.6	716.1	714.7	716.1	717.6	719.0
117.5°	816.9	815.8	814.7	814.2	814.2	814.3	814.3	814.4	814.3	814.3	814.2
120°	877.4	876.5	875.7	875.4	875.7	876.0	876.3	876.5	876.3	876.0	875.7
122.5°	937.4	937.0	936.6	935.8	934.7	933.6	932.5	931.4	932.5	933.6	934.7
125°	1025.4	1025.4	1025.4	1024.4	1022.4	1020.4	1018.4	1016.4	1018.4	1020.4	1022.4
127.5°	1103.5	1103.6	1103.8	1103.2	1101.7	1100.3	1098.9	1097.4	1098.9	1100.3	1101.7
130°	1154.3	1154.1	1153.8	1152.9	1151.5	1150.0	1148.6	1147.1	1148.6	1150.0	1151.5
132.5°	1202.8	1203.4	1204.1	1203.5	1201.9	1200.2	1198.5	1196.9	1198.5	1200.2	1201.9
135°	1273.9	1274.5	1275.0	1274.5	1272.7	1271.0	1269.3	1267.6	1269.3	1271.0	1272.7
137.5°	1338.0	1338.5	1339.0	1338.5	1337.0	1335.5	1334.0	1332.6	1334.0	1335.5	1337.0
140°	1376.9	1377.2	1377.5	1377.3	1376.7	1376.2	1375.6	1375.0	1375.6	1376.2	1376.7
142.5°	1415.9	1415.5	1415.1	1414.7	1414.4	1414.0	1413.7	1413.3	1413.7	1414.0	1414.4
145°	1472.1	1472.1	1472.1	1471.8	1471.3	1470.7	1470.1	1469.5	1470.1	1470.7	1471.3
147.5°	1519.1	1518.7	1518.4	1518.3	1518.4	1518.5	1518.6	1518.7	1518.6	1518.5	1518.4
150°	1548.7	1548.1	1547.5	1547.5	1548.1	1548.7	1549.2	1549.8	1549.2	1548.7	1548.1
152.5°	1575.6	1575.0	1574.4	1574.8	1576.1	1577.3	1578.6	1579.8	1578.6	1577.3	1576.1
155°	1612.1	1611.5	1611.0	1611.5	1613.3	1615.0	1616.7	1618.4	1616.7	1615.0	1613.3
157.5°	1643.7	1643.6	1643.6	1644.1	1645.1	1646.1	1647.2	1648.2	1647.2	1646.1	1645.1
160°	1661.9	1661.6	1661.3	1662.0	1663.7	1665.5	1667.2	1668.9	1667.2	1665.5	1663.7
162.5°	1678.5	1678.2	1677.9	1678.6	1680.3	1682.0	1683.8	1685.5	1683.8	1682.0	1680.3
165°	1700.7	1700.4	1700.1	1700.9	1702.6	1704.3	1706.0	1707.8	1706.0	1704.3	1702.6
167.5°	1717.0	1716.7	1716.5	1717.2	1719.0	1720.8	1722.6	1724.3	1722.6	1720.8	1719.0
170°	1725.3	1725.0	1724.7	1725.6	1727.6	1729.6	1731.7	1733.7	1731.7	1729.6	1727.6
172.5°	1732.1	1731.6	1731.1	1731.8	1733.8	1735.9	1737.9	1739.9	1737.9	1735.9	1733.8
175°	1739.6	1739.3	1739.0	1739.7	1741.4	1743.2	1744.9	1746.6	1744.9	1743.2	1741.4
177.5°	1744.1	1743.9	1743.6	1744.2	1745.6	1747.0	1748.3	1749.7	1748.3	1747.0	1745.6
180°	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0
2.5°	879.5	876.1	873.4	867.3	864.0	859.4	855.8	859.7	855.5	857.3	854.6
5°	852.1	841.4	833.8	822.8	813.3	804.6	798.1	797.0	793.9	792.4	787.9
7.5°	819.1	805.8	792.7	778.3	766.1	753.8	745.8	739.3	735.0	729.3	725.4
10°	799.6	781.8	766.6	749.1	733.9	720.6	710.0	704.7	699.7	692.5	689.9
12.5°	775.6	757.2	738.6	719.9	705.4	690.5	681.4	673.4	670.0	661.8	661.0
15°	746.8	719.1	700.9	681.9	661.7	649.6	642.0	633.3	629.5	623.8	619.6
17.5°	712.5	687.7	664.9	645.3	628.0	617.8	608.3	602.3	595.8	592.1	585.2
20°	687.6	664.0	641.2	620.3	607.0	595.3	587.7	582.0	575.1	573.2	566.4
22.5°	666.6	640.6	618.7	601.2	586.7	573.4	565.2	561.3	556.6	550.7	549.4
25°	632.5	605.5	586.9	569.4	556.5	544.4	538.7	533.7	529.2	525.0	523.5
27.5°	603.0	578.9	556.8	541.0	529.8	518.7	513.7	507.7	504.3	501.0	496.9
30°	582.4	557.7	538.3	523.1	510.9	501.1	495.7	491.6	488.5	485.5	483.2
32.5°	561.1	538.2	519.4	504.6	492.4	485.0	480.2	477.3	473.9	470.3	467.4
35°	533.0	507.9	489.7	476.7	467.2	461.5	456.2	453.6	449.8	449.8	446.7
37.5°	501.3	479.6	463.5	451.7	443.2	438.1	432.4	430.6	428.1	426.5	425.5
40°	482.4	462.3	447.1	435.3	426.2	422.0	417.5	414.4	412.9	411.0	410.3
42.5°	463.0	443.8	429.2	418.3	410.4	406.8	402.6	400.5	397.4	394.9	394.5
45°	433.4	414.8	401.5	392.8	386.0	381.8	379.1	374.6	373.0	370.0	369.6
47.5°	405.4	387.5	374.5	367.3	361.3	357.9	353.7	349.2	347.4	345.9	345.8
50°	384.4	368.1	355.9	349.1	343.4	338.5	334.3	331.3	330.1	330.1	330.9
52.5°	363.2	349.3	338.9	330.6	325.2	319.9	316.1	314.2	312.5	314.3	315.7
55°	332.0	318.0	310.4	302.4	297.1	291.0	289.1	288.3	287.2	290.2	291.7
57.5°	299.0	289.2	280.3	272.4	267.6	264.1	261.5	261.1	263.2	264.6	269.6
60°	278.1	266.7	258.7	252.6	246.9	244.6	243.9	243.1	244.6	248.8	255.3
62.5°	255.0	245.7	237.1	232.6	228.4	224.6	224.4	224.9	227.9	232.7	239.2
65°	221.1	213.1	207.4	202.1	198.7	196.4	197.2	198.7	202.1	208.6	215.8
67.5°	186.7	181.2	176.1	171.8	168.5	168.5	169.3	171.6	175.6	183.0	189.6
70°	164.5	158.4	154.2	152.3	149.7	148.2	150.4	154.2	157.6	164.5	170.2
72.5°	142.3	137.1	133.9	132.6	131.4	130.2	131.0	135.1	139.7	146.6	153.2
75°	109.4	107.5	105.2	103.7	102.6	103.3	104.1	107.9	111.7	118.9	126.5
77.5°	79.9	77.9	76.5	76.1	75.5	75.9	78.0	80.8	84.6	89.8	95.6
80°	60.4	59.6	58.9	58.5	58.5	58.9	61.9	63.8	67.2	72.2	76.7
82.5°	44.0	43.5	43.4	43.3	43.6	43.7	45.5	48.0	50.8	54.6	58.5
85°	23.2	22.4	23.6	23.9	23.2	24.3	25.1	26.6	27.7	29.6	31.5
87.5°	9.7	10.7	10.8	11.5	11.9	13.0	12.9	14.4	15.3	16.2	16.2
90°	10.5	12.7	14.7	16.7	18.7	20.7	22.2	23.6	25.0	26.5	27.6
92.5°	13.5	13.6	15.4	17.1	18.9	20.7	22.2	23.6	25.0	26.5	27.4
95°	70.3	64.4	53.5	42.6	31.6	20.7	22.2	23.6	25.0	26.5	27.2
97.5°	160.3	150.2	128.6	107.0	85.3	63.7	55.6	47.5	39.4	31.2	27.2
100°	219.7	220.7	221.8	223.0	224.1	225.3	182.4	139.5	96.7	53.8	31.8
102.5°	283.8	284.7	285.4	286.1	286.7	287.4	279.3	271.2	263.1	255.0	241.1
105°	385.3	385.8	385.8	385.8	385.8	385.8	385.8	385.8	385.8	385.8	385.7
107.5°	485.8	486.1	486.7	487.2	487.8	488.4	488.4	488.5	488.6	488.6	488.2
110°	554.2	554.4	555.0	555.6	556.2	556.7	555.9	555.0	554.2	553.3	553.0



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	621.1	621.7	622.0	622.3	622.7	623.0	621.9	620.8	619.8	618.7	617.9
115°	720.5	721.3	721.6	721.9	722.2	722.5	721.3	720.2	719.0	717.9	716.4
117.5°	814.2	814.7	815.8	816.9	818.0	819.1	817.6	816.1	814.6	813.1	811.9
120°	875.4	875.7	876.5	877.4	878.3	879.1	878.6	878.0	877.4	876.8	875.8
122.5°	935.8	936.6	937.0	937.4	937.8	938.2	937.6	937.0	936.4	935.9	934.7
125°	1024.4	1025.4	1025.4	1025.4	1025.4	1025.4	1024.3	1023.1	1022.0	1020.8	1019.8
127.5°	1103.2	1103.8	1103.6	1103.5	1103.3	1103.1	1102.5	1101.9	1101.2	1100.6	1099.2
130°	1152.9	1153.8	1154.1	1154.3	1154.6	1154.9	1154.1	1153.2	1152.3	1151.5	1150.3
132.5°	1203.5	1204.1	1203.4	1202.8	1202.2	1201.5	1201.4	1201.2	1201.0	1200.8	1200.0
135°	1274.5	1275.0	1274.5	1273.9	1273.3	1272.7	1272.2	1271.6	1271.0	1270.4	1269.3
137.5°	1338.5	1339.0	1338.5	1338.0	1337.5	1337.0	1337.1	1337.2	1337.3	1337.4	1336.7
140°	1377.3	1377.5	1377.2	1376.9	1376.6	1376.3	1376.9	1377.5	1378.0	1378.6	1378.0
142.5°	1414.7	1415.1	1415.5	1415.9	1416.3	1416.7	1416.8	1416.9	1417.1	1417.2	1416.4
145°	1471.8	1472.1	1472.1	1472.1	1472.1	1472.1	1472.4	1472.7	1473.0	1473.3	1472.6
147.5°	1518.3	1518.4	1518.7	1519.1	1519.4	1519.8	1520.1	1520.5	1520.8	1521.2	1520.3
150°	1547.5	1547.5	1548.1	1548.7	1549.2	1549.8	1550.4	1551.0	1551.5	1552.1	1551.2
152.5°	1574.8	1574.4	1575.0	1575.6	1576.2	1576.7	1577.3	1577.9	1578.5	1579.0	1578.3
155°	1611.5	1611.0	1611.5	1612.1	1612.7	1613.3	1614.1	1615.0	1615.8	1616.7	1616.0
157.5°	1644.1	1643.6	1643.6	1643.7	1643.8	1643.8	1644.7	1645.7	1646.6	1647.5	1646.8
160°	1662.0	1661.3	1661.6	1661.9	1662.2	1662.5	1663.6	1664.8	1665.9	1667.1	1666.5
162.5°	1678.6	1677.9	1678.2	1678.5	1678.7	1679.0	1680.6	1682.2	1683.9	1685.5	1685.0
165°	1700.9	1700.1	1700.4	1700.7	1701.0	1701.3	1703.0	1704.7	1706.5	1708.2	1707.9
167.5°	1717.2	1716.5	1716.7	1717.0	1717.3	1717.6	1719.7	1721.8	1723.8	1725.9	1725.6
170°	1725.6	1724.7	1725.0	1725.3	1725.6	1725.9	1728.2	1730.5	1732.8	1735.1	1735.0
172.5°	1731.8	1731.1	1731.6	1732.1	1732.6	1733.1	1735.2	1737.3	1739.4	1741.4	1741.2
175°	1739.7	1739.0	1739.3	1739.6	1739.9	1740.1	1742.4	1744.7	1747.0	1749.3	1749.2
177.5°	1744.2	1743.6	1743.9	1744.1	1744.3	1744.5	1746.2	1747.8	1749.4	1751.0	1750.9
180°	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0
2.5°	852.7	854.9	853.1	855.5	853.1	854.9	852.7	854.6	857.3	855.5	859.7
5°	786.0	782.5	784.8	783.3	784.8	782.5	786.0	787.9	792.4	793.9	797.0
7.5°	724.3	721.0	717.3	715.5	717.3	721.0	724.3	725.4	729.3	735.0	739.3
10°	685.7	681.5	681.1	678.5	681.1	681.5	685.7	689.9	692.5	699.7	704.7
12.5°	657.4	653.5	649.2	648.1	649.2	653.5	657.4	661.0	661.8	670.0	673.4
15°	617.3	614.3	611.6	613.9	611.6	614.3	617.3	619.6	623.8	629.5	633.3
17.5°	583.9	581.4	581.0	578.2	581.0	581.4	583.9	585.2	592.1	595.8	602.3
20°	563.0	561.1	561.8	556.9	561.8	561.1	563.0	566.4	573.2	575.1	582.0
22.5°	546.3	542.5	542.1	541.1	542.1	542.5	546.3	549.4	550.7	556.6	561.3
25°	520.1	518.2	516.3	518.2	516.3	518.2	520.1	523.5	525.0	529.2	533.7
27.5°	497.2	494.9	494.4	494.6	494.4	494.9	497.2	496.9	501.0	504.3	507.7
30°	483.2	479.4	479.8	479.4	479.8	479.4	483.2	483.2	485.5	488.5	491.6
32.5°	468.0	465.4	464.9	464.2	464.9	465.4	468.0	467.4	470.3	473.9	477.3
35°	445.6	445.6	443.7	443.7	443.7	445.6	445.6	446.7	449.8	449.8	453.6
37.5°	424.5	424.2	423.0	423.2	423.0	424.2	424.5	425.5	426.5	428.1	430.6
40°	408.7	408.4	407.2	404.9	407.2	408.4	408.7	410.3	411.0	412.9	414.4
42.5°	393.6	392.3	391.7	391.0	391.7	392.3	393.6	394.5	394.9	397.4	400.5
45°	369.6	369.6	368.9	368.5	368.9	369.6	369.6	369.6	370.0	373.0	374.6
47.5°	346.4	347.1	348.5	348.3	348.5	347.1	346.4	345.8	345.9	347.4	349.2
50°	332.4	332.8	333.9	334.3	333.9	332.8	332.4	330.9	330.1	330.1	331.3
52.5°	316.9	319.1	320.5	320.3	320.5	319.1	316.9	315.7	314.3	312.5	314.2
55°	295.2	297.8	300.5	300.9	300.5	297.8	295.2	291.7	290.2	287.2	288.3
57.5°	273.7	277.4	280.2	281.1	280.2	277.4	273.7	269.6	264.6	263.2	261.1
60°	259.1	264.0	267.4	269.0	267.4	264.0	259.1	255.3	248.8	244.6	243.1
62.5°	245.1	250.6	254.1	254.4	254.1	250.6	245.1	239.2	232.7	227.9	224.9
65°	222.2	227.9	231.0	233.2	231.0	227.9	222.2	215.8	208.6	202.1	198.7
67.5°	197.6	203.3	206.7	208.5	206.7	203.3	197.6	189.6	183.0	175.6	171.6
70°	179.7	185.4	189.9	191.5	189.9	185.4	179.7	170.2	164.5	157.6	154.2
72.5°	162.1	167.1	170.8	172.6	170.8	167.1	162.1	153.2	146.6	139.7	135.1
75°	131.4	138.3	141.7	143.6	141.7	138.3	131.4	126.5	118.9	111.7	107.9
77.5°	101.4	107.6	109.6	110.6	109.6	107.6	101.4	95.6	89.8	84.6	80.8
80°	81.3	85.1	87.8	88.1	87.8	85.1	81.3	76.7	72.2	67.2	63.8
82.5°	62.5	65.6	66.5	67.5	66.5	65.6	62.5	58.5	54.6	50.8	48.0
85°	34.2	35.7	36.1	35.7	36.1	35.7	34.2	31.5	29.6	27.7	26.6
87.5°	16.9	16.8	17.0	17.8	17.0	16.8	16.9	16.2	16.2	15.3	14.4
90°	28.5	29.3	30.2	31.1	30.2	29.3	28.5	27.6	26.5	25.0	23.6
92.5°	27.8	28.2	28.6	29.0	28.6	28.2	27.8	27.4	26.5	25.0	23.6
95°	27.2	27.2	27.2	27.2	27.2	27.2	27.2	27.2	26.5	25.0	23.6
97.5°	27.2	27.2	27.2	27.2	27.2	27.2	27.2	27.2	31.2	39.4	47.5
100°	30.6	29.5	28.3	27.2	28.3	29.5	30.6	31.8	53.8	96.7	139.5
102.5°	221.6	202.0	182.4	162.9	182.4	202.0	221.6	241.1	255.0	263.1	271.2
105°	385.4	385.1	384.8	384.5	384.8	385.1	385.4	385.7	385.8	385.8	385.8
107.5°	487.3	486.5	485.6	484.8	485.6	486.5	487.3	488.2	488.6	488.6	488.5
110°	553.3	553.6	553.9	554.2	553.9	553.6	553.3	553.0	553.3	554.2	555.0



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	617.5	617.1	616.7	616.3	616.7	617.1	617.5	617.9	618.7	619.8	620.8
115°	714.7	713.0	711.2	709.5	711.2	713.0	714.7	716.4	717.9	719.0	720.2
117.5°	811.2	810.5	809.7	809.0	809.7	810.5	811.2	811.9	813.1	814.6	816.1
120°	874.4	872.9	871.5	870.1	871.5	872.9	874.4	875.8	876.8	877.4	878.0
122.5°	933.1	931.4	929.7	928.1	929.7	931.4	933.1	934.7	935.9	936.4	937.0
125°	1019.0	1018.1	1017.2	1016.4	1017.2	1018.1	1019.0	1019.8	1020.8	1022.0	1023.1
127.5°	1097.1	1095.0	1092.8	1090.7	1092.8	1095.0	1097.1	1099.2	1100.6	1101.2	1101.9
130°	1148.9	1147.4	1146.0	1144.6	1146.0	1147.4	1148.9	1150.3	1151.5	1152.3	1153.2
132.5°	1198.6	1197.2	1195.7	1194.3	1195.7	1197.2	1198.6	1200.0	1200.8	1201.0	1201.2
135°	1267.6	1265.8	1264.1	1262.4	1264.1	1265.8	1267.6	1269.3	1270.4	1271.0	1271.6
137.5°	1335.2	1333.7	1332.2	1330.7	1332.2	1333.7	1335.2	1336.7	1337.4	1337.3	1337.2
140°	1376.3	1374.6	1372.9	1371.1	1372.9	1374.6	1376.3	1378.0	1378.6	1378.0	1377.5
142.5°	1414.6	1412.9	1411.2	1409.5	1411.2	1412.9	1414.6	1416.4	1417.2	1417.1	1416.9
145°	1470.8	1469.1	1467.4	1465.7	1467.4	1469.1	1470.8	1472.6	1473.3	1473.0	1472.7
147.5°	1518.2	1516.1	1514.1	1512.0	1514.1	1516.1	1518.2	1520.3	1521.2	1520.8	1520.5
150°	1548.9	1546.6	1544.3	1542.0	1544.3	1546.6	1548.9	1551.2	1552.1	1551.5	1551.0
152.5°	1576.2	1574.2	1572.1	1570.0	1572.1	1574.2	1576.2	1578.3	1579.0	1578.5	1577.9
155°	1613.7	1611.4	1609.1	1606.8	1609.1	1611.4	1613.7	1616.0	1616.7	1615.8	1615.0
157.5°	1644.5	1642.2	1639.9	1637.6	1639.9	1642.2	1644.5	1646.8	1647.5	1646.6	1645.7
160°	1664.2	1661.9	1659.6	1657.3	1659.6	1661.9	1664.2	1666.5	1667.1	1665.9	1664.8
162.5°	1682.5	1679.9	1677.4	1674.9	1677.4	1679.9	1682.5	1685.0	1685.5	1683.9	1682.2
165°	1705.6	1703.3	1701.0	1698.7	1701.0	1703.3	1705.6	1707.9	1708.2	1706.5	1704.7
167.5°	1723.0	1720.5	1717.9	1715.3	1717.9	1720.5	1723.0	1725.6	1725.9	1723.8	1721.8
170°	1732.4	1729.8	1727.2	1724.6	1727.2	1729.8	1732.4	1735.0	1735.1	1732.8	1730.5
172.5°	1738.6	1736.0	1733.4	1730.8	1733.4	1736.0	1738.6	1741.2	1741.4	1739.4	1737.3
175°	1746.6	1744.0	1741.4	1738.8	1741.4	1744.0	1746.6	1749.2	1749.3	1747.0	1744.7
177.5°	1749.0	1747.2	1745.3	1743.5	1745.3	1747.2	1749.0	1750.9	1751.0	1749.4	1747.8
180°	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0
2.5°	855.8	859.4	864.0	867.3	873.4	876.1	879.5	882.2	887.1	891.6	897.1
5°	798.1	804.6	813.3	822.8	833.8	841.4	852.1	858.5	871.4	883.2	894.6
7.5°	745.8	753.8	766.1	778.3	792.7	805.8	819.1	833.8	850.3	869.8	885.9
10°	710.0	720.6	733.9	749.1	766.6	781.8	799.6	815.6	835.7	858.5	879.8
12.5°	681.4	690.5	705.4	719.9	738.6	757.2	775.6	796.8	820.2	845.5	872.2
15°	642.0	649.6	661.7	681.9	700.9	719.1	746.8	766.6	796.2	824.3	856.6
17.5°	608.3	617.8	628.0	645.3	664.9	687.7	712.5	737.3	765.8	801.5	837.9
20°	587.7	595.3	607.0	620.3	641.2	664.0	687.6	712.6	747.6	784.4	823.6
22.5°	565.2	573.4	586.7	601.2	618.7	640.6	666.6	694.1	730.6	766.8	809.3
25°	538.7	544.4	556.5	569.4	586.9	605.5	632.5	662.9	699.0	740.4	783.7
27.5°	513.7	518.7	529.8	541.0	556.8	578.9	603.0	633.7	667.7	709.7	757.7
30°	495.7	501.1	510.9	523.1	538.3	557.7	582.4	611.2	647.7	688.7	738.9
32.5°	480.2	485.0	492.4	504.6	519.4	538.2	561.1	590.6	627.0	668.7	717.9
35°	456.2	461.5	467.2	476.7	489.7	507.9	533.0	560.7	595.6	635.9	681.1
37.5°	432.4	438.1	443.2	451.7	463.5	479.6	501.3	530.2	561.8	600.6	644.0
40°	417.5	422.0	426.2	435.3	447.1	462.3	482.4	508.3	541.7	577.8	613.9
42.5°	402.6	406.8	410.4	418.3	429.2	443.8	463.0	488.2	519.2	552.9	584.7
45°	379.1	381.8	386.0	392.8	401.5	414.8	433.4	455.9	482.1	514.0	537.9
47.5°	353.7	357.9	361.3	367.3	374.5	387.5	405.4	424.5	448.3	472.0	488.8
50°	334.3	338.5	343.4	349.1	355.9	368.1	384.4	403.8	423.9	442.2	456.6
52.5°	316.1	319.9	325.2	330.6	338.9	349.3	363.2	380.4	400.2	413.3	425.3
55°	289.1	291.0	297.1	302.4	310.4	318.0	332.0	347.2	359.4	369.2	379.1
57.5°	261.5	264.1	267.6	272.4	280.3	289.2	299.0	312.5	319.6	324.7	332.4
60°	243.9	244.6	246.9	252.6	258.7	266.7	278.1	287.6	292.9	297.1	303.5
62.5°	224.4	224.6	228.4	232.6	237.1	245.7	255.0	262.6	267.1	269.1	275.3
65°	197.2	196.4	198.7	202.1	207.4	213.1	221.1	227.9	227.5	229.8	233.6
67.5°	169.3	168.5	168.5	171.8	176.1	181.2	186.7	190.6	190.7	193.7	195.6
70°	150.4	148.2	149.7	152.3	154.2	158.4	164.5	166.0	166.4	167.9	169.8
72.5°	131.0	130.2	131.4	132.6	133.9	137.1	142.3	143.2	143.3	144.2	147.3
75°	104.1	103.3	102.6	103.7	105.2	107.5	109.4	110.9	110.5	110.9	113.2
77.5°	78.0	75.9	75.5	76.1	76.5	77.9	79.9	79.7	80.1	80.0	82.6
80°	61.9	58.9	58.5	58.5	58.9	59.6	60.4	61.2	60.0	61.2	61.9
82.5°	45.5	43.7	43.6	43.3	43.4	43.5	44.0	44.4	44.2	44.7	45.2
85°	25.1	24.3	23.2	23.9	23.6	22.4	23.2	22.0	21.7	22.0	22.4
87.5°	12.9	13.0	11.9	11.5	10.8	10.7	9.7	8.9	8.2	8.0	8.5
90°	22.2	20.7	18.7	16.7	14.7	12.7	10.5	8.2	5.9	3.6	1.3
92.5°	22.2	20.7	18.9	17.1	15.4	13.6	13.5	15.1	16.7	18.3	19.9
95°	22.2	20.7	31.6	42.6	53.5	64.4	70.3	71.2	72.1	72.9	73.8
97.5°	55.6	63.7	85.3	107.0	128.6	150.2	160.3	158.7	157.2	155.6	154.1
100°	182.4	225.3	224.1	223.0	221.8	220.7	219.7	218.8	217.9	217.1	216.2
102.5°	279.3	287.4	286.7	286.1	285.4	284.7	283.8	282.7	281.6	280.5	279.4
105°	385.8	385.8	385.8	385.8	385.8	385.8	385.3	384.1	383.0	381.8	380.7
107.5°	488.4	488.4	487.8	487.2	486.7	486.1	485.8	485.8	485.8	485.8	485.8
110°	555.9	556.7	556.2	555.6	555.0	554.4	554.2	554.2	554.2	554.2	554.2



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	621.9	623.0	622.7	622.3	622.0	621.7	621.1	620.4	619.8	619.1	618.4
115°	721.3	722.5	722.2	721.9	721.6	721.3	720.5	719.0	717.6	716.1	714.7
117.5°	817.6	819.1	818.0	816.9	815.8	814.7	814.2	814.2	814.3	814.3	814.4
120°	878.6	879.1	878.3	877.4	876.5	875.7	875.4	875.7	876.0	876.3	876.5
122.5°	937.6	938.2	937.8	937.4	937.0	936.6	935.8	934.7	933.6	932.5	931.4
125°	1024.3	1025.4	1025.4	1025.4	1025.4	1025.4	1024.4	1022.4	1020.4	1018.4	1016.4
127.5°	1102.5	1103.1	1103.3	1103.5	1103.6	1103.8	1103.2	1101.7	1100.3	1098.9	1097.4
130°	1154.1	1154.9	1154.6	1154.3	1154.1	1153.8	1152.9	1151.5	1150.0	1148.6	1147.1
132.5°	1201.4	1201.5	1202.2	1202.8	1203.4	1204.1	1203.5	1201.9	1200.2	1198.5	1196.9
135°	1272.2	1272.7	1273.3	1273.9	1274.5	1275.0	1274.5	1272.7	1271.0	1269.3	1267.6
137.5°	1337.1	1337.0	1337.5	1338.0	1338.5	1339.0	1338.5	1337.0	1335.5	1334.0	1332.6
140°	1376.9	1376.3	1376.6	1376.9	1377.2	1377.5	1377.3	1376.7	1376.2	1375.6	1375.0
142.5°	1416.8	1416.7	1416.3	1415.9	1415.5	1415.1	1414.7	1414.4	1414.0	1413.7	1413.3
145°	1472.4	1472.1	1472.1	1472.1	1472.1	1472.1	1471.8	1471.3	1470.7	1470.1	1469.5
147.5°	1520.1	1519.8	1519.4	1519.1	1518.7	1518.4	1518.3	1518.4	1518.5	1518.6	1518.7
150°	1550.4	1549.8	1549.2	1548.7	1548.1	1547.5	1547.5	1548.1	1548.7	1549.2	1549.8
152.5°	1577.3	1576.7	1576.2	1575.6	1575.0	1574.4	1574.8	1576.1	1577.3	1578.6	1579.8
155°	1614.1	1613.3	1612.7	1612.1	1611.5	1611.0	1611.5	1613.3	1615.0	1616.7	1618.4
157.5°	1644.7	1643.8	1643.8	1643.7	1643.6	1643.6	1644.1	1645.1	1646.1	1647.2	1648.2
160°	1663.6	1662.5	1662.2	1661.9	1661.6	1661.3	1662.0	1663.7	1665.5	1667.2	1668.9
162.5°	1680.6	1679.0	1678.7	1678.5	1678.2	1677.9	1678.6	1680.3	1682.0	1683.8	1685.5
165°	1703.0	1701.3	1701.0	1700.7	1700.4	1700.1	1700.9	1702.6	1704.3	1706.0	1707.8
167.5°	1719.7	1717.6	1717.3	1717.0	1716.7	1716.5	1717.2	1719.0	1720.8	1722.6	1724.3
170°	1728.2	1725.9	1725.6	1725.3	1725.0	1724.7	1725.6	1727.6	1729.6	1731.7	1733.7
172.5°	1735.2	1733.1	1732.6	1732.1	1731.6	1731.1	1731.8	1733.8	1735.9	1737.9	1739.9
175°	1742.4	1740.1	1739.9	1739.6	1739.3	1739.0	1739.7	1741.4	1743.2	1744.9	1746.6
177.5°	1746.2	1744.5	1744.3	1744.1	1743.9	1743.6	1744.2	1745.6	1747.0	1748.3	1749.7
180°	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0	895.0
2.5°	899.9	904.1	906.8	912.0	916.3	918.7	920.8	922.6	924.8	926.6	931.8
5°	905.6	915.5	923.9	936.8	948.6	957.7	967.5	976.3	983.5	993.8	1001.7
7.5°	903.1	920.7	939.1	959.0	979.5	998.5	1015.9	1032.3	1047.1	1065.0	1080.7
10°	900.7	924.6	948.2	975.1	1002.9	1026.4	1048.5	1070.9	1087.2	1110.0	1129.4
12.5°	898.9	927.1	955.5	987.9	1018.4	1051.6	1081.0	1097.3	1122.2	1140.4	1163.4
15°	891.2	928.4	967.5	1004.0	1047.3	1078.1	1103.9	1135.8	1159.0	1182.2	1207.2
17.5°	877.4	919.6	963.4	1011.2	1052.7	1085.8	1119.0	1149.8	1177.5	1208.5	1239.8
20°	871.1	913.2	963.4	1012.4	1053.0	1087.6	1121.8	1155.6	1186.0	1225.9	1261.9
22.5°	857.7	908.7	954.9	1002.6	1044.5	1082.1	1120.9	1159.2	1199.6	1244.7	1289.9
25°	833.8	885.5	934.5	981.6	1023.8	1070.9	1112.3	1163.6	1215.2	1274.9	1331.1
27.5°	809.1	858.5	903.4	948.9	998.1	1051.4	1105.1	1163.3	1231.0	1306.2	1385.6
30°	789.0	835.7	879.4	926.1	977.4	1037.4	1096.3	1165.5	1243.7	1328.4	1422.6
32.5°	765.6	808.7	851.2	900.6	956.5	1019.8	1088.4	1164.2	1258.3	1354.6	1451.5
35°	725.6	761.7	805.3	858.1	921.2	993.8	1073.2	1162.8	1270.7	1381.2	1462.9
37.5°	678.1	711.7	757.7	815.6	881.7	959.6	1053.8	1160.1	1274.7	1362.8	1389.2
40°	646.2	677.3	725.2	785.2	852.8	935.3	1038.6	1151.0	1261.9	1318.2	1296.5
42.5°	612.1	644.8	691.5	750.9	823.6	913.4	1019.4	1131.9	1224.9	1246.1	1171.3
45°	558.4	592.2	638.2	698.2	776.5	873.7	984.3	1086.4	1140.0	1101.6	985.8
47.5°	508.5	540.2	582.8	644.7	725.5	826.1	932.5	1014.0	1018.3	926.7	803.0
50°	474.5	503.7	546.6	608.6	688.7	790.5	886.6	950.8	922.0	818.3	699.4
52.5°	441.0	469.7	512.0	573.3	652.6	745.8	835.3	880.3	825.9	719.5	617.9
55°	392.8	417.9	459.3	515.9	591.1	677.7	753.7	769.2	698.6	593.7	511.3
57.5°	345.7	369.1	406.8	458.9	527.6	604.4	663.8	660.5	585.8	495.8	430.4
60°	313.8	336.6	370.0	420.9	483.6	549.7	600.6	588.4	514.4	436.9	381.8
62.5°	285.2	305.6	337.2	381.7	438.9	500.1	541.9	524.0	451.4	383.7	340.1
65°	243.1	260.2	287.2	325.2	372.7	423.2	455.5	432.3	370.4	317.6	282.6
67.5°	202.9	216.6	239.2	269.6	310.1	350.6	370.3	347.0	297.4	258.9	233.0
70°	177.4	189.6	207.0	234.0	269.3	303.5	318.3	297.4	254.9	221.8	203.2
72.5°	151.9	161.9	177.3	201.5	229.8	259.5	272.4	252.5	217.5	189.6	172.2
75°	117.4	124.2	134.9	151.6	174.0	197.5	204.8	187.3	164.9	144.0	132.6
77.5°	84.0	89.8	97.9	108.4	124.3	139.3	145.6	135.5	118.1	104.9	95.6
80°	64.6	67.6	74.5	83.2	95.7	105.2	109.4	102.9	90.8	80.9	73.7
82.5°	46.0	49.1	53.2	60.4	68.4	74.8	79.3	75.0	66.2	58.4	54.2
85°	22.4	24.3	26.6	29.6	35.7	39.5	39.1	36.5	33.0	30.0	27.7
87.5°	8.6	9.4	10.8	12.7	14.1	15.7	16.7	16.5	15.7	15.1	14.4
90°	3.6	5.9	8.2	10.5	12.7	14.7	16.7	18.7	20.7	22.2	23.6
92.5°	18.3	16.7	15.1	13.5	13.6	15.4	17.1	18.9	20.7	22.2	23.6
95°	72.9	72.1	71.2	70.3	64.4	53.5	42.6	31.6	20.7	22.2	23.6
97.5°	155.6	157.2	158.7	160.3	150.2	128.6	107.0	85.3	63.7	55.6	47.5
100°	217.1	217.9	218.8	219.7	220.7	221.8	223.0	224.1	225.3	182.4	139.5
102.5°	280.5	281.6	282.7	283.8	284.7	285.4	286.1	286.7	287.4	279.3	271.2
105°	381.8	383.0	384.1	385.3	385.8	385.8	385.8	385.8	385.8	385.8	385.8
107.5°	485.8	485.8	485.8	485.8	486.1	486.7	487.2	487.8	488.4	488.4	488.5
110°	554.2	554.2	554.2	554.2	554.4	555.0	555.6	556.2	556.7	555.9	555.0



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	619.1	619.8	620.4	621.1	621.7	622.0	622.3	622.7	623.0	621.9	620.8
115°	716.1	717.6	719.0	720.5	721.3	721.6	721.9	722.2	722.5	721.3	720.2
117.5°	814.3	814.3	814.2	814.2	814.7	815.8	816.9	818.0	819.1	817.6	816.1
120°	876.3	876.0	875.7	875.4	875.7	876.5	877.4	878.3	879.1	878.6	878.0
122.5°	932.5	933.6	934.7	935.8	936.6	937.0	937.4	937.8	938.2	937.6	937.0
125°	1018.4	1020.4	1022.4	1024.4	1025.4	1025.4	1025.4	1025.4	1025.4	1024.3	1023.1
127.5°	1098.9	1100.3	1101.7	1103.2	1103.8	1103.6	1103.5	1103.3	1103.1	1102.5	1101.9
130°	1148.6	1150.0	1151.5	1152.9	1153.8	1154.1	1154.3	1154.6	1154.9	1154.1	1153.2
132.5°	1198.5	1200.2	1201.9	1203.5	1204.1	1203.4	1202.8	1202.2	1201.5	1201.4	1201.2
135°	1269.3	1271.0	1272.7	1274.5	1275.0	1274.5	1273.9	1273.3	1272.7	1272.2	1271.6
137.5°	1334.0	1335.5	1337.0	1338.5	1339.0	1338.5	1338.0	1337.5	1337.0	1337.1	1337.2
140°	1375.6	1376.2	1376.7	1377.3	1377.5	1377.2	1376.9	1376.6	1376.3	1376.9	1377.5
142.5°	1413.7	1414.0	1414.4	1414.7	1415.1	1415.5	1415.9	1416.3	1416.7	1416.8	1416.9
145°	1470.1	1470.7	1471.3	1471.8	1472.1	1472.1	1472.1	1472.1	1472.1	1472.4	1472.7
147.5°	1518.6	1518.5	1518.4	1518.3	1518.4	1518.7	1519.1	1519.4	1519.8	1520.1	1520.5
150°	1549.2	1548.7	1548.1	1547.5	1547.5	1548.1	1548.7	1549.2	1549.8	1550.4	1551.0
152.5°	1578.6	1577.3	1576.1	1574.8	1574.4	1575.0	1575.6	1576.2	1576.7	1577.3	1577.9
155°	1616.7	1615.0	1613.3	1611.5	1611.0	1611.5	1612.1	1612.7	1613.3	1614.1	1615.0
157.5°	1647.2	1646.1	1645.1	1644.1	1643.6	1643.6	1643.7	1643.8	1643.8	1644.7	1645.7
160°	1667.2	1665.5	1663.7	1662.0	1661.3	1661.6	1661.9	1662.2	1662.5	1663.6	1664.8
162.5°	1683.8	1682.0	1680.3	1678.6	1677.9	1678.2	1678.5	1678.7	1679.0	1680.6	1682.2
165°	1706.0	1704.3	1702.6	1700.9	1700.1	1700.4	1700.7	1701.0	1701.3	1703.0	1704.7
167.5°	1722.6	1720.8	1719.0	1717.2	1716.5	1716.7	1717.0	1717.3	1717.6	1719.7	1721.8
170°	1731.7	1729.6	1727.6	1725.6	1724.7	1725.0	1725.3	1725.6	1725.9	1728.2	1730.5
172.5°	1737.9	1735.9	1733.8	1731.8	1731.1	1731.6	1732.1	1732.6	1733.1	1735.2	1737.3
175°	1744.9	1743.2	1741.4	1739.7	1739.0	1739.3	1739.6	1739.9	1740.1	1742.4	1744.7
177.5°	1748.3	1747.0	1745.6	1744.2	1743.6	1743.9	1744.1	1744.3	1744.5	1746.2	1747.8
180°	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	895.0	895.0	895.0	895.0	895.0	895.0	895.0
2.5°	936.0	938.4	943.6	941.8	944.2	945.4	946.7
5°	1011.6	1023.8	1029.1	1028.3	1036.3	1034.4	1032.5
7.5°	1097.0	1109.8	1116.9	1125.8	1131.0	1131.3	1135.8
10°	1145.3	1162.0	1168.9	1178.4	1184.5	1187.9	1187.5
12.5°	1182.4	1195.5	1210.8	1215.5	1223.7	1228.0	1226.4
15°	1227.0	1247.9	1263.8	1271.8	1282.1	1285.1	1289.3
17.5°	1266.8	1294.8	1313.5	1338.2	1347.6	1353.3	1349.9
20°	1296.9	1333.7	1352.4	1382.0	1398.3	1407.1	1404.0
22.5°	1332.5	1372.3	1406.8	1432.4	1457.3	1469.1	1471.5
25°	1393.4	1448.1	1498.6	1532.4	1563.2	1570.4	1586.4
27.5°	1461.5	1526.0	1580.0	1615.5	1637.0	1645.0	1650.0
30°	1504.3	1568.5	1609.2	1631.9	1638.8	1638.0	1637.3
32.5°	1525.3	1565.5	1573.3	1566.9	1551.3	1538.0	1524.2
35°	1495.6	1465.6	1420.7	1363.0	1320.5	1277.5	1273.3
37.5°	1345.1	1249.1	1174.5	1091.2	1043.1	1013.4	992.8
40°	1203.4	1094.4	1004.0	933.7	884.7	865.4	846.4
42.5°	1049.7	945.5	865.4	806.7	769.9	748.4	733.3
45°	852.8	760.9	698.2	655.7	626.4	609.7	600.2
47.5°	698.8	630.8	577.6	546.9	526.7	513.7	513.7
50°	616.2	551.2	515.9	491.6	474.1	463.8	465.7
52.5°	542.9	494.4	464.2	443.8	430.9	424.6	424.4
55°	454.0	419.0	399.3	384.4	375.7	368.5	370.0
57.5°	388.3	358.8	345.6	333.3	327.2	324.3	320.2
60°	347.6	324.8	313.4	303.5	297.4	295.2	291.0
62.5°	311.4	293.5	282.4	274.3	268.9	268.1	264.8
65°	261.7	248.1	238.2	234.4	228.7	227.2	227.2
67.5°	215.8	206.0	198.3	194.8	192.3	192.7	190.8
70°	186.9	178.9	174.0	170.2	168.3	168.7	167.1
72.5°	163.5	154.6	150.3	148.0	145.5	146.5	145.9
75°	123.8	119.3	117.0	114.7	113.2	112.4	111.7
77.5°	90.9	86.9	85.2	83.9	84.1	82.3	83.7
80°	70.3	66.9	65.7	63.8	63.4	63.4	63.1
82.5°	51.4	49.5	48.7	47.1	46.4	47.0	46.0
85°	26.6	25.1	24.7	24.7	23.9	23.2	25.1
87.5°	14.7	13.8	14.0	13.9	14.1	13.9	13.5
90°	25.0	26.5	27.6	28.5	29.3	30.2	31.1
92.5°	25.0	26.5	27.4	27.8	28.2	28.6	29.0
95°	25.0	26.5	27.2	27.2	27.2	27.2	27.2
97.5°	39.4	31.2	27.2	27.2	27.2	27.2	27.2
100°	96.7	53.8	31.8	30.6	29.5	28.3	27.2
102.5°	263.1	255.0	241.1	221.6	202.0	182.4	162.9
105°	385.8	385.8	385.7	385.4	385.1	384.8	384.5
107.5°	488.6	488.6	488.2	487.3	486.5	485.6	484.8
110°	554.2	553.3	553.0	553.3	553.6	553.9	554.2



TEST NUMBER: P333388

CATALOG NUMBER: S125DIW-S610D1340U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	619.8	618.7	617.9	617.5	617.1	616.7	616.3
115°	719.0	717.9	716.4	714.7	713.0	711.2	709.5
117.5°	814.6	813.1	811.9	811.2	810.5	809.7	809.0
120°	877.4	876.8	875.8	874.4	872.9	871.5	870.1
122.5°	936.4	935.9	934.7	933.1	931.4	929.7	928.1
125°	1022.0	1020.8	1019.8	1019.0	1018.1	1017.2	1016.4
127.5°	1101.2	1100.6	1099.2	1097.1	1095.0	1092.8	1090.7
130°	1152.3	1151.5	1150.3	1148.9	1147.4	1146.0	1144.6
132.5°	1201.0	1200.8	1200.0	1198.6	1197.2	1195.7	1194.3
135°	1271.0	1270.4	1269.3	1267.6	1265.8	1264.1	1262.4
137.5°	1337.3	1337.4	1336.7	1335.2	1333.7	1332.2	1330.7
140°	1378.0	1378.6	1378.0	1376.3	1374.6	1372.9	1371.1
142.5°	1417.1	1417.2	1416.4	1414.6	1412.9	1411.2	1409.5
145°	1473.0	1473.3	1472.6	1470.8	1469.1	1467.4	1465.7
147.5°	1520.8	1521.2	1520.3	1518.2	1516.1	1514.1	1512.0
150°	1551.5	1552.1	1551.2	1548.9	1546.6	1544.3	1542.0
152.5°	1578.5	1579.0	1578.3	1576.2	1574.2	1572.1	1570.0
155°	1615.8	1616.7	1616.0	1613.7	1611.4	1609.1	1606.8
157.5°	1646.6	1647.5	1646.8	1644.5	1642.2	1639.9	1637.6
160°	1665.9	1667.1	1666.5	1664.2	1661.9	1659.6	1657.3
162.5°	1683.9	1685.5	1685.0	1682.5	1679.9	1677.4	1674.9
165°	1706.5	1708.2	1707.9	1705.6	1703.3	1701.0	1698.7
167.5°	1723.8	1725.9	1725.6	1723.0	1720.5	1717.9	1715.3
170°	1732.8	1735.1	1735.0	1732.4	1729.8	1727.2	1724.6
172.5°	1739.4	1741.4	1741.2	1738.6	1736.0	1733.4	1730.8
175°	1747.0	1749.3	1749.2	1746.6	1744.0	1741.4	1738.8
177.5°	1749.4	1751.0	1750.9	1749.0	1747.2	1745.3	1743.5
180°	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6

(END OF REPORT)