

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333413

Luminaire Tested: **S125DIW-S850D1050U835-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333413  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIW-S850D1050U835-4F0-1E-UDD-A1  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7088.2 lumens  
Efficiency: N/A  
Efficacy: 134.8 lumens/watt  
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52  
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 52.6  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

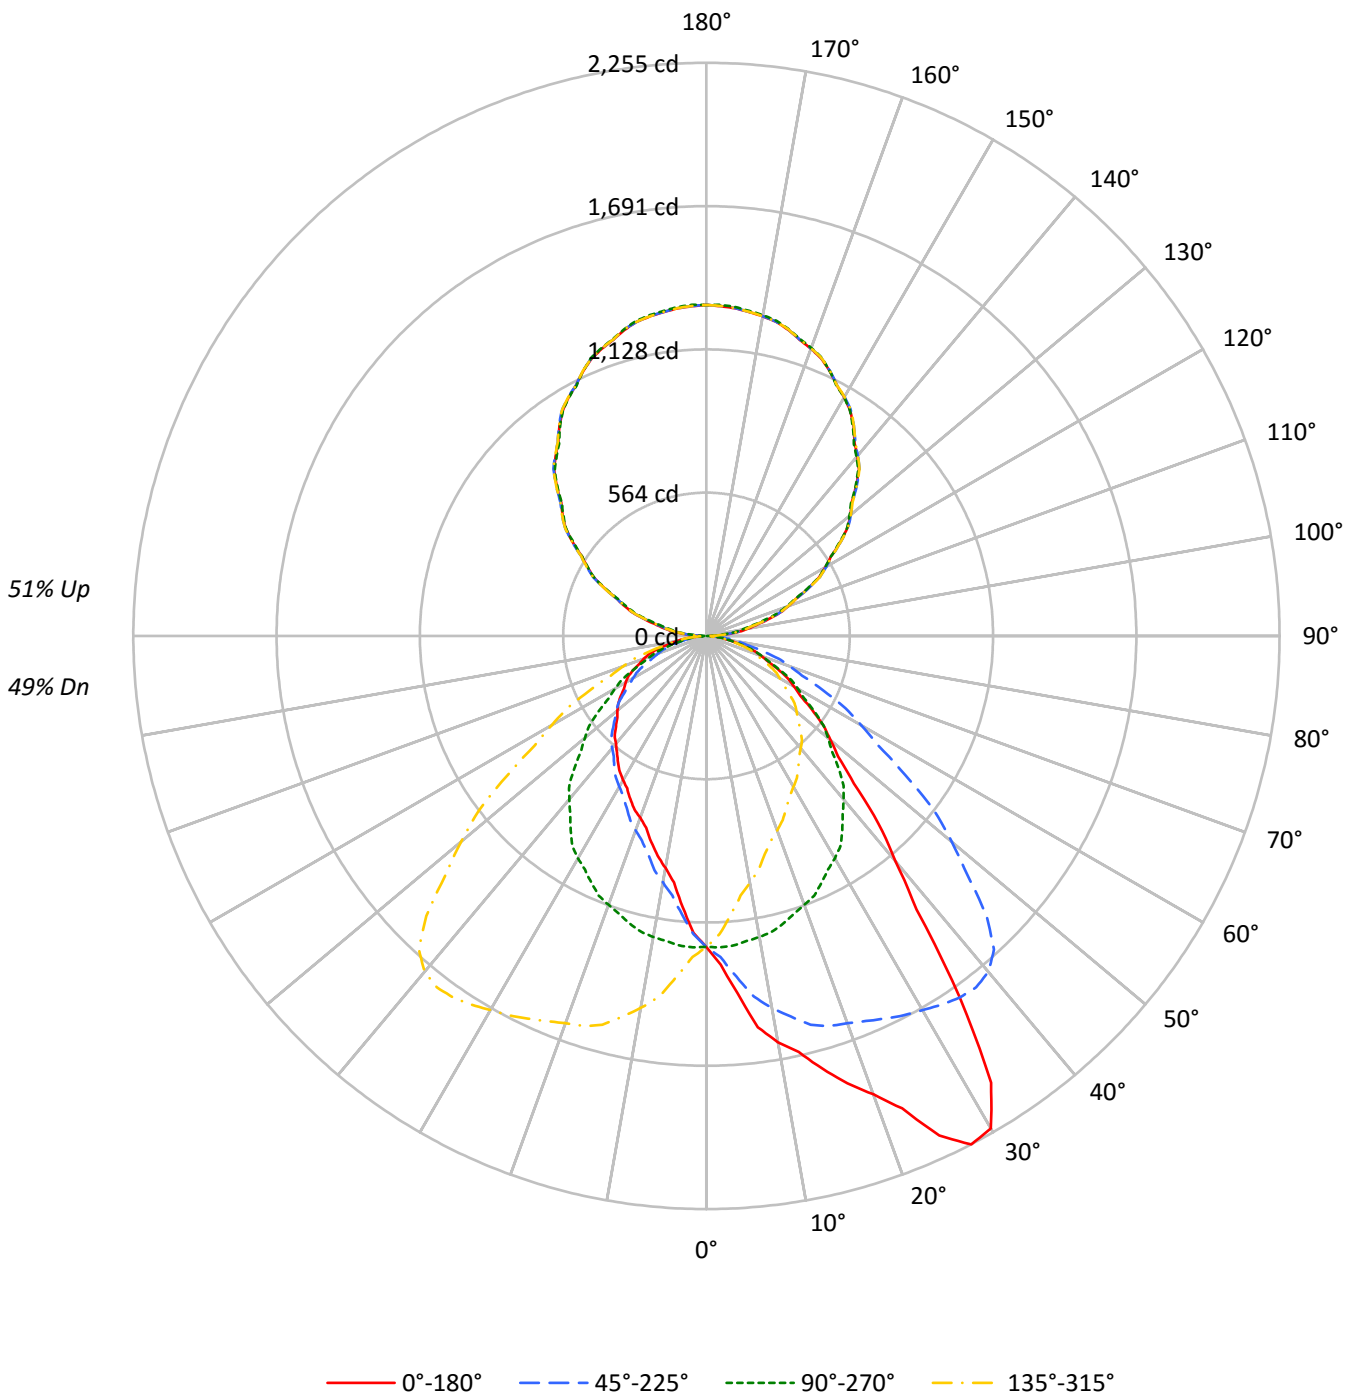



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	83	83	83	68	68	68	55	55	55	49
1	98	93	90	86	90	86	83	80	73	70	68	60	59	57	49	48	47	42
2	89	82	76	71	82	76	70	66	64	60	57	53	51	48	43	41	40	35
3	81	72	65	59	75	67	60	55	57	52	48	47	44	41	39	36	34	30
4	75	64	56	50	68	59	52	47	50	45	41	42	38	35	35	32	29	26
5	68	57	49	43	63	53	46	40	45	40	35	38	34	31	31	28	26	22
6	63	51	43	37	58	47	40	35	41	35	31	34	30	27	28	25	23	20
7	58	46	38	33	54	43	36	31	37	31	27	31	27	24	26	23	20	18
8	54	42	34	29	50	39	32	27	34	28	24	28	24	21	24	20	18	16
9	50	38	31	26	46	36	29	24	31	25	22	26	22	19	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	7901	7901	7901	7901
5°	9149	7927	6941	7927
10°	10645	7887	6082	7887
15°	11784	7829	5610	7829
20°	13190	7737	5232	7737
25°	15452	7633	5047	7633
30°	16690	7532	4887	7532
35°	13722	7340	4782	7340
40°	9754	7074	4666	7074
45°	7493	6716	4601	6716
50°	6396	6271	4591	6271
55°	5695	5835	4631	5835
60°	5137	5359	4748	5359
65°	4745	4879	4872	4879
70°	4315	4383	4942	4383
75°	3810	3860	4898	3860
80°	3206	3146	4482	3146
85°	2542	2267	3616	2267



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	117.8	1.7
10°-20°	350.7	4.9
20°-30°	569.4	8.0
30°-40°	694.5	9.8
40°-50°	631.8	8.9
50°-60°	503.3	7.1
60°-70°	350.5	4.9
70°-80°	186.9	2.6
80°-90°	50.0	0.7
90°-100°	87.2	1.2
100°-110°	257.5	3.6
110°-120°	436.2	6.2
120°-130°	574.0	8.1
130°-140°	643.2	9.1
140°-150°	630.4	8.9
150°-160°	529.5	7.5
160°-170°	352.0	5.0
170°-180°	123.2	1.7
0°-30°	1037.8	14.6
0°-40°	1732.4	24.4
0°-60°	2867.5	40.5
0°-90°	3455.0	48.7
90°-120°	780.9	11.0
90°-150°	2628.6	37.1
90°-180°	3633.0	51.3
0°-180°	7088.2	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1223	1223	1223	1223	1223	
5°	1411	1223	1071	1223	1411	142
15°	1762	1171	839	1171	1762	504
25°	2168	1071	708	1071	2168	990
35°	1740	931	606	931	1740	1065
45°	820	735	504	735	820	657
55°	506	518	411	518	506	455
65°	310	319	319	319	310	308
75°	153	155	196	155	153	164
85°	34	31	49	31	34	40
90°	24	1	24	1	24	15
95°	87	66	87	66	87	89
105°	251	231	251	231	251	266
115°	441	437	441	437	441	436
125°	641	637	641	637	641	573
135°	832	829	832	829	832	642
145°	1008	1004	1008	1004	1008	629
155°	1149	1149	1149	1149	1149	529
165°	1246	1249	1246	1249	1246	351
175°	1294	1299	1294	1299	1294	123
180°	1302	1302	1302	1302	1302	



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1294.0	1292.3	1290.7	1287.3	1289.8	1282.8	1279.4	1273.6	1266.6	1264.1	1261.2
5°	1411.3	1413.9	1416.5	1405.6	1406.7	1399.4	1382.8	1369.3	1358.4	1344.4	1334.5
7.5°	1552.6	1546.4	1545.9	1538.9	1526.7	1517.0	1499.5	1477.3	1455.8	1431.3	1411.0
10°	1623.2	1623.7	1619.0	1610.7	1597.8	1588.4	1565.6	1543.7	1517.3	1486.1	1463.8
12.5°	1676.4	1678.5	1672.6	1661.4	1655.1	1634.1	1616.2	1590.3	1558.8	1533.9	1499.9
15°	1762.4	1756.6	1752.5	1738.5	1727.6	1705.8	1677.2	1650.2	1615.9	1584.2	1552.6
17.5°	1845.2	1849.8	1842.0	1829.2	1795.4	1769.9	1731.6	1694.6	1652.0	1609.5	1571.7
20°	1919.2	1923.3	1911.4	1889.1	1848.6	1823.1	1772.7	1725.0	1675.6	1621.1	1579.6
22.5°	2011.4	2008.1	1992.0	1958.0	1922.9	1875.9	1821.3	1763.2	1701.4	1639.8	1584.6
25°	2168.4	2146.6	2136.7	2094.7	2048.5	1979.4	1904.6	1819.5	1742.6	1661.1	1590.5
27.5°	2255.4	2248.6	2237.6	2208.3	2159.7	2085.9	1997.7	1893.9	1785.5	1682.6	1590.2
30°	2238.0	2239.0	2240.1	2230.7	2199.6	2144.0	2056.3	1944.6	1815.8	1700.0	1593.1
32.5°	2083.5	2102.4	2120.4	2141.8	2150.5	2139.9	2084.9	1984.1	1851.6	1720.0	1591.4
35°	1740.5	1746.3	1804.9	1863.1	1942.0	2003.3	2044.3	1999.7	1888.0	1736.9	1589.4
37.5°	1357.1	1385.2	1425.8	1491.5	1605.4	1707.4	1838.6	1898.9	1862.9	1742.4	1585.8
40°	1156.9	1182.9	1209.3	1276.3	1372.4	1496.0	1645.0	1772.2	1801.8	1725.0	1573.3
42.5°	1002.4	1022.9	1052.3	1102.7	1183.0	1292.4	1434.8	1601.1	1703.4	1674.3	1547.2
45°	820.4	833.4	856.3	896.2	954.4	1040.1	1165.7	1347.5	1505.8	1558.3	1485.1
47.5°	702.2	702.1	719.9	747.5	789.5	862.3	955.2	1097.6	1266.8	1391.9	1386.1
50°	636.6	634.0	648.0	671.9	705.1	753.4	842.2	955.9	1118.5	1260.2	1299.7
52.5°	580.1	580.4	589.0	606.7	634.5	675.8	742.1	844.6	983.5	1129.0	1203.3
55°	505.8	503.7	513.5	525.5	545.7	572.7	620.5	698.9	811.6	954.9	1051.5
57.5°	437.6	443.3	447.3	455.6	472.4	490.5	530.8	588.3	677.7	800.7	902.8
60°	397.7	403.5	406.6	414.9	428.4	444.0	475.1	521.9	597.1	703.1	804.3
62.5°	362.0	366.5	367.5	375.0	386.0	401.2	425.7	464.9	524.4	617.1	716.3
65°	310.5	310.5	312.6	320.4	325.6	339.1	357.8	386.3	434.1	506.3	590.9
67.5°	260.9	263.4	262.8	266.3	271.1	281.5	294.9	318.5	353.9	406.6	474.3
70°	228.5	230.5	230.0	232.6	237.8	244.6	255.5	277.8	303.2	348.4	406.6
72.5°	199.4	200.2	198.9	202.3	205.4	211.3	223.5	235.4	259.2	297.3	345.1
75°	152.7	153.7	154.7	156.8	159.9	163.0	169.3	181.2	196.8	225.4	256.0
77.5°	114.4	112.5	115.0	114.7	116.4	118.8	124.3	130.6	143.4	161.5	185.2
80°	86.2	86.7	86.7	87.2	89.8	91.4	96.1	100.7	110.6	124.1	140.7
82.5°	62.9	64.3	63.5	64.4	66.6	67.7	70.3	74.1	79.9	90.5	102.5
85°	34.3	31.7	32.7	33.8	33.8	34.3	36.3	37.9	41.0	45.2	49.8
87.5°	14.8	15.5	15.8	15.7	16.0	15.8	17.2	17.0	18.0	19.0	20.4
90°	24.3	23.6	23.0	22.3	21.6	20.7	19.6	18.5	17.3	16.2	14.6
92.5°	47.8	47.3	46.8	46.3	45.8	44.9	43.4	41.9	40.4	38.9	37.0
95°	87.1	86.7	86.2	85.8	85.3	84.3	82.7	81.2	79.6	78.0	75.8
97.5°	132.1	131.9	131.6	131.3	131.0	130.2	128.7	127.2	125.7	124.2	121.1
100°	166.2	165.7	165.3	164.8	164.4	163.1	161.1	159.1	157.1	155.0	152.1
102.5°	200.2	199.6	199.0	198.3	197.7	196.3	194.1	191.9	189.7	187.5	186.0
105°	251.3	250.6	249.9	249.3	248.6	247.6	246.2	244.9	243.5	242.2	240.8
107.5°	303.6	303.6	303.7	303.7	303.8	303.4	302.8	302.1	301.4	300.7	299.7
110°	342.5	342.7	342.9	343.2	343.4	343.2	342.5	341.8	341.1	340.5	339.8



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	380.6	381.0	381.4	381.8	382.2	382.2	381.9	381.6	381.3	381.0	380.1
115°	440.8	441.0	441.2	441.4	441.7	441.9	442.1	442.3	442.6	442.8	442.3
117.5°	499.5	500.4	501.3	502.2	503.1	503.5	503.3	503.1	503.0	502.8	502.4
120°	540.1	541.0	541.9	542.8	543.7	544.1	544.1	544.1	544.1	544.1	543.9
122.5°	580.6	581.3	582.0	582.8	583.5	583.9	584.1	584.3	584.5	584.7	584.1
125°	641.4	641.6	641.8	642.1	642.3	642.6	643.1	643.5	644.0	644.4	644.2
127.5°	699.8	700.2	700.7	701.1	701.6	701.9	702.1	702.3	702.6	702.8	702.5
130°	738.7	739.1	739.6	740.0	740.5	740.8	741.0	741.3	741.5	741.7	741.3
132.5°	775.1	775.8	776.4	777.0	777.7	778.1	778.3	778.5	778.8	779.0	779.1
135°	831.9	832.8	833.7	834.6	835.5	835.9	835.9	835.9	835.9	835.9	835.7
137.5°	887.4	888.5	889.7	890.8	891.9	892.3	892.1	891.8	891.5	891.3	890.8
140°	923.1	924.2	925.3	926.5	927.6	927.9	927.5	927.0	926.6	926.1	925.4
142.5°	957.1	958.3	959.4	960.5	961.6	962.1	961.8	961.5	961.2	961.0	960.1
145°	1008.2	1008.9	1009.5	1010.2	1010.9	1011.2	1011.2	1011.2	1011.2	1011.2	1010.6
147.5°	1051.8	1053.3	1054.8	1056.4	1057.9	1058.4	1057.8	1057.3	1056.8	1056.2	1055.7
150°	1084.2	1084.6	1085.1	1085.5	1086.0	1086.2	1086.2	1086.2	1086.2	1086.2	1085.3
152.5°	1110.9	1111.7	1112.6	1113.4	1114.2	1114.3	1113.8	1113.2	1112.7	1112.2	1111.8
155°	1149.0	1150.2	1151.3	1152.4	1153.5	1153.7	1152.8	1151.9	1151.0	1150.1	1149.8
157.5°	1180.9	1182.3	1183.8	1185.3	1186.8	1187.1	1186.2	1185.3	1184.4	1183.5	1183.3
160°	1202.7	1203.9	1205.0	1206.1	1207.2	1207.4	1206.5	1205.6	1204.7	1203.8	1203.5
162.5°	1221.4	1222.7	1224.0	1225.3	1226.6	1226.7	1225.6	1224.6	1223.5	1222.4	1222.4
165°	1246.3	1247.7	1249.0	1250.4	1251.7	1251.9	1251.0	1250.1	1249.2	1248.3	1248.1
167.5°	1266.2	1267.6	1269.0	1270.4	1271.8	1271.8	1270.4	1269.1	1267.7	1266.4	1266.4
170°	1276.7	1278.3	1279.9	1281.4	1283.0	1283.1	1281.8	1280.4	1279.1	1277.7	1277.7
172.5°	1285.6	1287.0	1288.4	1289.8	1291.2	1291.2	1289.9	1288.5	1287.2	1285.8	1285.8
175°	1293.9	1295.5	1297.1	1298.7	1300.2	1300.4	1299.0	1297.6	1296.3	1294.9	1294.9
177.5°	1298.8	1300.1	1301.3	1302.6	1303.8	1303.9	1302.9	1301.8	1300.7	1299.6	1299.8
180°	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1258.7	1255.8	1252.4	1246.6	1239.6	1235.8	1230.0	1226.3	1218.8	1212.6	1205.9
5°	1322.5	1309.0	1296.6	1280.5	1262.8	1251.4	1237.9	1222.8	1207.3	1191.2	1173.5
7.5°	1388.7	1364.8	1338.8	1310.9	1283.6	1258.5	1234.5	1210.9	1188.9	1162.3	1139.8
10°	1433.1	1403.0	1370.8	1332.9	1296.1	1263.9	1231.2	1202.6	1173.5	1142.4	1114.8
12.5°	1477.6	1437.5	1392.0	1350.4	1306.0	1267.2	1228.7	1192.2	1155.7	1121.2	1089.1
15°	1509.0	1473.6	1431.6	1372.4	1322.5	1269.1	1218.2	1170.9	1126.8	1088.4	1047.9
17.5°	1529.6	1484.1	1439.0	1382.2	1316.8	1257.0	1199.4	1145.3	1095.5	1046.8	1007.8
20°	1533.4	1486.6	1439.4	1383.8	1316.8	1248.3	1190.7	1125.7	1072.3	1021.9	974.1
22.5°	1532.1	1479.2	1427.7	1370.5	1305.2	1242.1	1172.4	1106.2	1048.2	998.6	948.8
25°	1520.4	1463.8	1399.4	1341.8	1277.4	1210.4	1139.8	1071.2	1012.0	955.4	906.1
27.5°	1510.6	1437.2	1364.3	1297.1	1234.9	1173.5	1105.9	1035.7	970.1	912.7	866.2
30°	1498.6	1418.1	1336.0	1265.9	1202.1	1142.4	1078.5	1010.0	941.4	885.3	835.5
32.5°	1487.8	1394.0	1307.4	1231.1	1163.4	1105.4	1046.5	981.3	914.0	857.1	807.2
35°	1466.9	1358.4	1259.2	1173.0	1100.8	1041.1	991.8	931.0	869.2	814.2	766.4
37.5°	1440.4	1311.6	1205.2	1114.8	1035.7	972.8	926.9	880.2	820.9	767.9	724.7
40°	1419.6	1278.4	1165.7	1073.3	991.3	925.8	883.3	839.1	789.8	740.5	694.8
42.5°	1393.5	1248.5	1125.9	1026.4	945.1	881.4	836.7	799.2	755.7	709.7	667.3
45°	1345.4	1194.3	1061.4	954.4	872.3	809.5	763.3	735.3	702.6	658.9	623.1
47.5°	1274.7	1129.2	991.7	881.3	796.6	738.4	695.1	668.2	645.1	612.7	580.2
50°	1211.9	1080.6	941.4	831.8	747.2	688.5	648.6	624.1	604.4	579.5	552.0
52.5°	1141.7	1019.5	892.0	783.7	699.9	642.0	602.9	581.4	565.0	547.1	520.0
55°	1030.2	926.4	808.0	705.1	627.8	571.2	536.9	518.2	504.7	491.2	474.6
57.5°	907.3	826.1	721.2	627.3	556.0	504.5	472.5	454.3	443.9	436.9	427.1
60°	820.9	751.4	661.0	575.3	505.8	460.1	428.9	414.9	406.1	400.3	393.1
62.5°	740.8	683.7	599.9	521.7	460.9	417.7	389.9	376.3	367.8	365.0	359.0
65°	622.6	578.5	509.4	444.5	392.6	355.7	332.3	319.3	314.1	311.0	311.6
67.5°	506.2	479.3	423.8	368.5	327.0	296.1	277.4	267.4	264.8	260.7	260.6
70°	435.1	414.9	368.2	319.9	283.0	259.1	242.5	232.1	229.5	227.4	226.9
72.5°	372.4	354.7	314.1	275.4	242.3	221.3	207.6	201.4	197.1	195.9	195.8
75°	279.9	270.0	237.8	207.2	184.3	169.8	160.5	154.7	151.6	151.1	151.6
77.5°	199.0	190.4	169.9	148.2	133.8	122.8	114.9	112.9	109.4	109.5	108.9
80°	149.5	143.8	130.9	113.7	101.8	92.4	88.3	84.6	83.6	82.0	83.6
82.5°	108.4	102.3	93.5	82.6	72.7	67.1	62.9	61.8	61.2	60.4	60.8
85°	53.5	54.0	48.8	40.5	36.3	33.2	30.6	30.6	30.1	29.6	30.1
87.5°	20.9	19.7	17.8	16.2	13.7	12.1	11.4	11.4	10.5	10.5	11.3
90°	13.1	11.5	9.9	8.2	6.4	4.6	2.8	1.0	2.8	4.6	6.4
92.5°	35.0	33.1	31.2	29.6	28.3	27.0	25.8	24.5	25.8	27.0	28.3
95°	73.5	71.3	69.0	67.7	67.2	66.8	66.3	65.9	66.3	66.8	67.2
97.5°	118.0	114.9	111.8	110.2	110.0	109.8	109.6	109.4	109.6	109.8	110.0
100°	149.2	146.2	143.3	141.9	141.9	141.9	141.9	141.9	141.9	141.9	141.9
102.5°	184.5	183.0	181.5	180.3	179.4	178.5	177.6	176.7	177.6	178.5	179.4
105°	239.5	238.1	236.8	235.5	234.4	233.3	232.1	231.0	232.1	233.3	234.4
107.5°	298.7	297.6	296.6	295.5	294.4	293.3	292.1	291.0	292.1	293.3	294.4
110°	339.1	338.4	337.8	336.9	335.7	334.6	333.5	332.3	333.5	334.6	335.7





TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	379.3	378.4	377.6	376.8	376.3	375.7	375.1	374.5	375.1	375.7	376.3
115°	441.9	441.4	441.0	440.3	439.4	438.5	437.6	436.7	437.6	438.5	439.4
117.5°	502.0	501.6	501.2	500.8	500.3	499.9	499.5	499.1	499.5	499.9	500.3
120°	543.7	543.4	543.2	542.5	541.4	540.3	539.2	538.0	539.2	540.3	541.4
122.5°	583.5	582.9	582.3	581.8	581.4	581.0	580.6	580.2	580.6	581.0	581.4
125°	644.0	643.8	643.5	642.7	641.4	640.0	638.7	637.3	638.7	640.0	641.4
127.5°	702.3	702.0	701.7	701.2	700.4	699.7	698.9	698.1	698.9	699.7	700.4
130°	740.8	740.4	739.9	739.1	738.0	736.9	735.7	734.6	735.7	736.9	738.0
132.5°	779.2	779.3	779.4	778.5	776.6	774.8	772.9	771.1	772.9	774.8	776.6
135°	835.5	835.3	835.0	834.3	832.9	831.5	830.2	828.8	830.2	831.5	832.9
137.5°	890.3	889.8	889.3	888.4	887.1	885.8	884.5	883.2	884.5	885.8	887.1
140°	924.8	924.1	923.4	922.5	921.4	920.3	919.1	918.0	919.1	920.3	921.4
142.5°	959.3	958.4	957.6	956.7	955.7	954.8	953.8	952.9	953.8	954.8	955.7
145°	1009.9	1009.2	1008.5	1007.7	1006.8	1005.9	1005.0	1004.1	1005.0	1005.9	1006.8
147.5°	1055.1	1054.6	1054.1	1053.5	1053.0	1052.6	1052.1	1051.6	1052.1	1052.6	1053.0
150°	1084.4	1083.5	1082.6	1082.3	1082.5	1082.7	1083.0	1083.2	1083.0	1082.7	1082.5
152.5°	1111.4	1111.1	1110.7	1110.4	1110.1	1109.7	1109.4	1109.1	1109.4	1109.7	1110.1
155°	1149.6	1149.4	1149.1	1149.0	1149.0	1149.0	1149.0	1149.0	1149.0	1149.0	1149.0
157.5°	1183.0	1182.8	1182.6	1182.7	1183.2	1183.7	1184.2	1184.7	1184.2	1183.7	1183.2
160°	1203.3	1203.1	1202.9	1203.1	1203.8	1204.4	1205.1	1205.8	1205.1	1204.4	1203.8
162.5°	1222.3	1222.3	1222.2	1222.4	1222.9	1223.4	1223.9	1224.4	1223.9	1223.4	1222.9
165°	1247.9	1247.7	1247.4	1247.5	1248.0	1248.4	1248.9	1249.4	1248.9	1248.4	1248.0
167.5°	1266.4	1266.4	1266.4	1266.8	1267.7	1268.6	1269.5	1270.4	1269.5	1268.6	1267.7
170°	1277.7	1277.7	1277.7	1278.2	1279.1	1280.0	1280.9	1281.8	1280.9	1280.0	1279.1
172.5°	1285.8	1285.8	1285.8	1286.3	1287.2	1288.1	1289.0	1289.9	1289.0	1288.1	1287.2
175°	1294.9	1294.9	1294.9	1295.4	1296.3	1297.2	1298.1	1299.0	1298.1	1297.2	1296.3
177.5°	1300.0	1300.1	1300.3	1300.8	1301.5	1302.2	1302.9	1303.7	1302.9	1302.2	1301.5
180°	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1202.2	1197.6	1193.9	1185.6	1181.0	1174.8	1169.8	1175.2	1169.4	1171.9	1168.1
5°	1164.7	1150.2	1139.8	1124.7	1111.7	1099.8	1091.0	1089.4	1085.2	1083.2	1076.9
7.5°	1119.6	1101.4	1083.6	1063.9	1047.2	1030.3	1019.5	1010.6	1004.7	996.9	991.6
10°	1093.0	1068.6	1047.9	1024.0	1003.2	985.0	970.5	963.2	956.5	946.6	943.0
12.5°	1060.2	1035.0	1009.6	984.1	964.2	943.9	931.4	920.4	915.8	904.6	903.5
15°	1020.9	983.0	958.0	932.1	904.5	887.9	877.5	865.6	860.4	852.6	846.9
17.5°	973.9	940.1	908.9	882.0	858.4	844.4	831.5	823.3	814.4	809.3	800.0
20°	939.9	907.7	876.5	847.9	829.8	813.7	803.3	795.5	786.2	783.6	774.2
22.5°	911.2	875.7	845.8	821.8	801.9	783.8	772.5	767.3	760.8	752.8	750.9
25°	864.6	827.7	802.3	778.4	760.7	744.1	736.3	729.6	723.3	717.6	715.5
27.5°	824.3	791.3	761.1	739.5	724.2	709.0	702.1	693.9	689.4	684.8	679.2
30°	796.0	762.3	735.8	715.0	698.4	684.9	677.6	671.9	667.8	663.6	660.5
32.5°	766.9	735.7	710.0	689.7	673.1	662.9	656.4	652.4	647.8	642.8	638.9
35°	728.5	694.2	669.3	651.7	638.7	630.9	623.6	620.0	614.8	614.8	610.6
37.5°	685.2	655.6	633.6	617.5	605.9	598.9	591.0	588.5	585.2	583.0	581.6
40°	659.5	631.9	611.2	595.1	582.6	576.9	570.7	566.5	564.4	561.8	560.8
42.5°	632.9	606.6	586.7	571.8	561.0	556.1	550.3	547.4	543.2	539.8	539.2
45°	592.5	567.0	548.9	536.9	527.6	521.9	518.2	512.0	509.9	505.8	505.2
47.5°	554.1	529.7	511.9	502.1	493.9	489.2	483.5	477.3	474.9	472.8	472.6
50°	525.5	503.2	486.5	477.2	469.4	462.7	456.9	452.8	451.2	451.2	452.3
52.5°	496.4	477.4	463.3	451.9	444.5	437.3	432.0	429.5	427.1	429.6	431.5
55°	453.8	434.6	424.2	413.3	406.1	397.7	395.2	394.1	392.6	396.7	398.8
57.5°	408.8	395.3	383.1	372.3	365.8	361.0	357.5	356.8	359.7	361.7	368.5
60°	380.1	364.5	353.6	345.3	337.5	334.4	333.4	332.3	334.4	340.1	348.9
62.5°	348.5	335.9	324.1	317.9	312.2	307.0	306.8	307.4	311.6	318.1	326.9
65°	302.2	291.3	283.5	276.2	271.6	268.5	269.5	271.6	276.2	285.1	294.9
67.5°	255.2	247.7	240.7	234.8	230.3	230.3	231.4	234.5	240.0	250.2	259.2
70°	224.8	216.5	210.8	208.2	204.6	202.5	205.6	210.8	215.5	224.8	232.6
72.5°	194.5	187.5	183.0	181.2	179.7	178.0	179.0	184.6	191.0	200.3	209.4
75°	149.5	146.9	143.8	141.8	140.2	141.2	142.3	147.5	152.7	162.5	172.9
77.5°	109.1	106.4	104.6	104.1	103.2	103.7	106.7	110.5	115.6	122.8	130.6
80°	82.6	81.5	80.5	80.0	80.0	80.5	84.6	87.2	91.9	98.7	104.9
82.5°	60.1	59.5	59.3	59.2	59.6	59.7	62.2	65.6	69.5	74.6	80.0
85°	31.7	30.6	32.2	32.7	31.7	33.2	34.3	36.3	37.9	40.5	43.1
87.5°	12.0	13.2	13.1	13.8	14.1	15.3	15.1	17.0	18.0	19.1	18.9
90°	8.2	9.9	11.5	13.1	14.6	16.2	17.3	18.5	19.6	20.7	21.6
92.5°	29.6	31.2	33.1	35.0	37.0	38.9	40.4	41.9	43.4	44.9	45.8
95°	67.7	69.0	71.3	73.5	75.8	78.0	79.6	81.2	82.7	84.3	85.3
97.5°	110.2	111.8	114.9	118.0	121.1	124.2	125.7	127.2	128.7	130.2	131.0
100°	141.9	143.3	146.2	149.2	152.1	155.0	157.1	159.1	161.1	163.1	164.4
102.5°	180.3	181.5	183.0	184.5	186.0	187.5	189.7	191.9	194.1	196.3	197.7
105°	235.5	236.8	238.1	239.5	240.8	242.2	243.5	244.9	246.2	247.6	248.6
107.5°	295.5	296.6	297.6	298.7	299.7	300.7	301.4	302.1	302.8	303.4	303.8
110°	336.9	337.8	338.4	339.1	339.8	340.5	341.1	341.8	342.5	343.2	343.4



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	376.8	377.6	378.4	379.3	380.1	381.0	381.3	381.6	381.9	382.2	382.2
115°	440.3	441.0	441.4	441.9	442.3	442.8	442.6	442.3	442.1	441.9	441.7
117.5°	500.8	501.2	501.6	502.0	502.4	502.8	503.0	503.1	503.3	503.5	503.1
120°	542.5	543.2	543.4	543.7	543.9	544.1	544.1	544.1	544.1	544.1	543.7
122.5°	581.8	582.3	582.9	583.5	584.1	584.7	584.5	584.3	584.1	583.9	583.5
125°	642.7	643.5	643.8	644.0	644.2	644.4	644.0	643.5	643.1	642.6	642.3
127.5°	701.2	701.7	702.0	702.3	702.5	702.8	702.6	702.3	702.1	701.9	701.6
130°	739.1	739.9	740.4	740.8	741.3	741.7	741.5	741.3	741.0	740.8	740.5
132.5°	778.5	779.4	779.3	779.2	779.1	779.0	778.8	778.5	778.3	778.1	777.7
135°	834.3	835.0	835.3	835.5	835.7	835.9	835.9	835.9	835.9	835.9	835.5
137.5°	888.4	889.3	889.8	890.3	890.8	891.3	891.5	891.8	892.1	892.3	891.9
140°	922.5	923.4	924.1	924.8	925.4	926.1	926.6	927.0	927.5	927.9	927.6
142.5°	956.7	957.6	958.4	959.3	960.1	961.0	961.2	961.5	961.8	962.1	961.6
145°	1007.7	1008.5	1009.2	1009.9	1010.6	1011.2	1011.2	1011.2	1011.2	1011.2	1010.9
147.5°	1053.5	1054.1	1054.6	1055.1	1055.7	1056.2	1056.8	1057.3	1057.8	1058.4	1057.9
150°	1082.3	1082.6	1083.5	1084.4	1085.3	1086.2	1086.2	1086.2	1086.2	1086.2	1086.0
152.5°	1110.4	1110.7	1111.1	1111.4	1111.8	1112.2	1112.7	1113.2	1113.8	1114.3	1114.2
155°	1149.0	1149.1	1149.4	1149.6	1149.8	1150.1	1151.0	1151.9	1152.8	1153.7	1153.5
157.5°	1182.7	1182.6	1182.8	1183.0	1183.3	1183.5	1184.4	1185.3	1186.2	1187.1	1186.8
160°	1203.1	1202.9	1203.1	1203.3	1203.5	1203.8	1204.7	1205.6	1206.5	1207.4	1207.2
162.5°	1222.4	1222.2	1222.3	1222.3	1222.4	1222.4	1223.5	1224.6	1225.6	1226.7	1226.6
165°	1247.5	1247.4	1247.7	1247.9	1248.1	1248.3	1249.2	1250.1	1251.0	1251.9	1251.7
167.5°	1266.8	1266.4	1266.4	1266.4	1266.4	1266.4	1267.7	1269.1	1270.4	1271.8	1271.8
170°	1278.2	1277.7	1277.7	1277.7	1277.7	1277.7	1279.1	1280.4	1281.8	1283.1	1283.0
172.5°	1286.3	1285.8	1285.8	1285.8	1285.8	1285.8	1287.2	1288.5	1289.9	1291.2	1291.2
175°	1295.4	1294.9	1294.9	1294.9	1294.9	1294.9	1296.3	1297.6	1299.0	1300.4	1300.2
177.5°	1300.8	1300.3	1300.1	1300.0	1299.8	1299.6	1300.7	1301.8	1302.9	1303.9	1303.8
180°	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1165.6	1168.5	1166.0	1169.4	1166.0	1168.5	1165.6	1168.1	1171.9	1169.4	1175.2
5°	1074.3	1069.7	1072.8	1070.7	1072.8	1069.7	1074.3	1076.9	1083.2	1085.2	1089.4
7.5°	990.0	985.5	980.5	978.1	980.5	985.5	990.0	991.6	996.9	1004.7	1010.6
10°	937.3	931.5	931.0	927.4	931.0	931.5	937.3	943.0	946.6	956.5	963.2
12.5°	898.6	893.3	887.4	885.9	887.4	893.3	898.6	903.5	904.6	915.8	920.4
15°	843.8	839.6	836.0	839.1	836.0	839.6	843.8	846.9	852.6	860.4	865.6
17.5°	798.2	794.8	794.1	790.3	794.1	794.8	798.2	800.0	809.3	814.4	823.3
20°	769.5	766.9	768.0	761.2	768.0	766.9	769.5	774.2	783.6	786.2	795.5
22.5°	746.7	741.6	741.0	739.6	741.0	741.6	746.7	750.9	752.8	760.8	767.3
25°	710.9	708.3	705.7	708.3	705.7	708.3	710.9	715.5	717.6	723.3	729.6
27.5°	679.6	676.5	675.8	676.1	675.8	676.5	679.6	679.2	684.8	689.4	693.9
30°	660.5	655.3	655.8	655.3	655.8	655.3	660.5	660.5	663.6	667.8	671.9
32.5°	639.7	636.2	635.5	634.5	635.5	636.2	639.7	638.9	642.8	647.8	652.4
35°	609.1	609.1	606.5	606.5	606.5	609.1	609.1	610.6	614.8	614.8	620.0
37.5°	580.3	579.8	578.2	578.5	578.2	579.8	580.3	581.6	583.0	585.2	588.5
40°	558.7	558.2	556.6	553.5	556.6	558.2	558.7	560.8	561.8	564.4	566.5
42.5°	537.9	536.2	535.5	534.4	535.5	536.2	537.9	539.2	539.8	543.2	547.4
45°	505.2	505.2	504.2	503.7	504.2	505.2	505.2	505.2	505.8	509.9	512.0
47.5°	473.5	474.4	476.4	476.1	476.4	474.4	473.5	472.6	472.8	474.9	477.3
50°	454.3	454.9	456.4	456.9	456.4	454.9	454.3	452.3	451.2	451.2	452.8
52.5°	433.2	436.2	438.1	437.8	438.1	436.2	433.2	431.5	429.6	427.1	429.5
55°	403.5	407.1	410.7	411.3	410.7	407.1	403.5	398.8	396.7	392.6	394.1
57.5°	374.1	379.2	383.0	384.2	383.0	379.2	374.1	368.5	361.7	359.7	356.8
60°	354.1	360.9	365.6	367.6	365.6	360.9	354.1	348.9	340.1	334.4	332.3
62.5°	335.0	342.6	347.3	347.7	347.3	342.6	335.0	326.9	318.1	311.6	307.4
65°	303.8	311.6	315.7	318.8	315.7	311.6	303.8	294.9	285.1	276.2	271.6
67.5°	270.1	277.9	282.5	285.0	282.5	277.9	270.1	259.2	250.2	240.0	234.5
70°	245.6	253.4	259.6	261.7	259.6	253.4	245.6	232.6	224.8	215.5	210.8
72.5°	221.5	228.5	233.5	235.9	233.5	228.5	221.5	209.4	200.3	191.0	184.6
75°	179.7	189.0	193.7	196.3	193.7	189.0	179.7	172.9	162.5	152.7	147.5
77.5°	138.5	147.1	149.9	151.2	149.9	147.1	138.5	130.6	122.8	115.6	110.5
80°	111.1	116.3	119.9	120.5	119.9	116.3	111.1	104.9	98.7	91.9	87.2
82.5°	85.4	89.7	90.9	92.2	90.9	89.7	85.4	80.0	74.6	69.5	65.6
85°	46.7	48.8	49.3	48.8	49.3	48.8	46.7	43.1	40.5	37.9	36.3
87.5°	19.8	19.5	19.7	20.6	19.7	19.5	19.8	18.9	19.1	18.0	17.0
90°	22.3	23.0	23.6	24.3	23.6	23.0	22.3	21.6	20.7	19.6	18.5
92.5°	46.3	46.8	47.3	47.8	47.3	46.8	46.3	45.8	44.9	43.4	41.9
95°	85.8	86.2	86.7	87.1	86.7	86.2	85.8	85.3	84.3	82.7	81.2
97.5°	131.3	131.6	131.9	132.1	131.9	131.6	131.3	131.0	130.2	128.7	127.2
100°	164.8	165.3	165.7	166.2	165.7	165.3	164.8	164.4	163.1	161.1	159.1
102.5°	198.3	199.0	199.6	200.2	199.6	199.0	198.3	197.7	196.3	194.1	191.9
105°	249.3	249.9	250.6	251.3	250.6	249.9	249.3	248.6	247.6	246.2	244.9
107.5°	303.7	303.7	303.6	303.6	303.6	303.7	303.7	303.8	303.4	302.8	302.1
110°	343.2	342.9	342.7	342.5	342.7	342.9	343.2	343.4	343.2	342.5	341.8



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	381.8	381.4	381.0	380.6	381.0	381.4	381.8	382.2	382.2	381.9	381.6
115°	441.4	441.2	441.0	440.8	441.0	441.2	441.4	441.7	441.9	442.1	442.3
117.5°	502.2	501.3	500.4	499.5	500.4	501.3	502.2	503.1	503.5	503.3	503.1
120°	542.8	541.9	541.0	540.1	541.0	541.9	542.8	543.7	544.1	544.1	544.1
122.5°	582.8	582.0	581.3	580.6	581.3	582.0	582.8	583.5	583.9	584.1	584.3
125°	642.1	641.8	641.6	641.4	641.6	641.8	642.1	642.3	642.6	643.1	643.5
127.5°	701.1	700.7	700.2	699.8	700.2	700.7	701.1	701.6	701.9	702.1	702.3
130°	740.0	739.6	739.1	738.7	739.1	739.6	740.0	740.5	740.8	741.0	741.3
132.5°	777.0	776.4	775.8	775.1	775.8	776.4	777.0	777.7	778.1	778.3	778.5
135°	834.6	833.7	832.8	831.9	832.8	833.7	834.6	835.5	835.9	835.9	835.9
137.5°	890.8	889.7	888.5	887.4	888.5	889.7	890.8	891.9	892.3	892.1	891.8
140°	926.5	925.3	924.2	923.1	924.2	925.3	926.5	927.6	927.9	927.5	927.0
142.5°	960.5	959.4	958.3	957.1	958.3	959.4	960.5	961.6	962.1	961.8	961.5
145°	1010.2	1009.5	1008.9	1008.2	1008.9	1009.5	1010.2	1010.9	1011.2	1011.2	1011.2
147.5°	1056.4	1054.8	1053.3	1051.8	1053.3	1054.8	1056.4	1057.9	1058.4	1057.8	1057.3
150°	1085.5	1085.1	1084.6	1084.2	1084.6	1085.1	1085.5	1086.0	1086.2	1086.2	1086.2
152.5°	1113.4	1112.6	1111.7	1110.9	1111.7	1112.6	1113.4	1114.2	1114.3	1113.8	1113.2
155°	1152.4	1151.3	1150.2	1149.0	1150.2	1151.3	1152.4	1153.5	1153.7	1152.8	1151.9
157.5°	1185.3	1183.8	1182.3	1180.9	1182.3	1183.8	1185.3	1186.8	1187.1	1186.2	1185.3
160°	1206.1	1205.0	1203.9	1202.7	1203.9	1205.0	1206.1	1207.2	1207.4	1206.5	1205.6
162.5°	1225.3	1224.0	1222.7	1221.4	1222.7	1224.0	1225.3	1226.6	1226.7	1225.6	1224.6
165°	1250.4	1249.0	1247.7	1246.3	1247.7	1249.0	1250.4	1251.7	1251.9	1251.0	1250.1
167.5°	1270.4	1269.0	1267.6	1266.2	1267.6	1269.0	1270.4	1271.8	1271.8	1270.4	1269.1
170°	1281.4	1279.9	1278.3	1276.7	1278.3	1279.9	1281.4	1283.0	1283.1	1281.8	1280.4
172.5°	1289.8	1288.4	1287.0	1285.6	1287.0	1288.4	1289.8	1291.2	1291.2	1289.9	1288.5
175°	1298.7	1297.1	1295.5	1293.9	1295.5	1297.1	1298.7	1300.2	1300.4	1299.0	1297.6
177.5°	1302.6	1301.3	1300.1	1298.8	1300.1	1301.3	1302.6	1303.8	1303.9	1302.9	1301.8
180°	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1169.8	1174.8	1181.0	1185.6	1193.9	1197.6	1202.2	1205.9	1212.6	1218.8	1226.3
5°	1091.0	1099.8	1111.7	1124.7	1139.8	1150.2	1164.7	1173.5	1191.2	1207.3	1222.8
7.5°	1019.5	1030.3	1047.2	1063.9	1083.6	1101.4	1119.6	1139.8	1162.3	1188.9	1210.9
10°	970.5	985.0	1003.2	1024.0	1047.9	1068.6	1093.0	1114.8	1142.4	1173.5	1202.6
12.5°	931.4	943.9	964.2	984.1	1009.6	1035.0	1060.2	1089.1	1121.2	1155.7	1192.2
15°	877.5	887.9	904.5	932.1	958.0	983.0	1020.9	1047.9	1088.4	1126.8	1170.9
17.5°	831.5	844.4	858.4	882.0	908.9	940.1	973.9	1007.8	1046.8	1095.5	1145.3
20°	803.3	813.7	829.8	847.9	876.5	907.7	939.9	974.1	1021.9	1072.3	1125.7
22.5°	772.5	783.8	801.9	821.8	845.8	875.7	911.2	948.8	998.6	1048.2	1106.2
25°	736.3	744.1	760.7	778.4	802.3	827.7	864.6	906.1	955.4	1012.0	1071.2
27.5°	702.1	709.0	724.2	739.5	761.1	791.3	824.3	866.2	912.7	970.1	1035.7
30°	677.6	684.9	698.4	715.0	735.8	762.3	796.0	835.5	885.3	941.4	1010.0
32.5°	656.4	662.9	673.1	689.7	710.0	735.7	766.9	807.2	857.1	914.0	981.3
35°	623.6	630.9	638.7	651.7	669.3	694.2	728.5	766.4	814.2	869.2	931.0
37.5°	591.0	598.9	605.9	617.5	633.6	655.6	685.2	724.7	767.9	820.9	880.2
40°	570.7	576.9	582.6	595.1	611.2	631.9	659.5	694.8	740.5	789.8	839.1
42.5°	550.3	556.1	561.0	571.8	586.7	606.6	632.9	667.3	709.7	755.7	799.2
45°	518.2	521.9	527.6	536.9	548.9	567.0	592.5	623.1	658.9	702.6	735.3
47.5°	483.5	489.2	493.9	502.1	511.9	529.7	554.1	580.2	612.7	645.1	668.2
50°	456.9	462.7	469.4	477.2	486.5	503.2	525.5	552.0	579.5	604.4	624.1
52.5°	432.0	437.3	444.5	451.9	463.3	477.4	496.4	520.0	547.1	565.0	581.4
55°	395.2	397.7	406.1	413.3	424.2	434.6	453.8	474.6	491.2	504.7	518.2
57.5°	357.5	361.0	365.8	372.3	383.1	395.3	408.8	427.1	436.9	443.9	454.3
60°	333.4	334.4	337.5	345.3	353.6	364.5	380.1	393.1	400.3	406.1	414.9
62.5°	306.8	307.0	312.2	317.9	324.1	335.9	348.5	359.0	365.0	367.8	376.3
65°	269.5	268.5	271.6	276.2	283.5	291.3	302.2	311.6	311.0	314.1	319.3
67.5°	231.4	230.3	230.3	234.8	240.7	247.7	255.2	260.6	260.7	264.8	267.4
70°	205.6	202.5	204.6	208.2	210.8	216.5	224.8	226.9	227.4	229.5	232.1
72.5°	179.0	178.0	179.7	181.2	183.0	187.5	194.5	195.8	195.9	197.1	201.4
75°	142.3	141.2	140.2	141.8	143.8	146.9	149.5	151.6	151.1	151.6	154.7
77.5°	106.7	103.7	103.2	104.1	104.6	106.4	109.1	108.9	109.5	109.4	112.9
80°	84.6	80.5	80.0	80.0	80.5	81.5	82.6	83.6	82.0	83.6	84.6
82.5°	62.2	59.7	59.6	59.2	59.3	59.5	60.1	60.8	60.4	61.2	61.8
85°	34.3	33.2	31.7	32.7	32.2	30.6	31.7	30.1	29.6	30.1	30.6
87.5°	15.1	15.3	14.1	13.8	13.1	13.2	12.0	11.3	10.5	10.5	11.4
90°	17.3	16.2	14.6	13.1	11.5	9.9	8.2	6.4	4.6	2.8	1.0
92.5°	40.4	38.9	37.0	35.0	33.1	31.2	29.6	28.3	27.0	25.8	24.5
95°	79.6	78.0	75.8	73.5	71.3	69.0	67.7	67.2	66.8	66.3	65.9
97.5°	125.7	124.2	121.1	118.0	114.9	111.8	110.2	110.0	109.8	109.6	109.4
100°	157.1	155.0	152.1	149.2	146.2	143.3	141.9	141.9	141.9	141.9	141.9
102.5°	189.7	187.5	186.0	184.5	183.0	181.5	180.3	179.4	178.5	177.6	176.7
105°	243.5	242.2	240.8	239.5	238.1	236.8	235.5	234.4	233.3	232.1	231.0
107.5°	301.4	300.7	299.7	298.7	297.6	296.6	295.5	294.4	293.3	292.1	291.0
110°	341.1	340.5	339.8	339.1	338.4	337.8	336.9	335.7	334.6	333.5	332.3



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	381.3	381.0	380.1	379.3	378.4	377.6	376.8	376.3	375.7	375.1	374.5
115°	442.6	442.8	442.3	441.9	441.4	441.0	440.3	439.4	438.5	437.6	436.7
117.5°	503.0	502.8	502.4	502.0	501.6	501.2	500.8	500.3	499.9	499.5	499.1
120°	544.1	544.1	543.9	543.7	543.4	543.2	542.5	541.4	540.3	539.2	538.0
122.5°	584.5	584.7	584.1	583.5	582.9	582.3	581.8	581.4	581.0	580.6	580.2
125°	644.0	644.4	644.2	644.0	643.8	643.5	642.7	641.4	640.0	638.7	637.3
127.5°	702.6	702.8	702.5	702.3	702.0	701.7	701.2	700.4	699.7	698.9	698.1
130°	741.5	741.7	741.3	740.8	740.4	739.9	739.1	738.0	736.9	735.7	734.6
132.5°	778.8	779.0	779.1	779.2	779.3	779.4	778.5	776.6	774.8	772.9	771.1
135°	835.9	835.9	835.7	835.5	835.3	835.0	834.3	832.9	831.5	830.2	828.8
137.5°	891.5	891.3	890.8	890.3	889.8	889.3	888.4	887.1	885.8	884.5	883.2
140°	926.6	926.1	925.4	924.8	924.1	923.4	922.5	921.4	920.3	919.1	918.0
142.5°	961.2	961.0	960.1	959.3	958.4	957.6	956.7	955.7	954.8	953.8	952.9
145°	1011.2	1011.2	1010.6	1009.9	1009.2	1008.5	1007.7	1006.8	1005.9	1005.0	1004.1
147.5°	1056.8	1056.2	1055.7	1055.1	1054.6	1054.1	1053.5	1053.0	1052.6	1052.1	1051.6
150°	1086.2	1086.2	1085.3	1084.4	1083.5	1082.6	1082.3	1082.5	1082.7	1083.0	1083.2
152.5°	1112.7	1112.2	1111.8	1111.4	1111.1	1110.7	1110.4	1110.1	1109.7	1109.4	1109.1
155°	1151.0	1150.1	1149.8	1149.6	1149.4	1149.1	1149.0	1149.0	1149.0	1149.0	1149.0
157.5°	1184.4	1183.5	1183.3	1183.0	1182.8	1182.6	1182.7	1183.2	1183.7	1184.2	1184.7
160°	1204.7	1203.8	1203.5	1203.3	1203.1	1202.9	1203.1	1203.8	1204.4	1205.1	1205.8
162.5°	1223.5	1222.4	1222.4	1222.3	1222.3	1222.2	1222.4	1222.9	1223.4	1223.9	1224.4
165°	1249.2	1248.3	1248.1	1247.9	1247.7	1247.4	1247.5	1248.0	1248.4	1248.9	1249.4
167.5°	1267.7	1266.4	1266.4	1266.4	1266.4	1266.4	1266.8	1267.7	1268.6	1269.5	1270.4
170°	1279.1	1277.7	1277.7	1277.7	1277.7	1277.7	1278.2	1279.1	1280.0	1280.9	1281.8
172.5°	1287.2	1285.8	1285.8	1285.8	1285.8	1285.8	1286.3	1287.2	1288.1	1289.0	1289.9
175°	1296.3	1294.9	1294.9	1294.9	1294.9	1294.9	1295.4	1296.3	1297.2	1298.1	1299.0
177.5°	1300.7	1299.6	1299.8	1300.0	1300.1	1300.3	1300.8	1301.5	1302.2	1302.9	1303.7
180°	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1230.0	1235.8	1239.6	1246.6	1252.4	1255.8	1258.7	1261.2	1264.1	1266.6	1273.6
5°	1237.9	1251.4	1262.8	1280.5	1296.6	1309.0	1322.5	1334.5	1344.4	1358.4	1369.3
7.5°	1234.5	1258.5	1283.6	1310.9	1338.8	1364.8	1388.7	1411.0	1431.3	1455.8	1477.3
10°	1231.2	1263.9	1296.1	1332.9	1370.8	1403.0	1433.1	1463.8	1486.1	1517.3	1543.7
12.5°	1228.7	1267.2	1306.0	1350.4	1392.0	1437.5	1477.6	1499.9	1533.9	1558.8	1590.3
15°	1218.2	1269.1	1322.5	1372.4	1431.6	1473.6	1509.0	1552.6	1584.2	1615.9	1650.2
17.5°	1199.4	1257.0	1316.8	1382.2	1439.0	1484.1	1529.6	1571.7	1609.5	1652.0	1694.6
20°	1190.7	1248.3	1316.8	1383.8	1439.4	1486.6	1533.4	1579.6	1621.1	1675.6	1725.0
22.5°	1172.4	1242.1	1305.2	1370.5	1427.7	1479.2	1532.1	1584.6	1639.8	1701.4	1763.2
25°	1139.8	1210.4	1277.4	1341.8	1399.4	1463.8	1520.4	1590.5	1661.1	1742.6	1819.5
27.5°	1105.9	1173.5	1234.9	1297.1	1364.3	1437.2	1510.6	1590.2	1682.6	1785.5	1893.9
30°	1078.5	1142.4	1202.1	1265.9	1336.0	1418.1	1498.6	1593.1	1700.0	1815.8	1944.6
32.5°	1046.5	1105.4	1163.4	1231.1	1307.4	1394.0	1487.8	1591.4	1720.0	1851.6	1984.1
35°	991.8	1041.1	1100.8	1173.0	1259.2	1358.4	1466.9	1589.4	1736.9	1888.0	1999.7
37.5°	926.9	972.8	1035.7	1114.8	1205.2	1311.6	1440.4	1585.8	1742.4	1862.9	1898.9
40°	883.3	925.8	991.3	1073.3	1165.7	1278.4	1419.6	1573.3	1725.0	1801.8	1772.2
42.5°	836.7	881.4	945.1	1026.4	1125.9	1248.5	1393.5	1547.2	1674.3	1703.4	1601.1
45°	763.3	809.5	872.3	954.4	1061.4	1194.3	1345.4	1485.1	1558.3	1505.8	1347.5
47.5°	695.1	738.4	796.6	881.3	991.7	1129.2	1274.7	1386.1	1391.9	1266.8	1097.6
50°	648.6	688.5	747.2	831.8	941.4	1080.6	1211.9	1299.7	1260.2	1118.5	955.9
52.5°	602.9	642.0	699.9	783.7	892.0	1019.5	1141.7	1203.3	1129.0	983.5	844.6
55°	536.9	571.2	627.8	705.1	808.0	926.4	1030.2	1051.5	954.9	811.6	698.9
57.5°	472.5	504.5	556.0	627.3	721.2	826.1	907.3	902.8	800.7	677.7	588.3
60°	428.9	460.1	505.8	575.3	661.0	751.4	820.9	804.3	703.1	597.1	521.9
62.5°	389.9	417.7	460.9	521.7	599.9	683.7	740.8	716.3	617.1	524.4	464.9
65°	332.3	355.7	392.6	444.5	509.4	578.5	622.6	590.9	506.3	434.1	386.3
67.5°	277.4	296.1	327.0	368.5	423.8	479.3	506.2	474.3	406.6	353.9	318.5
70°	242.5	259.1	283.0	319.9	368.2	414.9	435.1	406.6	348.4	303.2	277.8
72.5°	207.6	221.3	242.3	275.4	314.1	354.7	372.4	345.1	297.3	259.2	235.4
75°	160.5	169.8	184.3	207.2	237.8	270.0	279.9	256.0	225.4	196.8	181.2
77.5°	114.9	122.8	133.8	148.2	169.9	190.4	199.0	185.2	161.5	143.4	130.6
80°	88.3	92.4	101.8	113.7	130.9	143.8	149.5	140.7	124.1	110.6	100.7
82.5°	62.9	67.1	72.7	82.6	93.5	102.3	108.4	102.5	90.5	79.9	74.1
85°	30.6	33.2	36.3	40.5	48.8	54.0	53.5	49.8	45.2	41.0	37.9
87.5°	11.4	12.1	13.7	16.2	17.8	19.7	20.9	20.4	19.0	18.0	17.0
90°	2.8	4.6	6.4	8.2	9.9	11.5	13.1	14.6	16.2	17.3	18.5
92.5°	25.8	27.0	28.3	29.6	31.2	33.1	35.0	37.0	38.9	40.4	41.9
95°	66.3	66.8	67.2	67.7	69.0	71.3	73.5	75.8	78.0	79.6	81.2
97.5°	109.6	109.8	110.0	110.2	111.8	114.9	118.0	121.1	124.2	125.7	127.2
100°	141.9	141.9	141.9	141.9	143.3	146.2	149.2	152.1	155.0	157.1	159.1
102.5°	177.6	178.5	179.4	180.3	181.5	183.0	184.5	186.0	187.5	189.7	191.9
105°	232.1	233.3	234.4	235.5	236.8	238.1	239.5	240.8	242.2	243.5	244.9
107.5°	292.1	293.3	294.4	295.5	296.6	297.6	298.7	299.7	300.7	301.4	302.1
110°	333.5	334.6	335.7	336.9	337.8	338.4	339.1	339.8	340.5	341.1	341.8





TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	375.1	375.7	376.3	376.8	377.6	378.4	379.3	380.1	381.0	381.3	381.6
115°	437.6	438.5	439.4	440.3	441.0	441.4	441.9	442.3	442.8	442.6	442.3
117.5°	499.5	499.9	500.3	500.8	501.2	501.6	502.0	502.4	502.8	503.0	503.1
120°	539.2	540.3	541.4	542.5	543.2	543.4	543.7	543.9	544.1	544.1	544.1
122.5°	580.6	581.0	581.4	581.8	582.3	582.9	583.5	584.1	584.7	584.5	584.3
125°	638.7	640.0	641.4	642.7	643.5	643.8	644.0	644.2	644.4	644.0	643.5
127.5°	698.9	699.7	700.4	701.2	701.7	702.0	702.3	702.5	702.8	702.6	702.3
130°	735.7	736.9	738.0	739.1	739.9	740.4	740.8	741.3	741.7	741.5	741.3
132.5°	772.9	774.8	776.6	778.5	779.4	779.3	779.2	779.1	779.0	778.8	778.5
135°	830.2	831.5	832.9	834.3	835.0	835.3	835.5	835.7	835.9	835.9	835.9
137.5°	884.5	885.8	887.1	888.4	889.3	889.8	890.3	890.8	891.3	891.5	891.8
140°	919.1	920.3	921.4	922.5	923.4	924.1	924.8	925.4	926.1	926.6	927.0
142.5°	953.8	954.8	955.7	956.7	957.6	958.4	959.3	960.1	961.0	961.2	961.5
145°	1005.0	1005.9	1006.8	1007.7	1008.5	1009.2	1009.9	1010.6	1011.2	1011.2	1011.2
147.5°	1052.1	1052.6	1053.0	1053.5	1054.1	1054.6	1055.1	1055.7	1056.2	1056.8	1057.3
150°	1083.0	1082.7	1082.5	1082.3	1082.6	1083.5	1084.4	1085.3	1086.2	1086.2	1086.2
152.5°	1109.4	1109.7	1110.1	1110.4	1110.7	1111.1	1111.4	1111.8	1112.2	1112.7	1113.2
155°	1149.0	1149.0	1149.0	1149.0	1149.1	1149.4	1149.6	1149.8	1150.1	1151.0	1151.9
157.5°	1184.2	1183.7	1183.2	1182.7	1182.6	1182.8	1183.0	1183.3	1183.5	1184.4	1185.3
160°	1205.1	1204.4	1203.8	1203.1	1202.9	1203.1	1203.3	1203.5	1203.8	1204.7	1205.6
162.5°	1223.9	1223.4	1222.9	1222.4	1222.2	1222.3	1222.3	1222.4	1222.4	1223.5	1224.6
165°	1248.9	1248.4	1248.0	1247.5	1247.4	1247.7	1247.9	1248.1	1248.3	1249.2	1250.1
167.5°	1269.5	1268.6	1267.7	1266.8	1266.4	1266.4	1266.4	1266.4	1266.4	1267.7	1269.1
170°	1280.9	1280.0	1279.1	1278.2	1277.7	1277.7	1277.7	1277.7	1277.7	1279.1	1280.4
172.5°	1289.0	1288.1	1287.2	1286.3	1285.8	1285.8	1285.8	1285.8	1285.8	1287.2	1288.5
175°	1298.1	1297.2	1296.3	1295.4	1294.9	1294.9	1294.9	1294.9	1294.9	1296.3	1297.6
177.5°	1302.9	1302.2	1301.5	1300.8	1300.3	1300.1	1300.0	1299.8	1299.6	1300.7	1301.8
180°	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1279.4	1282.8	1289.8	1287.3	1290.7	1292.3	1294.0
5°	1382.8	1399.4	1406.7	1405.6	1416.5	1413.9	1411.3
7.5°	1499.5	1517.0	1526.7	1538.9	1545.9	1546.4	1552.6
10°	1565.6	1588.4	1597.8	1610.7	1619.0	1623.7	1623.2
12.5°	1616.2	1634.1	1655.1	1661.4	1672.6	1678.5	1676.4
15°	1677.2	1705.8	1727.6	1738.5	1752.5	1756.6	1762.4
17.5°	1731.6	1769.9	1795.4	1829.2	1842.0	1849.8	1845.2
20°	1772.7	1823.1	1848.6	1889.1	1911.4	1923.3	1919.2
22.5°	1821.3	1875.9	1922.9	1958.0	1992.0	2008.1	2011.4
25°	1904.6	1979.4	2048.5	2094.7	2136.7	2146.6	2168.4
27.5°	1997.7	2085.9	2159.7	2208.3	2237.6	2248.6	2255.4
30°	2056.3	2144.0	2199.6	2230.7	2240.1	2239.0	2238.0
32.5°	2084.9	2139.9	2150.5	2141.8	2120.4	2102.4	2083.5
35°	2044.3	2003.3	1942.0	1863.1	1804.9	1746.3	1740.5
37.5°	1838.6	1707.4	1605.4	1491.5	1425.8	1385.2	1357.1
40°	1645.0	1496.0	1372.4	1276.3	1209.3	1182.9	1156.9
42.5°	1434.8	1292.4	1183.0	1102.7	1052.3	1022.9	1002.4
45°	1165.7	1040.1	954.4	896.2	856.3	833.4	820.4
47.5°	955.2	862.3	789.5	747.5	719.9	702.1	702.2
50°	842.2	753.4	705.1	671.9	648.0	634.0	636.6
52.5°	742.1	675.8	634.5	606.7	589.0	580.4	580.1
55°	620.5	572.7	545.7	525.5	513.5	503.7	505.8
57.5°	530.8	490.5	472.4	455.6	447.3	443.3	437.6
60°	475.1	444.0	428.4	414.9	406.6	403.5	397.7
62.5°	425.7	401.2	386.0	375.0	367.5	366.5	362.0
65°	357.8	339.1	325.6	320.4	312.6	310.5	310.5
67.5°	294.9	281.5	271.1	266.3	262.8	263.4	260.9
70°	255.5	244.6	237.8	232.6	230.0	230.5	228.5
72.5°	223.5	211.3	205.4	202.3	198.9	200.2	199.4
75°	169.3	163.0	159.9	156.8	154.7	153.7	152.7
77.5°	124.3	118.8	116.4	114.7	115.0	112.5	114.4
80°	96.1	91.4	89.8	87.2	86.7	86.7	86.2
82.5°	70.3	67.7	66.6	64.4	63.5	64.3	62.9
85°	36.3	34.3	33.8	33.8	32.7	31.7	34.3
87.5°	17.2	15.8	16.0	15.7	15.8	15.5	14.8
90°	19.6	20.7	21.6	22.3	23.0	23.6	24.3
92.5°	43.4	44.9	45.8	46.3	46.8	47.3	47.8
95°	82.7	84.3	85.3	85.8	86.2	86.7	87.1
97.5°	128.7	130.2	131.0	131.3	131.6	131.9	132.1
100°	161.1	163.1	164.4	164.8	165.3	165.7	166.2
102.5°	194.1	196.3	197.7	198.3	199.0	199.6	200.2
105°	246.2	247.6	248.6	249.3	249.9	250.6	251.3
107.5°	302.8	303.4	303.8	303.7	303.7	303.6	303.6
110°	342.5	343.2	343.4	343.2	342.9	342.7	342.5



TEST NUMBER: P333413

CATALOG NUMBER: S125DIW-S850D1050U835-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	381.9	382.2	382.2	381.8	381.4	381.0	380.6
115°	442.1	441.9	441.7	441.4	441.2	441.0	440.8
117.5°	503.3	503.5	503.1	502.2	501.3	500.4	499.5
120°	544.1	544.1	543.7	542.8	541.9	541.0	540.1
122.5°	584.1	583.9	583.5	582.8	582.0	581.3	580.6
125°	643.1	642.6	642.3	642.1	641.8	641.6	641.4
127.5°	702.1	701.9	701.6	701.1	700.7	700.2	699.8
130°	741.0	740.8	740.5	740.0	739.6	739.1	738.7
132.5°	778.3	778.1	777.7	777.0	776.4	775.8	775.1
135°	835.9	835.9	835.5	834.6	833.7	832.8	831.9
137.5°	892.1	892.3	891.9	890.8	889.7	888.5	887.4
140°	927.5	927.9	927.6	926.5	925.3	924.2	923.1
142.5°	961.8	962.1	961.6	960.5	959.4	958.3	957.1
145°	1011.2	1011.2	1010.9	1010.2	1009.5	1008.9	1008.2
147.5°	1057.8	1058.4	1057.9	1056.4	1054.8	1053.3	1051.8
150°	1086.2	1086.2	1086.0	1085.5	1085.1	1084.6	1084.2
152.5°	1113.8	1114.3	1114.2	1113.4	1112.6	1111.7	1110.9
155°	1152.8	1153.7	1153.5	1152.4	1151.3	1150.2	1149.0
157.5°	1186.2	1187.1	1186.8	1185.3	1183.8	1182.3	1180.9
160°	1206.5	1207.4	1207.2	1206.1	1205.0	1203.9	1202.7
162.5°	1225.6	1226.7	1226.6	1225.3	1224.0	1222.7	1221.4
165°	1251.0	1251.9	1251.7	1250.4	1249.0	1247.7	1246.3
167.5°	1270.4	1271.8	1271.8	1270.4	1269.0	1267.6	1266.2
170°	1281.8	1283.1	1283.0	1281.4	1279.9	1278.3	1276.7
172.5°	1289.9	1291.2	1291.2	1289.8	1288.4	1287.0	1285.6
175°	1299.0	1300.4	1300.2	1298.7	1297.1	1295.5	1293.9
177.5°	1302.9	1303.9	1303.8	1302.6	1301.3	1300.1	1298.8
180°	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0

(END OF REPORT)