

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333424

Luminaire Tested: **S125DIW-S850D1560U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333424
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S850D1560U835-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9692.4 lumens
Efficiency: N/A
Efficacy: 142.3 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 68.1
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

Luminous Intensity Polar Plot

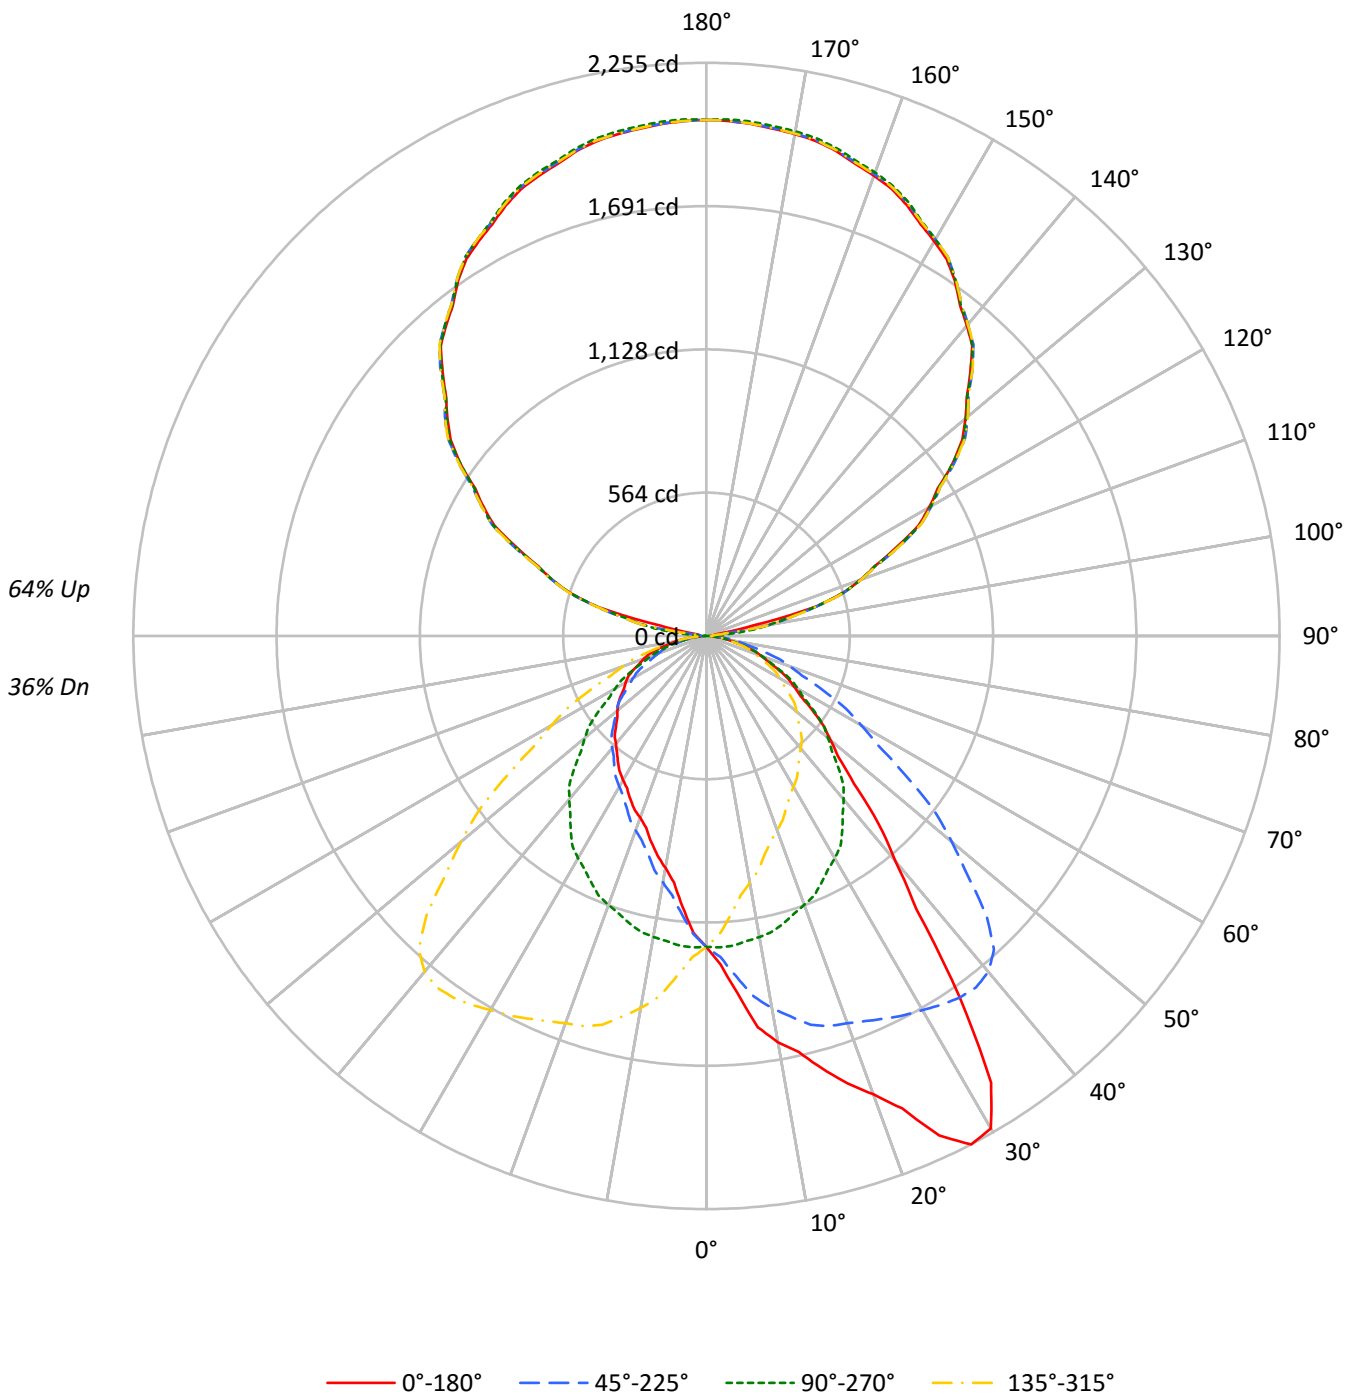



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43	36
1	95	91	87	83	86	82	79	76	66	64	62	52	50	49	38	37	37	30
2	86	79	73	68	78	72	67	63	58	55	52	45	43	41	34	32	31	26
3	79	70	63	57	71	63	57	52	51	47	43	40	37	35	30	28	27	22
4	72	62	54	48	65	56	50	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	24	22	20	16
6	61	49	41	36	55	45	38	33	37	32	28	29	25	23	22	20	18	14
7	56	44	37	31	51	40	34	29	33	28	24	26	23	20	20	18	16	13
8	52	40	33	27	47	37	30	25	30	25	22	24	20	18	18	16	14	11
9	48	37	29	24	44	33	27	23	28	23	19	22	18	16	17	14	13	10
10	45	33	26	22	41	31	24	20	25	21	17	20	17	14	16	13	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	7901	7901	7901	7901
5°	9149	7927	6941	7927
10°	10645	7887	6082	7887
15°	11784	7829	5610	7829
20°	13190	7737	5232	7737
25°	15452	7633	5047	7633
30°	16690	7532	4887	7532
35°	13722	7340	4782	7340
40°	9754	7074	4666	7074
45°	7493	6716	4601	6716
50°	6396	6271	4591	6271
55°	5695	5835	4631	5835
60°	5137	5359	4748	5359
65°	4745	4879	4872	4879
70°	4315	4383	4942	4383
75°	3810	3860	4898	3860
80°	3206	3146	4482	3146
85°	2542	2267	3616	2267



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.8	1.2
10°-20°	350.7	3.6
20°-30°	569.4	5.9
30°-40°	694.5	7.2
40°-50°	631.8	6.5
50°-60°	503.3	5.2
60°-70°	350.5	3.6
70°-80°	186.9	1.9
80°-90°	51.4	0.5
90°-100°	73.8	0.8
100°-110°	454.8	4.7
110°-120°	824.9	8.5
120°-130°	1058.6	10.9
130°-140°	1138.6	11.7
140°-150°	1068.8	11.0
150°-160°	864.5	8.9
160°-170°	559.1	5.8
170°-180°	192.9	2.0
0°-30°	1037.8	10.7
0°-40°	1732.4	17.9
0°-60°	2867.5	29.6
0°-90°	3456.3	35.7
90°-120°	1353.5	14.0
90°-150°	4619.5	47.7
90°-180°	6236.0	64.3
0°-180°	9692.4	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1223	1223	1223	1223	1223	
5°	1411	1223	1071	1223	1411	142
15°	1762	1171	839	1171	1762	504
25°	2168	1071	708	1071	2168	990
35°	1740	931	606	931	1740	1065
45°	820	735	504	735	820	657
55°	506	518	411	518	506	455
65°	310	319	319	319	310	308
75°	153	155	196	155	153	164
85°	34	31	49	31	34	40
90°	36	2	36	2	36	17
95°	32	86	32	86	32	26
105°	447	443	447	443	447	404
115°	825	831	825	831	825	819
125°	1182	1182	1182	1182	1182	1051
135°	1468	1474	1468	1474	1468	1133
145°	1704	1709	1704	1709	1704	1064
155°	1868	1882	1868	1882	1868	861
165°	1975	1986	1975	1986	1975	557
175°	2022	2031	2022	2031	2022	192
180°	2031	2031	2031	2031	2031	



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1294.0	1292.3	1290.7	1287.3	1289.8	1282.8	1279.4	1273.6	1266.6	1264.1	1261.2
5°	1411.3	1413.9	1416.5	1405.6	1406.7	1399.4	1382.8	1369.3	1358.4	1344.4	1334.5
7.5°	1552.6	1546.4	1545.9	1538.9	1526.7	1517.0	1499.5	1477.3	1455.8	1431.3	1411.0
10°	1623.2	1623.7	1619.0	1610.7	1597.8	1588.4	1565.6	1543.7	1517.3	1486.1	1463.8
12.5°	1676.4	1678.5	1672.6	1661.4	1655.1	1634.1	1616.2	1590.3	1558.8	1533.9	1499.9
15°	1762.4	1756.6	1752.5	1738.5	1727.6	1705.8	1677.2	1650.2	1615.9	1584.2	1552.6
17.5°	1845.2	1849.8	1842.0	1829.2	1795.4	1769.9	1731.6	1694.6	1652.0	1609.5	1571.7
20°	1919.2	1923.3	1911.4	1889.1	1848.6	1823.1	1772.7	1725.0	1675.6	1621.1	1579.6
22.5°	2011.4	2008.1	1992.0	1958.0	1922.9	1875.9	1821.3	1763.2	1701.4	1639.8	1584.6
25°	2168.4	2146.6	2136.7	2094.7	2048.5	1979.4	1904.6	1819.5	1742.6	1661.1	1590.5
27.5°	2255.4	2248.6	2237.6	2208.3	2159.7	2085.9	1997.7	1893.9	1785.5	1682.6	1590.2
30°	2238.0	2239.0	2240.1	2230.7	2199.6	2144.0	2056.3	1944.6	1815.8	1700.0	1593.1
32.5°	2083.5	2102.4	2120.4	2141.8	2150.5	2139.9	2084.9	1984.1	1851.6	1720.0	1591.4
35°	1740.5	1746.3	1804.9	1863.1	1942.0	2003.3	2044.3	1999.7	1888.0	1736.9	1589.4
37.5°	1357.1	1385.2	1425.8	1491.5	1605.4	1707.4	1838.6	1898.9	1862.9	1742.4	1585.8
40°	1156.9	1182.9	1209.3	1276.3	1372.4	1496.0	1645.0	1772.2	1801.8	1725.0	1573.3
42.5°	1002.4	1022.9	1052.3	1102.7	1183.0	1292.4	1434.8	1601.1	1703.4	1674.3	1547.2
45°	820.4	833.4	856.3	896.2	954.4	1040.1	1165.7	1347.5	1505.8	1558.3	1485.1
47.5°	702.2	702.1	719.9	747.5	789.5	862.3	955.2	1097.6	1266.8	1391.9	1386.1
50°	636.6	634.0	648.0	671.9	705.1	753.4	842.2	955.9	1118.5	1260.2	1299.7
52.5°	580.1	580.4	589.0	606.7	634.5	675.8	742.1	844.6	983.5	1129.0	1203.3
55°	505.8	503.7	513.5	525.5	545.7	572.7	620.5	698.9	811.6	954.9	1051.5
57.5°	437.6	443.3	447.3	455.6	472.4	490.5	530.8	588.3	677.7	800.7	902.8
60°	397.7	403.5	406.6	414.9	428.4	444.0	475.1	521.9	597.1	703.1	804.3
62.5°	362.0	366.5	367.5	375.0	386.0	401.2	425.7	464.9	524.4	617.1	716.3
65°	310.5	310.5	312.6	320.4	325.6	339.1	357.8	386.3	434.1	506.3	590.9
67.5°	260.9	263.4	262.8	266.3	271.1	281.5	294.9	318.5	353.9	406.6	474.3
70°	228.5	230.5	230.0	232.6	237.8	244.6	255.5	277.8	303.2	348.4	406.6
72.5°	199.4	200.2	198.9	202.3	205.4	211.3	223.5	235.4	259.2	297.3	345.1
75°	152.7	153.7	154.7	156.8	159.9	163.0	169.3	181.2	196.8	225.4	256.0
77.5°	114.4	112.5	115.0	114.7	116.4	118.8	124.3	130.6	143.4	161.5	185.2
80°	86.2	86.7	86.7	87.2	89.8	91.4	96.1	100.7	110.6	124.1	140.7
82.5°	62.9	64.3	63.5	64.4	66.6	67.7	70.3	74.1	79.9	90.5	102.5
85°	34.3	31.7	32.7	33.8	33.8	34.3	36.3	37.9	41.0	45.2	49.8
87.5°	17.2	17.8	18.0	17.8	18.1	17.8	19.1	18.8	19.7	20.6	21.8
90°	36.1	35.1	34.1	33.1	32.1	30.8	29.1	27.4	25.8	24.1	21.7
92.5°	33.7	33.3	32.8	32.3	31.8	30.8	29.1	27.4	25.8	24.1	22.0
95°	31.6	31.6	31.6	31.6	31.6	30.8	29.1	27.4	25.8	24.1	36.8
97.5°	31.6	31.6	31.6	31.6	31.6	36.3	45.8	55.2	64.6	74.1	99.2
100°	31.6	33.0	34.3	35.6	37.0	62.6	112.4	162.2	212.1	261.9	260.6
102.5°	189.4	212.1	234.9	257.6	280.4	296.5	305.9	315.3	324.8	334.2	333.4
105°	447.1	447.4	447.8	448.1	448.4	448.6	448.6	448.6	448.6	448.6	448.6
107.5°	563.6	564.6	565.6	566.6	567.6	568.1	568.0	568.0	567.9	567.8	567.2
110°	644.3	644.0	643.6	643.3	643.0	643.3	644.3	645.3	646.3	647.3	646.6



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	716.5	717.0	717.5	718.0	718.4	719.3	720.6	721.8	723.1	724.4	724.0
115°	824.9	826.9	828.9	831.0	833.0	834.6	836.0	837.3	838.6	840.0	839.7
117.5°	940.5	941.4	942.3	943.2	944.0	945.3	947.1	948.8	950.5	952.3	951.0
120°	1011.6	1013.3	1014.9	1016.6	1018.3	1019.5	1020.1	1020.8	1021.5	1022.1	1021.1
122.5°	1079.0	1081.0	1082.9	1084.9	1086.8	1088.1	1088.8	1089.4	1090.1	1090.8	1090.3
125°	1181.7	1182.7	1183.7	1184.7	1185.7	1186.9	1188.2	1189.6	1190.9	1192.2	1192.2
127.5°	1268.1	1270.6	1273.1	1275.5	1278.0	1279.6	1280.4	1281.1	1281.8	1282.6	1282.8
130°	1330.7	1332.4	1334.1	1335.8	1337.4	1338.8	1339.8	1340.8	1341.8	1342.8	1342.4
132.5°	1388.5	1390.2	1391.9	1393.6	1395.2	1396.2	1396.4	1396.6	1396.8	1397.0	1397.7
135°	1467.7	1469.7	1471.7	1473.7	1475.7	1477.1	1477.8	1478.4	1479.1	1479.8	1480.4
137.5°	1547.2	1548.9	1550.7	1552.4	1554.2	1555.0	1554.8	1554.7	1554.6	1554.4	1555.0
140°	1594.2	1596.2	1598.2	1600.2	1602.2	1602.9	1602.2	1601.5	1600.9	1600.2	1600.5
142.5°	1638.7	1640.7	1642.7	1644.7	1646.8	1647.7	1647.6	1647.4	1647.3	1647.2	1646.7
145°	1704.1	1706.1	1708.1	1710.1	1712.1	1712.9	1712.6	1712.3	1711.9	1711.6	1711.6
147.5°	1758.0	1760.4	1762.8	1765.2	1767.6	1768.6	1768.2	1767.8	1767.4	1767.0	1766.6
150°	1792.9	1795.6	1798.2	1800.9	1803.6	1804.6	1803.9	1803.2	1802.6	1801.9	1801.2
152.5°	1825.4	1827.8	1830.2	1832.6	1835.0	1835.9	1835.2	1834.6	1833.9	1833.2	1832.6
155°	1868.1	1870.8	1873.5	1876.2	1878.8	1879.7	1878.7	1877.7	1876.7	1875.7	1875.0
157.5°	1904.0	1906.6	1909.3	1912.0	1914.7	1915.5	1914.4	1913.3	1912.3	1911.2	1911.1
160°	1926.9	1929.5	1932.2	1934.9	1937.6	1938.2	1936.9	1935.5	1934.2	1932.9	1932.5
162.5°	1947.3	1950.3	1953.2	1956.2	1959.1	1959.6	1957.8	1955.9	1954.0	1952.1	1951.8
165°	1975.0	1977.7	1980.4	1983.1	1985.7	1986.1	1984.1	1982.0	1980.0	1978.0	1977.7
167.5°	1994.3	1997.3	2000.3	2003.3	2006.3	2006.6	2004.2	2001.8	1999.4	1997.0	1996.7
170°	2005.1	2008.1	2011.2	2014.2	2017.2	2017.3	2014.7	2012.0	2009.3	2006.6	2006.3
172.5°	2012.4	2015.4	2018.4	2021.4	2024.4	2024.7	2022.3	2019.9	2017.5	2015.1	2014.5
175°	2021.7	2024.7	2027.7	2030.7	2033.7	2033.9	2031.2	2028.5	2025.9	2023.2	2022.9
177.5°	2027.1	2029.2	2031.4	2033.5	2035.7	2035.8	2033.9	2032.1	2030.2	2028.3	2028.0
180°	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1258.7	1255.8	1252.4	1246.6	1239.6	1235.8	1230.0	1226.3	1218.8	1212.6	1205.9
5°	1322.5	1309.0	1296.6	1280.5	1262.8	1251.4	1237.9	1222.8	1207.3	1191.2	1173.5
7.5°	1388.7	1364.8	1338.8	1310.9	1283.6	1258.5	1234.5	1210.9	1188.9	1162.3	1139.8
10°	1433.1	1403.0	1370.8	1332.9	1296.1	1263.9	1231.2	1202.6	1173.5	1142.4	1114.8
12.5°	1477.6	1437.5	1392.0	1350.4	1306.0	1267.2	1228.7	1192.2	1155.7	1121.2	1089.1
15°	1509.0	1473.6	1431.6	1372.4	1322.5	1269.1	1218.2	1170.9	1126.8	1088.4	1047.9
17.5°	1529.6	1484.1	1439.0	1382.2	1316.8	1257.0	1199.4	1145.3	1095.5	1046.8	1007.8
20°	1533.4	1486.6	1439.4	1383.8	1316.8	1248.3	1190.7	1125.7	1072.3	1021.9	974.1
22.5°	1532.1	1479.2	1427.7	1370.5	1305.2	1242.1	1172.4	1106.2	1048.2	998.6	948.8
25°	1520.4	1463.8	1399.4	1341.8	1277.4	1210.4	1139.8	1071.2	1012.0	955.4	906.1
27.5°	1510.6	1437.2	1364.3	1297.1	1234.9	1173.5	1105.9	1035.7	970.1	912.7	866.2
30°	1498.6	1418.1	1336.0	1265.9	1202.1	1142.4	1078.5	1010.0	941.4	885.3	835.5
32.5°	1487.8	1394.0	1307.4	1231.1	1163.4	1105.4	1046.5	981.3	914.0	857.1	807.2
35°	1466.9	1358.4	1259.2	1173.0	1100.8	1041.1	991.8	931.0	869.2	814.2	766.4
37.5°	1440.4	1311.6	1205.2	1114.8	1035.7	972.8	926.9	880.2	820.9	767.9	724.7
40°	1419.6	1278.4	1165.7	1073.3	991.3	925.8	883.3	839.1	789.8	740.5	694.8
42.5°	1393.5	1248.5	1125.9	1026.4	945.1	881.4	836.7	799.2	755.7	709.7	667.3
45°	1345.4	1194.3	1061.4	954.4	872.3	809.5	763.3	735.3	702.6	658.9	623.1
47.5°	1274.7	1129.2	991.7	881.3	796.6	738.4	695.1	668.2	645.1	612.7	580.2
50°	1211.9	1080.6	941.4	831.8	747.2	688.5	648.6	624.1	604.4	579.5	552.0
52.5°	1141.7	1019.5	892.0	783.7	699.9	642.0	602.9	581.4	565.0	547.1	520.0
55°	1030.2	926.4	808.0	705.1	627.8	571.2	536.9	518.2	504.7	491.2	474.6
57.5°	907.3	826.1	721.2	627.3	556.0	504.5	472.5	454.3	443.9	436.9	427.1
60°	820.9	751.4	661.0	575.3	505.8	460.1	428.9	414.9	406.1	400.3	393.1
62.5°	740.8	683.7	599.9	521.7	460.9	417.7	389.9	376.3	367.8	365.0	359.0
65°	622.6	578.5	509.4	444.5	392.6	355.7	332.3	319.3	314.1	311.0	311.6
67.5°	506.2	479.3	423.8	368.5	327.0	296.1	277.4	267.4	264.8	260.7	260.6
70°	435.1	414.9	368.2	319.9	283.0	259.1	242.5	232.1	229.5	227.4	226.9
72.5°	372.4	354.7	314.1	275.4	242.3	221.3	207.6	201.4	197.1	195.9	195.8
75°	279.9	270.0	237.8	207.2	184.3	169.8	160.5	154.7	151.6	151.1	151.6
77.5°	199.0	190.4	169.9	148.2	133.8	122.8	114.9	112.9	109.4	109.5	108.9
80°	149.5	143.8	130.9	113.7	101.8	92.4	88.3	84.6	83.6	82.0	83.6
82.5°	108.4	102.3	93.5	82.6	72.7	67.1	62.9	61.8	61.2	60.4	60.8
85°	53.5	54.0	48.8	40.5	36.3	33.2	30.6	30.6	30.1	29.6	30.1
87.5°	22.2	20.9	18.7	17.0	14.4	12.6	11.6	11.5	10.8	10.9	11.9
90°	19.4	17.1	14.7	12.2	9.5	6.9	4.2	1.5	4.2	6.9	9.5
92.5°	19.9	17.9	15.8	15.7	17.6	19.4	21.3	23.2	21.3	19.4	17.6
95°	49.5	62.2	74.9	81.8	82.8	83.8	84.8	85.8	84.8	83.8	82.8
97.5°	124.4	149.5	174.7	186.4	184.6	182.7	180.9	179.1	180.9	182.7	184.6
100°	259.3	257.9	256.6	255.4	254.4	253.4	252.4	251.4	252.4	253.4	254.4
102.5°	332.6	331.8	331.0	329.9	328.7	327.4	326.1	324.9	326.1	327.4	328.7
105°	448.6	448.6	448.6	447.9	446.6	445.3	443.9	442.6	443.9	445.3	446.6
107.5°	566.5	565.8	565.1	564.8	564.8	564.8	564.8	564.8	564.8	564.8	564.8
110°	646.0	645.3	644.6	644.3	644.3	644.3	644.3	644.3	644.3	644.3	644.3



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	723.6	723.2	722.8	722.2	721.4	720.6	719.8	719.0	719.8	720.6	721.4
115°	839.3	839.0	838.6	837.6	836.0	834.3	832.6	831.0	832.6	834.3	836.0
117.5°	949.7	948.5	947.2	946.6	946.7	946.7	946.8	946.9	946.8	946.7	946.7
120°	1020.1	1019.1	1018.1	1017.8	1018.1	1018.5	1018.8	1019.1	1018.8	1018.5	1018.1
122.5°	1089.8	1089.4	1088.9	1088.0	1086.8	1085.5	1084.2	1083.0	1084.2	1085.5	1086.8
125°	1192.2	1192.2	1192.2	1191.1	1188.7	1186.4	1184.0	1181.7	1184.0	1186.4	1188.7
127.5°	1283.0	1283.2	1283.4	1282.6	1281.0	1279.3	1277.6	1275.9	1277.6	1279.3	1281.0
130°	1342.1	1341.8	1341.4	1340.4	1338.8	1337.1	1335.4	1333.7	1335.4	1337.1	1338.8
132.5°	1398.4	1399.2	1399.9	1399.3	1397.4	1395.4	1393.5	1391.5	1393.5	1395.4	1397.4
135°	1481.1	1481.8	1482.4	1481.8	1479.8	1477.8	1475.7	1473.7	1475.7	1477.8	1479.8
137.5°	1555.6	1556.2	1556.8	1556.3	1554.5	1552.8	1551.0	1549.3	1551.0	1552.8	1554.5
140°	1600.9	1601.2	1601.5	1601.4	1600.7	1600.0	1599.4	1598.7	1599.4	1600.0	1600.7
142.5°	1646.2	1645.8	1645.3	1644.8	1644.4	1644.0	1643.6	1643.2	1643.6	1644.0	1644.4
145°	1711.6	1711.6	1711.6	1711.3	1710.6	1709.9	1709.2	1708.6	1709.2	1709.9	1710.6
147.5°	1766.2	1765.8	1765.4	1765.2	1765.4	1765.5	1765.6	1765.8	1765.6	1765.5	1765.4
150°	1800.6	1799.9	1799.2	1799.2	1799.9	1800.6	1801.2	1801.9	1801.2	1800.6	1799.9
152.5°	1831.9	1831.2	1830.5	1830.9	1832.4	1833.9	1835.4	1836.8	1835.4	1833.9	1832.4
155°	1874.3	1873.7	1873.0	1873.7	1875.7	1877.7	1879.7	1881.7	1879.7	1877.7	1875.7
157.5°	1911.1	1911.0	1910.9	1911.5	1912.7	1913.9	1915.1	1916.3	1915.1	1913.9	1912.7
160°	1932.2	1931.9	1931.5	1932.4	1934.4	1936.4	1938.4	1940.4	1938.4	1936.4	1934.4
162.5°	1951.5	1951.1	1950.8	1951.6	1953.6	1955.7	1957.7	1959.7	1957.7	1955.7	1953.6
165°	1977.4	1977.0	1976.7	1977.5	1979.5	1981.5	1983.6	1985.6	1983.6	1981.5	1979.5
167.5°	1996.3	1996.0	1995.7	1996.5	1998.6	2000.7	2002.8	2004.8	2002.8	2000.7	1998.6
170°	2006.0	2005.6	2005.3	2006.3	2008.6	2011.0	2013.3	2015.7	2013.3	2011.0	2008.6
172.5°	2013.9	2013.3	2012.7	2013.5	2015.9	2018.2	2020.6	2022.9	2020.6	2018.2	2015.9
175°	2022.5	2022.2	2021.9	2022.7	2024.7	2026.7	2028.7	2030.7	2028.7	2026.7	2024.7
177.5°	2027.8	2027.5	2027.2	2027.9	2029.5	2031.1	2032.7	2034.3	2032.7	2031.1	2029.5
180°	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1202.2	1197.6	1193.9	1185.6	1181.0	1174.8	1169.8	1175.2	1169.4	1171.9	1168.1
5°	1164.7	1150.2	1139.8	1124.7	1111.7	1099.8	1091.0	1089.4	1085.2	1083.2	1076.9
7.5°	1119.6	1101.4	1083.6	1063.9	1047.2	1030.3	1019.5	1010.6	1004.7	996.9	991.6
10°	1093.0	1068.6	1047.9	1024.0	1003.2	985.0	970.5	963.2	956.5	946.6	943.0
12.5°	1060.2	1035.0	1009.6	984.1	964.2	943.9	931.4	920.4	915.8	904.6	903.5
15°	1020.9	983.0	958.0	932.1	904.5	887.9	877.5	865.6	860.4	852.6	846.9
17.5°	973.9	940.1	908.9	882.0	858.4	844.4	831.5	823.3	814.4	809.3	800.0
20°	939.9	907.7	876.5	847.9	829.8	813.7	803.3	795.5	786.2	783.6	774.2
22.5°	911.2	875.7	845.8	821.8	801.9	783.8	772.5	767.3	760.8	752.8	750.9
25°	864.6	827.7	802.3	778.4	760.7	744.1	736.3	729.6	723.3	717.6	715.5
27.5°	824.3	791.3	761.1	739.5	724.2	709.0	702.1	693.9	689.4	684.8	679.2
30°	796.0	762.3	735.8	715.0	698.4	684.9	677.6	671.9	667.8	663.6	660.5
32.5°	766.9	735.7	710.0	689.7	673.1	662.9	656.4	652.4	647.8	642.8	638.9
35°	728.5	694.2	669.3	651.7	638.7	630.9	623.6	620.0	614.8	614.8	610.6
37.5°	685.2	655.6	633.6	617.5	605.9	598.9	591.0	588.5	585.2	583.0	581.6
40°	659.5	631.9	611.2	595.1	582.6	576.9	570.7	566.5	564.4	561.8	560.8
42.5°	632.9	606.6	586.7	571.8	561.0	556.1	550.3	547.4	543.2	539.8	539.2
45°	592.5	567.0	548.9	536.9	527.6	521.9	518.2	512.0	509.9	505.8	505.2
47.5°	554.1	529.7	511.9	502.1	493.9	489.2	483.5	477.3	474.9	472.8	472.6
50°	525.5	503.2	486.5	477.2	469.4	462.7	456.9	452.8	451.2	451.2	452.3
52.5°	496.4	477.4	463.3	451.9	444.5	437.3	432.0	429.5	427.1	429.6	431.5
55°	453.8	434.6	424.2	413.3	406.1	397.7	395.2	394.1	392.6	396.7	398.8
57.5°	408.8	395.3	383.1	372.3	365.8	361.0	357.5	356.8	359.7	361.7	368.5
60°	380.1	364.5	353.6	345.3	337.5	334.4	333.4	332.3	334.4	340.1	348.9
62.5°	348.5	335.9	324.1	317.9	312.2	307.0	306.8	307.4	311.6	318.1	326.9
65°	302.2	291.3	283.5	276.2	271.6	268.5	269.5	271.6	276.2	285.1	294.9
67.5°	255.2	247.7	240.7	234.8	230.3	230.3	231.4	234.5	240.0	250.2	259.2
70°	224.8	216.5	210.8	208.2	204.6	202.5	205.6	210.8	215.5	224.8	232.6
72.5°	194.5	187.5	183.0	181.2	179.7	178.0	179.0	184.6	191.0	200.3	209.4
75°	149.5	146.9	143.8	141.8	140.2	141.2	142.3	147.5	152.7	162.5	172.9
77.5°	109.1	106.4	104.6	104.1	103.2	103.7	106.7	110.5	115.6	122.8	130.6
80°	82.6	81.5	80.5	80.0	80.0	80.5	84.6	87.2	91.9	98.7	104.9
82.5°	60.1	59.5	59.3	59.2	59.6	59.7	62.2	65.6	69.5	74.6	80.0
85°	31.7	30.6	32.2	32.7	31.7	33.2	34.3	36.3	37.9	40.5	43.1
87.5°	12.8	14.2	14.2	15.1	15.6	16.9	16.8	18.8	19.9	21.1	21.0
90°	12.2	14.7	17.1	19.4	21.7	24.1	25.8	27.4	29.1	30.8	32.1
92.5°	15.7	15.8	17.9	19.9	22.0	24.1	25.8	27.4	29.1	30.8	31.8
95°	81.8	74.9	62.2	49.5	36.8	24.1	25.8	27.4	29.1	30.8	31.6
97.5°	186.4	174.7	149.5	124.4	99.2	74.1	64.6	55.2	45.8	36.3	31.6
100°	255.4	256.6	257.9	259.3	260.6	261.9	212.1	162.2	112.4	62.6	37.0
102.5°	329.9	331.0	331.8	332.6	333.4	334.2	324.8	315.3	305.9	296.5	280.4
105°	447.9	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.6	448.4
107.5°	564.8	565.1	565.8	566.5	567.2	567.8	567.9	568.0	568.0	568.1	567.6
110°	644.3	644.6	645.3	646.0	646.6	647.3	646.3	645.3	644.3	643.3	643.0



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	722.2	722.8	723.2	723.6	724.0	724.4	723.1	721.8	720.6	719.3	718.4
115°	837.6	838.6	839.0	839.3	839.7	840.0	838.6	837.3	836.0	834.6	833.0
117.5°	946.6	947.2	948.5	949.7	951.0	952.3	950.5	948.8	947.1	945.3	944.0
120°	1017.8	1018.1	1019.1	1020.1	1021.1	1022.1	1021.5	1020.8	1020.1	1019.5	1018.3
122.5°	1088.0	1088.9	1089.4	1089.8	1090.3	1090.8	1090.1	1089.4	1088.8	1088.1	1086.8
125°	1191.1	1192.2	1192.2	1192.2	1192.2	1192.2	1190.9	1189.6	1188.2	1186.9	1185.7
127.5°	1282.6	1283.4	1283.2	1283.0	1282.8	1282.6	1281.8	1281.1	1280.4	1279.6	1278.0
130°	1340.4	1341.4	1341.8	1342.1	1342.4	1342.8	1341.8	1340.8	1339.8	1338.8	1337.4
132.5°	1399.3	1399.9	1399.2	1398.4	1397.7	1397.0	1396.8	1396.6	1396.4	1396.2	1395.2
135°	1481.8	1482.4	1481.8	1481.1	1480.4	1479.8	1479.1	1478.4	1477.8	1477.1	1475.7
137.5°	1556.3	1556.8	1556.2	1555.6	1555.0	1554.4	1554.6	1554.7	1554.8	1555.0	1554.2
140°	1601.4	1601.5	1601.2	1600.9	1600.5	1600.2	1600.9	1601.5	1602.2	1602.9	1602.2
142.5°	1644.8	1645.3	1645.8	1646.2	1646.7	1647.2	1647.3	1647.4	1647.6	1647.7	1646.8
145°	1711.3	1711.6	1711.6	1711.6	1711.6	1711.6	1711.9	1712.3	1712.6	1712.9	1712.1
147.5°	1765.2	1765.4	1765.8	1766.2	1766.6	1767.0	1767.4	1767.8	1768.2	1768.6	1767.6
150°	1799.2	1799.2	1799.9	1800.6	1801.2	1801.9	1802.6	1803.2	1803.9	1804.6	1803.6
152.5°	1830.9	1830.5	1831.2	1831.9	1832.6	1833.2	1833.9	1834.6	1835.2	1835.9	1835.0
155°	1873.7	1873.0	1873.7	1874.3	1875.0	1875.7	1876.7	1877.7	1878.7	1879.7	1878.8
157.5°	1911.5	1910.9	1911.0	1911.1	1911.1	1911.2	1912.3	1913.3	1914.4	1915.5	1914.7
160°	1932.4	1931.5	1931.9	1932.2	1932.5	1932.9	1934.2	1935.5	1936.9	1938.2	1937.6
162.5°	1951.6	1950.8	1951.1	1951.5	1951.8	1952.1	1954.0	1955.9	1957.8	1959.6	1959.1
165°	1977.5	1976.7	1977.0	1977.4	1977.7	1978.0	1980.0	1982.0	1984.1	1986.1	1985.7
167.5°	1996.5	1995.7	1996.0	1996.3	1996.7	1997.0	1999.4	2001.8	2004.2	2006.6	2006.3
170°	2006.3	2005.3	2005.6	2006.0	2006.3	2006.6	2009.3	2012.0	2014.7	2017.3	2017.2
172.5°	2013.5	2012.7	2013.3	2013.9	2014.5	2015.1	2017.5	2019.9	2022.3	2024.7	2024.4
175°	2022.7	2021.9	2022.2	2022.5	2022.9	2023.2	2025.9	2028.5	2031.2	2033.9	2033.7
177.5°	2027.9	2027.2	2027.5	2027.8	2028.0	2028.3	2030.2	2032.1	2033.9	2035.8	2035.7
180°	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1165.6	1168.5	1166.0	1169.4	1166.0	1168.5	1165.6	1168.1	1171.9	1169.4	1175.2
5°	1074.3	1069.7	1072.8	1070.7	1072.8	1069.7	1074.3	1076.9	1083.2	1085.2	1089.4
7.5°	990.0	985.5	980.5	978.1	980.5	985.5	990.0	991.6	996.9	1004.7	1010.6
10°	937.3	931.5	931.0	927.4	931.0	931.5	937.3	943.0	946.6	956.5	963.2
12.5°	898.6	893.3	887.4	885.9	887.4	893.3	898.6	903.5	904.6	915.8	920.4
15°	843.8	839.6	836.0	839.1	836.0	839.6	843.8	846.9	852.6	860.4	865.6
17.5°	798.2	794.8	794.1	790.3	794.1	794.8	798.2	800.0	809.3	814.4	823.3
20°	769.5	766.9	768.0	761.2	768.0	766.9	769.5	774.2	783.6	786.2	795.5
22.5°	746.7	741.6	741.0	739.6	741.0	741.6	746.7	750.9	752.8	760.8	767.3
25°	710.9	708.3	705.7	708.3	705.7	708.3	710.9	715.5	717.6	723.3	729.6
27.5°	679.6	676.5	675.8	676.1	675.8	676.5	679.6	679.2	684.8	689.4	693.9
30°	660.5	655.3	655.8	655.3	655.8	655.3	660.5	660.5	663.6	667.8	671.9
32.5°	639.7	636.2	635.5	634.5	635.5	636.2	639.7	638.9	642.8	647.8	652.4
35°	609.1	609.1	606.5	606.5	606.5	609.1	609.1	610.6	614.8	614.8	620.0
37.5°	580.3	579.8	578.2	578.5	578.2	579.8	580.3	581.6	583.0	585.2	588.5
40°	558.7	558.2	556.6	553.5	556.6	558.2	558.7	560.8	561.8	564.4	566.5
42.5°	537.9	536.2	535.5	534.4	535.5	536.2	537.9	539.2	539.8	543.2	547.4
45°	505.2	505.2	504.2	503.7	504.2	505.2	505.2	505.2	505.8	509.9	512.0
47.5°	473.5	474.4	476.4	476.1	476.4	474.4	473.5	472.6	472.8	474.9	477.3
50°	454.3	454.9	456.4	456.9	456.4	454.9	454.3	452.3	451.2	451.2	452.8
52.5°	433.2	436.2	438.1	437.8	438.1	436.2	433.2	431.5	429.6	427.1	429.5
55°	403.5	407.1	410.7	411.3	410.7	407.1	403.5	398.8	396.7	392.6	394.1
57.5°	374.1	379.2	383.0	384.2	383.0	379.2	374.1	368.5	361.7	359.7	356.8
60°	354.1	360.9	365.6	367.6	365.6	360.9	354.1	348.9	340.1	334.4	332.3
62.5°	335.0	342.6	347.3	347.7	347.3	342.6	335.0	326.9	318.1	311.6	307.4
65°	303.8	311.6	315.7	318.8	315.7	311.6	303.8	294.9	285.1	276.2	271.6
67.5°	270.1	277.9	282.5	285.0	282.5	277.9	270.1	259.2	250.2	240.0	234.5
70°	245.6	253.4	259.6	261.7	259.6	253.4	245.6	232.6	224.8	215.5	210.8
72.5°	221.5	228.5	233.5	235.9	233.5	228.5	221.5	209.4	200.3	191.0	184.6
75°	179.7	189.0	193.7	196.3	193.7	189.0	179.7	172.9	162.5	152.7	147.5
77.5°	138.5	147.1	149.9	151.2	149.9	147.1	138.5	130.6	122.8	115.6	110.5
80°	111.1	116.3	119.9	120.5	119.9	116.3	111.1	104.9	98.7	91.9	87.2
82.5°	85.4	89.7	90.9	92.2	90.9	89.7	85.4	80.0	74.6	69.5	65.6
85°	46.7	48.8	49.3	48.8	49.3	48.8	46.7	43.1	40.5	37.9	36.3
87.5°	22.0	21.8	22.0	23.0	22.0	21.8	22.0	21.0	21.1	19.9	18.8
90°	33.1	34.1	35.1	36.1	35.1	34.1	33.1	32.1	30.8	29.1	27.4
92.5°	32.3	32.8	33.3	33.7	33.3	32.8	32.3	31.8	30.8	29.1	27.4
95°	31.6	31.6	31.6	31.6	31.6	31.6	31.6	31.6	30.8	29.1	27.4
97.5°	31.6	31.6	31.6	31.6	31.6	31.6	31.6	31.6	36.3	45.8	55.2
100°	35.6	34.3	33.0	31.6	33.0	34.3	35.6	37.0	62.6	112.4	162.2
102.5°	257.6	234.9	212.1	189.4	212.1	234.9	257.6	280.4	296.5	305.9	315.3
105°	448.1	447.8	447.4	447.1	447.4	447.8	448.1	448.4	448.6	448.6	448.6
107.5°	566.6	565.6	564.6	563.6	564.6	565.6	566.6	567.6	568.1	568.0	568.0
110°	643.3	643.6	644.0	644.3	644.0	643.6	643.3	643.0	643.3	644.3	645.3



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	718.0	717.5	717.0	716.5	717.0	717.5	718.0	718.4	719.3	720.6	721.8
115°	831.0	828.9	826.9	824.9	826.9	828.9	831.0	833.0	834.6	836.0	837.3
117.5°	943.2	942.3	941.4	940.5	941.4	942.3	943.2	944.0	945.3	947.1	948.8
120°	1016.6	1014.9	1013.3	1011.6	1013.3	1014.9	1016.6	1018.3	1019.5	1020.1	1020.8
122.5°	1084.9	1082.9	1081.0	1079.0	1081.0	1082.9	1084.9	1086.8	1088.1	1088.8	1089.4
125°	1184.7	1183.7	1182.7	1181.7	1182.7	1183.7	1184.7	1185.7	1186.9	1188.2	1189.6
127.5°	1275.5	1273.1	1270.6	1268.1	1270.6	1273.1	1275.5	1278.0	1279.6	1280.4	1281.1
130°	1335.8	1334.1	1332.4	1330.7	1332.4	1334.1	1335.8	1337.4	1338.8	1339.8	1340.8
132.5°	1393.6	1391.9	1390.2	1388.5	1390.2	1391.9	1393.6	1395.2	1396.2	1396.4	1396.6
135°	1473.7	1471.7	1469.7	1467.7	1469.7	1471.7	1473.7	1475.7	1477.1	1477.8	1478.4
137.5°	1552.4	1550.7	1548.9	1547.2	1548.9	1550.7	1552.4	1554.2	1555.0	1554.8	1554.7
140°	1600.2	1598.2	1596.2	1594.2	1596.2	1598.2	1600.2	1602.2	1602.9	1602.2	1601.5
142.5°	1644.7	1642.7	1640.7	1638.7	1640.7	1642.7	1644.7	1646.8	1647.7	1647.6	1647.4
145°	1710.1	1708.1	1706.1	1704.1	1706.1	1708.1	1710.1	1712.1	1712.9	1712.6	1712.3
147.5°	1765.2	1762.8	1760.4	1758.0	1760.4	1762.8	1765.2	1767.6	1768.6	1768.2	1767.8
150°	1800.9	1798.2	1795.6	1792.9	1795.6	1798.2	1800.9	1803.6	1804.6	1803.9	1803.2
152.5°	1832.6	1830.2	1827.8	1825.4	1827.8	1830.2	1832.6	1835.0	1835.9	1835.2	1834.6
155°	1876.2	1873.5	1870.8	1868.1	1870.8	1873.5	1876.2	1878.8	1879.7	1878.7	1877.7
157.5°	1912.0	1909.3	1906.6	1904.0	1906.6	1909.3	1912.0	1914.7	1915.5	1914.4	1913.3
160°	1934.9	1932.2	1929.5	1926.9	1929.5	1932.2	1934.9	1937.6	1938.2	1936.9	1935.5
162.5°	1956.2	1953.2	1950.3	1947.3	1950.3	1953.2	1956.2	1959.1	1959.6	1957.8	1955.9
165°	1983.1	1980.4	1977.7	1975.0	1977.7	1980.4	1983.1	1985.7	1986.1	1984.1	1982.0
167.5°	2003.3	2000.3	1997.3	1994.3	1997.3	2000.3	2003.3	2006.3	2006.6	2004.2	2001.8
170°	2014.2	2011.2	2008.1	2005.1	2008.1	2011.2	2014.2	2017.2	2017.3	2014.7	2012.0
172.5°	2021.4	2018.4	2015.4	2012.4	2015.4	2018.4	2021.4	2024.4	2024.7	2022.3	2019.9
175°	2030.7	2027.7	2024.7	2021.7	2024.7	2027.7	2030.7	2033.7	2033.9	2031.2	2028.5
177.5°	2033.5	2031.4	2029.2	2027.1	2029.2	2031.4	2033.5	2035.7	2035.8	2033.9	2032.1
180°	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1169.8	1174.8	1181.0	1185.6	1193.9	1197.6	1202.2	1205.9	1212.6	1218.8	1226.3
5°	1091.0	1099.8	1111.7	1124.7	1139.8	1150.2	1164.7	1173.5	1191.2	1207.3	1222.8
7.5°	1019.5	1030.3	1047.2	1063.9	1083.6	1101.4	1119.6	1139.8	1162.3	1188.9	1210.9
10°	970.5	985.0	1003.2	1024.0	1047.9	1068.6	1093.0	1114.8	1142.4	1173.5	1202.6
12.5°	931.4	943.9	964.2	984.1	1009.6	1035.0	1060.2	1089.1	1121.2	1155.7	1192.2
15°	877.5	887.9	904.5	932.1	958.0	983.0	1020.9	1047.9	1088.4	1126.8	1170.9
17.5°	831.5	844.4	858.4	882.0	908.9	940.1	973.9	1007.8	1046.8	1095.5	1145.3
20°	803.3	813.7	829.8	847.9	876.5	907.7	939.9	974.1	1021.9	1072.3	1125.7
22.5°	772.5	783.8	801.9	821.8	845.8	875.7	911.2	948.8	998.6	1048.2	1106.2
25°	736.3	744.1	760.7	778.4	802.3	827.7	864.6	906.1	955.4	1012.0	1071.2
27.5°	702.1	709.0	724.2	739.5	761.1	791.3	824.3	866.2	912.7	970.1	1035.7
30°	677.6	684.9	698.4	715.0	735.8	762.3	796.0	835.5	885.3	941.4	1010.0
32.5°	656.4	662.9	673.1	689.7	710.0	735.7	766.9	807.2	857.1	914.0	981.3
35°	623.6	630.9	638.7	651.7	669.3	694.2	728.5	766.4	814.2	869.2	931.0
37.5°	591.0	598.9	605.9	617.5	633.6	655.6	685.2	724.7	767.9	820.9	880.2
40°	570.7	576.9	582.6	595.1	611.2	631.9	659.5	694.8	740.5	789.8	839.1
42.5°	550.3	556.1	561.0	571.8	586.7	606.6	632.9	667.3	709.7	755.7	799.2
45°	518.2	521.9	527.6	536.9	548.9	567.0	592.5	623.1	658.9	702.6	735.3
47.5°	483.5	489.2	493.9	502.1	511.9	529.7	554.1	580.2	612.7	645.1	668.2
50°	456.9	462.7	469.4	477.2	486.5	503.2	525.5	552.0	579.5	604.4	624.1
52.5°	432.0	437.3	444.5	451.9	463.3	477.4	496.4	520.0	547.1	565.0	581.4
55°	395.2	397.7	406.1	413.3	424.2	434.6	453.8	474.6	491.2	504.7	518.2
57.5°	357.5	361.0	365.8	372.3	383.1	395.3	408.8	427.1	436.9	443.9	454.3
60°	333.4	334.4	337.5	345.3	353.6	364.5	380.1	393.1	400.3	406.1	414.9
62.5°	306.8	307.0	312.2	317.9	324.1	335.9	348.5	359.0	365.0	367.8	376.3
65°	269.5	268.5	271.6	276.2	283.5	291.3	302.2	311.6	311.0	314.1	319.3
67.5°	231.4	230.3	230.3	234.8	240.7	247.7	255.2	260.6	260.7	264.8	267.4
70°	205.6	202.5	204.6	208.2	210.8	216.5	224.8	226.9	227.4	229.5	232.1
72.5°	179.0	178.0	179.7	181.2	183.0	187.5	194.5	195.8	195.9	197.1	201.4
75°	142.3	141.2	140.2	141.8	143.8	146.9	149.5	151.6	151.1	151.6	154.7
77.5°	106.7	103.7	103.2	104.1	104.6	106.4	109.1	108.9	109.5	109.4	112.9
80°	84.6	80.5	80.0	80.0	80.5	81.5	82.6	83.6	82.0	83.6	84.6
82.5°	62.2	59.7	59.6	59.2	59.3	59.5	60.1	60.8	60.4	61.2	61.8
85°	34.3	33.2	31.7	32.7	32.2	30.6	31.7	30.1	29.6	30.1	30.6
87.5°	16.8	16.9	15.6	15.1	14.2	14.2	12.8	11.9	10.9	10.8	11.5
90°	25.8	24.1	21.7	19.4	17.1	14.7	12.2	9.5	6.9	4.2	1.5
92.5°	25.8	24.1	22.0	19.9	17.9	15.8	15.7	17.6	19.4	21.3	23.2
95°	25.8	24.1	36.8	49.5	62.2	74.9	81.8	82.8	83.8	84.8	85.8
97.5°	64.6	74.1	99.2	124.4	149.5	174.7	186.4	184.6	182.7	180.9	179.1
100°	212.1	261.9	260.6	259.3	257.9	256.6	255.4	254.4	253.4	252.4	251.4
102.5°	324.8	334.2	333.4	332.6	331.8	331.0	329.9	328.7	327.4	326.1	324.9
105°	448.6	448.6	448.6	448.6	448.6	448.6	447.9	446.6	445.3	443.9	442.6
107.5°	567.9	567.8	567.2	566.5	565.8	565.1	564.8	564.8	564.8	564.8	564.8
110°	646.3	647.3	646.6	646.0	645.3	644.6	644.3	644.3	644.3	644.3	644.3



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	723.1	724.4	724.0	723.6	723.2	722.8	722.2	721.4	720.6	719.8	719.0
115°	838.6	840.0	839.7	839.3	839.0	838.6	837.6	836.0	834.3	832.6	831.0
117.5°	950.5	952.3	951.0	949.7	948.5	947.2	946.6	946.7	946.7	946.8	946.9
120°	1021.5	1022.1	1021.1	1020.1	1019.1	1018.1	1017.8	1018.1	1018.5	1018.8	1019.1
122.5°	1090.1	1090.8	1090.3	1089.8	1089.4	1088.9	1088.0	1086.8	1085.5	1084.2	1083.0
125°	1190.9	1192.2	1192.2	1192.2	1192.2	1192.2	1191.1	1188.7	1186.4	1184.0	1181.7
127.5°	1281.8	1282.6	1282.8	1283.0	1283.2	1283.4	1282.6	1281.0	1279.3	1277.6	1275.9
130°	1341.8	1342.8	1342.4	1342.1	1341.8	1341.4	1340.4	1338.8	1337.1	1335.4	1333.7
132.5°	1396.8	1397.0	1397.7	1398.4	1399.2	1399.9	1399.3	1397.4	1395.4	1393.5	1391.5
135°	1479.1	1479.8	1480.4	1481.1	1481.8	1482.4	1481.8	1479.8	1477.8	1475.7	1473.7
137.5°	1554.6	1554.4	1555.0	1555.6	1556.2	1556.8	1556.3	1554.5	1552.8	1551.0	1549.3
140°	1600.9	1600.2	1600.5	1600.9	1601.2	1601.5	1601.4	1600.7	1600.0	1599.4	1598.7
142.5°	1647.3	1647.2	1646.7	1646.2	1645.8	1645.3	1644.8	1644.4	1644.0	1643.6	1643.2
145°	1711.9	1711.6	1711.6	1711.6	1711.6	1711.6	1711.3	1710.6	1709.9	1709.2	1708.6
147.5°	1767.4	1767.0	1766.6	1766.2	1765.8	1765.4	1765.2	1765.4	1765.5	1765.6	1765.8
150°	1802.6	1801.9	1801.2	1800.6	1799.9	1799.2	1799.2	1799.9	1800.6	1801.2	1801.9
152.5°	1833.9	1833.2	1832.6	1831.9	1831.2	1830.5	1830.9	1832.4	1833.9	1835.4	1836.8
155°	1876.7	1875.7	1875.0	1874.3	1873.7	1873.0	1873.7	1875.7	1877.7	1879.7	1881.7
157.5°	1912.3	1911.2	1911.1	1911.1	1911.0	1910.9	1911.5	1912.7	1913.9	1915.1	1916.3
160°	1934.2	1932.9	1932.5	1932.2	1931.9	1931.5	1932.4	1934.4	1936.4	1938.4	1940.4
162.5°	1954.0	1952.1	1951.8	1951.5	1951.1	1950.8	1951.6	1953.6	1955.7	1957.7	1959.7
165°	1980.0	1978.0	1977.7	1977.4	1977.0	1976.7	1977.5	1979.5	1981.5	1983.6	1985.6
167.5°	1999.4	1997.0	1996.7	1996.3	1996.0	1995.7	1996.5	1998.6	2000.7	2002.8	2004.8
170°	2009.3	2006.6	2006.3	2006.0	2005.6	2005.3	2006.3	2008.6	2011.0	2013.3	2015.7
172.5°	2017.5	2015.1	2014.5	2013.9	2013.3	2012.7	2013.5	2015.9	2018.2	2020.6	2022.9
175°	2025.9	2023.2	2022.9	2022.5	2022.2	2021.9	2022.7	2024.7	2026.7	2028.7	2030.7
177.5°	2030.2	2028.3	2028.0	2027.8	2027.5	2027.2	2027.9	2029.5	2031.1	2032.7	2034.3
180°	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1230.0	1235.8	1239.6	1246.6	1252.4	1255.8	1258.7	1261.2	1264.1	1266.6	1273.6
5°	1237.9	1251.4	1262.8	1280.5	1296.6	1309.0	1322.5	1334.5	1344.4	1358.4	1369.3
7.5°	1234.5	1258.5	1283.6	1310.9	1338.8	1364.8	1388.7	1411.0	1431.3	1455.8	1477.3
10°	1231.2	1263.9	1296.1	1332.9	1370.8	1403.0	1433.1	1463.8	1486.1	1517.3	1543.7
12.5°	1228.7	1267.2	1306.0	1350.4	1392.0	1437.5	1477.6	1499.9	1533.9	1558.8	1590.3
15°	1218.2	1269.1	1322.5	1372.4	1431.6	1473.6	1509.0	1552.6	1584.2	1615.9	1650.2
17.5°	1199.4	1257.0	1316.8	1382.2	1439.0	1484.1	1529.6	1571.7	1609.5	1652.0	1694.6
20°	1190.7	1248.3	1316.8	1383.8	1439.4	1486.6	1533.4	1579.6	1621.1	1675.6	1725.0
22.5°	1172.4	1242.1	1305.2	1370.5	1427.7	1479.2	1532.1	1584.6	1639.8	1701.4	1763.2
25°	1139.8	1210.4	1277.4	1341.8	1399.4	1463.8	1520.4	1590.5	1661.1	1742.6	1819.5
27.5°	1105.9	1173.5	1234.9	1297.1	1364.3	1437.2	1510.6	1590.2	1682.6	1785.5	1893.9
30°	1078.5	1142.4	1202.1	1265.9	1336.0	1418.1	1498.6	1593.1	1700.0	1815.8	1944.6
32.5°	1046.5	1105.4	1163.4	1231.1	1307.4	1394.0	1487.8	1591.4	1720.0	1851.6	1984.1
35°	991.8	1041.1	1100.8	1173.0	1259.2	1358.4	1466.9	1589.4	1736.9	1888.0	1999.7
37.5°	926.9	972.8	1035.7	1114.8	1205.2	1311.6	1440.4	1585.8	1742.4	1862.9	1898.9
40°	883.3	925.8	991.3	1073.3	1165.7	1278.4	1419.6	1573.3	1725.0	1801.8	1772.2
42.5°	836.7	881.4	945.1	1026.4	1125.9	1248.5	1393.5	1547.2	1674.3	1703.4	1601.1
45°	763.3	809.5	872.3	954.4	1061.4	1194.3	1345.4	1485.1	1558.3	1505.8	1347.5
47.5°	695.1	738.4	796.6	881.3	991.7	1129.2	1274.7	1386.1	1391.9	1266.8	1097.6
50°	648.6	688.5	747.2	831.8	941.4	1080.6	1211.9	1299.7	1260.2	1118.5	955.9
52.5°	602.9	642.0	699.9	783.7	892.0	1019.5	1141.7	1203.3	1129.0	983.5	844.6
55°	536.9	571.2	627.8	705.1	808.0	926.4	1030.2	1051.5	954.9	811.6	698.9
57.5°	472.5	504.5	556.0	627.3	721.2	826.1	907.3	902.8	800.7	677.7	588.3
60°	428.9	460.1	505.8	575.3	661.0	751.4	820.9	804.3	703.1	597.1	521.9
62.5°	389.9	417.7	460.9	521.7	599.9	683.7	740.8	716.3	617.1	524.4	464.9
65°	332.3	355.7	392.6	444.5	509.4	578.5	622.6	590.9	506.3	434.1	386.3
67.5°	277.4	296.1	327.0	368.5	423.8	479.3	506.2	474.3	406.6	353.9	318.5
70°	242.5	259.1	283.0	319.9	368.2	414.9	435.1	406.6	348.4	303.2	277.8
72.5°	207.6	221.3	242.3	275.4	314.1	354.7	372.4	345.1	297.3	259.2	235.4
75°	160.5	169.8	184.3	207.2	237.8	270.0	279.9	256.0	225.4	196.8	181.2
77.5°	114.9	122.8	133.8	148.2	169.9	190.4	199.0	185.2	161.5	143.4	130.6
80°	88.3	92.4	101.8	113.7	130.9	143.8	149.5	140.7	124.1	110.6	100.7
82.5°	62.9	67.1	72.7	82.6	93.5	102.3	108.4	102.5	90.5	79.9	74.1
85°	30.6	33.2	36.3	40.5	48.8	54.0	53.5	49.8	45.2	41.0	37.9
87.5°	11.6	12.6	14.4	17.0	18.7	20.9	22.2	21.8	20.6	19.7	18.8
90°	4.2	6.9	9.5	12.2	14.7	17.1	19.4	21.7	24.1	25.8	27.4
92.5°	21.3	19.4	17.6	15.7	15.8	17.9	19.9	22.0	24.1	25.8	27.4
95°	84.8	83.8	82.8	81.8	74.9	62.2	49.5	36.8	24.1	25.8	27.4
97.5°	180.9	182.7	184.6	186.4	174.7	149.5	124.4	99.2	74.1	64.6	55.2
100°	252.4	253.4	254.4	255.4	256.6	257.9	259.3	260.6	261.9	212.1	162.2
102.5°	326.1	327.4	328.7	329.9	331.0	331.8	332.6	333.4	334.2	324.8	315.3
105°	443.9	445.3	446.6	447.9	448.6	448.6	448.6	448.6	448.6	448.6	448.6
107.5°	564.8	564.8	564.8	564.8	565.1	565.8	566.5	567.2	567.8	567.9	568.0
110°	644.3	644.3	644.3	644.3	644.6	645.3	646.0	646.6	647.3	646.3	645.3



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	719.8	720.6	721.4	722.2	722.8	723.2	723.6	724.0	724.4	723.1	721.8
115°	832.6	834.3	836.0	837.6	838.6	839.0	839.3	839.7	840.0	838.6	837.3
117.5°	946.8	946.7	946.7	946.6	947.2	948.5	949.7	951.0	952.3	950.5	948.8
120°	1018.8	1018.5	1018.1	1017.8	1018.1	1019.1	1020.1	1021.1	1022.1	1021.5	1020.8
122.5°	1084.2	1085.5	1086.8	1088.0	1088.9	1089.4	1089.8	1090.3	1090.8	1090.1	1089.4
125°	1184.0	1186.4	1188.7	1191.1	1192.2	1192.2	1192.2	1192.2	1192.2	1190.9	1189.6
127.5°	1277.6	1279.3	1281.0	1282.6	1283.4	1283.2	1283.0	1282.8	1282.6	1281.8	1281.1
130°	1335.4	1337.1	1338.8	1340.4	1341.4	1341.8	1342.1	1342.4	1342.8	1341.8	1340.8
132.5°	1393.5	1395.4	1397.4	1399.3	1399.9	1399.2	1398.4	1397.7	1397.0	1396.8	1396.6
135°	1475.7	1477.8	1479.8	1481.8	1482.4	1481.8	1481.1	1480.4	1479.8	1479.1	1478.4
137.5°	1551.0	1552.8	1554.5	1556.3	1556.8	1556.2	1555.6	1555.0	1554.4	1554.6	1554.7
140°	1599.4	1600.0	1600.7	1601.4	1601.5	1601.2	1600.9	1600.5	1600.2	1600.9	1601.5
142.5°	1643.6	1644.0	1644.4	1644.8	1645.3	1645.8	1646.2	1646.7	1647.2	1647.3	1647.4
145°	1709.2	1709.9	1710.6	1711.3	1711.6	1711.6	1711.6	1711.6	1711.6	1711.9	1712.3
147.5°	1765.6	1765.5	1765.4	1765.2	1765.4	1765.8	1766.2	1766.6	1767.0	1767.4	1767.8
150°	1801.2	1800.6	1799.9	1799.2	1799.2	1799.9	1800.6	1801.2	1801.9	1802.6	1803.2
152.5°	1835.4	1833.9	1832.4	1830.9	1830.5	1831.2	1831.9	1832.6	1833.2	1833.9	1834.6
155°	1879.7	1877.7	1875.7	1873.7	1873.0	1873.7	1874.3	1875.0	1875.7	1876.7	1877.7
157.5°	1915.1	1913.9	1912.7	1911.5	1910.9	1911.0	1911.1	1911.1	1911.2	1912.3	1913.3
160°	1938.4	1936.4	1934.4	1932.4	1931.5	1931.9	1932.2	1932.5	1932.9	1934.2	1935.5
162.5°	1957.7	1955.7	1953.6	1951.6	1950.8	1951.1	1951.5	1951.8	1952.1	1954.0	1955.9
165°	1983.6	1981.5	1979.5	1977.5	1976.7	1977.0	1977.4	1977.7	1978.0	1980.0	1982.0
167.5°	2002.8	2000.7	1998.6	1996.5	1995.7	1996.0	1996.3	1996.7	1997.0	1999.4	2001.8
170°	2013.3	2011.0	2008.6	2006.3	2005.3	2005.6	2006.0	2006.3	2006.6	2009.3	2012.0
172.5°	2020.6	2018.2	2015.9	2013.5	2012.7	2013.3	2013.9	2014.5	2015.1	2017.5	2019.9
175°	2028.7	2026.7	2024.7	2022.7	2021.9	2022.2	2022.5	2022.9	2023.2	2025.9	2028.5
177.5°	2032.7	2031.1	2029.5	2027.9	2027.2	2027.5	2027.8	2028.0	2028.3	2030.2	2032.1
180°	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1279.4	1282.8	1289.8	1287.3	1290.7	1292.3	1294.0
5°	1382.8	1399.4	1406.7	1405.6	1416.5	1413.9	1411.3
7.5°	1499.5	1517.0	1526.7	1538.9	1545.9	1546.4	1552.6
10°	1565.6	1588.4	1597.8	1610.7	1619.0	1623.7	1623.2
12.5°	1616.2	1634.1	1655.1	1661.4	1672.6	1678.5	1676.4
15°	1677.2	1705.8	1727.6	1738.5	1752.5	1756.6	1762.4
17.5°	1731.6	1769.9	1795.4	1829.2	1842.0	1849.8	1845.2
20°	1772.7	1823.1	1848.6	1889.1	1911.4	1923.3	1919.2
22.5°	1821.3	1875.9	1922.9	1958.0	1992.0	2008.1	2011.4
25°	1904.6	1979.4	2048.5	2094.7	2136.7	2146.6	2168.4
27.5°	1997.7	2085.9	2159.7	2208.3	2237.6	2248.6	2255.4
30°	2056.3	2144.0	2199.6	2230.7	2240.1	2239.0	2238.0
32.5°	2084.9	2139.9	2150.5	2141.8	2120.4	2102.4	2083.5
35°	2044.3	2003.3	1942.0	1863.1	1804.9	1746.3	1740.5
37.5°	1838.6	1707.4	1605.4	1491.5	1425.8	1385.2	1357.1
40°	1645.0	1496.0	1372.4	1276.3	1209.3	1182.9	1156.9
42.5°	1434.8	1292.4	1183.0	1102.7	1052.3	1022.9	1002.4
45°	1165.7	1040.1	954.4	896.2	856.3	833.4	820.4
47.5°	955.2	862.3	789.5	747.5	719.9	702.1	702.2
50°	842.2	753.4	705.1	671.9	648.0	634.0	636.6
52.5°	742.1	675.8	634.5	606.7	589.0	580.4	580.1
55°	620.5	572.7	545.7	525.5	513.5	503.7	505.8
57.5°	530.8	490.5	472.4	455.6	447.3	443.3	437.6
60°	475.1	444.0	428.4	414.9	406.6	403.5	397.7
62.5°	425.7	401.2	386.0	375.0	367.5	366.5	362.0
65°	357.8	339.1	325.6	320.4	312.6	310.5	310.5
67.5°	294.9	281.5	271.1	266.3	262.8	263.4	260.9
70°	255.5	244.6	237.8	232.6	230.0	230.5	228.5
72.5°	223.5	211.3	205.4	202.3	198.9	200.2	199.4
75°	169.3	163.0	159.9	156.8	154.7	153.7	152.7
77.5°	124.3	118.8	116.4	114.7	115.0	112.5	114.4
80°	96.1	91.4	89.8	87.2	86.7	86.7	86.2
82.5°	70.3	67.7	66.6	64.4	63.5	64.3	62.9
85°	36.3	34.3	33.8	33.8	32.7	31.7	34.3
87.5°	19.1	17.8	18.1	17.8	18.0	17.8	17.2
90°	29.1	30.8	32.1	33.1	34.1	35.1	36.1
92.5°	29.1	30.8	31.8	32.3	32.8	33.3	33.7
95°	29.1	30.8	31.6	31.6	31.6	31.6	31.6
97.5°	45.8	36.3	31.6	31.6	31.6	31.6	31.6
100°	112.4	62.6	37.0	35.6	34.3	33.0	31.6
102.5°	305.9	296.5	280.4	257.6	234.9	212.1	189.4
105°	448.6	448.6	448.4	448.1	447.8	447.4	447.1
107.5°	568.0	568.1	567.6	566.6	565.6	564.6	563.6
110°	644.3	643.3	643.0	643.3	643.6	644.0	644.3



TEST NUMBER: P333424

CATALOG NUMBER: S125DIW-S850D1560U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	720.6	719.3	718.4	718.0	717.5	717.0	716.5
115°	836.0	834.6	833.0	831.0	828.9	826.9	824.9
117.5°	947.1	945.3	944.0	943.2	942.3	941.4	940.5
120°	1020.1	1019.5	1018.3	1016.6	1014.9	1013.3	1011.6
122.5°	1088.8	1088.1	1086.8	1084.9	1082.9	1081.0	1079.0
125°	1188.2	1186.9	1185.7	1184.7	1183.7	1182.7	1181.7
127.5°	1280.4	1279.6	1278.0	1275.5	1273.1	1270.6	1268.1
130°	1339.8	1338.8	1337.4	1335.8	1334.1	1332.4	1330.7
132.5°	1396.4	1396.2	1395.2	1393.6	1391.9	1390.2	1388.5
135°	1477.8	1477.1	1475.7	1473.7	1471.7	1469.7	1467.7
137.5°	1554.8	1555.0	1554.2	1552.4	1550.7	1548.9	1547.2
140°	1602.2	1602.9	1602.2	1600.2	1598.2	1596.2	1594.2
142.5°	1647.6	1647.7	1646.8	1644.7	1642.7	1640.7	1638.7
145°	1712.6	1712.9	1712.1	1710.1	1708.1	1706.1	1704.1
147.5°	1768.2	1768.6	1767.6	1765.2	1762.8	1760.4	1758.0
150°	1803.9	1804.6	1803.6	1800.9	1798.2	1795.6	1792.9
152.5°	1835.2	1835.9	1835.0	1832.6	1830.2	1827.8	1825.4
155°	1878.7	1879.7	1878.8	1876.2	1873.5	1870.8	1868.1
157.5°	1914.4	1915.5	1914.7	1912.0	1909.3	1906.6	1904.0
160°	1936.9	1938.2	1937.6	1934.9	1932.2	1929.5	1926.9
162.5°	1957.8	1959.6	1959.1	1956.2	1953.2	1950.3	1947.3
165°	1984.1	1986.1	1985.7	1983.1	1980.4	1977.7	1975.0
167.5°	2004.2	2006.6	2006.3	2003.3	2000.3	1997.3	1994.3
170°	2014.7	2017.3	2017.2	2014.2	2011.2	2008.1	2005.1
172.5°	2022.3	2024.7	2024.4	2021.4	2018.4	2015.4	2012.4
175°	2031.2	2033.9	2033.7	2030.7	2027.7	2024.7	2021.7
177.5°	2033.9	2035.8	2035.7	2033.5	2031.4	2029.2	2027.1
180°	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7	2030.7

(END OF REPORT)