

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333401

Luminaire Tested: **S125DIW-S850D470U835-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333401
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S850D470U835-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5078.6 lumens
Efficiency: N/A
Efficacy: 134.7 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 37.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

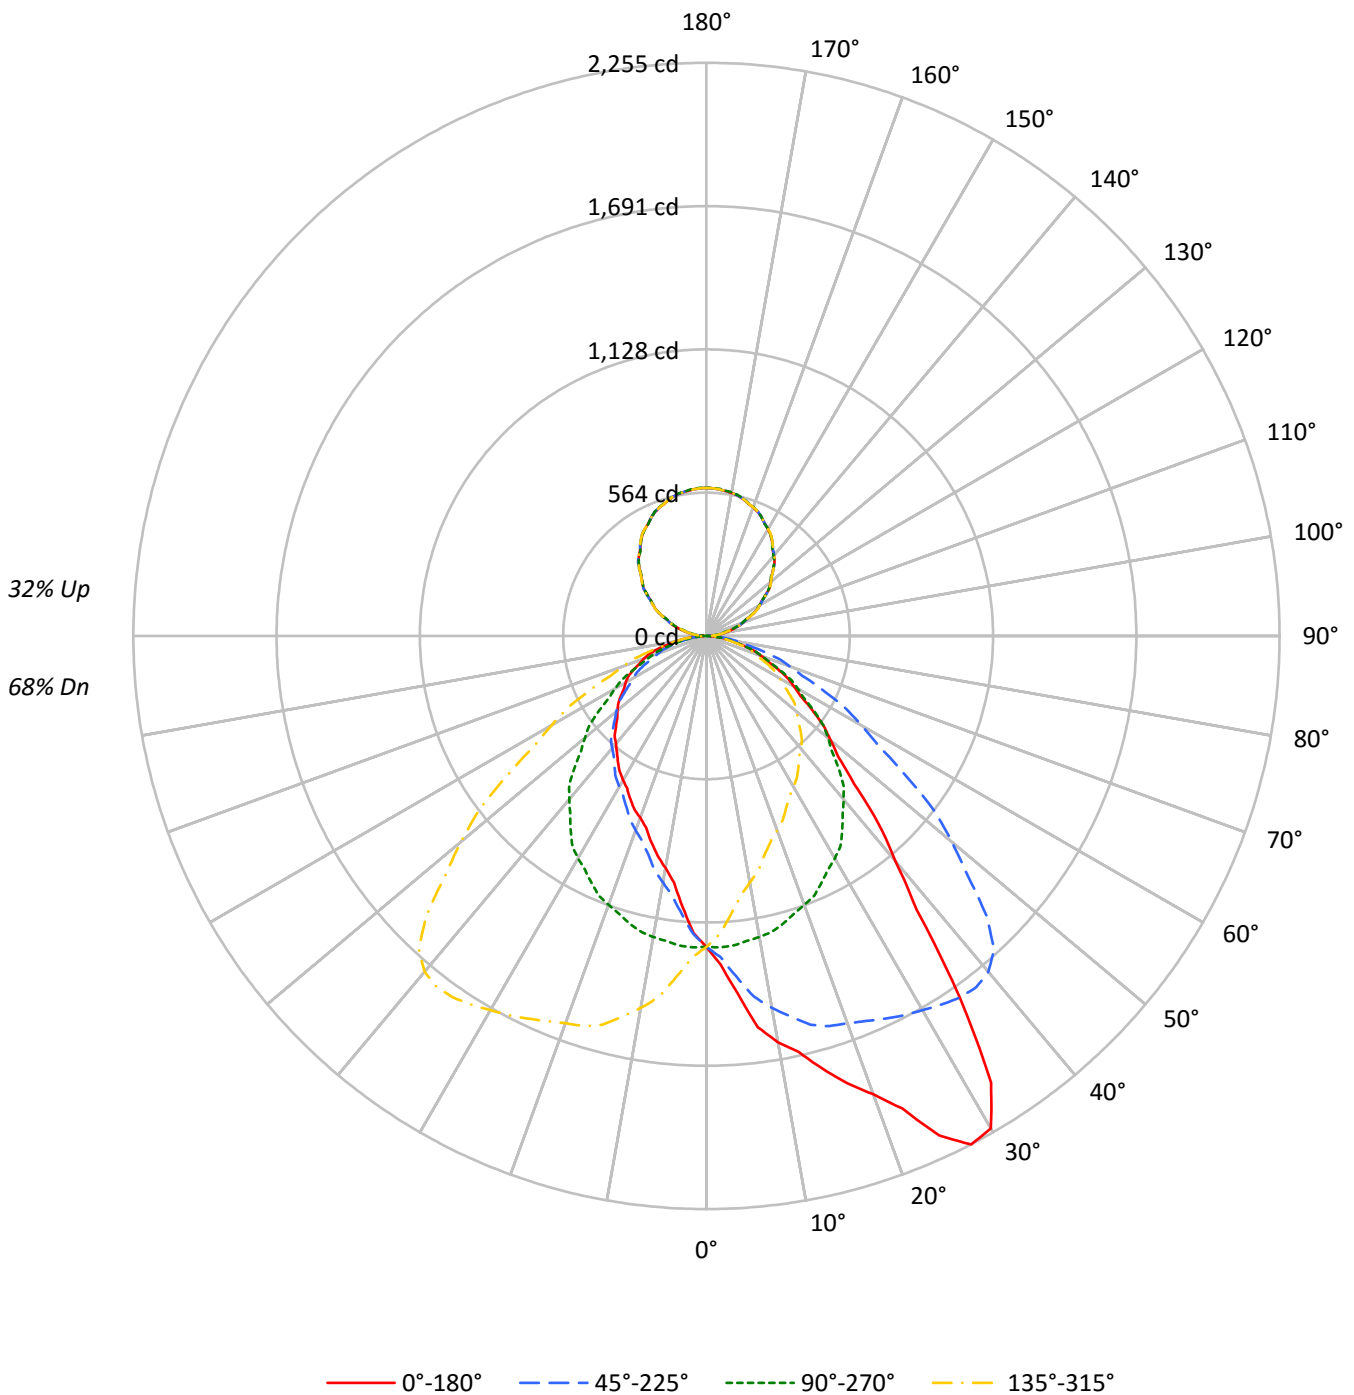



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	93	93	93	83	83	83	73	73	73	68
1	102	98	94	90	96	92	89	86	82	80	77	73	71	70	65	63	62	58
2	93	86	80	74	88	81	76	71	73	68	65	65	61	59	57	55	53	49
3	85	76	68	62	80	72	65	60	64	59	55	57	53	50	51	48	45	42
4	78	67	59	53	73	64	57	51	57	51	47	51	47	43	46	42	39	36
5	72	60	52	46	68	57	50	44	51	45	41	46	41	37	41	37	34	31
6	66	54	46	40	62	51	44	38	46	40	36	42	37	33	37	33	30	28
7	61	49	41	35	58	47	39	34	42	36	31	38	33	29	34	30	27	24
8	57	44	37	31	54	42	35	30	39	32	28	35	30	26	31	27	24	22
9	53	41	33	28	50	39	32	27	35	29	25	32	27	23	29	25	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	27	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	7901	7901	7901	7901
5°	9149	7927	6941	7927
10°	10645	7887	6082	7887
15°	11784	7829	5610	7829
20°	13190	7737	5232	7737
25°	15452	7633	5047	7633
30°	16690	7532	4887	7532
35°	13722	7340	4782	7340
40°	9754	7074	4666	7074
45°	7493	6716	4601	6716
50°	6396	6271	4591	6271
55°	5695	5835	4631	5835
60°	5137	5359	4748	5359
65°	4745	4879	4872	4879
70°	4315	4383	4942	4383
75°	3810	3860	4898	3860
80°	3206	3146	4482	3146
85°	2542	2267	3616	2267



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.8	2.3
10°-20°	350.7	6.9
20°-30°	569.4	11.2
30°-40°	694.5	13.7
40°-50°	631.8	12.4
50°-60°	503.3	9.9
60°-70°	350.5	6.9
70°-80°	186.9	3.7
80°-90°	48.5	1.0
90°-100°	39.0	0.8
100°-110°	115.2	2.3
110°-120°	195.1	3.8
120°-130°	256.8	5.1
130°-140°	287.7	5.7
140°-150°	282.0	5.6
150°-160°	236.9	4.7
160°-170°	157.4	3.1
170°-180°	55.1	1.1
0°-30°	1037.8	20.4
0°-40°	1732.4	34.1
0°-60°	2867.5	56.5
0°-90°	3453.4	68.0
90°-120°	349.3	6.9
90°-150°	1175.8	23.2
90°-180°	1625.0	32.0
0°-180°	5078.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1223	1223	1223	1223	1223	
5°	1411	1223	1071	1223	1411	142
15°	1762	1171	839	1171	1762	504
25°	2168	1071	708	1071	2168	990
35°	1740	931	606	931	1740	1065
45°	820	735	504	735	820	657
55°	506	518	411	518	506	455
65°	310	319	319	319	310	308
75°	153	155	196	155	153	164
85°	34	31	49	31	34	40
90°	11	0	11	0	11	8
95°	39	30	39	30	39	40
105°	112	103	112	103	112	119
115°	197	195	197	195	197	195
125°	287	285	287	285	287	256
135°	372	371	372	371	372	287
145°	451	449	451	449	451	282
155°	514	514	514	514	514	237
165°	558	559	558	559	558	157
175°	579	581	579	581	579	55
180°	582	582	582	582	582	



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1294.0	1292.3	1290.7	1287.3	1289.8	1282.8	1279.4	1273.6	1266.6	1264.1	1261.2
5°	1411.3	1413.9	1416.5	1405.6	1406.7	1399.4	1382.8	1369.3	1358.4	1344.4	1334.5
7.5°	1552.6	1546.4	1545.9	1538.9	1526.7	1517.0	1499.5	1477.3	1455.8	1431.3	1411.0
10°	1623.2	1623.7	1619.0	1610.7	1597.8	1588.4	1565.6	1543.7	1517.3	1486.1	1463.8
12.5°	1676.4	1678.5	1672.6	1661.4	1655.1	1634.1	1616.2	1590.3	1558.8	1533.9	1499.9
15°	1762.4	1756.6	1752.5	1738.5	1727.6	1705.8	1677.2	1650.2	1615.9	1584.2	1552.6
17.5°	1845.2	1849.8	1842.0	1829.2	1795.4	1769.9	1731.6	1694.6	1652.0	1609.5	1571.7
20°	1919.2	1923.3	1911.4	1889.1	1848.6	1823.1	1772.7	1725.0	1675.6	1621.1	1579.6
22.5°	2011.4	2008.1	1992.0	1958.0	1922.9	1875.9	1821.3	1763.2	1701.4	1639.8	1584.6
25°	2168.4	2146.6	2136.7	2094.7	2048.5	1979.4	1904.6	1819.5	1742.6	1661.1	1590.5
27.5°	2255.4	2248.6	2237.6	2208.3	2159.7	2085.9	1997.7	1893.9	1785.5	1682.6	1590.2
30°	2238.0	2239.0	2240.1	2230.7	2199.6	2144.0	2056.3	1944.6	1815.8	1700.0	1593.1
32.5°	2083.5	2102.4	2120.4	2141.8	2150.5	2139.9	2084.9	1984.1	1851.6	1720.0	1591.4
35°	1740.5	1746.3	1804.9	1863.1	1942.0	2003.3	2044.3	1999.7	1888.0	1736.9	1589.4
37.5°	1357.1	1385.2	1425.8	1491.5	1605.4	1707.4	1838.6	1898.9	1862.9	1742.4	1585.8
40°	1156.9	1182.9	1209.3	1276.3	1372.4	1496.0	1645.0	1772.2	1801.8	1725.0	1573.3
42.5°	1002.4	1022.9	1052.3	1102.7	1183.0	1292.4	1434.8	1601.1	1703.4	1674.3	1547.2
45°	820.4	833.4	856.3	896.2	954.4	1040.1	1165.7	1347.5	1505.8	1558.3	1485.1
47.5°	702.2	702.1	719.9	747.5	789.5	862.3	955.2	1097.6	1266.8	1391.9	1386.1
50°	636.6	634.0	648.0	671.9	705.1	753.4	842.2	955.9	1118.5	1260.2	1299.7
52.5°	580.1	580.4	589.0	606.7	634.5	675.8	742.1	844.6	983.5	1129.0	1203.3
55°	505.8	503.7	513.5	525.5	545.7	572.7	620.5	698.9	811.6	954.9	1051.5
57.5°	437.6	443.3	447.3	455.6	472.4	490.5	530.8	588.3	677.7	800.7	902.8
60°	397.7	403.5	406.6	414.9	428.4	444.0	475.1	521.9	597.1	703.1	804.3
62.5°	362.0	366.5	367.5	375.0	386.0	401.2	425.7	464.9	524.4	617.1	716.3
65°	310.5	310.5	312.6	320.4	325.6	339.1	357.8	386.3	434.1	506.3	590.9
67.5°	260.9	263.4	262.8	266.3	271.1	281.5	294.9	318.5	353.9	406.6	474.3
70°	228.5	230.5	230.0	232.6	237.8	244.6	255.5	277.8	303.2	348.4	406.6
72.5°	199.4	200.2	198.9	202.3	205.4	211.3	223.5	235.4	259.2	297.3	345.1
75°	152.7	153.7	154.7	156.8	159.9	163.0	169.3	181.2	196.8	225.4	256.0
77.5°	114.4	112.5	115.0	114.7	116.4	118.8	124.3	130.6	143.4	161.5	185.2
80°	86.2	86.7	86.7	87.2	89.8	91.4	96.1	100.7	110.6	124.1	140.7
82.5°	62.9	64.3	63.5	64.4	66.6	67.7	70.3	74.1	79.9	90.5	102.5
85°	34.3	31.7	32.7	33.8	33.8	34.3	36.3	37.9	41.0	45.2	49.8
87.5°	12.1	12.9	13.3	13.2	13.6	13.5	15.0	14.9	16.1	17.2	18.8
90°	10.9	10.6	10.3	10.0	9.7	9.3	8.8	8.3	7.8	7.3	6.5
92.5°	21.4	21.2	20.9	20.7	20.5	20.1	19.4	18.7	18.1	17.4	16.5
95°	39.0	38.8	38.6	38.4	38.2	37.7	37.0	36.3	35.6	34.9	33.9
97.5°	59.1	59.0	58.9	58.7	58.6	58.2	57.6	56.9	56.2	55.6	54.2
100°	74.3	74.1	73.9	73.7	73.5	73.0	72.1	71.2	70.3	69.3	68.0
102.5°	89.6	89.3	89.0	88.7	88.4	87.8	86.8	85.8	84.8	83.8	83.2
105°	112.4	112.1	111.8	111.5	111.2	110.7	110.1	109.5	108.9	108.3	107.7
107.5°	135.8	135.8	135.8	135.9	135.9	135.7	135.4	135.1	134.8	134.5	134.1
110°	153.2	153.3	153.4	153.5	153.6	153.5	153.2	152.9	152.6	152.3	152.0



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	170.2	170.4	170.6	170.8	171.0	171.0	170.8	170.7	170.6	170.4	170.0
115°	197.2	197.3	197.4	197.5	197.6	197.7	197.8	197.9	198.0	198.1	197.9
117.5°	223.4	223.8	224.3	224.7	225.1	225.2	225.1	225.1	225.0	224.9	224.7
120°	241.6	242.0	242.4	242.8	243.2	243.4	243.4	243.4	243.4	243.4	243.3
122.5°	259.7	260.0	260.4	260.7	261.0	261.2	261.3	261.4	261.4	261.5	261.3
125°	286.9	287.0	287.1	287.2	287.3	287.5	287.7	287.9	288.1	288.3	288.2
127.5°	313.0	313.2	313.4	313.6	313.8	314.0	314.1	314.2	314.3	314.4	314.2
130°	330.4	330.6	330.8	331.0	331.2	331.4	331.5	331.6	331.7	331.8	331.6
132.5°	346.7	347.0	347.3	347.6	347.9	348.0	348.1	348.2	348.3	348.4	348.5
135°	372.1	372.5	372.9	373.3	373.7	373.9	373.9	373.9	373.9	373.9	373.8
137.5°	396.9	397.4	398.0	398.5	399.0	399.2	399.0	398.9	398.8	398.7	398.4
140°	412.9	413.4	413.9	414.4	414.9	415.1	414.9	414.7	414.5	414.3	414.0
142.5°	428.1	428.6	429.1	429.6	430.1	430.3	430.2	430.1	430.0	429.9	429.5
145°	451.0	451.3	451.6	451.9	452.2	452.3	452.3	452.3	452.3	452.3	452.0
147.5°	470.5	471.1	471.8	472.5	473.2	473.4	473.2	472.9	472.7	472.5	472.2
150°	485.0	485.2	485.4	485.6	485.8	485.9	485.9	485.9	485.9	485.9	485.5
152.5°	496.9	497.3	497.7	498.0	498.4	498.4	498.2	498.0	497.7	497.5	497.3
155°	514.0	514.5	515.0	515.5	516.0	516.0	515.6	515.2	514.8	514.4	514.3
157.5°	528.2	528.9	529.5	530.2	530.9	531.0	530.6	530.2	529.8	529.4	529.3
160°	538.0	538.5	539.0	539.5	540.0	540.1	539.7	539.3	538.9	538.4	538.3
162.5°	546.3	546.9	547.5	548.1	548.7	548.7	548.2	547.8	547.3	546.8	546.8
165°	557.5	558.1	558.7	559.3	559.9	560.0	559.6	559.2	558.8	558.4	558.3
167.5°	566.4	567.0	567.6	568.2	568.9	568.9	568.3	567.7	567.1	566.5	566.5
170°	571.1	571.8	572.5	573.2	573.9	574.0	573.3	572.7	572.1	571.5	571.5
172.5°	575.1	575.7	576.3	576.9	577.6	577.6	577.0	576.4	575.8	575.2	575.2
175°	578.8	579.5	580.2	580.9	581.6	581.7	581.1	580.4	579.8	579.2	579.2
177.5°	581.0	581.5	582.1	582.7	583.2	583.3	582.8	582.3	581.8	581.3	581.4
180°	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1258.7	1255.8	1252.4	1246.6	1239.6	1235.8	1230.0	1226.3	1218.8	1212.6	1205.9
5°	1322.5	1309.0	1296.6	1280.5	1262.8	1251.4	1237.9	1222.8	1207.3	1191.2	1173.5
7.5°	1388.7	1364.8	1338.8	1310.9	1283.6	1258.5	1234.5	1210.9	1188.9	1162.3	1139.8
10°	1433.1	1403.0	1370.8	1332.9	1296.1	1263.9	1231.2	1202.6	1173.5	1142.4	1114.8
12.5°	1477.6	1437.5	1392.0	1350.4	1306.0	1267.2	1228.7	1192.2	1155.7	1121.2	1089.1
15°	1509.0	1473.6	1431.6	1372.4	1322.5	1269.1	1218.2	1170.9	1126.8	1088.4	1047.9
17.5°	1529.6	1484.1	1439.0	1382.2	1316.8	1257.0	1199.4	1145.3	1095.5	1046.8	1007.8
20°	1533.4	1486.6	1439.4	1383.8	1316.8	1248.3	1190.7	1125.7	1072.3	1021.9	974.1
22.5°	1532.1	1479.2	1427.7	1370.5	1305.2	1242.1	1172.4	1106.2	1048.2	998.6	948.8
25°	1520.4	1463.8	1399.4	1341.8	1277.4	1210.4	1139.8	1071.2	1012.0	955.4	906.1
27.5°	1510.6	1437.2	1364.3	1297.1	1234.9	1173.5	1105.9	1035.7	970.1	912.7	866.2
30°	1498.6	1418.1	1336.0	1265.9	1202.1	1142.4	1078.5	1010.0	941.4	885.3	835.5
32.5°	1487.8	1394.0	1307.4	1231.1	1163.4	1105.4	1046.5	981.3	914.0	857.1	807.2
35°	1466.9	1358.4	1259.2	1173.0	1100.8	1041.1	991.8	931.0	869.2	814.2	766.4
37.5°	1440.4	1311.6	1205.2	1114.8	1035.7	972.8	926.9	880.2	820.9	767.9	724.7
40°	1419.6	1278.4	1165.7	1073.3	991.3	925.8	883.3	839.1	789.8	740.5	694.8
42.5°	1393.5	1248.5	1125.9	1026.4	945.1	881.4	836.7	799.2	755.7	709.7	667.3
45°	1345.4	1194.3	1061.4	954.4	872.3	809.5	763.3	735.3	702.6	658.9	623.1
47.5°	1274.7	1129.2	991.7	881.3	796.6	738.4	695.1	668.2	645.1	612.7	580.2
50°	1211.9	1080.6	941.4	831.8	747.2	688.5	648.6	624.1	604.4	579.5	552.0
52.5°	1141.7	1019.5	892.0	783.7	699.9	642.0	602.9	581.4	565.0	547.1	520.0
55°	1030.2	926.4	808.0	705.1	627.8	571.2	536.9	518.2	504.7	491.2	474.6
57.5°	907.3	826.1	721.2	627.3	556.0	504.5	472.5	454.3	443.9	436.9	427.1
60°	820.9	751.4	661.0	575.3	505.8	460.1	428.9	414.9	406.1	400.3	393.1
62.5°	740.8	683.7	599.9	521.7	460.9	417.7	389.9	376.3	367.8	365.0	359.0
65°	622.6	578.5	509.4	444.5	392.6	355.7	332.3	319.3	314.1	311.0	311.6
67.5°	506.2	479.3	423.8	368.5	327.0	296.1	277.4	267.4	264.8	260.7	260.6
70°	435.1	414.9	368.2	319.9	283.0	259.1	242.5	232.1	229.5	227.4	226.9
72.5°	372.4	354.7	314.1	275.4	242.3	221.3	207.6	201.4	197.1	195.9	195.8
75°	279.9	270.0	237.8	207.2	184.3	169.8	160.5	154.7	151.6	151.1	151.6
77.5°	199.0	190.4	169.9	148.2	133.8	122.8	114.9	112.9	109.4	109.5	108.9
80°	149.5	143.8	130.9	113.7	101.8	92.4	88.3	84.6	83.6	82.0	83.6
82.5°	108.4	102.3	93.5	82.6	72.7	67.1	62.9	61.8	61.2	60.4	60.8
85°	53.5	54.0	48.8	40.5	36.3	33.2	30.6	30.6	30.1	29.6	30.1
87.5°	19.4	18.5	16.7	15.3	13.0	11.6	11.1	11.3	10.2	10.0	10.5
90°	5.8	5.1	4.4	3.7	2.9	2.1	1.3	0.5	1.3	2.1	2.9
92.5°	15.7	14.8	13.9	13.2	12.7	12.1	11.5	11.0	11.5	12.1	12.7
95°	32.9	31.9	30.9	30.3	30.1	29.9	29.7	29.5	29.7	29.9	30.1
97.5°	52.8	51.4	50.0	49.3	49.2	49.1	49.0	48.9	49.0	49.1	49.2
100°	66.7	65.4	64.1	63.5	63.5	63.5	63.5	63.5	63.5	63.5	63.5
102.5°	82.5	81.9	81.2	80.7	80.3	79.9	79.4	79.0	79.4	79.9	80.3
105°	107.1	106.5	105.9	105.4	104.8	104.3	103.8	103.3	103.8	104.3	104.8
107.5°	133.6	133.1	132.7	132.2	131.7	131.2	130.7	130.2	130.7	131.2	131.7
110°	151.7	151.4	151.1	150.7	150.2	149.7	149.2	148.7	149.2	149.7	150.2



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	169.7	169.3	168.9	168.6	168.3	168.0	167.8	167.5	167.8	168.0	168.3
115°	197.7	197.5	197.3	197.0	196.6	196.2	195.7	195.3	195.7	196.2	196.6
117.5°	224.5	224.4	224.2	224.0	223.8	223.6	223.4	223.3	223.4	223.6	223.8
120°	243.2	243.1	243.0	242.7	242.2	241.7	241.2	240.7	241.2	241.7	242.2
122.5°	261.0	260.7	260.5	260.2	260.1	259.9	259.7	259.5	259.7	259.9	260.1
125°	288.1	288.0	287.9	287.5	286.9	286.3	285.7	285.1	285.7	286.3	286.9
127.5°	314.1	314.0	313.9	313.7	313.3	313.0	312.6	312.3	312.6	313.0	313.3
130°	331.4	331.2	331.0	330.6	330.1	329.6	329.1	328.6	329.1	329.6	330.1
132.5°	348.5	348.6	348.6	348.2	347.4	346.6	345.7	344.9	345.7	346.6	347.4
135°	373.7	373.6	373.5	373.2	372.6	372.0	371.4	370.7	371.4	372.0	372.6
137.5°	398.2	398.0	397.8	397.4	396.8	396.2	395.6	395.0	395.6	396.2	396.8
140°	413.7	413.4	413.1	412.6	412.1	411.6	411.1	410.6	411.1	411.6	412.1
142.5°	429.1	428.7	428.3	427.9	427.5	427.1	426.6	426.2	426.6	427.1	427.5
145°	451.7	451.4	451.1	450.8	450.4	450.0	449.6	449.2	449.6	450.0	450.4
147.5°	472.0	471.7	471.5	471.3	471.0	470.8	470.6	470.4	470.6	470.8	471.0
150°	485.1	484.7	484.3	484.1	484.2	484.3	484.4	484.5	484.4	484.3	484.2
152.5°	497.2	497.0	496.8	496.7	496.5	496.4	496.3	496.1	496.3	496.4	496.5
155°	514.2	514.1	514.0	514.0	514.0	514.0	514.0	514.0	514.0	514.0	514.0
157.5°	529.2	529.1	529.0	529.0	529.3	529.5	529.7	529.9	529.7	529.5	529.3
160°	538.2	538.1	538.0	538.1	538.4	538.7	539.1	539.4	539.1	538.7	538.4
162.5°	546.7	546.7	546.7	546.8	547.0	547.3	547.5	547.7	547.5	547.3	547.0
165°	558.2	558.1	558.0	558.0	558.2	558.4	558.6	558.8	558.6	558.4	558.2
167.5°	566.5	566.5	566.5	566.7	567.1	567.5	567.9	568.3	567.9	567.5	567.1
170°	571.5	571.5	571.5	571.7	572.1	572.5	572.9	573.3	572.9	572.5	572.1
172.5°	575.2	575.2	575.2	575.4	575.8	576.2	576.6	577.0	576.6	576.2	575.8
175°	579.2	579.2	579.2	579.4	579.8	580.2	580.6	581.1	580.6	580.2	579.8
177.5°	581.5	581.6	581.6	581.8	582.2	582.5	582.8	583.1	582.8	582.5	582.2
180°	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1202.2	1197.6	1193.9	1185.6	1181.0	1174.8	1169.8	1175.2	1169.4	1171.9	1168.1
5°	1164.7	1150.2	1139.8	1124.7	1111.7	1099.8	1091.0	1089.4	1085.2	1083.2	1076.9
7.5°	1119.6	1101.4	1083.6	1063.9	1047.2	1030.3	1019.5	1010.6	1004.7	996.9	991.6
10°	1093.0	1068.6	1047.9	1024.0	1003.2	985.0	970.5	963.2	956.5	946.6	943.0
12.5°	1060.2	1035.0	1009.6	984.1	964.2	943.9	931.4	920.4	915.8	904.6	903.5
15°	1020.9	983.0	958.0	932.1	904.5	887.9	877.5	865.6	860.4	852.6	846.9
17.5°	973.9	940.1	908.9	882.0	858.4	844.4	831.5	823.3	814.4	809.3	800.0
20°	939.9	907.7	876.5	847.9	829.8	813.7	803.3	795.5	786.2	783.6	774.2
22.5°	911.2	875.7	845.8	821.8	801.9	783.8	772.5	767.3	760.8	752.8	750.9
25°	864.6	827.7	802.3	778.4	760.7	744.1	736.3	729.6	723.3	717.6	715.5
27.5°	824.3	791.3	761.1	739.5	724.2	709.0	702.1	693.9	689.4	684.8	679.2
30°	796.0	762.3	735.8	715.0	698.4	684.9	677.6	671.9	667.8	663.6	660.5
32.5°	766.9	735.7	710.0	689.7	673.1	662.9	656.4	652.4	647.8	642.8	638.9
35°	728.5	694.2	669.3	651.7	638.7	630.9	623.6	620.0	614.8	614.8	610.6
37.5°	685.2	655.6	633.6	617.5	605.9	598.9	591.0	588.5	585.2	583.0	581.6
40°	659.5	631.9	611.2	595.1	582.6	576.9	570.7	566.5	564.4	561.8	560.8
42.5°	632.9	606.6	586.7	571.8	561.0	556.1	550.3	547.4	543.2	539.8	539.2
45°	592.5	567.0	548.9	536.9	527.6	521.9	518.2	512.0	509.9	505.8	505.2
47.5°	554.1	529.7	511.9	502.1	493.9	489.2	483.5	477.3	474.9	472.8	472.6
50°	525.5	503.2	486.5	477.2	469.4	462.7	456.9	452.8	451.2	451.2	452.3
52.5°	496.4	477.4	463.3	451.9	444.5	437.3	432.0	429.5	427.1	429.6	431.5
55°	453.8	434.6	424.2	413.3	406.1	397.7	395.2	394.1	392.6	396.7	398.8
57.5°	408.8	395.3	383.1	372.3	365.8	361.0	357.5	356.8	359.7	361.7	368.5
60°	380.1	364.5	353.6	345.3	337.5	334.4	333.4	332.3	334.4	340.1	348.9
62.5°	348.5	335.9	324.1	317.9	312.2	307.0	306.8	307.4	311.6	318.1	326.9
65°	302.2	291.3	283.5	276.2	271.6	268.5	269.5	271.6	276.2	285.1	294.9
67.5°	255.2	247.7	240.7	234.8	230.3	230.3	231.4	234.5	240.0	250.2	259.2
70°	224.8	216.5	210.8	208.2	204.6	202.5	205.6	210.8	215.5	224.8	232.6
72.5°	194.5	187.5	183.0	181.2	179.7	178.0	179.0	184.6	191.0	200.3	209.4
75°	149.5	146.9	143.8	141.8	140.2	141.2	142.3	147.5	152.7	162.5	172.9
77.5°	109.1	106.4	104.6	104.1	103.2	103.7	106.7	110.5	115.6	122.8	130.6
80°	82.6	81.5	80.5	80.0	80.0	80.5	84.6	87.2	91.9	98.7	104.9
82.5°	60.1	59.5	59.3	59.2	59.6	59.7	62.2	65.6	69.5	74.6	80.0
85°	31.7	30.6	32.2	32.7	31.7	33.2	34.3	36.3	37.9	40.5	43.1
87.5°	11.1	12.1	11.8	12.4	12.5	13.5	13.2	14.9	15.9	16.8	16.5
90°	3.7	4.4	5.1	5.8	6.5	7.3	7.8	8.3	8.8	9.3	9.7
92.5°	13.2	13.9	14.8	15.7	16.5	17.4	18.1	18.7	19.4	20.1	20.5
95°	30.3	30.9	31.9	32.9	33.9	34.9	35.6	36.3	37.0	37.7	38.2
97.5°	49.3	50.0	51.4	52.8	54.2	55.6	56.2	56.9	57.6	58.2	58.6
100°	63.5	64.1	65.4	66.7	68.0	69.3	70.3	71.2	72.1	73.0	73.5
102.5°	80.7	81.2	81.9	82.5	83.2	83.8	84.8	85.8	86.8	87.8	88.4
105°	105.4	105.9	106.5	107.1	107.7	108.3	108.9	109.5	110.1	110.7	111.2
107.5°	132.2	132.7	133.1	133.6	134.1	134.5	134.8	135.1	135.4	135.7	135.9
110°	150.7	151.1	151.4	151.7	152.0	152.3	152.6	152.9	153.2	153.5	153.6



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	168.6	168.9	169.3	169.7	170.0	170.4	170.6	170.7	170.8	171.0	171.0
115°	197.0	197.3	197.5	197.7	197.9	198.1	198.0	197.9	197.8	197.7	197.6
117.5°	224.0	224.2	224.4	224.5	224.7	224.9	225.0	225.1	225.1	225.2	225.1
120°	242.7	243.0	243.1	243.2	243.3	243.4	243.4	243.4	243.4	243.4	243.2
122.5°	260.2	260.5	260.7	261.0	261.3	261.5	261.4	261.4	261.3	261.2	261.0
125°	287.5	287.9	288.0	288.1	288.2	288.3	288.1	287.9	287.7	287.5	287.3
127.5°	313.7	313.9	314.0	314.1	314.2	314.4	314.3	314.2	314.1	314.0	313.8
130°	330.6	331.0	331.2	331.4	331.6	331.8	331.7	331.6	331.5	331.4	331.2
132.5°	348.2	348.6	348.6	348.5	348.5	348.4	348.3	348.2	348.1	348.0	347.9
135°	373.2	373.5	373.6	373.7	373.8	373.9	373.9	373.9	373.9	373.9	373.7
137.5°	397.4	397.8	398.0	398.2	398.4	398.7	398.8	398.9	399.0	399.2	399.0
140°	412.6	413.1	413.4	413.7	414.0	414.3	414.5	414.7	414.9	415.1	414.9
142.5°	427.9	428.3	428.7	429.1	429.5	429.9	430.0	430.1	430.2	430.3	430.1
145°	450.8	451.1	451.4	451.7	452.0	452.3	452.3	452.3	452.3	452.3	452.2
147.5°	471.3	471.5	471.7	472.0	472.2	472.5	472.7	472.9	473.2	473.4	473.2
150°	484.1	484.3	484.7	485.1	485.5	485.9	485.9	485.9	485.9	485.9	485.8
152.5°	496.7	496.8	497.0	497.2	497.3	497.5	497.7	498.0	498.2	498.4	498.4
155°	514.0	514.0	514.1	514.2	514.3	514.4	514.8	515.2	515.6	516.0	516.0
157.5°	529.0	529.0	529.1	529.2	529.3	529.4	529.8	530.2	530.6	531.0	530.9
160°	538.1	538.0	538.1	538.2	538.3	538.4	538.9	539.3	539.7	540.1	540.0
162.5°	546.8	546.7	546.7	546.7	546.8	546.8	547.3	547.8	548.2	548.7	548.7
165°	558.0	558.0	558.1	558.2	558.3	558.4	558.8	559.2	559.6	560.0	559.9
167.5°	566.7	566.5	566.5	566.5	566.5	566.5	567.1	567.7	568.3	568.9	568.9
170°	571.7	571.5	571.5	571.5	571.5	571.5	572.1	572.7	573.3	574.0	573.9
172.5°	575.4	575.2	575.2	575.2	575.2	575.2	575.8	576.4	577.0	577.6	577.6
175°	579.4	579.2	579.2	579.2	579.2	579.2	579.8	580.4	581.1	581.7	581.6
177.5°	581.8	581.6	581.6	581.5	581.4	581.3	581.8	582.3	582.8	583.3	583.2
180°	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1165.6	1168.5	1166.0	1169.4	1166.0	1168.5	1165.6	1168.1	1171.9	1169.4	1175.2
5°	1074.3	1069.7	1072.8	1070.7	1072.8	1069.7	1074.3	1076.9	1083.2	1085.2	1089.4
7.5°	990.0	985.5	980.5	978.1	980.5	985.5	990.0	991.6	996.9	1004.7	1010.6
10°	937.3	931.5	931.0	927.4	931.0	931.5	937.3	943.0	946.6	956.5	963.2
12.5°	898.6	893.3	887.4	885.9	887.4	893.3	898.6	903.5	904.6	915.8	920.4
15°	843.8	839.6	836.0	839.1	836.0	839.6	843.8	846.9	852.6	860.4	865.6
17.5°	798.2	794.8	794.1	790.3	794.1	794.8	798.2	800.0	809.3	814.4	823.3
20°	769.5	766.9	768.0	761.2	768.0	766.9	769.5	774.2	783.6	786.2	795.5
22.5°	746.7	741.6	741.0	739.6	741.0	741.6	746.7	750.9	752.8	760.8	767.3
25°	710.9	708.3	705.7	708.3	705.7	708.3	710.9	715.5	717.6	723.3	729.6
27.5°	679.6	676.5	675.8	676.1	675.8	676.5	679.6	679.2	684.8	689.4	693.9
30°	660.5	655.3	655.8	655.3	655.8	655.3	660.5	660.5	663.6	667.8	671.9
32.5°	639.7	636.2	635.5	634.5	635.5	636.2	639.7	638.9	642.8	647.8	652.4
35°	609.1	609.1	606.5	606.5	606.5	609.1	609.1	610.6	614.8	614.8	620.0
37.5°	580.3	579.8	578.2	578.5	578.2	579.8	580.3	581.6	583.0	585.2	588.5
40°	558.7	558.2	556.6	553.5	556.6	558.2	558.7	560.8	561.8	564.4	566.5
42.5°	537.9	536.2	535.5	534.4	535.5	536.2	537.9	539.2	539.8	543.2	547.4
45°	505.2	505.2	504.2	503.7	504.2	505.2	505.2	505.2	505.8	509.9	512.0
47.5°	473.5	474.4	476.4	476.1	476.4	474.4	473.5	472.6	472.8	474.9	477.3
50°	454.3	454.9	456.4	456.9	456.4	454.9	454.3	452.3	451.2	451.2	452.8
52.5°	433.2	436.2	438.1	437.8	438.1	436.2	433.2	431.5	429.6	427.1	429.5
55°	403.5	407.1	410.7	411.3	410.7	407.1	403.5	398.8	396.7	392.6	394.1
57.5°	374.1	379.2	383.0	384.2	383.0	379.2	374.1	368.5	361.7	359.7	356.8
60°	354.1	360.9	365.6	367.6	365.6	360.9	354.1	348.9	340.1	334.4	332.3
62.5°	335.0	342.6	347.3	347.7	347.3	342.6	335.0	326.9	318.1	311.6	307.4
65°	303.8	311.6	315.7	318.8	315.7	311.6	303.8	294.9	285.1	276.2	271.6
67.5°	270.1	277.9	282.5	285.0	282.5	277.9	270.1	259.2	250.2	240.0	234.5
70°	245.6	253.4	259.6	261.7	259.6	253.4	245.6	232.6	224.8	215.5	210.8
72.5°	221.5	228.5	233.5	235.9	233.5	228.5	221.5	209.4	200.3	191.0	184.6
75°	179.7	189.0	193.7	196.3	193.7	189.0	179.7	172.9	162.5	152.7	147.5
77.5°	138.5	147.1	149.9	151.2	149.9	147.1	138.5	130.6	122.8	115.6	110.5
80°	111.1	116.3	119.9	120.5	119.9	116.3	111.1	104.9	98.7	91.9	87.2
82.5°	85.4	89.7	90.9	92.2	90.9	89.7	85.4	80.0	74.6	69.5	65.6
85°	46.7	48.8	49.3	48.8	49.3	48.8	46.7	43.1	40.5	37.9	36.3
87.5°	17.4	17.0	17.1	18.0	17.1	17.0	17.4	16.5	16.8	15.9	14.9
90°	10.0	10.3	10.6	10.9	10.6	10.3	10.0	9.7	9.3	8.8	8.3
92.5°	20.7	20.9	21.2	21.4	21.2	20.9	20.7	20.5	20.1	19.4	18.7
95°	38.4	38.6	38.8	39.0	38.8	38.6	38.4	38.2	37.7	37.0	36.3
97.5°	58.7	58.9	59.0	59.1	59.0	58.9	58.7	58.6	58.2	57.6	56.9
100°	73.7	73.9	74.1	74.3	74.1	73.9	73.7	73.5	73.0	72.1	71.2
102.5°	88.7	89.0	89.3	89.6	89.3	89.0	88.7	88.4	87.8	86.8	85.8
105°	111.5	111.8	112.1	112.4	112.1	111.8	111.5	111.2	110.7	110.1	109.5
107.5°	135.9	135.8	135.8	135.8	135.8	135.8	135.9	135.9	135.7	135.4	135.1
110°	153.5	153.4	153.3	153.2	153.3	153.4	153.5	153.6	153.5	153.2	152.9



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	170.8	170.6	170.4	170.2	170.4	170.6	170.8	171.0	171.0	170.8	170.7
115°	197.5	197.4	197.3	197.2	197.3	197.4	197.5	197.6	197.7	197.8	197.9
117.5°	224.7	224.3	223.8	223.4	223.8	224.3	224.7	225.1	225.2	225.1	225.1
120°	242.8	242.4	242.0	241.6	242.0	242.4	242.8	243.2	243.4	243.4	243.4
122.5°	260.7	260.4	260.0	259.7	260.0	260.4	260.7	261.0	261.2	261.3	261.4
125°	287.2	287.1	287.0	286.9	287.0	287.1	287.2	287.3	287.5	287.7	287.9
127.5°	313.6	313.4	313.2	313.0	313.2	313.4	313.6	313.8	314.0	314.1	314.2
130°	331.0	330.8	330.6	330.4	330.6	330.8	331.0	331.2	331.4	331.5	331.6
132.5°	347.6	347.3	347.0	346.7	347.0	347.3	347.6	347.9	348.0	348.1	348.2
135°	373.3	372.9	372.5	372.1	372.5	372.9	373.3	373.7	373.9	373.9	373.9
137.5°	398.5	398.0	397.4	396.9	397.4	398.0	398.5	399.0	399.2	399.0	398.9
140°	414.4	413.9	413.4	412.9	413.4	413.9	414.4	414.9	415.1	414.9	414.7
142.5°	429.6	429.1	428.6	428.1	428.6	429.1	429.6	430.1	430.3	430.2	430.1
145°	451.9	451.6	451.3	451.0	451.3	451.6	451.9	452.2	452.3	452.3	452.3
147.5°	472.5	471.8	471.1	470.5	471.1	471.8	472.5	473.2	473.4	473.2	472.9
150°	485.6	485.4	485.2	485.0	485.2	485.4	485.6	485.8	485.9	485.9	485.9
152.5°	498.0	497.7	497.3	496.9	497.3	497.7	498.0	498.4	498.4	498.2	498.0
155°	515.5	515.0	514.5	514.0	514.5	515.0	515.5	516.0	516.0	515.6	515.2
157.5°	530.2	529.5	528.9	528.2	528.9	529.5	530.2	530.9	531.0	530.6	530.2
160°	539.5	539.0	538.5	538.0	538.5	539.0	539.5	540.0	540.1	539.7	539.3
162.5°	548.1	547.5	546.9	546.3	546.9	547.5	548.1	548.7	548.7	548.2	547.8
165°	559.3	558.7	558.1	557.5	558.1	558.7	559.3	559.9	560.0	559.6	559.2
167.5°	568.2	567.6	567.0	566.4	567.0	567.6	568.2	568.9	568.9	568.3	567.7
170°	573.2	572.5	571.8	571.1	571.8	572.5	573.2	573.9	574.0	573.3	572.7
172.5°	576.9	576.3	575.7	575.1	575.7	576.3	576.9	577.6	577.6	577.0	576.4
175°	580.9	580.2	579.5	578.8	579.5	580.2	580.9	581.6	581.7	581.1	580.4
177.5°	582.7	582.1	581.5	581.0	581.5	582.1	582.7	583.2	583.3	582.8	582.3
180°	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1169.8	1174.8	1181.0	1185.6	1193.9	1197.6	1202.2	1205.9	1212.6	1218.8	1226.3
5°	1091.0	1099.8	1111.7	1124.7	1139.8	1150.2	1164.7	1173.5	1191.2	1207.3	1222.8
7.5°	1019.5	1030.3	1047.2	1063.9	1083.6	1101.4	1119.6	1139.8	1162.3	1188.9	1210.9
10°	970.5	985.0	1003.2	1024.0	1047.9	1068.6	1093.0	1114.8	1142.4	1173.5	1202.6
12.5°	931.4	943.9	964.2	984.1	1009.6	1035.0	1060.2	1089.1	1121.2	1155.7	1192.2
15°	877.5	887.9	904.5	932.1	958.0	983.0	1020.9	1047.9	1088.4	1126.8	1170.9
17.5°	831.5	844.4	858.4	882.0	908.9	940.1	973.9	1007.8	1046.8	1095.5	1145.3
20°	803.3	813.7	829.8	847.9	876.5	907.7	939.9	974.1	1021.9	1072.3	1125.7
22.5°	772.5	783.8	801.9	821.8	845.8	875.7	911.2	948.8	998.6	1048.2	1106.2
25°	736.3	744.1	760.7	778.4	802.3	827.7	864.6	906.1	955.4	1012.0	1071.2
27.5°	702.1	709.0	724.2	739.5	761.1	791.3	824.3	866.2	912.7	970.1	1035.7
30°	677.6	684.9	698.4	715.0	735.8	762.3	796.0	835.5	885.3	941.4	1010.0
32.5°	656.4	662.9	673.1	689.7	710.0	735.7	766.9	807.2	857.1	914.0	981.3
35°	623.6	630.9	638.7	651.7	669.3	694.2	728.5	766.4	814.2	869.2	931.0
37.5°	591.0	598.9	605.9	617.5	633.6	655.6	685.2	724.7	767.9	820.9	880.2
40°	570.7	576.9	582.6	595.1	611.2	631.9	659.5	694.8	740.5	789.8	839.1
42.5°	550.3	556.1	561.0	571.8	586.7	606.6	632.9	667.3	709.7	755.7	799.2
45°	518.2	521.9	527.6	536.9	548.9	567.0	592.5	623.1	658.9	702.6	735.3
47.5°	483.5	489.2	493.9	502.1	511.9	529.7	554.1	580.2	612.7	645.1	668.2
50°	456.9	462.7	469.4	477.2	486.5	503.2	525.5	552.0	579.5	604.4	624.1
52.5°	432.0	437.3	444.5	451.9	463.3	477.4	496.4	520.0	547.1	565.0	581.4
55°	395.2	397.7	406.1	413.3	424.2	434.6	453.8	474.6	491.2	504.7	518.2
57.5°	357.5	361.0	365.8	372.3	383.1	395.3	408.8	427.1	436.9	443.9	454.3
60°	333.4	334.4	337.5	345.3	353.6	364.5	380.1	393.1	400.3	406.1	414.9
62.5°	306.8	307.0	312.2	317.9	324.1	335.9	348.5	359.0	365.0	367.8	376.3
65°	269.5	268.5	271.6	276.2	283.5	291.3	302.2	311.6	311.0	314.1	319.3
67.5°	231.4	230.3	230.3	234.8	240.7	247.7	255.2	260.6	260.7	264.8	267.4
70°	205.6	202.5	204.6	208.2	210.8	216.5	224.8	226.9	227.4	229.5	232.1
72.5°	179.0	178.0	179.7	181.2	183.0	187.5	194.5	195.8	195.9	197.1	201.4
75°	142.3	141.2	140.2	141.8	143.8	146.9	149.5	151.6	151.1	151.6	154.7
77.5°	106.7	103.7	103.2	104.1	104.6	106.4	109.1	108.9	109.5	109.4	112.9
80°	84.6	80.5	80.0	80.0	80.5	81.5	82.6	83.6	82.0	83.6	84.6
82.5°	62.2	59.7	59.6	59.2	59.3	59.5	60.1	60.8	60.4	61.2	61.8
85°	34.3	33.2	31.7	32.7	32.2	30.6	31.7	30.1	29.6	30.1	30.6
87.5°	13.2	13.5	12.5	12.4	11.8	12.1	11.1	10.5	10.0	10.2	11.3
90°	7.8	7.3	6.5	5.8	5.1	4.4	3.7	2.9	2.1	1.3	0.5
92.5°	18.1	17.4	16.5	15.7	14.8	13.9	13.2	12.7	12.1	11.5	11.0
95°	35.6	34.9	33.9	32.9	31.9	30.9	30.3	30.1	29.9	29.7	29.5
97.5°	56.2	55.6	54.2	52.8	51.4	50.0	49.3	49.2	49.1	49.0	48.9
100°	70.3	69.3	68.0	66.7	65.4	64.1	63.5	63.5	63.5	63.5	63.5
102.5°	84.8	83.8	83.2	82.5	81.9	81.2	80.7	80.3	79.9	79.4	79.0
105°	108.9	108.3	107.7	107.1	106.5	105.9	105.4	104.8	104.3	103.8	103.3
107.5°	134.8	134.5	134.1	133.6	133.1	132.7	132.2	131.7	131.2	130.7	130.2
110°	152.6	152.3	152.0	151.7	151.4	151.1	150.7	150.2	149.7	149.2	148.7



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	170.6	170.4	170.0	169.7	169.3	168.9	168.6	168.3	168.0	167.8	167.5
115°	198.0	198.1	197.9	197.7	197.5	197.3	197.0	196.6	196.2	195.7	195.3
117.5°	225.0	224.9	224.7	224.5	224.4	224.2	224.0	223.8	223.6	223.4	223.3
120°	243.4	243.4	243.3	243.2	243.1	243.0	242.7	242.2	241.7	241.2	240.7
122.5°	261.4	261.5	261.3	261.0	260.7	260.5	260.2	260.1	259.9	259.7	259.5
125°	288.1	288.3	288.2	288.1	288.0	287.9	287.5	286.9	286.3	285.7	285.1
127.5°	314.3	314.4	314.2	314.1	314.0	313.9	313.7	313.3	313.0	312.6	312.3
130°	331.7	331.8	331.6	331.4	331.2	331.0	330.6	330.1	329.6	329.1	328.6
132.5°	348.3	348.4	348.5	348.5	348.6	348.6	348.2	347.4	346.6	345.7	344.9
135°	373.9	373.9	373.8	373.7	373.6	373.5	373.2	372.6	372.0	371.4	370.7
137.5°	398.8	398.7	398.4	398.2	398.0	397.8	397.4	396.8	396.2	395.6	395.0
140°	414.5	414.3	414.0	413.7	413.4	413.1	412.6	412.1	411.6	411.1	410.6
142.5°	430.0	429.9	429.5	429.1	428.7	428.3	427.9	427.5	427.1	426.6	426.2
145°	452.3	452.3	452.0	451.7	451.4	451.1	450.8	450.4	450.0	449.6	449.2
147.5°	472.7	472.5	472.2	472.0	471.7	471.5	471.3	471.0	470.8	470.6	470.4
150°	485.9	485.9	485.5	485.1	484.7	484.3	484.1	484.2	484.3	484.4	484.5
152.5°	497.7	497.5	497.3	497.2	497.0	496.8	496.7	496.5	496.4	496.3	496.1
155°	514.8	514.4	514.3	514.2	514.1	514.0	514.0	514.0	514.0	514.0	514.0
157.5°	529.8	529.4	529.3	529.2	529.1	529.0	529.0	529.3	529.5	529.7	529.9
160°	538.9	538.4	538.3	538.2	538.1	538.0	538.1	538.4	538.7	539.1	539.4
162.5°	547.3	546.8	546.8	546.7	546.7	546.7	546.8	547.0	547.3	547.5	547.7
165°	558.8	558.4	558.3	558.2	558.1	558.0	558.0	558.2	558.4	558.6	558.8
167.5°	567.1	566.5	566.5	566.5	566.5	566.5	566.7	567.1	567.5	567.9	568.3
170°	572.1	571.5	571.5	571.5	571.5	571.5	571.7	572.1	572.5	572.9	573.3
172.5°	575.8	575.2	575.2	575.2	575.2	575.2	575.4	575.8	576.2	576.6	577.0
175°	579.8	579.2	579.2	579.2	579.2	579.2	579.4	579.8	580.2	580.6	581.1
177.5°	581.8	581.3	581.4	581.5	581.6	581.6	581.8	582.2	582.5	582.8	583.1
180°	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1230.0	1235.8	1239.6	1246.6	1252.4	1255.8	1258.7	1261.2	1264.1	1266.6	1273.6
5°	1237.9	1251.4	1262.8	1280.5	1296.6	1309.0	1322.5	1334.5	1344.4	1358.4	1369.3
7.5°	1234.5	1258.5	1283.6	1310.9	1338.8	1364.8	1388.7	1411.0	1431.3	1455.8	1477.3
10°	1231.2	1263.9	1296.1	1332.9	1370.8	1403.0	1433.1	1463.8	1486.1	1517.3	1543.7
12.5°	1228.7	1267.2	1306.0	1350.4	1392.0	1437.5	1477.6	1499.9	1533.9	1558.8	1590.3
15°	1218.2	1269.1	1322.5	1372.4	1431.6	1473.6	1509.0	1552.6	1584.2	1615.9	1650.2
17.5°	1199.4	1257.0	1316.8	1382.2	1439.0	1484.1	1529.6	1571.7	1609.5	1652.0	1694.6
20°	1190.7	1248.3	1316.8	1383.8	1439.4	1486.6	1533.4	1579.6	1621.1	1675.6	1725.0
22.5°	1172.4	1242.1	1305.2	1370.5	1427.7	1479.2	1532.1	1584.6	1639.8	1701.4	1763.2
25°	1139.8	1210.4	1277.4	1341.8	1399.4	1463.8	1520.4	1590.5	1661.1	1742.6	1819.5
27.5°	1105.9	1173.5	1234.9	1297.1	1364.3	1437.2	1510.6	1590.2	1682.6	1785.5	1893.9
30°	1078.5	1142.4	1202.1	1265.9	1336.0	1418.1	1498.6	1593.1	1700.0	1815.8	1944.6
32.5°	1046.5	1105.4	1163.4	1231.1	1307.4	1394.0	1487.8	1591.4	1720.0	1851.6	1984.1
35°	991.8	1041.1	1100.8	1173.0	1259.2	1358.4	1466.9	1589.4	1736.9	1888.0	1999.7
37.5°	926.9	972.8	1035.7	1114.8	1205.2	1311.6	1440.4	1585.8	1742.4	1862.9	1898.9
40°	883.3	925.8	991.3	1073.3	1165.7	1278.4	1419.6	1573.3	1725.0	1801.8	1772.2
42.5°	836.7	881.4	945.1	1026.4	1125.9	1248.5	1393.5	1547.2	1674.3	1703.4	1601.1
45°	763.3	809.5	872.3	954.4	1061.4	1194.3	1345.4	1485.1	1558.3	1505.8	1347.5
47.5°	695.1	738.4	796.6	881.3	991.7	1129.2	1274.7	1386.1	1391.9	1266.8	1097.6
50°	648.6	688.5	747.2	831.8	941.4	1080.6	1211.9	1299.7	1260.2	1118.5	955.9
52.5°	602.9	642.0	699.9	783.7	892.0	1019.5	1141.7	1203.3	1129.0	983.5	844.6
55°	536.9	571.2	627.8	705.1	808.0	926.4	1030.2	1051.5	954.9	811.6	698.9
57.5°	472.5	504.5	556.0	627.3	721.2	826.1	907.3	902.8	800.7	677.7	588.3
60°	428.9	460.1	505.8	575.3	661.0	751.4	820.9	804.3	703.1	597.1	521.9
62.5°	389.9	417.7	460.9	521.7	599.9	683.7	740.8	716.3	617.1	524.4	464.9
65°	332.3	355.7	392.6	444.5	509.4	578.5	622.6	590.9	506.3	434.1	386.3
67.5°	277.4	296.1	327.0	368.5	423.8	479.3	506.2	474.3	406.6	353.9	318.5
70°	242.5	259.1	283.0	319.9	368.2	414.9	435.1	406.6	348.4	303.2	277.8
72.5°	207.6	221.3	242.3	275.4	314.1	354.7	372.4	345.1	297.3	259.2	235.4
75°	160.5	169.8	184.3	207.2	237.8	270.0	279.9	256.0	225.4	196.8	181.2
77.5°	114.9	122.8	133.8	148.2	169.9	190.4	199.0	185.2	161.5	143.4	130.6
80°	88.3	92.4	101.8	113.7	130.9	143.8	149.5	140.7	124.1	110.6	100.7
82.5°	62.9	67.1	72.7	82.6	93.5	102.3	108.4	102.5	90.5	79.9	74.1
85°	30.6	33.2	36.3	40.5	48.8	54.0	53.5	49.8	45.2	41.0	37.9
87.5°	11.1	11.6	13.0	15.3	16.7	18.5	19.4	18.8	17.2	16.1	14.9
90°	1.3	2.1	2.9	3.7	4.4	5.1	5.8	6.5	7.3	7.8	8.3
92.5°	11.5	12.1	12.7	13.2	13.9	14.8	15.7	16.5	17.4	18.1	18.7
95°	29.7	29.9	30.1	30.3	30.9	31.9	32.9	33.9	34.9	35.6	36.3
97.5°	49.0	49.1	49.2	49.3	50.0	51.4	52.8	54.2	55.6	56.2	56.9
100°	63.5	63.5	63.5	63.5	64.1	65.4	66.7	68.0	69.3	70.3	71.2
102.5°	79.4	79.9	80.3	80.7	81.2	81.9	82.5	83.2	83.8	84.8	85.8
105°	103.8	104.3	104.8	105.4	105.9	106.5	107.1	107.7	108.3	108.9	109.5
107.5°	130.7	131.2	131.7	132.2	132.7	133.1	133.6	134.1	134.5	134.8	135.1
110°	149.2	149.7	150.2	150.7	151.1	151.4	151.7	152.0	152.3	152.6	152.9



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	167.8	168.0	168.3	168.6	168.9	169.3	169.7	170.0	170.4	170.6	170.7
115°	195.7	196.2	196.6	197.0	197.3	197.5	197.7	197.9	198.1	198.0	197.9
117.5°	223.4	223.6	223.8	224.0	224.2	224.4	224.5	224.7	224.9	225.0	225.1
120°	241.2	241.7	242.2	242.7	243.0	243.1	243.2	243.3	243.4	243.4	243.4
122.5°	259.7	259.9	260.1	260.2	260.5	260.7	261.0	261.3	261.5	261.4	261.4
125°	285.7	286.3	286.9	287.5	287.9	288.0	288.1	288.2	288.3	288.1	287.9
127.5°	312.6	313.0	313.3	313.7	313.9	314.0	314.1	314.2	314.4	314.3	314.2
130°	329.1	329.6	330.1	330.6	331.0	331.2	331.4	331.6	331.8	331.7	331.6
132.5°	345.7	346.6	347.4	348.2	348.6	348.6	348.5	348.5	348.4	348.3	348.2
135°	371.4	372.0	372.6	373.2	373.5	373.6	373.7	373.8	373.9	373.9	373.9
137.5°	395.6	396.2	396.8	397.4	397.8	398.0	398.2	398.4	398.7	398.8	398.9
140°	411.1	411.6	412.1	412.6	413.1	413.4	413.7	414.0	414.3	414.5	414.7
142.5°	426.6	427.1	427.5	427.9	428.3	428.7	429.1	429.5	429.9	430.0	430.1
145°	449.6	450.0	450.4	450.8	451.1	451.4	451.7	452.0	452.3	452.3	452.3
147.5°	470.6	470.8	471.0	471.3	471.5	471.7	472.0	472.2	472.5	472.7	472.9
150°	484.4	484.3	484.2	484.1	484.3	484.7	485.1	485.5	485.9	485.9	485.9
152.5°	496.3	496.4	496.5	496.7	496.8	497.0	497.2	497.3	497.5	497.7	498.0
155°	514.0	514.0	514.0	514.0	514.0	514.1	514.2	514.3	514.4	514.8	515.2
157.5°	529.7	529.5	529.3	529.0	529.0	529.1	529.2	529.3	529.4	529.8	530.2
160°	539.1	538.7	538.4	538.1	538.0	538.1	538.2	538.3	538.4	538.9	539.3
162.5°	547.5	547.3	547.0	546.8	546.7	546.7	546.7	546.8	546.8	547.3	547.8
165°	558.6	558.4	558.2	558.0	558.0	558.1	558.2	558.3	558.4	558.8	559.2
167.5°	567.9	567.5	567.1	566.7	566.5	566.5	566.5	566.5	566.5	567.1	567.7
170°	572.9	572.5	572.1	571.7	571.5	571.5	571.5	571.5	571.5	572.1	572.7
172.5°	576.6	576.2	575.8	575.4	575.2	575.2	575.2	575.2	575.2	575.8	576.4
175°	580.6	580.2	579.8	579.4	579.2	579.2	579.2	579.2	579.2	579.8	580.4
177.5°	582.8	582.5	582.2	581.8	581.6	581.6	581.5	581.4	581.3	581.8	582.3
180°	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4	582.4



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1279.4	1282.8	1289.8	1287.3	1290.7	1292.3	1294.0
5°	1382.8	1399.4	1406.7	1405.6	1416.5	1413.9	1411.3
7.5°	1499.5	1517.0	1526.7	1538.9	1545.9	1546.4	1552.6
10°	1565.6	1588.4	1597.8	1610.7	1619.0	1623.7	1623.2
12.5°	1616.2	1634.1	1655.1	1661.4	1672.6	1678.5	1676.4
15°	1677.2	1705.8	1727.6	1738.5	1752.5	1756.6	1762.4
17.5°	1731.6	1769.9	1795.4	1829.2	1842.0	1849.8	1845.2
20°	1772.7	1823.1	1848.6	1889.1	1911.4	1923.3	1919.2
22.5°	1821.3	1875.9	1922.9	1958.0	1992.0	2008.1	2011.4
25°	1904.6	1979.4	2048.5	2094.7	2136.7	2146.6	2168.4
27.5°	1997.7	2085.9	2159.7	2208.3	2237.6	2248.6	2255.4
30°	2056.3	2144.0	2199.6	2230.7	2240.1	2239.0	2238.0
32.5°	2084.9	2139.9	2150.5	2141.8	2120.4	2102.4	2083.5
35°	2044.3	2003.3	1942.0	1863.1	1804.9	1746.3	1740.5
37.5°	1838.6	1707.4	1605.4	1491.5	1425.8	1385.2	1357.1
40°	1645.0	1496.0	1372.4	1276.3	1209.3	1182.9	1156.9
42.5°	1434.8	1292.4	1183.0	1102.7	1052.3	1022.9	1002.4
45°	1165.7	1040.1	954.4	896.2	856.3	833.4	820.4
47.5°	955.2	862.3	789.5	747.5	719.9	702.1	702.2
50°	842.2	753.4	705.1	671.9	648.0	634.0	636.6
52.5°	742.1	675.8	634.5	606.7	589.0	580.4	580.1
55°	620.5	572.7	545.7	525.5	513.5	503.7	505.8
57.5°	530.8	490.5	472.4	455.6	447.3	443.3	437.6
60°	475.1	444.0	428.4	414.9	406.6	403.5	397.7
62.5°	425.7	401.2	386.0	375.0	367.5	366.5	362.0
65°	357.8	339.1	325.6	320.4	312.6	310.5	310.5
67.5°	294.9	281.5	271.1	266.3	262.8	263.4	260.9
70°	255.5	244.6	237.8	232.6	230.0	230.5	228.5
72.5°	223.5	211.3	205.4	202.3	198.9	200.2	199.4
75°	169.3	163.0	159.9	156.8	154.7	153.7	152.7
77.5°	124.3	118.8	116.4	114.7	115.0	112.5	114.4
80°	96.1	91.4	89.8	87.2	86.7	86.7	86.2
82.5°	70.3	67.7	66.6	64.4	63.5	64.3	62.9
85°	36.3	34.3	33.8	33.8	32.7	31.7	34.3
87.5°	15.0	13.5	13.6	13.2	13.3	12.9	12.1
90°	8.8	9.3	9.7	10.0	10.3	10.6	10.9
92.5°	19.4	20.1	20.5	20.7	20.9	21.2	21.4
95°	37.0	37.7	38.2	38.4	38.6	38.8	39.0
97.5°	57.6	58.2	58.6	58.7	58.9	59.0	59.1
100°	72.1	73.0	73.5	73.7	73.9	74.1	74.3
102.5°	86.8	87.8	88.4	88.7	89.0	89.3	89.6
105°	110.1	110.7	111.2	111.5	111.8	112.1	112.4
107.5°	135.4	135.7	135.9	135.9	135.8	135.8	135.8
110°	153.2	153.5	153.6	153.5	153.4	153.3	153.2



TEST NUMBER: P333401

CATALOG NUMBER: S125DIW-S850D470U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	170.8	171.0	171.0	170.8	170.6	170.4	170.2
115°	197.8	197.7	197.6	197.5	197.4	197.3	197.2
117.5°	225.1	225.2	225.1	224.7	224.3	223.8	223.4
120°	243.4	243.4	243.2	242.8	242.4	242.0	241.6
122.5°	261.3	261.2	261.0	260.7	260.4	260.0	259.7
125°	287.7	287.5	287.3	287.2	287.1	287.0	286.9
127.5°	314.1	314.0	313.8	313.6	313.4	313.2	313.0
130°	331.5	331.4	331.2	331.0	330.8	330.6	330.4
132.5°	348.1	348.0	347.9	347.6	347.3	347.0	346.7
135°	373.9	373.9	373.7	373.3	372.9	372.5	372.1
137.5°	399.0	399.2	399.0	398.5	398.0	397.4	396.9
140°	414.9	415.1	414.9	414.4	413.9	413.4	412.9
142.5°	430.2	430.3	430.1	429.6	429.1	428.6	428.1
145°	452.3	452.3	452.2	451.9	451.6	451.3	451.0
147.5°	473.2	473.4	473.2	472.5	471.8	471.1	470.5
150°	485.9	485.9	485.8	485.6	485.4	485.2	485.0
152.5°	498.2	498.4	498.4	498.0	497.7	497.3	496.9
155°	515.6	516.0	516.0	515.5	515.0	514.5	514.0
157.5°	530.6	531.0	530.9	530.2	529.5	528.9	528.2
160°	539.7	540.1	540.0	539.5	539.0	538.5	538.0
162.5°	548.2	548.7	548.7	548.1	547.5	546.9	546.3
165°	559.6	560.0	559.9	559.3	558.7	558.1	557.5
167.5°	568.3	568.9	568.9	568.2	567.6	567.0	566.4
170°	573.3	574.0	573.9	573.2	572.5	571.8	571.1
172.5°	577.0	577.6	577.6	576.9	576.3	575.7	575.1
175°	581.1	581.7	581.6	580.9	580.2	579.5	578.8
177.5°	582.8	583.3	583.2	582.7	582.1	581.5	581.0
180°	582.4	582.4	582.4	582.4	582.4	582.4	582.4

(END OF REPORT)