

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333731

Luminaire Tested: **S125RDIW-S1270D1050U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333731
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S1270D1050U835-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8512.8 lumens
Efficiency: N/A
Efficacy: 126.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 67.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333731

CATALOG NUMBER: S125RDIW-S1270D1050U835-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

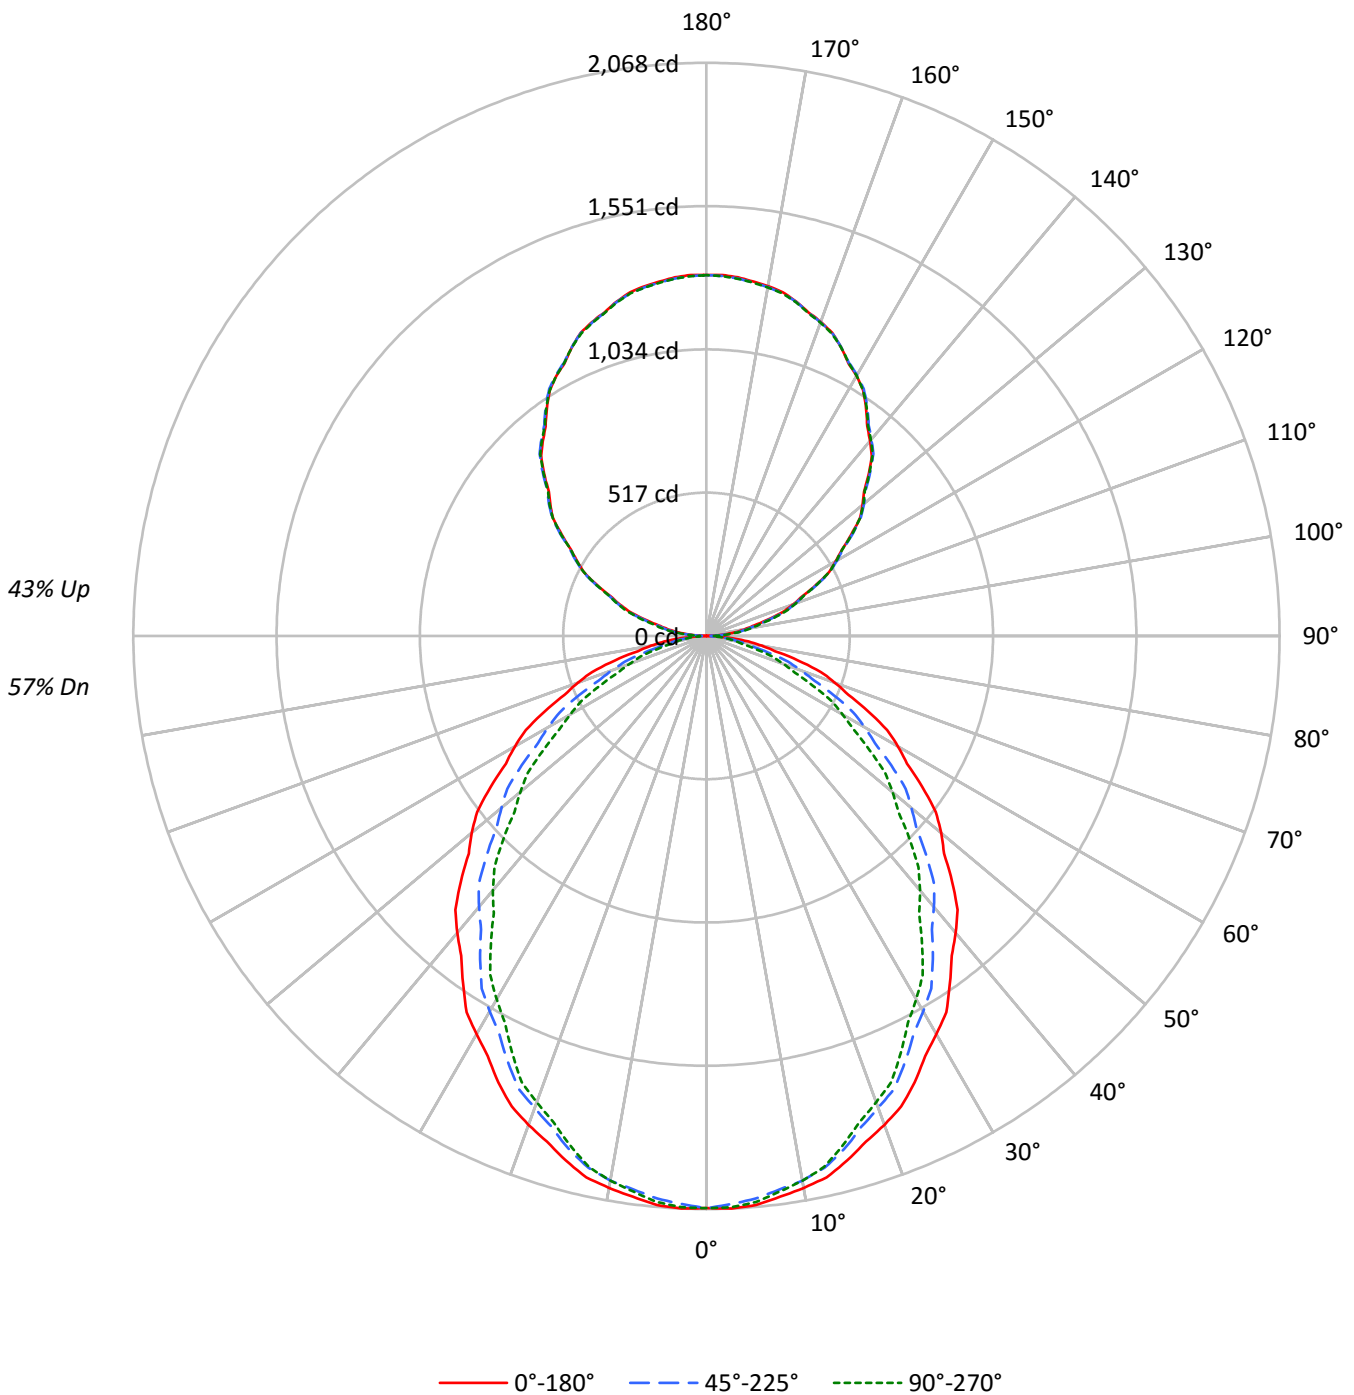



TEST NUMBER: P333731

CATALOG NUMBER: S125RDIW-S1270D1050U835-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	75	75	75	63	63	63	57
1	100	95	92	88	93	89	86	83	77	75	72	66	64	63	56	55	54	49
2	91	84	78	72	84	78	73	68	68	64	60	58	55	53	50	47	46	41
3	83	74	66	61	77	69	63	57	60	55	51	52	48	45	44	41	39	35
4	76	65	57	51	71	61	54	49	53	48	44	46	42	39	40	36	34	30
5	70	58	50	44	65	55	48	42	48	42	38	42	37	34	36	32	30	27
6	65	53	44	39	60	49	42	37	43	38	33	38	33	30	32	29	26	23
7	60	48	40	34	56	45	38	32	39	34	29	34	30	26	30	26	23	21
8	56	43	35	30	52	41	34	29	36	30	26	32	27	24	27	24	21	19
9	52	40	32	27	48	37	30	26	33	27	23	29	24	21	25	22	19	17
10	48	36	29	24	45	34	28	23	31	25	21	27	22	19	23	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13332	13332	13332
5°	13363	13211	13291
10°	13262	13088	13088
15°	13104	12822	12718
20°	12902	12451	12302
25°	12666	12088	11821
30°	12371	11662	11290
35°	12071	11223	10694
40°	11790	10765	10108
45°	11449	10253	9470
50°	11106	9697	8804
55°	10709	9164	8094
60°	10311	8519	7330
65°	9840	7768	6457
70°	9304	6830	5565
75°	8559	5757	4629
80°	7539	4523	3887
85°	6358	3698	3468



TEST NUMBER: P333731

CATALOG NUMBER: S125RDIW-S1270D1050U835-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	194.1	2.3
10°-20°	542.5	6.4
20°-30°	786.6	9.2
30°-40°	896.5	10.5
40°-50°	873.9	10.3
50°-60°	735.6	8.6
60°-70°	515.6	6.1
70°-80°	265.0	3.1
80°-90°	69.8	0.8
90°-100°	87.2	1.0
100°-110°	257.5	3.0
110°-120°	436.2	5.1
120°-130°	574.0	6.7
130°-140°	643.2	7.6
140°-150°	630.4	7.4
150°-160°	529.5	6.2
160°-170°	352.0	4.1
170°-180°	123.2	1.4
0°-30°	1523.2	17.9
0°-40°	2419.7	28.4
0°-60°	4029.1	47.3
0°-90°	4879.6	57.3
90°-120°	780.9	9.2
90°-150°	2628.6	30.9
90°-180°	3633.0	42.7
0°-180°	8512.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2064	2064	2064	2064	2064	
5°	2061	2054	2038	2052	2050	195
15°	1960	1949	1918	1915	1902	552
25°	1777	1752	1696	1676	1659	817
35°	1531	1492	1424	1380	1356	958
45°	1254	1206	1123	1062	1037	967
55°	951	899	814	746	719	850
65°	644	589	508	448	422	638
75°	343	295	231	198	186	363
85°	86	59	50	48	47	96
90°	1	9	16	21	24	8
95°	66	68	78	85	87	70
105°	231	236	242	248	251	247
115°	437	441	443	442	441	432
125°	637	643	644	642	641	571
135°	829	835	836	836	832	639
145°	1004	1008	1011	1011	1008	627
155°	1149	1149	1150	1154	1149	529
165°	1249	1247	1248	1252	1246	352
175°	1299	1295	1295	1300	1294	123
180°	1302	1302	1302	1302	1302	



TEST NUMBER: P333731

CATALOG NUMBER: S125RDIW-S1270D1050U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3
2.5°	2068.0	2067.2	2066.3	2065.5	2064.7	2062.9	2060.1	2057.3	2054.6	2051.8	2054.6
5°	2061.2	2059.8	2058.4	2057.0	2055.6	2053.0	2049.2	2045.4	2041.6	2037.8	2041.2
7.5°	2040.9	2039.6	2038.3	2036.9	2035.6	2032.7	2028.1	2023.5	2019.0	2014.4	2016.8
10°	2022.2	2021.1	2020.1	2019.1	2018.0	2015.1	2010.2	2005.4	2000.5	1995.7	1996.7
12.5°	2001.0	1999.7	1998.3	1997.0	1995.7	1991.8	1985.3	1978.8	1972.2	1965.7	1966.5
15°	1959.8	1957.7	1955.7	1953.6	1951.5	1946.8	1939.5	1932.3	1925.0	1917.7	1917.4
17.5°	1913.3	1910.2	1907.0	1903.8	1900.6	1894.4	1885.3	1876.1	1867.0	1857.8	1856.1
20°	1877.2	1873.7	1870.2	1866.8	1863.3	1856.0	1845.0	1833.9	1822.8	1811.7	1810.0
22.5°	1837.3	1833.8	1830.3	1826.9	1823.4	1815.9	1804.2	1792.6	1780.9	1769.3	1765.9
25°	1777.4	1772.2	1767.0	1761.8	1756.6	1747.6	1734.8	1722.0	1709.1	1696.3	1691.8
27.5°	1708.8	1702.5	1696.2	1689.9	1683.6	1673.6	1659.8	1646.1	1632.4	1618.7	1612.4
30°	1658.9	1652.3	1645.7	1639.2	1632.6	1622.0	1607.4	1592.9	1578.3	1563.8	1555.8
32.5°	1610.3	1602.6	1594.9	1587.2	1579.5	1568.2	1553.4	1538.6	1523.7	1508.9	1500.1
35°	1531.1	1522.7	1514.4	1506.1	1497.8	1485.8	1470.2	1454.7	1439.1	1423.5	1413.4
37.5°	1453.4	1443.3	1433.2	1423.1	1412.9	1399.8	1383.8	1367.7	1351.6	1335.5	1323.5
40°	1398.5	1388.1	1377.7	1367.3	1357.0	1343.4	1326.8	1310.2	1293.5	1276.9	1263.8
42.5°	1341.2	1330.5	1319.8	1309.1	1298.5	1284.5	1267.4	1250.2	1233.0	1215.8	1203.2
45°	1253.5	1243.5	1233.4	1223.4	1213.3	1198.8	1179.7	1160.7	1141.6	1122.6	1108.7
47.5°	1162.8	1152.2	1141.6	1131.0	1120.4	1105.5	1086.3	1067.1	1047.9	1028.7	1014.4
50°	1105.4	1094.0	1082.5	1071.1	1059.7	1044.1	1024.3	1004.6	984.8	965.1	950.5
52.5°	1043.0	1031.3	1019.6	1007.9	996.2	981.0	962.4	943.8	925.1	906.5	890.8
55°	951.1	940.0	928.9	917.8	906.7	891.5	872.1	852.7	833.3	813.9	798.3
57.5°	858.1	846.3	834.4	822.6	810.7	795.5	776.8	758.0	739.3	720.6	705.4
60°	798.3	786.1	774.0	761.9	749.8	734.3	715.6	696.9	678.2	659.5	644.3
62.5°	734.7	723.1	711.5	699.9	688.4	673.1	654.1	635.1	616.1	597.1	583.0
65°	643.9	632.1	620.4	608.6	596.8	581.7	563.4	545.0	526.6	508.3	494.4
67.5°	553.8	542.0	530.2	518.5	506.7	492.0	474.4	456.8	439.2	421.6	408.9
70°	492.7	480.9	469.1	457.3	445.6	431.0	413.7	396.4	379.0	361.7	351.0
72.5°	432.8	421.3	409.8	398.3	386.8	372.9	356.7	340.5	324.3	308.1	298.2
75°	343.0	332.6	322.2	311.8	301.4	289.0	274.4	259.9	245.3	230.7	223.1
77.5°	253.8	245.5	237.2	228.9	220.6	210.6	198.9	187.3	175.7	164.0	158.7
80°	202.7	194.4	186.1	177.7	169.4	160.4	150.7	141.0	131.3	121.6	118.5
82.5°	152.8	145.3	137.8	130.3	122.9	115.8	109.1	102.5	95.8	89.2	87.7
85°	85.8	79.5	73.3	67.0	60.8	56.8	55.1	53.4	51.6	49.9	49.5
87.5°	28.9	27.3	25.7	24.2	22.6	21.8	21.8	21.9	21.9	22.0	22.2
90°	1.0	2.8	4.6	6.4	8.2	9.9	11.5	13.1	14.6	16.2	17.3
92.5°	24.5	25.8	27.0	28.3	29.6	31.2	33.1	35.0	37.0	38.9	40.4
95°	65.9	66.3	66.8	67.2	67.7	69.0	71.3	73.5	75.8	78.0	79.6
97.5°	109.4	109.6	109.8	110.0	110.2	111.8	114.9	118.0	121.1	124.2	125.7
100°	141.9	141.9	141.9	141.9	141.9	143.3	146.2	149.2	152.1	155.0	157.1
102.5°	176.7	177.6	178.5	179.4	180.3	181.5	183.0	184.5	186.0	187.5	189.7
105°	231.0	232.1	233.3	234.4	235.5	236.8	238.1	239.5	240.8	242.2	243.5
107.5°	291.0	292.1	293.3	294.4	295.5	296.6	297.6	298.7	299.7	300.7	301.4
110°	332.3	333.5	334.6	335.7	336.9	337.8	338.4	339.1	339.8	340.5	341.1



TEST NUMBER: P333731

CATALOG NUMBER: S125RDIW-S1270D1050U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	374.5	375.1	375.7	376.3	376.8	377.6	378.4	379.3	380.1	381.0	381.3
115°	436.7	437.6	438.5	439.4	440.3	441.0	441.4	441.9	442.3	442.8	442.6
117.5°	499.1	499.5	499.9	500.3	500.8	501.2	501.6	502.0	502.4	502.8	503.0
120°	538.0	539.2	540.3	541.4	542.5	543.2	543.4	543.7	543.9	544.1	544.1
122.5°	580.2	580.6	581.0	581.4	581.8	582.3	582.9	583.5	584.1	584.7	584.5
125°	637.3	638.7	640.0	641.4	642.7	643.5	643.8	644.0	644.2	644.4	644.0
127.5°	698.1	698.9	699.7	700.4	701.2	701.7	702.0	702.3	702.5	702.8	702.6
130°	734.6	735.7	736.9	738.0	739.1	739.9	740.4	740.8	741.3	741.7	741.5
132.5°	771.1	772.9	774.8	776.6	778.5	779.4	779.3	779.2	779.1	779.0	778.8
135°	828.8	830.2	831.5	832.9	834.3	835.0	835.3	835.5	835.7	835.9	835.9
137.5°	883.2	884.5	885.8	887.1	888.4	889.3	889.8	890.3	890.8	891.3	891.5
140°	918.0	919.1	920.3	921.4	922.5	923.4	924.1	924.8	925.4	926.1	926.6
142.5°	952.9	953.8	954.8	955.7	956.7	957.6	958.4	959.3	960.1	961.0	961.2
145°	1004.1	1005.0	1005.9	1006.8	1007.7	1008.5	1009.2	1009.9	1010.6	1011.2	1011.2
147.5°	1051.6	1052.1	1052.6	1053.0	1053.5	1054.1	1054.6	1055.1	1055.7	1056.2	1056.8
150°	1083.2	1083.0	1082.7	1082.5	1082.3	1082.6	1083.5	1084.4	1085.3	1086.2	1086.2
152.5°	1109.1	1109.4	1109.7	1110.1	1110.4	1110.7	1111.1	1111.4	1111.8	1112.2	1112.7
155°	1149.0	1149.0	1149.0	1149.0	1149.0	1149.1	1149.4	1149.6	1149.8	1150.1	1151.0
157.5°	1184.7	1184.2	1183.7	1183.2	1182.7	1182.6	1182.8	1183.0	1183.3	1183.5	1184.4
160°	1205.8	1205.1	1204.4	1203.8	1203.1	1202.9	1203.1	1203.3	1203.5	1203.8	1204.7
162.5°	1224.4	1223.9	1223.4	1222.9	1222.4	1222.2	1222.3	1222.3	1222.4	1222.4	1223.5
165°	1249.4	1248.9	1248.4	1248.0	1247.5	1247.4	1247.7	1247.9	1248.1	1248.3	1249.2
167.5°	1270.4	1269.5	1268.6	1267.7	1266.8	1266.4	1266.4	1266.4	1266.4	1266.4	1267.7
170°	1281.8	1280.9	1280.0	1279.1	1278.2	1277.7	1277.7	1277.7	1277.7	1277.7	1279.1
172.5°	1289.9	1289.0	1288.1	1287.2	1286.3	1285.8	1285.8	1285.8	1285.8	1285.8	1287.2
175°	1299.0	1298.1	1297.2	1296.3	1295.4	1294.9	1294.9	1294.9	1294.9	1294.9	1296.3
177.5°	1303.7	1302.9	1302.2	1301.5	1300.8	1300.3	1300.1	1300.0	1299.8	1299.6	1300.7
180°	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0



TEST NUMBER: P333731

CATALOG NUMBER: S125RDIW-S1270D1050U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3
2.5°	2057.3	2060.1	2062.9	2064.1	2063.9	2063.6	2063.3	2063.0
5°	2044.7	2048.2	2051.6	2053.0	2052.3	2051.6	2050.9	2050.2
7.5°	2019.2	2021.7	2024.1	2024.9	2024.1	2023.4	2022.6	2021.9
10°	1997.7	1998.8	1999.8	1999.8	1998.8	1997.7	1996.7	1995.7
12.5°	1967.3	1968.0	1968.8	1968.4	1966.8	1965.2	1963.6	1962.0
15°	1917.0	1916.7	1916.3	1914.6	1911.5	1908.4	1905.2	1902.1
17.5°	1854.4	1852.6	1850.9	1848.8	1846.2	1843.6	1841.1	1838.5
20°	1808.2	1806.5	1804.8	1802.3	1799.2	1796.1	1793.0	1789.9
22.5°	1762.5	1759.1	1755.7	1752.7	1750.2	1747.6	1745.0	1742.5
25°	1687.3	1682.8	1678.3	1674.1	1670.3	1666.5	1662.7	1658.9
27.5°	1606.1	1599.8	1593.5	1588.5	1584.8	1581.1	1577.4	1573.8
30°	1547.9	1539.9	1531.9	1526.4	1523.3	1520.1	1517.0	1513.9
32.5°	1491.3	1482.5	1473.7	1467.3	1463.4	1459.4	1455.5	1451.5
35°	1403.4	1393.3	1383.3	1375.8	1371.0	1366.1	1361.3	1356.4
37.5°	1311.4	1299.4	1287.3	1278.9	1274.2	1269.5	1264.8	1260.1
40°	1250.6	1237.4	1224.3	1215.6	1211.4	1207.3	1203.1	1199.0
42.5°	1190.6	1178.0	1165.4	1156.0	1149.9	1143.8	1137.7	1131.6
45°	1094.8	1081.0	1067.1	1057.6	1052.4	1047.2	1042.0	1036.8
47.5°	1000.2	985.9	971.6	961.6	955.8	950.1	944.3	938.6
50°	936.0	921.4	906.9	897.0	891.8	886.6	881.4	876.2
52.5°	875.1	859.5	843.8	833.4	828.2	823.0	817.8	812.6
55°	782.7	767.1	751.5	740.9	735.4	729.8	724.3	718.8
57.5°	690.1	674.9	659.6	649.6	644.6	639.7	634.8	629.9
60°	629.0	613.8	598.5	588.3	583.1	577.9	572.7	567.5
62.5°	568.9	554.7	540.6	530.9	525.7	520.5	515.3	510.1
65°	480.6	466.7	452.8	443.3	438.1	432.9	427.7	422.5
67.5°	396.2	383.5	370.9	362.4	358.3	354.1	350.0	345.8
70°	340.2	329.5	318.8	311.3	307.1	303.0	298.8	294.7
72.5°	288.3	278.4	268.4	262.1	259.3	256.6	253.8	251.0
75°	215.5	207.9	200.3	195.2	192.8	190.4	188.0	185.5
77.5°	153.3	148.0	142.7	139.1	137.3	135.5	133.7	131.9
80°	115.4	112.3	109.1	107.2	106.5	105.8	105.2	104.5
82.5°	86.3	84.8	83.4	82.4	82.0	81.6	81.2	80.8
85°	49.2	48.9	48.5	48.2	47.8	47.5	47.1	46.8
87.5°	22.4	22.6	22.9	22.9	22.8	22.6	22.5	22.3
90°	18.5	19.6	20.7	21.6	22.3	23.0	23.6	24.3
92.5°	41.9	43.4	44.9	45.8	46.3	46.8	47.3	47.8
95°	81.2	82.7	84.3	85.3	85.8	86.2	86.7	87.1
97.5°	127.2	128.7	130.2	131.0	131.3	131.6	131.9	132.1
100°	159.1	161.1	163.1	164.4	164.8	165.3	165.7	166.2
102.5°	191.9	194.1	196.3	197.7	198.3	199.0	199.6	200.2
105°	244.9	246.2	247.6	248.6	249.3	249.9	250.6	251.3
107.5°	302.1	302.8	303.4	303.8	303.7	303.7	303.6	303.6
110°	341.8	342.5	343.2	343.4	343.2	342.9	342.7	342.5



TEST NUMBER: P333731

CATALOG NUMBER: S125RDIW-S1270D1050U835-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	381.6	381.9	382.2	382.2	381.8	381.4	381.0	380.6
115°	442.3	442.1	441.9	441.7	441.4	441.2	441.0	440.8
117.5°	503.1	503.3	503.5	503.1	502.2	501.3	500.4	499.5
120°	544.1	544.1	544.1	543.7	542.8	541.9	541.0	540.1
122.5°	584.3	584.1	583.9	583.5	582.8	582.0	581.3	580.6
125°	643.5	643.1	642.6	642.3	642.1	641.8	641.6	641.4
127.5°	702.3	702.1	701.9	701.6	701.1	700.7	700.2	699.8
130°	741.3	741.0	740.8	740.5	740.0	739.6	739.1	738.7
132.5°	778.5	778.3	778.1	777.7	777.0	776.4	775.8	775.1
135°	835.9	835.9	835.9	835.5	834.6	833.7	832.8	831.9
137.5°	891.8	892.1	892.3	891.9	890.8	889.7	888.5	887.4
140°	927.0	927.5	927.9	927.6	926.5	925.3	924.2	923.1
142.5°	961.5	961.8	962.1	961.6	960.5	959.4	958.3	957.1
145°	1011.2	1011.2	1011.2	1010.9	1010.2	1009.5	1008.9	1008.2
147.5°	1057.3	1057.8	1058.4	1057.9	1056.4	1054.8	1053.3	1051.8
150°	1086.2	1086.2	1086.2	1086.0	1085.5	1085.1	1084.6	1084.2
152.5°	1113.2	1113.8	1114.3	1114.2	1113.4	1112.6	1111.7	1110.9
155°	1151.9	1152.8	1153.7	1153.5	1152.4	1151.3	1150.2	1149.0
157.5°	1185.3	1186.2	1187.1	1186.8	1185.3	1183.8	1182.3	1180.9
160°	1205.6	1206.5	1207.4	1207.2	1206.1	1205.0	1203.9	1202.7
162.5°	1224.6	1225.6	1226.7	1226.6	1225.3	1224.0	1222.7	1221.4
165°	1250.1	1251.0	1251.9	1251.7	1250.4	1249.0	1247.7	1246.3
167.5°	1269.1	1270.4	1271.8	1271.8	1270.4	1269.0	1267.6	1266.2
170°	1280.4	1281.8	1283.1	1283.0	1281.4	1279.9	1278.3	1276.7
172.5°	1288.5	1289.9	1291.2	1291.2	1289.8	1288.4	1287.0	1285.6
175°	1297.6	1299.0	1300.4	1300.2	1298.7	1297.1	1295.5	1293.9
177.5°	1301.8	1302.9	1303.9	1303.8	1302.6	1301.3	1300.1	1298.8
180°	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0	1302.0

(END OF REPORT)