

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333674

Luminaire Tested: **S125RDIW-S610D1340U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333674
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S610D1340U835-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1340 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7743.7 lumens
Efficiency: N/A
Efficacy: 143.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333674

CATALOG NUMBER: S125RDIW-S610D1340U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

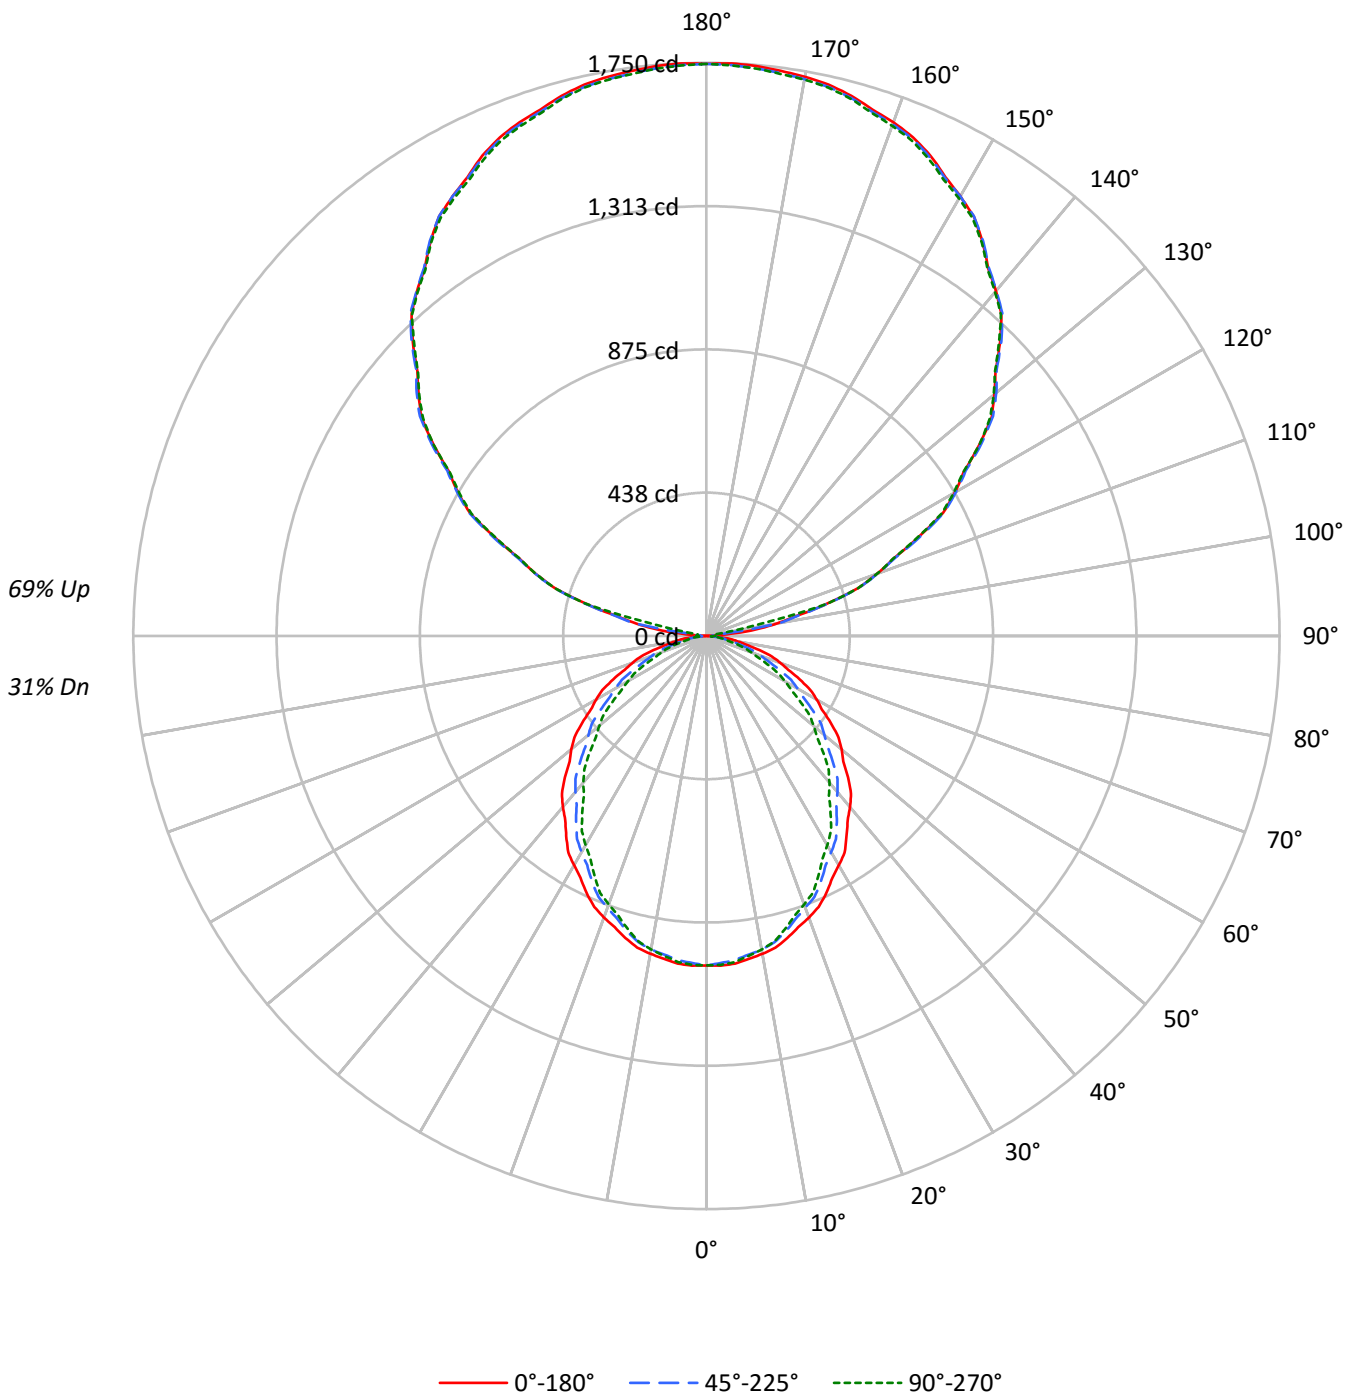



TEST NUMBER: P333674

CATALOG NUMBER: S125RDIW-S610D1340U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	38	38	38	31
1	94	89	86	82	84	81	77	75	64	62	60	48	47	46	34	33	33	26
2	85	78	72	67	76	70	66	61	56	53	50	43	40	38	30	29	28	22
3	78	69	62	56	70	62	56	51	49	45	42	38	35	33	27	25	24	19
4	71	61	53	48	64	55	48	43	44	39	36	34	30	28	24	22	20	16
5	65	54	46	41	58	49	42	37	39	34	31	30	27	24	22	20	18	14
6	60	48	41	35	54	44	37	32	35	30	27	27	24	21	20	17	16	13
7	55	44	36	31	50	40	33	28	32	27	23	25	21	19	18	16	14	11
8	51	40	32	27	46	36	29	25	29	24	21	23	19	17	16	14	13	10
9	48	36	29	24	43	33	26	22	27	22	18	21	17	15	15	13	11	9
10	45	33	26	21	40	30	24	20	24	20	17	19	16	13	14	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6497	6497	6497
5°	6512	6438	6477
10°	6462	6378	6378
15°	6386	6248	6197
20°	6287	6068	5994
25°	6173	5890	5761
30°	6029	5683	5502
35°	5882	5469	5211
40°	5746	5246	4926
45°	5580	4996	4615
50°	5413	4725	4290
55°	5219	4466	3944
60°	5025	4151	3573
65°	4795	3785	3147
70°	4534	3329	2712
75°	4172	2805	2256
80°	3675	2205	1893
85°	3097	1801	1690



TEST NUMBER: P333674

CATALOG NUMBER: S125RDIW-S610D1340U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.6	1.2
10°-20°	264.3	3.4
20°-30°	383.3	5.0
30°-40°	436.9	5.6
40°-50°	425.9	5.5
50°-60°	358.5	4.6
60°-70°	251.3	3.2
70°-80°	129.2	1.7
80°-90°	36.3	0.5
90°-100°	63.5	0.8
100°-110°	391.2	5.1
110°-120°	709.5	9.2
120°-130°	910.5	11.8
130°-140°	979.3	12.6
140°-150°	919.2	11.9
150°-160°	743.6	9.6
160°-170°	480.9	6.2
170°-180°	165.9	2.1
0°-30°	742.3	9.6
0°-40°	1179.2	15.2
0°-60°	1963.5	25.4
0°-90°	2380.2	30.7
90°-120°	1164.1	15.0
90°-150°	3973.2	51.3
90°-180°	5364.0	69.3
0°-180°	7743.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1006	1006	1006	1006	1006	
5°	1004	1001	993	1000	999	95
15°	955	950	934	933	927	269
25°	866	854	827	817	808	398
35°	746	727	694	672	661	467
45°	611	588	547	518	505	471
55°	464	438	397	364	350	414
65°	314	287	248	218	206	311
75°	167	144	112	96	90	177
85°	42	29	24	24	23	47
90°	1	12	21	27	31	5
95°	74	67	21	27	27	94
105°	381	386	386	386	384	404
115°	715	721	722	717	710	708
125°	1016	1025	1025	1020	1016	907
135°	1268	1275	1273	1270	1262	977
145°	1470	1472	1472	1473	1466	919
155°	1618	1611	1613	1616	1607	745
165°	1708	1700	1701	1708	1699	482
175°	1747	1739	1740	1749	1739	166
180°	1747	1747	1747	1747	1747	



TEST NUMBER: P333674

CATALOG NUMBER: S125RDIW-S610D1340U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0
2.5°	1007.8	1007.4	1007.0	1006.6	1006.2	1005.3	1003.9	1002.6	1001.2	999.9	1001.2
5°	1004.4	1003.8	1003.1	1002.4	1001.7	1000.5	998.6	996.8	994.9	993.0	994.7
7.5°	994.6	993.9	993.3	992.6	992.0	990.6	988.3	986.1	983.9	981.6	982.8
10°	985.4	984.9	984.4	983.9	983.4	982.0	979.6	977.3	974.9	972.5	973.0
12.5°	975.1	974.5	973.8	973.2	972.5	970.6	967.5	964.3	961.1	957.9	958.3
15°	955.1	954.0	953.0	952.0	951.0	948.7	945.2	941.6	938.1	934.5	934.4
17.5°	932.4	930.9	929.3	927.8	926.2	923.2	918.7	914.3	909.8	905.4	904.5
20°	914.8	913.1	911.4	909.7	908.0	904.5	899.1	893.7	888.3	882.9	882.0
22.5°	895.3	893.6	892.0	890.3	888.6	884.9	879.2	873.6	867.9	862.2	860.6
25°	866.2	863.6	861.1	858.6	856.0	851.6	845.4	839.1	832.9	826.6	824.5
27.5°	832.7	829.7	826.6	823.5	820.4	815.6	808.9	802.2	795.5	788.8	785.7
30°	808.4	805.2	802.0	798.8	795.6	790.4	783.3	776.3	769.2	762.1	758.2
32.5°	784.7	781.0	777.2	773.5	769.7	764.2	757.0	749.8	742.5	735.3	731.0
35°	746.1	742.1	738.0	734.0	729.9	724.1	716.5	708.9	701.3	693.7	688.8
37.5°	708.3	703.3	698.4	693.5	688.6	682.2	674.3	666.5	658.7	650.8	645.0
40°	681.5	676.5	671.4	666.3	661.3	654.7	646.6	638.5	630.4	622.3	615.9
42.5°	653.6	648.4	643.2	638.0	632.8	626.0	617.6	609.2	600.9	592.5	586.3
45°	610.9	606.0	601.1	596.2	591.3	584.2	574.9	565.6	556.3	547.0	540.3
47.5°	566.7	561.5	556.3	551.2	546.0	538.7	529.4	520.0	510.7	501.3	494.4
50°	538.7	533.1	527.5	522.0	516.4	508.8	499.2	489.6	479.9	470.3	463.2
52.5°	508.3	502.6	496.9	491.2	485.5	478.1	469.0	459.9	450.8	441.7	434.1
55°	463.5	458.1	452.7	447.3	441.9	434.4	425.0	415.5	406.1	396.6	389.0
57.5°	418.2	412.4	406.6	400.9	395.1	387.6	378.5	369.4	360.3	351.2	343.7
60°	389.0	383.1	377.2	371.3	365.4	357.9	348.7	339.6	330.5	321.4	314.0
62.5°	358.0	352.4	346.7	341.1	335.5	328.0	318.8	309.5	300.3	291.0	284.1
65°	313.8	308.1	302.3	296.6	290.8	283.5	274.5	265.6	256.6	247.7	240.9
67.5°	269.9	264.1	258.4	252.7	246.9	239.8	231.2	222.6	214.0	205.4	199.3
70°	240.1	234.4	228.6	222.9	217.1	210.0	201.6	193.2	184.7	176.3	171.0
72.5°	210.9	205.3	199.7	194.1	188.5	181.7	173.8	165.9	158.0	150.1	145.3
75°	167.2	162.1	157.0	152.0	146.9	140.8	133.7	126.6	119.5	112.4	108.7
77.5°	123.7	119.6	115.6	111.5	107.5	102.6	96.9	91.3	85.6	79.9	77.3
80°	98.8	94.7	90.7	86.6	82.6	78.2	73.4	68.7	64.0	59.3	57.7
82.5°	74.5	70.8	67.2	63.5	59.9	56.4	53.2	49.9	46.7	43.5	42.8
85°	41.8	38.7	35.7	32.7	29.6	27.7	26.8	26.0	25.2	24.3	24.1
87.5°	14.2	13.8	13.3	12.8	12.3	12.2	12.5	12.7	13.0	13.3	13.5
90°	1.3	3.6	5.9	8.2	10.5	12.7	14.7	16.7	18.7	20.7	22.2
92.5°	19.9	18.3	16.7	15.1	13.5	13.6	15.4	17.1	18.9	20.7	22.2
95°	73.8	72.9	72.1	71.2	70.3	64.4	53.5	42.6	31.6	20.7	22.2
97.5°	154.1	155.6	157.2	158.7	160.3	150.2	128.6	107.0	85.3	63.7	55.6
100°	216.2	217.1	217.9	218.8	219.7	220.7	221.8	223.0	224.1	225.3	182.4
102.5°	279.4	280.5	281.6	282.7	283.8	284.7	285.4	286.1	286.7	287.4	279.3
105°	380.7	381.8	383.0	384.1	385.3	385.8	385.8	385.8	385.8	385.8	385.8
107.5°	485.8	485.8	485.8	485.8	485.8	486.1	486.7	487.2	487.8	488.4	488.4
110°	554.2	554.2	554.2	554.2	554.2	554.4	555.0	555.6	556.2	556.7	555.9



TEST NUMBER: P333674

CATALOG NUMBER: S125RDIW-S610D1340U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	618.4	619.1	619.8	620.4	621.1	621.7	622.0	622.3	622.7	623.0	621.9
115°	714.7	716.1	717.6	719.0	720.5	721.3	721.6	721.9	722.2	722.5	721.3
117.5°	814.4	814.3	814.3	814.2	814.2	814.7	815.8	816.9	818.0	819.1	817.6
120°	876.5	876.3	876.0	875.7	875.4	875.7	876.5	877.4	878.3	879.1	878.6
122.5°	931.4	932.5	933.6	934.7	935.8	936.6	937.0	937.4	937.8	938.2	937.6
125°	1016.4	1018.4	1020.4	1022.4	1024.4	1025.4	1025.4	1025.4	1025.4	1025.4	1024.3
127.5°	1097.4	1098.9	1100.3	1101.7	1103.2	1103.8	1103.6	1103.5	1103.3	1103.1	1102.5
130°	1147.1	1148.6	1150.0	1151.5	1152.9	1153.8	1154.1	1154.3	1154.6	1154.9	1154.1
132.5°	1196.9	1198.5	1200.2	1201.9	1203.5	1204.1	1203.4	1202.8	1202.2	1201.5	1201.4
135°	1267.6	1269.3	1271.0	1272.7	1274.5	1275.0	1274.5	1273.9	1273.3	1272.7	1272.2
137.5°	1332.6	1334.0	1335.5	1337.0	1338.5	1339.0	1338.5	1338.0	1337.5	1337.0	1337.1
140°	1375.0	1375.6	1376.2	1376.7	1377.3	1377.5	1377.2	1376.9	1376.6	1376.3	1376.9
142.5°	1413.3	1413.7	1414.0	1414.4	1414.7	1415.1	1415.5	1415.9	1416.3	1416.7	1416.8
145°	1469.5	1470.1	1470.7	1471.3	1471.8	1472.1	1472.1	1472.1	1472.1	1472.1	1472.4
147.5°	1518.7	1518.6	1518.5	1518.4	1518.3	1518.4	1518.7	1519.1	1519.4	1519.8	1520.1
150°	1549.8	1549.2	1548.7	1548.1	1547.5	1547.5	1548.1	1548.7	1549.2	1549.8	1550.4
152.5°	1579.8	1578.6	1577.3	1576.1	1574.8	1574.4	1575.0	1575.6	1576.2	1576.7	1577.3
155°	1618.4	1616.7	1615.0	1613.3	1611.5	1611.0	1611.5	1612.1	1612.7	1613.3	1614.1
157.5°	1648.2	1647.2	1646.1	1645.1	1644.1	1643.6	1643.6	1643.7	1643.8	1643.8	1644.7
160°	1668.9	1667.2	1665.5	1663.7	1662.0	1661.3	1661.6	1661.9	1662.2	1662.5	1663.6
162.5°	1685.5	1683.8	1682.0	1680.3	1678.6	1677.9	1678.2	1678.5	1678.7	1679.0	1680.6
165°	1707.8	1706.0	1704.3	1702.6	1700.9	1700.1	1700.4	1700.7	1701.0	1701.3	1703.0
167.5°	1724.3	1722.6	1720.8	1719.0	1717.2	1716.5	1716.7	1717.0	1717.3	1717.6	1719.7
170°	1733.7	1731.7	1729.6	1727.6	1725.6	1724.7	1725.0	1725.3	1725.6	1725.9	1728.2
172.5°	1739.9	1737.9	1735.9	1733.8	1731.8	1731.1	1731.6	1732.1	1732.6	1733.1	1735.2
175°	1746.6	1744.9	1743.2	1741.4	1739.7	1739.0	1739.3	1739.6	1739.9	1740.1	1742.4
177.5°	1749.7	1748.3	1747.0	1745.6	1744.2	1743.6	1743.9	1744.1	1744.3	1744.5	1746.2
180°	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6



TEST NUMBER: P333674

CATALOG NUMBER: S125RDIW-S610D1340U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0
2.5°	1002.6	1003.9	1005.3	1005.9	1005.8	1005.6	1005.5	1005.4
5°	996.4	998.1	999.8	1000.5	1000.1	999.8	999.5	999.1
7.5°	984.0	985.2	986.4	986.8	986.4	986.0	985.7	985.3
10°	973.5	974.0	974.6	974.6	974.0	973.5	973.0	972.5
12.5°	958.7	959.1	959.4	959.2	958.4	957.7	956.9	956.1
15°	934.2	934.0	933.9	933.0	931.5	930.0	928.5	926.9
17.5°	903.7	902.8	902.0	900.9	899.7	898.4	897.2	895.9
20°	881.2	880.3	879.5	878.3	876.8	875.3	873.8	872.2
22.5°	858.9	857.2	855.6	854.1	852.9	851.6	850.4	849.1
25°	822.3	820.1	817.9	815.8	814.0	812.1	810.3	808.4
27.5°	782.7	779.6	776.5	774.1	772.3	770.5	768.7	766.9
30°	754.3	750.4	746.5	743.8	742.3	740.8	739.3	737.8
32.5°	726.7	722.5	718.2	715.1	713.1	711.2	709.3	707.4
35°	683.9	679.0	674.1	670.5	668.1	665.7	663.4	661.0
37.5°	639.1	633.2	627.3	623.2	620.9	618.7	616.4	614.1
40°	609.4	603.0	596.6	592.4	590.4	588.3	586.3	584.3
42.5°	580.2	574.0	567.9	563.3	560.4	557.4	554.4	551.5
45°	533.5	526.8	520.0	515.4	512.9	510.3	507.8	505.3
47.5°	487.4	480.4	473.5	468.6	465.8	463.0	460.2	457.4
50°	456.1	449.0	441.9	437.1	434.6	432.1	429.5	427.0
52.5°	426.5	418.8	411.2	406.1	403.6	401.1	398.5	396.0
55°	381.4	373.8	366.2	361.1	358.4	355.7	353.0	350.3
57.5°	336.3	328.9	321.5	316.5	314.1	311.7	309.4	307.0
60°	306.5	299.1	291.7	286.7	284.2	281.6	279.1	276.6
62.5°	277.2	270.3	263.4	258.7	256.2	253.7	251.1	248.6
65°	234.2	227.4	220.7	216.0	213.5	211.0	208.4	205.9
67.5°	193.1	186.9	180.7	176.6	174.6	172.6	170.5	168.5
70°	165.8	160.6	155.3	151.7	149.7	147.7	145.6	143.6
72.5°	140.5	135.6	130.8	127.7	126.4	125.0	123.7	122.3
75°	105.0	101.3	97.6	95.1	94.0	92.8	91.6	90.4
77.5°	74.7	72.1	69.5	67.8	66.9	66.0	65.2	64.3
80°	56.2	54.7	53.2	52.3	51.9	51.6	51.2	50.9
82.5°	42.0	41.3	40.6	40.2	40.0	39.8	39.6	39.4
85°	24.0	23.8	23.6	23.5	23.3	23.1	23.0	22.8
87.5°	13.8	14.1	14.4	14.6	14.6	14.6	14.7	14.7
90°	23.6	25.0	26.5	27.6	28.5	29.3	30.2	31.1
92.5°	23.6	25.0	26.5	27.4	27.8	28.2	28.6	29.0
95°	23.6	25.0	26.5	27.2	27.2	27.2	27.2	27.2
97.5°	47.5	39.4	31.2	27.2	27.2	27.2	27.2	27.2
100°	139.5	96.7	53.8	31.8	30.6	29.5	28.3	27.2
102.5°	271.2	263.1	255.0	241.1	221.6	202.0	182.4	162.9
105°	385.8	385.8	385.8	385.7	385.4	385.1	384.8	384.5
107.5°	488.5	488.6	488.6	488.2	487.3	486.5	485.6	484.8
110°	555.0	554.2	553.3	553.0	553.3	553.6	553.9	554.2



TEST NUMBER: P333674

CATALOG NUMBER: S125RDIW-S610D1340U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	620.8	619.8	618.7	617.9	617.5	617.1	616.7	616.3
115°	720.2	719.0	717.9	716.4	714.7	713.0	711.2	709.5
117.5°	816.1	814.6	813.1	811.9	811.2	810.5	809.7	809.0
120°	878.0	877.4	876.8	875.8	874.4	872.9	871.5	870.1
122.5°	937.0	936.4	935.9	934.7	933.1	931.4	929.7	928.1
125°	1023.1	1022.0	1020.8	1019.8	1019.0	1018.1	1017.2	1016.4
127.5°	1101.9	1101.2	1100.6	1099.2	1097.1	1095.0	1092.8	1090.7
130°	1153.2	1152.3	1151.5	1150.3	1148.9	1147.4	1146.0	1144.6
132.5°	1201.2	1201.0	1200.8	1200.0	1198.6	1197.2	1195.7	1194.3
135°	1271.6	1271.0	1270.4	1269.3	1267.6	1265.8	1264.1	1262.4
137.5°	1337.2	1337.3	1337.4	1336.7	1335.2	1333.7	1332.2	1330.7
140°	1377.5	1378.0	1378.6	1378.0	1376.3	1374.6	1372.9	1371.1
142.5°	1416.9	1417.1	1417.2	1416.4	1414.6	1412.9	1411.2	1409.5
145°	1472.7	1473.0	1473.3	1472.6	1470.8	1469.1	1467.4	1465.7
147.5°	1520.5	1520.8	1521.2	1520.3	1518.2	1516.1	1514.1	1512.0
150°	1551.0	1551.5	1552.1	1551.2	1548.9	1546.6	1544.3	1542.0
152.5°	1577.9	1578.5	1579.0	1578.3	1576.2	1574.2	1572.1	1570.0
155°	1615.0	1615.8	1616.7	1616.0	1613.7	1611.4	1609.1	1606.8
157.5°	1645.7	1646.6	1647.5	1646.8	1644.5	1642.2	1639.9	1637.6
160°	1664.8	1665.9	1667.1	1666.5	1664.2	1661.9	1659.6	1657.3
162.5°	1682.2	1683.9	1685.5	1685.0	1682.5	1679.9	1677.4	1674.9
165°	1704.7	1706.5	1708.2	1707.9	1705.6	1703.3	1701.0	1698.7
167.5°	1721.8	1723.8	1725.9	1725.6	1723.0	1720.5	1717.9	1715.3
170°	1730.5	1732.8	1735.1	1735.0	1732.4	1729.8	1727.2	1724.6
172.5°	1737.3	1739.4	1741.4	1741.2	1738.6	1736.0	1733.4	1730.8
175°	1744.7	1747.0	1749.3	1749.2	1746.6	1744.0	1741.4	1738.8
177.5°	1747.8	1749.4	1751.0	1750.9	1749.0	1747.2	1745.3	1743.5
180°	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6	1746.6

(END OF REPORT)