

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333659-935

Luminaire Tested: **S125RDIW-S375D1560U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333659-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S375D1560U935-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5904.4 lumens
Efficiency: N/A
Efficacy: 110.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333659-935

CATALOG NUMBER: S125RDIW-S375D1560U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

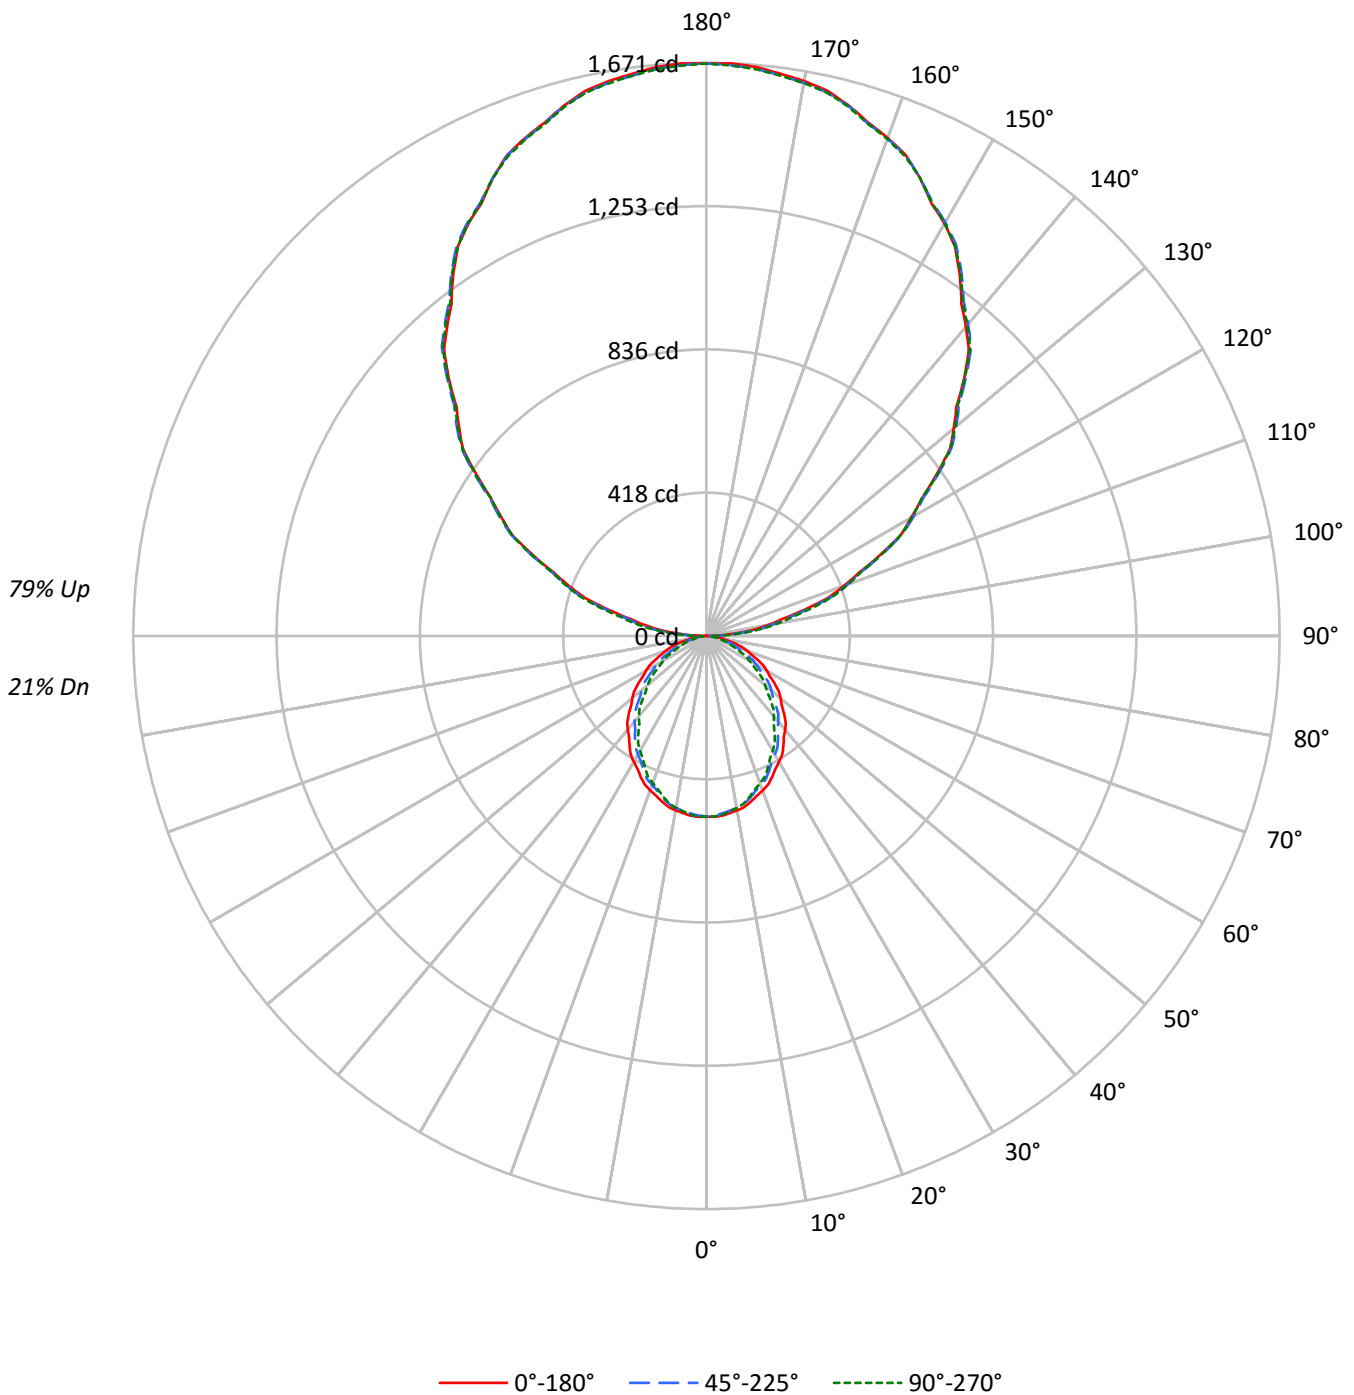



TEST NUMBER: P333659-935

CATALOG NUMBER: S125RDIW-S375D1560U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	100	100	100	100	89	89	89	89	67	67	67	48	48	48	30	30	30	21
1	91	87	84	80	81	77	74	72	59	57	55	42	41	40	26	26	25	18
2	83	76	70	66	73	68	63	59	52	48	46	37	35	33	23	22	21	15
3	76	67	60	55	67	60	54	49	46	42	38	33	30	28	21	19	18	13
4	69	59	52	46	61	53	46	42	40	36	33	29	26	24	18	17	16	11
5	64	53	45	39	56	47	40	35	36	32	28	26	23	21	17	15	14	10
6	58	47	39	34	52	42	35	31	32	28	24	23	20	18	15	13	12	9
7	54	42	35	29	48	38	31	27	29	25	21	21	18	16	14	12	11	8
8	50	38	31	26	44	34	28	23	27	22	19	19	16	14	13	11	10	7
9	46	35	28	23	41	31	25	21	24	20	17	18	15	13	12	10	9	6
10	43	32	25	20	38	28	22	18	22	18	15	16	13	11	11	9	8	6

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3402	3402	3402
5°	3411	3371	3392
10°	3385	3341	3341
15°	3344	3273	3245
20°	3293	3178	3140
25°	3233	3085	3017
30°	3157	2976	2882
35°	3080	2864	2730
40°	3010	2748	2580
45°	2922	2617	2417
50°	2834	2475	2247
55°	2733	2339	2066
60°	2631	2174	1870
65°	2512	1984	1647
70°	2374	1743	1420
75°	2186	1470	1183
80°	1923	1153	993
85°	1623	941	889



TEST NUMBER: P333659-935

CATALOG NUMBER: S125RDIW-S375D1560U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.5	0.8
10°-20°	138.4	2.3
20°-30°	200.8	3.4
30°-40°	228.8	3.9
40°-50°	223.0	3.8
50°-60°	187.7	3.2
60°-70°	131.6	2.2
70°-80°	67.6	1.1
80°-90°	20.7	0.4
90°-100°	111.8	1.9
100°-110°	330.0	5.6
110°-120°	559.0	9.5
120°-130°	735.7	12.5
130°-140°	824.3	14.0
140°-150°	807.9	13.7
150°-160°	678.6	11.5
160°-170°	451.1	7.6
170°-180°	157.9	2.7
0°-30°	388.7	6.6
0°-40°	617.6	10.5
0°-60°	1028.3	17.4
0°-90°	1248.3	21.1
90°-120°	1000.8	16.9
90°-150°	3368.6	57.1
90°-180°	4656.0	78.9
0°-180°	5904.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	527	527	527	527	527	
5°	526	524	520	524	523	50
15°	500	498	490	489	485	141
25°	454	447	433	428	423	209
35°	391	381	363	352	346	245
45°	320	308	286	271	265	247
55°	243	230	208	190	184	217
65°	164	150	130	114	108	163
75°	88	75	59	50	47	93
85°	22	15	13	12	12	25
90°	1	12	21	27	31	6
95°	84	88	100	109	112	90
105°	296	303	310	318	322	316
115°	560	565	568	566	565	553
125°	817	824	826	823	822	731
135°	1062	1070	1071	1071	1066	818
145°	1287	1292	1296	1296	1292	804
155°	1473	1473	1474	1478	1473	678
165°	1601	1599	1600	1604	1597	451
175°	1665	1660	1660	1666	1658	158
180°	1669	1669	1669	1669	1669	



TEST NUMBER: P333659-935

CATALOG NUMBER: S125RDIW-S375D1560U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	526.8	526.8	526.8	526.8	526.8	526.8	526.8	526.8	526.8	526.8	526.8
2.5°	527.8	527.6	527.4	527.2	526.9	526.5	525.8	525.0	524.3	523.7	524.3
5°	526.1	525.7	525.4	525.0	524.6	524.0	523.0	522.0	521.1	520.0	521.0
7.5°	520.9	520.6	520.2	519.9	519.5	518.8	517.6	516.4	515.3	514.1	514.7
10°	516.1	515.8	515.6	515.3	515.1	514.3	513.1	511.8	510.6	509.4	509.6
12.5°	510.7	510.3	510.1	509.7	509.4	508.3	506.7	505.1	503.3	501.7	501.9
15°	500.2	499.6	499.1	498.6	498.1	496.9	495.0	493.2	491.3	489.5	489.4
17.5°	488.4	487.5	486.7	485.9	485.1	483.5	481.1	478.8	476.5	474.2	473.7
20°	479.1	478.2	477.3	476.5	475.5	473.7	470.9	468.0	465.2	462.4	461.9
22.5°	468.9	468.0	467.2	466.2	465.4	463.5	460.5	457.5	454.5	451.6	450.7
25°	453.7	452.3	451.0	449.6	448.3	446.0	442.7	439.5	436.2	432.9	431.8
27.5°	436.1	434.5	432.9	431.3	429.6	427.1	423.6	420.1	416.6	413.1	411.5
30°	423.4	421.7	420.0	418.4	416.6	414.0	410.3	406.6	402.9	399.1	397.1
32.5°	411.0	409.0	407.1	405.1	403.1	400.3	396.5	392.7	388.9	385.1	382.9
35°	390.7	388.7	386.5	384.4	382.3	379.2	375.2	371.3	367.3	363.3	360.8
37.5°	370.9	368.3	365.8	363.2	360.6	357.2	353.2	349.0	345.0	340.9	337.8
40°	357.0	354.3	351.6	349.0	346.3	342.9	338.6	334.4	330.1	325.9	322.5
42.5°	342.2	339.6	336.8	334.2	331.4	327.9	323.5	319.1	314.7	310.3	307.1
45°	319.9	317.4	314.8	312.2	309.7	305.9	301.1	296.3	291.4	286.5	282.9
47.5°	296.8	294.0	291.4	288.6	285.9	282.1	277.2	272.3	267.4	262.5	258.9
50°	282.1	279.2	276.3	273.4	270.4	266.5	261.4	256.4	251.3	246.3	242.6
52.5°	266.2	263.2	260.2	257.3	254.3	250.4	245.6	240.8	236.1	231.4	227.4
55°	242.7	239.9	237.0	234.3	231.4	227.6	222.6	217.6	212.7	207.7	203.7
57.5°	219.0	216.0	212.9	209.9	206.9	203.0	198.2	193.5	188.7	183.9	180.0
60°	203.7	200.6	197.5	194.4	191.3	187.4	182.6	177.9	173.1	168.3	164.5
62.5°	187.5	184.5	181.6	178.7	175.6	171.8	166.9	162.1	157.2	152.4	148.8
65°	164.4	161.4	158.3	155.3	152.3	148.4	143.8	139.1	134.4	129.8	126.2
67.5°	141.4	138.4	135.3	132.3	129.3	125.5	121.1	116.6	112.1	107.6	104.4
70°	125.7	122.8	119.8	116.8	113.7	110.0	105.6	101.2	96.8	92.3	89.5
72.5°	110.5	107.5	104.6	101.7	98.8	95.1	91.0	86.9	82.7	78.6	76.1
75°	87.6	84.9	82.2	79.6	77.0	73.8	70.0	66.3	62.6	58.9	56.9
77.5°	64.7	62.7	60.5	58.4	56.3	53.7	50.8	47.8	44.9	41.8	40.5
80°	51.7	49.6	47.5	45.4	43.2	41.0	38.5	36.0	33.5	31.0	30.2
82.5°	39.0	37.1	35.2	33.2	31.3	29.5	27.9	26.2	24.5	22.7	22.4
85°	21.9	20.3	18.7	17.1	15.5	14.5	14.0	13.6	13.2	12.7	12.7
87.5°	7.6	7.6	7.5	7.5	7.4	7.6	7.9	8.3	8.6	9.0	9.2
90°	1.3	3.6	5.9	8.3	10.5	12.7	14.7	16.7	18.8	20.8	22.2
92.5°	31.4	33.1	34.7	36.2	37.9	40.0	42.4	44.9	47.4	49.9	51.7
95°	84.4	85.0	85.6	86.1	86.7	88.4	91.4	94.2	97.1	100.0	102.0
97.5°	140.3	140.4	140.7	140.9	141.2	143.3	147.2	151.3	155.2	159.2	161.1
100°	181.8	181.8	181.8	181.8	181.8	183.7	187.4	191.1	194.9	198.6	201.3
102.5°	226.4	227.6	228.8	229.9	231.1	232.6	234.5	236.4	238.3	240.2	243.1
105°	296.1	297.5	298.9	300.4	301.9	303.4	305.1	306.9	308.6	310.4	312.1
107.5°	372.9	374.4	375.8	377.3	378.7	380.1	381.4	382.7	384.1	385.4	386.2
110°	425.9	427.4	428.8	430.2	431.7	432.8	433.7	434.5	435.4	436.3	437.1



TEST NUMBER: P333659-935

CATALOG NUMBER: S125RDIW-S375D1560U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	479.9	480.7	481.5	482.2	482.9	483.9	484.9	486.0	487.2	488.3	488.6
115°	559.6	560.9	562.0	563.1	564.3	565.2	565.8	566.3	566.9	567.5	567.1
117.5°	639.6	640.2	640.7	641.2	641.7	642.2	642.7	643.3	643.8	644.4	644.5
120°	689.5	691.0	692.4	693.9	695.3	696.1	696.5	696.7	697.0	697.3	697.3
122.5°	743.6	744.1	744.6	745.1	745.6	746.2	747.0	747.8	748.5	749.2	749.0
125°	816.7	818.5	820.3	822.0	823.7	824.8	825.0	825.3	825.6	825.9	825.3
127.5°	894.7	895.7	896.6	897.6	898.6	899.3	899.7	900.0	900.3	900.7	900.3
130°	941.4	942.9	944.3	945.7	947.2	948.2	948.8	949.3	949.9	950.5	950.2
132.5°	988.2	990.6	992.9	995.3	997.6	998.8	998.7	998.5	998.4	998.3	998.0
135°	1062.2	1063.9	1065.7	1067.4	1069.1	1070.1	1070.4	1070.7	1071.0	1071.3	1071.3
137.5°	1131.8	1133.5	1135.1	1136.8	1138.5	1139.6	1140.3	1140.9	1141.5	1142.2	1142.5
140°	1176.5	1177.9	1179.3	1180.8	1182.2	1183.4	1184.2	1185.2	1186.0	1186.9	1187.4
142.5°	1221.2	1222.4	1223.6	1224.8	1226.0	1227.1	1228.2	1229.3	1230.5	1231.5	1231.8
145°	1286.9	1288.0	1289.2	1290.3	1291.5	1292.4	1293.3	1294.2	1295.0	1295.9	1295.9
147.5°	1347.6	1348.2	1348.8	1349.5	1350.1	1350.8	1351.5	1352.2	1352.9	1353.6	1354.3
150°	1388.1	1387.8	1387.6	1387.2	1387.0	1387.4	1388.5	1389.7	1390.9	1392.1	1392.1
152.5°	1421.3	1421.8	1422.2	1422.5	1423.0	1423.4	1423.9	1424.4	1424.8	1425.3	1426.0
155°	1472.6	1472.6	1472.6	1472.6	1472.6	1472.7	1473.0	1473.3	1473.5	1473.9	1475.0
157.5°	1518.2	1517.6	1517.0	1516.3	1515.7	1515.5	1515.8	1516.1	1516.4	1516.7	1517.9
160°	1545.2	1544.4	1543.5	1542.7	1541.8	1541.5	1541.8	1542.1	1542.4	1542.7	1543.8
162.5°	1569.2	1568.5	1567.9	1567.3	1566.6	1566.3	1566.3	1566.4	1566.5	1566.5	1568.0
165°	1601.1	1600.5	1599.9	1599.4	1598.8	1598.6	1599.0	1599.2	1599.5	1599.8	1600.9
167.5°	1628.1	1626.9	1625.8	1624.6	1623.5	1622.9	1622.9	1622.9	1622.9	1622.9	1624.6
170°	1642.6	1641.5	1640.3	1639.2	1638.1	1637.4	1637.4	1637.4	1637.4	1637.4	1639.2
172.5°	1653.0	1651.9	1650.7	1649.6	1648.4	1647.9	1647.9	1647.9	1647.9	1647.9	1649.6
175°	1664.7	1663.5	1662.4	1661.2	1660.1	1659.5	1659.5	1659.5	1659.5	1659.5	1661.2
177.5°	1670.7	1669.7	1668.9	1667.9	1667.0	1666.4	1666.2	1665.9	1665.7	1665.5	1666.9
180°	1668.6	1668.6	1668.6	1668.6	1668.6	1668.6	1668.6	1668.6	1668.6	1668.6	1668.6



TEST NUMBER: P333659-935

CATALOG NUMBER: S125RDIW-S375D1560U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	526.8	526.8	526.8	526.8	526.8	526.8	526.8	526.8
2.5°	525.0	525.8	526.5	526.8	526.8	526.7	526.6	526.5
5°	521.9	522.7	523.6	524.0	523.8	523.6	523.4	523.2
7.5°	515.3	516.0	516.6	516.8	516.6	516.4	516.3	516.0
10°	509.9	510.1	510.4	510.4	510.1	509.9	509.6	509.4
12.5°	502.0	502.3	502.5	502.4	502.0	501.5	501.2	500.8
15°	489.2	489.1	489.0	488.6	487.8	487.1	486.3	485.4
17.5°	473.3	472.9	472.4	471.8	471.2	470.5	469.8	469.2
20°	461.5	461.1	460.6	460.0	459.2	458.4	457.6	456.8
22.5°	449.8	448.9	448.1	447.3	446.7	446.0	445.4	444.7
25°	430.7	429.5	428.3	427.3	426.3	425.3	424.4	423.4
27.5°	409.9	408.3	406.7	405.4	404.5	403.6	402.6	401.7
30°	395.0	393.0	391.0	389.6	388.7	388.0	387.2	386.4
32.5°	380.6	378.4	376.1	374.5	373.5	372.5	371.4	370.5
35°	358.2	355.6	353.0	351.1	349.9	348.7	347.4	346.2
37.5°	334.7	331.7	328.6	326.4	325.2	324.0	322.8	321.6
40°	319.2	315.8	312.5	310.2	309.2	308.2	307.0	306.0
42.5°	303.8	300.7	297.4	295.1	293.5	291.9	290.3	288.8
45°	279.4	275.9	272.3	269.9	268.6	267.3	266.0	264.6
47.5°	255.3	251.6	248.0	245.4	243.9	242.5	241.0	239.5
50°	238.8	235.1	231.4	228.9	227.6	226.3	225.0	223.6
52.5°	223.3	219.4	215.3	212.7	211.4	210.1	208.7	207.4
55°	199.8	195.8	191.8	189.1	187.7	186.2	184.9	183.5
57.5°	176.2	172.3	168.3	165.7	164.5	163.2	162.0	160.7
60°	160.6	156.6	152.7	150.2	148.8	147.5	146.2	144.8
62.5°	145.2	141.5	137.9	135.5	134.1	132.9	131.6	130.2
65°	122.6	119.1	115.5	113.1	111.8	110.5	109.2	107.8
67.5°	101.1	97.9	94.6	92.5	91.4	90.4	89.3	88.3
70°	86.9	84.1	81.4	79.5	78.4	77.3	76.3	75.2
72.5°	73.5	71.0	68.5	66.9	66.2	65.5	64.7	64.1
75°	55.0	53.0	51.1	49.9	49.2	48.6	48.0	47.4
77.5°	39.2	37.8	36.4	35.5	35.0	34.6	34.1	33.7
80°	29.4	28.7	27.9	27.4	27.2	27.0	26.9	26.7
82.5°	22.0	21.6	21.3	21.0	20.9	20.8	20.8	20.6
85°	12.6	12.5	12.4	12.3	12.2	12.1	12.1	12.0
87.5°	9.5	9.8	10.1	10.2	10.4	10.5	10.6	10.7
90°	23.7	25.1	26.5	27.7	28.6	29.4	30.3	31.2
92.5°	53.6	55.5	57.5	58.7	59.4	60.0	60.6	61.3
95°	104.0	106.1	108.1	109.3	109.9	110.6	111.1	111.7
97.5°	163.0	164.9	166.8	168.0	168.3	168.7	169.0	169.4
100°	203.9	206.5	209.1	210.7	211.2	211.8	212.4	212.9
102.5°	245.9	248.7	251.5	253.4	254.2	254.9	255.8	256.6
105°	313.8	315.6	317.3	318.6	319.4	320.3	321.2	322.0
107.5°	387.1	388.0	388.8	389.3	389.2	389.2	389.1	389.0
110°	438.1	438.9	439.8	440.1	439.8	439.5	439.2	438.9



TEST NUMBER: P333659-935

CATALOG NUMBER: S125RDIW-S375D1560U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	489.0	489.5	489.8	489.8	489.3	488.8	488.3	487.8
115°	566.9	566.6	566.3	566.0	565.8	565.4	565.2	564.9
117.5°	644.8	645.1	645.2	644.8	643.6	642.5	641.4	640.2
120°	697.3	697.3	697.3	696.7	695.6	694.4	693.3	692.2
122.5°	748.8	748.6	748.3	747.8	746.8	745.9	744.9	744.1
125°	824.8	824.1	823.5	823.1	822.9	822.5	822.3	822.0
127.5°	900.1	899.8	899.5	899.1	898.5	897.9	897.3	896.7
130°	949.9	949.7	949.3	948.9	948.4	947.8	947.2	946.7
132.5°	997.7	997.5	997.1	996.6	995.8	995.0	994.2	993.3
135°	1071.3	1071.3	1071.3	1070.7	1069.5	1068.4	1067.2	1066.1
137.5°	1142.9	1143.2	1143.6	1143.1	1141.6	1140.1	1138.7	1137.2
140°	1188.0	1188.6	1189.1	1188.7	1187.3	1185.9	1184.4	1182.9
142.5°	1232.2	1232.5	1233.0	1232.3	1230.9	1229.5	1228.0	1226.6
145°	1295.9	1295.9	1295.9	1295.5	1294.6	1293.7	1292.9	1292.0
147.5°	1355.0	1355.6	1356.3	1355.7	1353.8	1351.8	1349.9	1347.9
150°	1392.1	1392.1	1392.1	1391.7	1391.1	1390.6	1390.0	1389.4
152.5°	1426.7	1427.4	1428.1	1427.9	1426.8	1425.8	1424.8	1423.7
155°	1476.1	1477.3	1478.4	1478.3	1476.9	1475.4	1473.9	1472.6
157.5°	1519.0	1520.2	1521.3	1521.0	1519.0	1517.1	1515.2	1513.3
160°	1545.0	1546.1	1547.3	1547.1	1545.7	1544.2	1542.8	1541.4
162.5°	1569.3	1570.7	1572.1	1571.9	1570.3	1568.6	1566.9	1565.2
165°	1602.1	1603.3	1604.4	1604.1	1602.4	1600.7	1599.0	1597.2
167.5°	1626.3	1628.1	1629.8	1629.8	1628.0	1626.3	1624.4	1622.6
170°	1640.9	1642.6	1644.3	1644.3	1642.2	1640.2	1638.1	1636.2
172.5°	1651.3	1653.0	1654.8	1654.8	1652.9	1651.1	1649.3	1647.6
175°	1663.0	1664.7	1666.5	1666.3	1664.3	1662.2	1660.3	1658.2
177.5°	1668.3	1669.7	1671.0	1670.9	1669.3	1667.7	1666.0	1664.5
180°	1668.6	1668.6	1668.6	1668.6	1668.6	1668.6	1668.6	1668.6

(END OF REPORT)