

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333670-935

Luminaire Tested: **S125RDIW-S610D1050U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333670-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S610D1050U935-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1050 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5655.9 lumens
Efficiency: N/A
Efficacy: 125.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 45.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333670-935

CATALOG NUMBER: S125RDIW-S610D1050U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

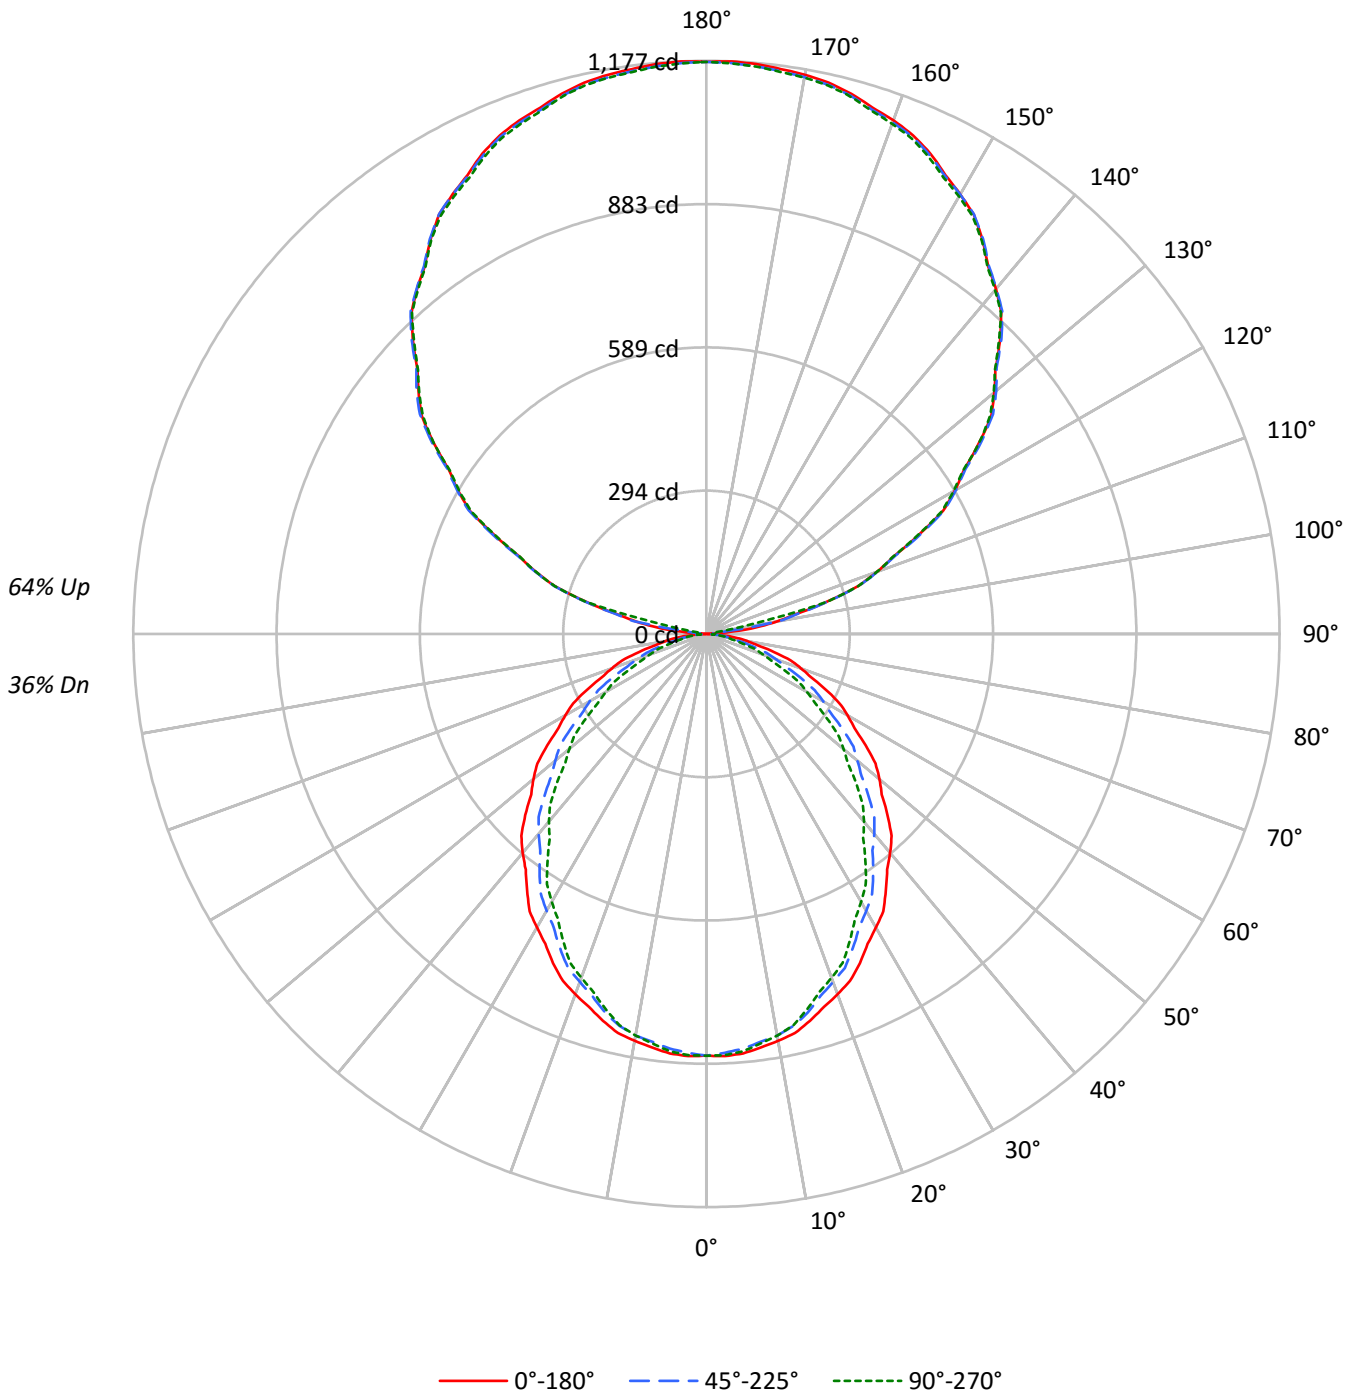



TEST NUMBER: P333670-935

CATALOG NUMBER: S125RDIW-S610D1050U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	43	43	43	36
1	95	91	87	84	86	82	79	76	66	64	62	52	51	49	39	38	37	31
2	86	79	73	68	78	72	67	63	58	55	52	46	43	41	34	33	31	26
3	79	70	63	57	71	63	57	53	52	47	44	41	38	35	30	28	27	22
4	72	62	54	48	65	56	50	45	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20	17
6	61	49	41	36	55	45	38	33	37	32	28	29	26	23	22	20	18	15
7	56	44	37	31	51	41	34	29	33	28	25	27	23	20	20	18	16	13
8	52	40	33	28	47	37	30	26	30	25	22	24	21	18	19	16	14	12
9	49	37	29	25	44	34	27	23	28	23	19	22	19	16	17	15	13	11
10	45	34	27	22	41	31	25	20	26	21	18	21	17	15	16	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5594	5594	5594
5°	5607	5543	5577
10°	5564	5491	5491
15°	5498	5380	5336
20°	5413	5225	5161
25°	5315	5072	4960
30°	5190	4894	4737
35°	5065	4709	4487
40°	4947	4517	4242
45°	4804	4302	3974
50°	4660	4068	3693
55°	4494	3845	3396
60°	4326	3574	3077
65°	4129	3260	2709
70°	3903	2866	2334
75°	3593	2415	1941
80°	3165	1901	1629
85°	2668	1549	1452



TEST NUMBER: P333670-935

CATALOG NUMBER: S125RDIW-S610D1050U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.4	1.4
10°-20°	227.6	4.0
20°-30°	330.1	5.8
30°-40°	376.2	6.7
40°-50°	366.7	6.5
50°-60°	308.6	5.5
60°-70°	216.4	3.8
70°-80°	111.2	2.0
80°-90°	30.5	0.5
90°-100°	42.7	0.8
100°-110°	263.1	4.7
110°-120°	477.1	8.4
120°-130°	612.4	10.8
130°-140°	658.7	11.6
140°-150°	618.2	10.9
150°-160°	500.1	8.8
160°-170°	323.4	5.7
170°-180°	111.6	2.0
0°-30°	639.1	11.3
0°-40°	1015.3	18.0
0°-60°	1690.5	29.9
0°-90°	2048.6	36.2
90°-120°	782.9	13.8
90°-150°	2672.2	47.2
90°-180°	3607.0	63.8
0°-180°	5655.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	866	866	866	866	866	
5°	865	862	855	861	860	82
15°	822	818	805	804	798	232
25°	746	735	712	703	696	343
35°	642	626	597	579	569	402
45°	526	506	471	446	435	406
55°	399	377	342	313	302	357
65°	270	247	213	188	177	268
75°	144	124	97	83	78	152
85°	36	25	21	20	20	40
90°	1	8	14	18	21	4
95°	50	45	14	18	18	63
105°	256	259	260	259	259	271
115°	481	485	486	482	477	476
125°	684	689	690	686	684	610
135°	852	857	856	854	849	657
145°	988	990	990	991	986	618
155°	1088	1084	1085	1087	1081	501
165°	1149	1144	1144	1149	1142	324
175°	1175	1170	1170	1177	1170	112
180°	1175	1175	1175	1175	1175	



TEST NUMBER: P333670-935

CATALOG NUMBER: S125RDIW-S610D1050U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2
2.5°	867.7	867.4	867.0	866.7	866.3	865.6	864.4	863.2	862.0	860.9	862.0
5°	864.8	864.3	863.7	863.1	862.5	861.4	859.8	858.2	856.6	855.0	856.4
7.5°	856.4	855.7	855.2	854.6	854.1	852.9	850.9	849.0	847.1	845.2	846.2
10°	848.4	848.0	847.6	847.1	846.7	845.5	843.4	841.5	839.4	837.3	837.8
12.5°	839.6	839.0	838.4	837.9	837.3	835.7	833.0	830.3	827.5	824.8	825.1
15°	822.3	821.4	820.5	819.7	818.8	816.8	813.8	810.7	807.7	804.6	804.5
17.5°	802.8	801.5	800.1	798.8	797.5	794.9	791.0	787.2	783.3	779.5	778.8
20°	787.6	786.2	784.7	783.3	781.8	778.8	774.1	769.5	764.8	760.2	759.4
22.5°	770.9	769.4	768.0	766.5	765.1	761.9	757.0	752.2	747.3	742.4	741.0
25°	745.8	743.6	741.4	739.3	737.0	733.2	727.9	722.5	717.1	711.7	709.9
27.5°	717.0	714.4	711.7	709.0	706.4	702.2	696.5	690.7	684.9	679.2	676.5
30°	696.0	693.3	690.5	687.8	685.0	680.5	674.4	668.4	662.3	656.2	652.8
32.5°	675.6	672.4	669.2	666.0	662.7	658.0	651.8	645.6	639.3	633.1	629.4
35°	642.4	638.9	635.4	632.0	628.4	623.5	616.9	610.4	603.8	597.3	593.1
37.5°	609.8	605.5	601.3	597.1	592.9	587.4	580.6	573.9	567.1	560.3	555.3
40°	586.8	582.5	578.1	573.7	569.4	563.7	556.7	549.7	542.8	535.8	530.3
42.5°	562.7	558.3	553.8	549.3	544.8	539.0	531.8	524.5	517.4	510.1	504.8
45°	526.0	521.8	517.5	513.3	509.1	503.0	495.0	487.0	479.0	471.0	465.2
47.5°	487.9	483.5	479.0	474.6	470.1	463.8	455.8	447.7	439.7	431.6	425.7
50°	463.8	459.0	454.2	449.4	444.6	438.1	429.8	421.5	413.2	404.9	398.8
52.5°	437.6	432.7	427.8	422.9	418.0	411.6	403.8	396.0	388.1	380.3	373.8
55°	399.1	394.4	389.8	385.1	380.5	374.0	365.9	357.7	349.7	341.5	334.9
57.5°	360.1	355.1	350.1	345.2	340.2	333.7	325.9	318.1	310.2	302.4	295.9
60°	334.9	329.8	324.8	319.7	314.6	308.2	300.2	292.4	284.6	276.7	270.4
62.5°	308.2	303.4	298.5	293.7	288.9	282.4	274.5	266.5	258.6	250.6	244.6
65°	270.2	265.3	260.3	255.4	250.4	244.1	236.3	228.7	220.9	213.3	207.4
67.5°	232.4	227.4	222.5	217.6	212.6	206.5	199.1	191.7	184.3	176.8	171.6
70°	206.7	201.8	196.8	191.9	186.9	180.8	173.6	166.3	159.0	151.8	147.2
72.5°	181.6	176.8	171.9	167.1	162.3	156.4	149.6	142.8	136.0	129.2	125.1
75°	144.0	139.6	135.2	130.9	126.5	121.2	115.1	109.0	102.9	96.8	93.6
77.5°	106.5	103.0	99.5	96.0	92.6	88.3	83.4	78.6	73.7	68.8	66.6
80°	85.1	81.5	78.1	74.6	71.1	67.3	63.2	59.2	55.1	51.1	49.7
82.5°	64.1	61.0	57.9	54.7	51.6	48.6	45.8	43.0	40.2	37.5	36.9
85°	36.0	33.3	30.7	28.2	25.5	23.8	23.1	22.4	21.7	20.9	20.8
87.5°	12.2	11.7	11.2	10.7	10.2	10.0	10.2	10.3	10.5	10.7	10.8
90°	0.9	2.4	4.0	5.5	7.1	8.5	9.9	11.2	12.6	13.9	14.9
92.5°	13.4	12.3	11.3	10.2	9.0	9.1	10.3	11.5	12.7	13.9	14.9
95°	49.6	49.1	48.5	47.9	47.4	43.3	36.0	28.7	21.3	13.9	14.9
97.5°	103.7	104.7	105.7	106.8	107.8	101.1	86.5	72.0	57.4	42.9	37.4
100°	145.4	146.0	146.5	147.1	147.7	148.4	149.2	150.0	150.8	151.5	122.7
102.5°	188.0	188.6	189.4	190.1	190.9	191.5	191.9	192.3	192.9	193.3	187.9
105°	256.0	256.8	257.5	258.3	259.1	259.5	259.5	259.5	259.5	259.5	259.5
107.5°	326.7	326.7	326.7	326.7	326.7	326.9	327.3	327.7	328.0	328.5	328.5
110°	372.7	372.7	372.7	372.7	372.7	372.9	373.2	373.7	374.0	374.4	373.8



TEST NUMBER: P333670-935

CATALOG NUMBER: S125RDIW-S610D1050U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	415.9	416.4	416.8	417.2	417.8	418.1	418.4	418.5	418.8	419.0	418.3
115°	480.7	481.6	482.6	483.5	484.6	485.1	485.3	485.5	485.7	485.9	485.1
117.5°	547.8	547.7	547.7	547.6	547.6	547.9	548.6	549.4	550.1	550.9	549.8
120°	589.5	589.4	589.1	588.9	588.8	588.9	589.5	590.1	590.6	591.2	590.9
122.5°	626.5	627.2	627.9	628.6	629.4	629.9	630.2	630.4	630.7	630.9	630.6
125°	683.5	684.9	686.3	687.6	689.0	689.7	689.7	689.7	689.7	689.7	688.9
127.5°	738.0	739.1	740.0	741.0	741.9	742.4	742.3	742.2	742.0	741.9	741.5
130°	771.5	772.5	773.4	774.4	775.4	775.9	776.2	776.4	776.5	776.7	776.2
132.5°	804.9	806.1	807.2	808.3	809.4	809.8	809.3	808.9	808.5	808.1	808.0
135°	852.5	853.7	854.8	856.0	857.1	857.6	857.1	856.8	856.4	856.0	855.6
137.5°	896.2	897.2	898.2	899.2	900.3	900.6	900.3	899.9	899.5	899.1	899.2
140°	924.8	925.1	925.6	925.9	926.3	926.4	926.3	926.0	925.8	925.7	926.0
142.5°	950.5	950.8	951.1	951.2	951.5	951.7	952.0	952.3	952.5	952.8	952.9
145°	988.3	988.8	989.1	989.5	989.9	990.1	990.1	990.1	990.1	990.1	990.3
147.5°	1021.4	1021.4	1021.3	1021.2	1021.1	1021.2	1021.4	1021.7	1021.9	1022.1	1022.4
150°	1042.3	1042.0	1041.6	1041.2	1040.8	1040.8	1041.2	1041.6	1042.0	1042.3	1042.8
152.5°	1062.6	1061.7	1060.8	1060.0	1059.1	1058.9	1059.3	1059.7	1060.1	1060.4	1060.8
155°	1088.5	1087.4	1086.2	1085.0	1083.8	1083.5	1083.8	1084.3	1084.6	1085.0	1085.5
157.5°	1108.5	1107.8	1107.2	1106.5	1105.7	1105.4	1105.4	1105.4	1105.5	1105.5	1106.2
160°	1122.5	1121.3	1120.2	1119.0	1117.8	1117.3	1117.5	1117.8	1117.9	1118.1	1118.9
162.5°	1133.6	1132.5	1131.3	1130.1	1128.9	1128.4	1128.7	1128.9	1129.0	1129.2	1130.3
165°	1148.6	1147.5	1146.2	1145.1	1143.9	1143.4	1143.7	1143.8	1144.0	1144.2	1145.4
167.5°	1159.7	1158.6	1157.4	1156.2	1154.9	1154.4	1154.6	1154.8	1155.0	1155.2	1156.6
170°	1166.0	1164.7	1163.3	1161.9	1160.5	1160.0	1160.2	1160.4	1160.5	1160.8	1162.4
172.5°	1170.2	1168.8	1167.4	1166.1	1164.8	1164.2	1164.6	1164.9	1165.3	1165.6	1167.0
175°	1174.7	1173.5	1172.3	1171.2	1170.0	1169.6	1169.8	1169.9	1170.2	1170.4	1171.9
177.5°	1176.8	1175.9	1174.9	1174.0	1173.1	1172.7	1172.9	1173.0	1173.1	1173.3	1174.4
180°	1174.7	1174.7	1174.7	1174.7	1174.7	1174.7	1174.7	1174.7	1174.7	1174.7	1174.7



TEST NUMBER: P333670-935

CATALOG NUMBER: S125RDIW-S610D1050U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2
2.5°	863.2	864.4	865.6	866.1	866.0	865.8	865.7	865.6
5°	857.9	859.4	860.8	861.4	861.1	860.8	860.6	860.2
7.5°	847.2	848.3	849.3	849.6	849.3	848.9	848.7	848.3
10°	838.2	838.6	839.1	839.1	838.6	838.2	837.8	837.3
12.5°	825.4	825.8	826.0	825.9	825.2	824.6	823.9	823.2
15°	804.3	804.2	804.1	803.3	802.0	800.7	799.4	798.1
17.5°	778.1	777.3	776.6	775.7	774.6	773.5	772.5	771.4
20°	758.7	757.9	757.2	756.2	754.9	753.6	752.3	751.0
22.5°	739.5	738.0	736.7	735.4	734.3	733.2	732.2	731.1
25°	708.0	706.1	704.2	702.4	700.9	699.2	697.7	696.0
27.5°	673.9	671.2	668.6	666.5	665.0	663.4	661.9	660.3
30°	649.5	646.1	642.7	640.4	639.1	637.8	636.5	635.2
32.5°	625.7	622.1	618.4	615.7	614.0	612.3	610.7	609.1
35°	588.8	584.6	580.4	577.3	575.2	573.2	571.2	569.1
37.5°	550.3	545.2	540.1	536.6	534.6	532.7	530.7	528.7
40°	524.7	519.2	513.7	510.1	508.3	506.5	504.8	503.1
42.5°	499.6	494.2	489.0	485.0	482.5	479.9	477.3	474.8
45°	459.3	453.6	447.7	443.8	441.6	439.4	437.2	435.1
47.5°	419.7	413.6	407.7	403.5	401.1	398.6	396.2	393.8
50°	392.7	386.6	380.5	376.3	374.2	372.0	369.8	367.6
52.5°	367.2	360.6	354.0	349.7	347.5	345.3	343.1	341.0
55°	328.4	321.8	315.3	310.9	308.6	306.3	303.9	301.6
57.5°	289.6	283.2	276.8	272.5	270.4	268.4	266.4	264.3
60°	263.9	257.5	251.2	246.8	244.7	242.5	240.3	238.2
62.5°	238.7	232.7	226.8	222.7	220.6	218.4	216.2	214.0
65°	201.6	195.8	190.0	186.0	183.8	181.7	179.4	177.3
67.5°	166.3	160.9	155.6	152.1	150.3	148.6	146.8	145.1
70°	142.8	138.3	133.7	130.6	128.9	127.2	125.4	123.6
72.5°	121.0	116.8	112.6	109.9	108.8	107.6	106.5	105.3
75°	90.4	87.2	84.0	81.9	80.9	79.9	78.9	77.8
77.5°	64.3	62.1	59.8	58.4	57.6	56.8	56.1	55.4
80°	48.4	47.1	45.8	45.0	44.7	44.4	44.1	43.8
82.5°	36.2	35.6	35.0	34.6	34.4	34.3	34.1	33.9
85°	20.7	20.5	20.3	20.2	20.1	19.9	19.8	19.6
87.5°	11.0	11.2	11.5	11.5	11.5	11.5	11.5	11.5
90°	15.8	16.9	17.8	18.6	19.2	19.7	20.3	20.9
92.5°	15.8	16.9	17.8	18.4	18.7	18.9	19.2	19.5
95°	15.8	16.9	17.8	18.3	18.3	18.3	18.3	18.3
97.5°	31.9	26.4	21.0	18.3	18.3	18.3	18.3	18.3
100°	93.8	65.0	36.2	21.4	20.6	19.8	19.0	18.3
102.5°	182.4	176.9	171.5	162.2	149.0	135.9	122.7	109.5
105°	259.5	259.5	259.5	259.4	259.2	259.0	258.8	258.6
107.5°	328.6	328.6	328.6	328.4	327.8	327.2	326.6	326.1
110°	373.2	372.7	372.1	372.0	372.1	372.3	372.5	372.7



TEST NUMBER: P333670-935

CATALOG NUMBER: S125RDIW-S610D1050U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	417.6	416.8	416.1	415.6	415.3	415.0	414.7	414.5
115°	484.3	483.5	482.8	481.8	480.7	479.5	478.4	477.2
117.5°	548.9	547.9	546.8	546.0	545.6	545.1	544.6	544.1
120°	590.5	590.1	589.7	589.0	588.1	587.1	586.2	585.1
122.5°	630.2	629.8	629.4	628.7	627.6	626.5	625.3	624.2
125°	688.1	687.3	686.6	685.9	685.4	684.8	684.2	683.5
127.5°	741.1	740.6	740.2	739.3	737.9	736.4	734.9	733.6
130°	775.6	775.0	774.4	773.6	772.7	771.7	770.8	769.8
132.5°	807.9	807.7	807.6	807.1	806.2	805.1	804.2	803.2
135°	855.2	854.8	854.5	853.7	852.5	851.4	850.2	849.0
137.5°	899.3	899.4	899.5	899.1	898.0	897.0	896.0	895.0
140°	926.4	926.8	927.2	926.8	925.7	924.5	923.3	922.1
142.5°	953.0	953.0	953.1	952.6	951.4	950.3	949.1	948.0
145°	990.5	990.7	990.8	990.4	989.2	988.1	986.9	985.8
147.5°	1022.6	1022.9	1023.0	1022.5	1021.1	1019.7	1018.3	1016.9
150°	1043.1	1043.5	1043.9	1043.3	1041.7	1040.2	1038.6	1037.1
152.5°	1061.2	1061.6	1062.0	1061.5	1060.1	1058.7	1057.3	1055.9
155°	1086.2	1086.8	1087.4	1086.8	1085.3	1083.7	1082.2	1080.6
157.5°	1106.8	1107.4	1108.0	1107.6	1106.0	1104.5	1102.9	1101.4
160°	1119.6	1120.4	1121.2	1120.8	1119.3	1117.8	1116.2	1114.7
162.5°	1131.4	1132.5	1133.6	1133.2	1131.5	1129.9	1128.2	1126.4
165°	1146.5	1147.7	1148.8	1148.7	1147.1	1145.6	1144.0	1142.5
167.5°	1158.0	1159.3	1160.8	1160.6	1158.8	1157.1	1155.4	1153.7
170°	1163.9	1165.4	1167.0	1166.8	1165.1	1163.4	1161.7	1159.9
172.5°	1168.5	1169.8	1171.2	1171.0	1169.3	1167.5	1165.8	1164.1
175°	1173.5	1175.0	1176.6	1176.5	1174.7	1172.9	1171.2	1169.5
177.5°	1175.4	1176.6	1177.7	1177.6	1176.3	1175.1	1173.9	1172.6
180°	1174.7	1174.7	1174.7	1174.7	1174.7	1174.7	1174.7	1174.7

(END OF REPORT)