

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333663-935

Luminaire Tested: **S125RDIW-S610D470U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333663-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIW-S610D470U935-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3446.6 lumens  
Efficiency: N/A  
Efficacy: 114.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 30.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333663-935

CATALOG NUMBER: S125RDIW-S610D470U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

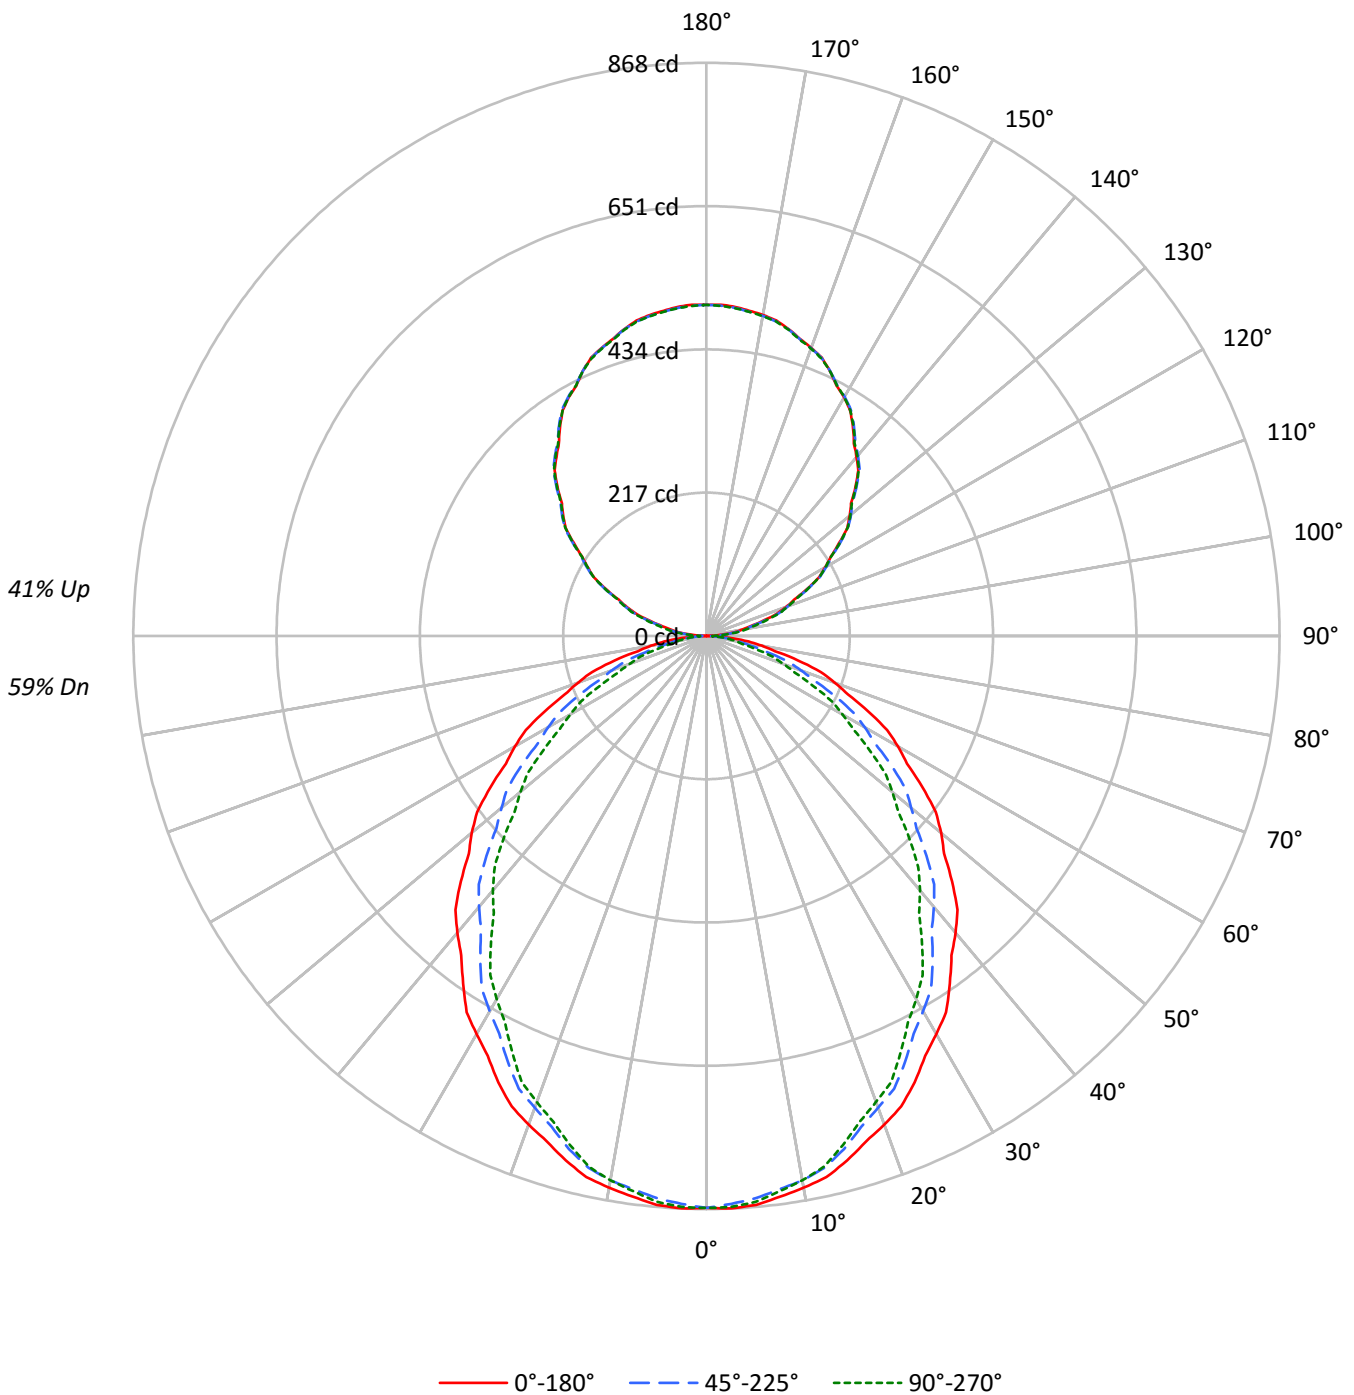



TEST NUMBER: P333663-935

CATALOG NUMBER: S125RDIW-S610D470U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	89	89	89	76	76	76	65	65	65	59
1	100	96	92	89	93	90	86	83	78	76	73	67	66	64	58	56	55	51
2	91	84	78	73	85	79	73	69	69	65	61	60	57	54	51	49	47	43
3	84	74	67	61	78	69	63	58	61	56	52	53	49	46	45	43	40	36
4	77	66	58	52	71	62	55	49	54	49	44	47	43	39	41	38	35	31
5	70	59	51	45	66	55	48	42	49	43	38	43	38	34	37	33	30	27
6	65	53	45	39	61	50	42	37	44	38	34	39	34	30	33	30	27	24
7	60	48	40	34	56	45	38	33	40	34	30	35	30	27	31	27	24	22
8	56	44	36	30	52	41	34	29	37	31	27	32	28	24	28	24	22	19
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	26	22	20	18
10	49	37	29	25	46	35	28	24	31	25	22	28	23	20	24	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5594	5594	5594
5°	5607	5543	5577
10°	5564	5491	5491
15°	5498	5380	5336
20°	5413	5225	5161
25°	5315	5072	4960
30°	5190	4894	4737
35°	5065	4709	4487
40°	4947	4517	4242
45°	4804	4302	3974
50°	4660	4068	3693
55°	4494	3845	3396
60°	4326	3574	3077
65°	4129	3260	2709
70°	3903	2866	2334
75°	3593	2415	1941
80°	3165	1901	1629
85°	2668	1549	1452



TEST NUMBER: P333663-935

CATALOG NUMBER: S125RDIW-S610D470U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	81.4	2.4
10°-20°	227.6	6.6
20°-30°	330.1	9.6
30°-40°	376.2	10.9
40°-50°	366.7	10.6
50°-60°	308.6	9.0
60°-70°	216.4	6.3
70°-80°	111.2	3.2
80°-90°	29.2	0.8
90°-100°	33.6	1.0
100°-110°	99.2	2.9
110°-120°	168.0	4.9
120°-130°	221.1	6.4
130°-140°	247.7	7.2
140°-150°	242.8	7.0
150°-160°	203.9	5.9
160°-170°	135.6	3.9
170°-180°	47.4	1.4
<hr/>		
0°-30°	639.1	18.5
0°-40°	1015.3	29.5
0°-60°	1690.5	49.0
0°-90°	2047.3	59.4
90°-120°	300.8	8.7
90°-150°	1012.4	29.4
90°-180°	1399.0	40.6
0°-180°	3446.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	866	866	866	866	866	
5°	865	862	855	861	860	82
15°	822	818	805	804	798	232
25°	746	735	712	703	696	343
35°	642	626	597	579	569	402
45°	526	506	471	446	435	406
55°	399	377	342	313	302	357
65°	270	247	213	188	177	268
75°	144	124	97	83	78	152
85°	36	25	21	20	20	40
90°	0	4	6	8	9	3
95°	25	26	30	33	34	27
105°	89	91	93	96	97	95
115°	168	170	171	170	170	166
125°	246	248	248	247	247	220
135°	319	321	322	322	320	246
145°	387	388	389	389	388	242
155°	443	443	443	444	443	204
165°	481	480	481	482	480	136
175°	500	499	499	501	498	48
180°	501	501	501	501	501	



TEST NUMBER: P333663-935

CATALOG NUMBER: S125RDIW-S610D470U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2
2.5°	867.7	867.4	867.0	866.7	866.3	865.6	864.4	863.2	862.0	860.9	862.0
5°	864.8	864.3	863.7	863.1	862.5	861.4	859.8	858.2	856.6	855.0	856.4
7.5°	856.4	855.7	855.2	854.6	854.1	852.9	850.9	849.0	847.1	845.2	846.2
10°	848.4	848.0	847.6	847.1	846.7	845.5	843.4	841.5	839.4	837.3	837.8
12.5°	839.6	839.0	838.4	837.9	837.3	835.7	833.0	830.3	827.5	824.8	825.1
15°	822.3	821.4	820.5	819.7	818.8	816.8	813.8	810.7	807.7	804.6	804.5
17.5°	802.8	801.5	800.1	798.8	797.5	794.9	791.0	787.2	783.3	779.5	778.8
20°	787.6	786.2	784.7	783.3	781.8	778.8	774.1	769.5	764.8	760.2	759.4
22.5°	770.9	769.4	768.0	766.5	765.1	761.9	757.0	752.2	747.3	742.4	741.0
25°	745.8	743.6	741.4	739.3	737.0	733.2	727.9	722.5	717.1	711.7	709.9
27.5°	717.0	714.4	711.7	709.0	706.4	702.2	696.5	690.7	684.9	679.2	676.5
30°	696.0	693.3	690.5	687.8	685.0	680.5	674.4	668.4	662.3	656.2	652.8
32.5°	675.6	672.4	669.2	666.0	662.7	658.0	651.8	645.6	639.3	633.1	629.4
35°	642.4	638.9	635.4	632.0	628.4	623.5	616.9	610.4	603.8	597.3	593.1
37.5°	609.8	605.5	601.3	597.1	592.9	587.4	580.6	573.9	567.1	560.3	555.3
40°	586.8	582.5	578.1	573.7	569.4	563.7	556.7	549.7	542.8	535.8	530.3
42.5°	562.7	558.3	553.8	549.3	544.8	539.0	531.8	524.5	517.4	510.1	504.8
45°	526.0	521.8	517.5	513.3	509.1	503.0	495.0	487.0	479.0	471.0	465.2
47.5°	487.9	483.5	479.0	474.6	470.1	463.8	455.8	447.7	439.7	431.6	425.7
50°	463.8	459.0	454.2	449.4	444.6	438.1	429.8	421.5	413.2	404.9	398.8
52.5°	437.6	432.7	427.8	422.9	418.0	411.6	403.8	396.0	388.1	380.3	373.8
55°	399.1	394.4	389.8	385.1	380.5	374.0	365.9	357.7	349.7	341.5	334.9
57.5°	360.1	355.1	350.1	345.2	340.2	333.7	325.9	318.1	310.2	302.4	295.9
60°	334.9	329.8	324.8	319.7	314.6	308.2	300.2	292.4	284.6	276.7	270.4
62.5°	308.2	303.4	298.5	293.7	288.9	282.4	274.5	266.5	258.6	250.6	244.6
65°	270.2	265.3	260.3	255.4	250.4	244.1	236.3	228.7	220.9	213.3	207.4
67.5°	232.4	227.4	222.5	217.6	212.6	206.5	199.1	191.7	184.3	176.8	171.6
70°	206.7	201.8	196.8	191.9	186.9	180.8	173.6	166.3	159.0	151.8	147.2
72.5°	181.6	176.8	171.9	167.1	162.3	156.4	149.6	142.8	136.0	129.2	125.1
75°	144.0	139.6	135.2	130.9	126.5	121.2	115.1	109.0	102.9	96.8	93.6
77.5°	106.5	103.0	99.5	96.0	92.6	88.3	83.4	78.6	73.7	68.8	66.6
80°	85.1	81.5	78.1	74.6	71.1	67.3	63.2	59.2	55.1	51.1	49.7
82.5°	64.1	61.0	57.9	54.7	51.6	48.6	45.8	43.0	40.2	37.5	36.9
85°	36.0	33.3	30.7	28.2	25.5	23.8	23.1	22.4	21.7	20.9	20.8
87.5°	12.1	11.5	10.8	10.1	9.4	9.0	9.1	9.1	9.1	9.1	9.2
90°	0.4	1.1	1.8	2.5	3.2	3.8	4.4	5.0	5.6	6.3	6.7
92.5°	9.5	9.9	10.4	10.9	11.4	12.0	12.7	13.5	14.2	15.0	15.6
95°	25.4	25.6	25.7	25.9	26.1	26.6	27.5	28.3	29.2	30.0	30.7
97.5°	42.1	42.2	42.3	42.4	42.4	43.0	44.3	45.5	46.7	47.9	48.4
100°	54.7	54.7	54.7	54.7	54.7	55.2	56.3	57.4	58.5	59.7	60.5
102.5°	68.0	68.4	68.8	69.1	69.5	69.9	70.5	71.0	71.6	72.2	73.0
105°	88.9	89.4	89.8	90.2	90.7	91.2	91.7	92.2	92.7	93.2	93.8
107.5°	112.1	112.5	113.0	113.4	113.8	114.3	114.6	115.0	115.5	115.8	116.1
110°	128.0	128.5	128.9	129.3	129.8	130.1	130.4	130.6	130.9	131.1	131.4



TEST NUMBER: P333663-935

CATALOG NUMBER: S125RDIW-S610D470U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	144.2	144.5	144.6	144.9	145.2	145.4	145.8	146.1	146.4	146.7	146.9
115°	168.2	168.5	168.9	169.3	169.6	169.9	170.0	170.2	170.4	170.6	170.5
117.5°	192.3	192.3	192.5	192.7	192.9	193.0	193.2	193.3	193.5	193.6	193.7
120°	207.2	207.7	208.1	208.5	209.0	209.2	209.3	209.4	209.5	209.6	209.6
122.5°	223.4	223.6	223.8	223.9	224.0	224.3	224.5	224.7	225.0	225.2	225.1
125°	245.5	246.0	246.5	247.0	247.5	247.9	248.0	248.1	248.1	248.2	248.1
127.5°	268.9	269.1	269.5	269.8	270.1	270.3	270.4	270.4	270.5	270.7	270.6
130°	282.9	283.4	283.8	284.2	284.6	285.0	285.2	285.3	285.5	285.7	285.6
132.5°	297.0	297.6	298.4	299.1	299.8	300.1	300.1	300.1	300.1	300.0	299.9
135°	319.2	319.8	320.3	320.8	321.3	321.6	321.7	321.8	321.8	321.9	321.9
137.5°	340.1	340.6	341.1	341.6	342.2	342.5	342.7	342.9	343.0	343.3	343.4
140°	353.5	354.0	354.4	354.8	355.2	355.7	355.9	356.2	356.5	356.7	356.9
142.5°	367.0	367.3	367.7	368.1	368.4	368.8	369.1	369.5	369.8	370.1	370.2
145°	386.8	387.1	387.4	387.8	388.1	388.4	388.7	388.9	389.2	389.4	389.4
147.5°	405.0	405.2	405.4	405.5	405.8	406.0	406.1	406.4	406.6	406.8	407.0
150°	417.2	417.1	417.0	416.9	416.8	417.0	417.3	417.7	418.0	418.4	418.4
152.5°	427.1	427.3	427.4	427.5	427.7	427.7	427.9	428.1	428.2	428.3	428.5
155°	442.6	442.6	442.6	442.6	442.6	442.6	442.6	442.7	442.8	442.9	443.2
157.5°	456.2	456.1	455.9	455.7	455.5	455.5	455.6	455.6	455.7	455.8	456.2
160°	464.4	464.2	463.8	463.6	463.3	463.2	463.3	463.4	463.5	463.6	464.0
162.5°	471.6	471.4	471.2	471.0	470.8	470.7	470.7	470.7	470.8	470.8	471.2
165°	481.1	481.0	480.8	480.6	480.4	480.4	480.5	480.6	480.7	480.8	481.1
167.5°	489.3	489.0	488.6	488.3	487.9	487.8	487.8	487.8	487.8	487.8	488.3
170°	493.6	493.3	492.9	492.6	492.2	492.1	492.1	492.1	492.1	492.1	492.6
172.5°	496.8	496.5	496.1	495.8	495.4	495.2	495.2	495.2	495.2	495.2	495.8
175°	500.3	499.9	499.6	499.2	498.9	498.7	498.7	498.7	498.7	498.7	499.2
177.5°	502.0	501.8	501.5	501.3	500.9	500.8	500.8	500.7	500.6	500.5	500.9
180°	501.4	501.4	501.4	501.4	501.4	501.4	501.4	501.4	501.4	501.4	501.4



TEST NUMBER: P333663-935

CATALOG NUMBER: S125RDIW-S610D470U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2
2.5°	863.2	864.4	865.6	866.1	866.0	865.8	865.7	865.6
5°	857.9	859.4	860.8	861.4	861.1	860.8	860.6	860.2
7.5°	847.2	848.3	849.3	849.6	849.3	848.9	848.7	848.3
10°	838.2	838.6	839.1	839.1	838.6	838.2	837.8	837.3
12.5°	825.4	825.8	826.0	825.9	825.2	824.6	823.9	823.2
15°	804.3	804.2	804.1	803.3	802.0	800.7	799.4	798.1
17.5°	778.1	777.3	776.6	775.7	774.6	773.5	772.5	771.4
20°	758.7	757.9	757.2	756.2	754.9	753.6	752.3	751.0
22.5°	739.5	738.0	736.7	735.4	734.3	733.2	732.2	731.1
25°	708.0	706.1	704.2	702.4	700.9	699.2	697.7	696.0
27.5°	673.9	671.2	668.6	666.5	665.0	663.4	661.9	660.3
30°	649.5	646.1	642.7	640.4	639.1	637.8	636.5	635.2
32.5°	625.7	622.1	618.4	615.7	614.0	612.3	610.7	609.1
35°	588.8	584.6	580.4	577.3	575.2	573.2	571.2	569.1
37.5°	550.3	545.2	540.1	536.6	534.6	532.7	530.7	528.7
40°	524.7	519.2	513.7	510.1	508.3	506.5	504.8	503.1
42.5°	499.6	494.2	489.0	485.0	482.5	479.9	477.3	474.8
45°	459.3	453.6	447.7	443.8	441.6	439.4	437.2	435.1
47.5°	419.7	413.6	407.7	403.5	401.1	398.6	396.2	393.8
50°	392.7	386.6	380.5	376.3	374.2	372.0	369.8	367.6
52.5°	367.2	360.6	354.0	349.7	347.5	345.3	343.1	341.0
55°	328.4	321.8	315.3	310.9	308.6	306.3	303.9	301.6
57.5°	289.6	283.2	276.8	272.5	270.4	268.4	266.4	264.3
60°	263.9	257.5	251.2	246.8	244.7	242.5	240.3	238.2
62.5°	238.7	232.7	226.8	222.7	220.6	218.4	216.2	214.0
65°	201.6	195.8	190.0	186.0	183.8	181.7	179.4	177.3
67.5°	166.3	160.9	155.6	152.1	150.3	148.6	146.8	145.1
70°	142.8	138.3	133.7	130.6	128.9	127.2	125.4	123.6
72.5°	121.0	116.8	112.6	109.9	108.8	107.6	106.5	105.3
75°	90.4	87.2	84.0	81.9	80.9	79.9	78.9	77.8
77.5°	64.3	62.1	59.8	58.4	57.6	56.8	56.1	55.4
80°	48.4	47.1	45.8	45.0	44.7	44.4	44.1	43.8
82.5°	36.2	35.6	35.0	34.6	34.4	34.3	34.1	33.9
85°	20.7	20.5	20.3	20.2	20.1	19.9	19.8	19.6
87.5°	9.3	9.4	9.5	9.5	9.4	9.3	9.3	9.2
90°	7.1	7.6	8.0	8.4	8.6	8.9	9.1	9.4
92.5°	16.1	16.7	17.3	17.7	17.8	18.0	18.3	18.4
95°	31.3	31.9	32.5	32.9	33.1	33.2	33.4	33.6
97.5°	49.0	49.6	50.1	50.5	50.5	50.7	50.8	50.9
100°	61.3	62.1	62.9	63.3	63.5	63.6	63.8	64.0
102.5°	73.9	74.7	75.6	76.1	76.4	76.6	76.9	77.1
105°	94.3	94.8	95.3	95.7	96.0	96.3	96.5	96.8
107.5°	116.3	116.6	116.8	117.0	117.0	116.9	116.9	116.9
110°	131.6	131.9	132.2	132.2	132.2	132.1	132.0	131.9





TEST NUMBER: P333663-935

CATALOG NUMBER: S125RDIW-S610D470U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	147.0	147.1	147.2	147.2	147.1	146.9	146.7	146.5
115°	170.4	170.3	170.2	170.1	170.0	170.0	169.9	169.8
117.5°	193.8	193.8	193.9	193.8	193.5	193.1	192.7	192.3
120°	209.6	209.6	209.6	209.4	209.1	208.7	208.4	208.0
122.5°	225.1	225.0	224.9	224.7	224.5	224.2	223.9	223.6
125°	247.9	247.7	247.5	247.4	247.3	247.2	247.1	247.0
127.5°	270.5	270.4	270.4	270.2	270.0	269.8	269.7	269.5
130°	285.5	285.4	285.3	285.2	285.0	284.8	284.6	284.5
132.5°	299.8	299.7	299.6	299.5	299.3	299.0	298.8	298.5
135°	321.9	321.9	321.9	321.8	321.4	321.1	320.7	320.4
137.5°	343.5	343.5	343.7	343.5	343.1	342.7	342.2	341.7
140°	357.1	357.2	357.4	357.2	356.8	356.4	355.9	355.5
142.5°	370.3	370.4	370.5	370.3	369.9	369.5	369.0	368.6
145°	389.4	389.4	389.4	389.3	389.1	388.8	388.6	388.3
147.5°	407.2	407.4	407.6	407.4	406.8	406.2	405.6	405.1
150°	418.4	418.4	418.4	418.3	418.1	417.9	417.8	417.6
152.5°	428.8	429.0	429.1	429.1	428.8	428.5	428.2	427.8
155°	443.6	443.9	444.3	444.3	443.8	443.4	443.0	442.6
157.5°	456.5	456.8	457.2	457.1	456.5	455.9	455.4	454.8
160°	464.3	464.7	465.0	464.9	464.5	464.1	463.6	463.2
162.5°	471.7	472.0	472.4	472.4	471.9	471.4	470.9	470.4
165°	481.5	481.8	482.2	482.1	481.6	481.0	480.5	480.0
167.5°	488.8	489.3	489.8	489.8	489.2	488.7	488.2	487.7
170°	493.1	493.6	494.2	494.1	493.5	492.9	492.3	491.7
172.5°	496.3	496.8	497.3	497.3	496.7	496.2	495.7	495.2
175°	499.7	500.3	500.8	500.8	500.2	499.6	498.9	498.3
177.5°	501.4	501.8	502.2	502.1	501.7	501.2	500.7	500.2
180°	501.4	501.4	501.4	501.4	501.4	501.4	501.4	501.4

(END OF REPORT)