

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333682-935

Luminaire Tested: **S125RDIW-S850D470U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333682-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIW-S850D470U935-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 470 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4411.6 lumens  
Efficiency: N/A  
Efficacy: 117.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 37.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333682-935

CATALOG NUMBER: S125RDIW-S850D470U935-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

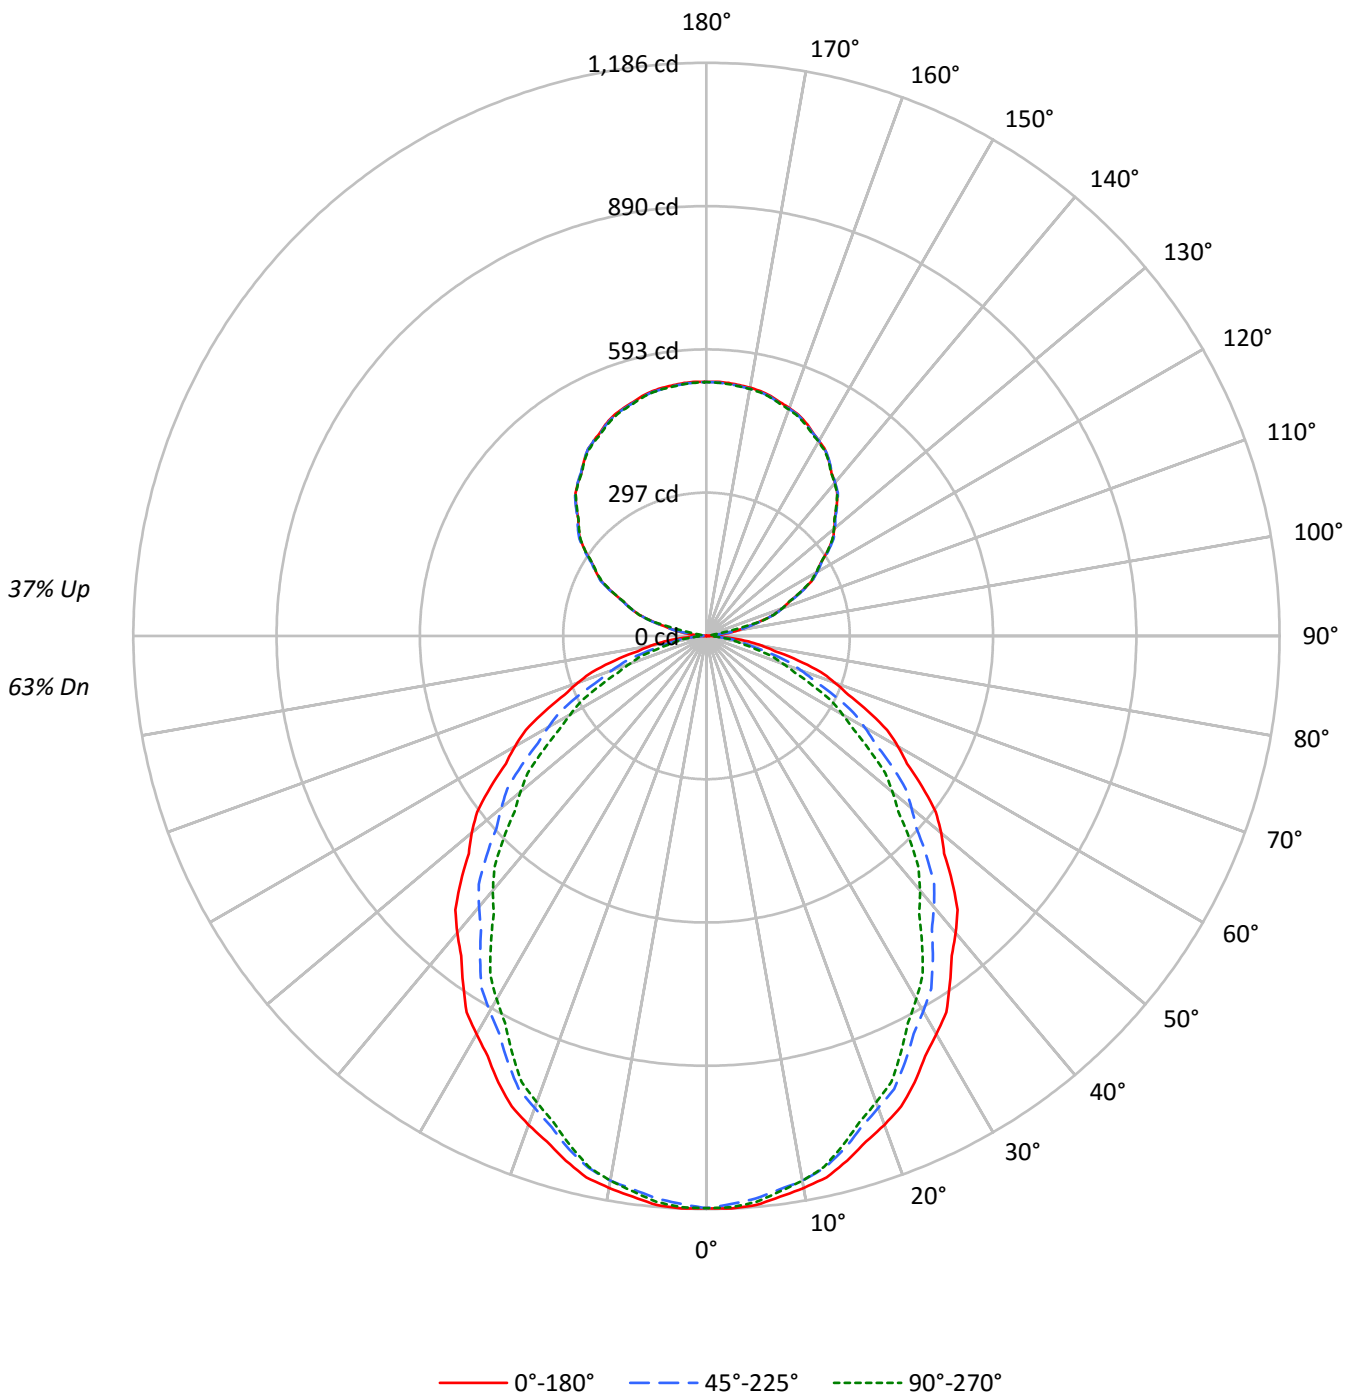



TEST NUMBER: P333682-935

CATALOG NUMBER: S125RDIW-S850D470U935-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	68	68	68	63
1	101	97	93	89	95	91	88	85	80	78	75	70	68	67	61	60	58	54
2	92	85	79	74	86	80	74	70	71	66	63	62	59	56	54	52	50	46
3	84	75	67	62	79	71	64	59	62	57	53	55	51	48	48	45	43	39
4	77	66	58	52	72	63	56	50	56	50	46	49	45	41	43	40	37	34
5	71	59	51	45	67	56	49	43	50	44	39	44	40	36	39	35	32	29
6	66	53	45	39	61	51	43	38	45	39	35	40	35	32	35	32	29	26
7	61	48	40	35	57	46	39	33	41	35	31	37	32	28	32	28	25	23
8	57	44	36	31	53	42	35	30	38	32	27	34	29	25	30	26	23	21
9	53	40	33	28	50	38	31	27	35	29	25	31	26	23	28	24	21	19
10	49	37	30	25	46	35	29	24	32	26	22	29	24	21	26	22	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7647	7647	7647
5°	7664	7577	7623
10°	7606	7506	7506
15°	7515	7353	7294
20°	7399	7142	7056
25°	7264	6933	6780
30°	7095	6689	6475
35°	6923	6437	6133
40°	6762	6175	5798
45°	6566	5881	5431
50°	6370	5561	5050
55°	6141	5255	4641
60°	5913	4885	4204
65°	5644	4455	3703
70°	5336	3916	3191
75°	4908	3301	2655
80°	4322	2592	2228
85°	3646	2119	1993



TEST NUMBER: P333682-935

CATALOG NUMBER: S125RDIW-S850D470U935-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	111.3	2.5
10°-20°	311.1	7.1
20°-30°	451.2	10.2
30°-40°	514.2	11.7
40°-50°	501.2	11.4
50°-60°	421.9	9.6
60°-70°	295.7	6.7
70°-80°	152.0	3.4
80°-90°	39.5	0.9
90°-100°	19.1	0.4
100°-110°	117.7	2.7
110°-120°	213.4	4.8
120°-130°	273.9	6.2
130°-140°	294.6	6.7
140°-150°	276.5	6.3
150°-160°	223.7	5.1
160°-170°	144.7	3.3
170°-180°	49.9	1.1
0°-30°	873.6	19.8
0°-40°	1387.8	31.5
0°-60°	2310.8	52.4
0°-90°	2798.0	63.4
90°-120°	350.2	7.9
90°-150°	1195.3	27.1
90°-180°	1614.0	36.6
0°-180°	4411.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1184	1184	1184	1184	1184	
5°	1182	1178	1169	1177	1176	112
15°	1124	1118	1100	1099	1091	317
25°	1019	1005	973	961	951	469
35°	878	856	816	791	778	550
45°	719	692	644	609	595	554
55°	545	516	467	428	412	488
65°	369	338	292	257	242	366
75°	197	169	132	113	106	208
85°	49	34	29	28	27	55
90°	0	4	6	8	9	3
95°	22	20	6	8	8	28
105°	114	116	116	116	116	121
115°	215	217	217	216	213	213
125°	306	308	308	307	306	273
135°	381	384	383	382	380	294
145°	442	443	443	443	441	276
155°	487	485	485	486	483	224
165°	514	512	512	514	511	145
175°	526	523	524	526	523	50
180°	526	526	526	526	526	



TEST NUMBER: P333682-935

CATALOG NUMBER: S125RDIW-S850D470U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0
2.5°	1186.0	1185.6	1185.1	1184.6	1184.1	1183.1	1181.6	1179.9	1178.4	1176.7	1178.4
5°	1182.2	1181.4	1180.5	1179.7	1179.0	1177.5	1175.3	1173.1	1170.9	1168.7	1170.7
7.5°	1170.5	1169.8	1169.0	1168.2	1167.5	1165.8	1163.2	1160.5	1158.0	1155.3	1156.7
10°	1159.8	1159.2	1158.6	1158.0	1157.4	1155.7	1153.0	1150.1	1147.4	1144.6	1145.1
12.5°	1147.6	1146.9	1146.1	1145.4	1144.6	1142.4	1138.6	1134.9	1131.2	1127.4	1127.8
15°	1124.0	1122.8	1121.6	1120.4	1119.2	1116.5	1112.4	1108.2	1104.1	1099.8	1099.7
17.5°	1097.3	1095.5	1093.7	1091.9	1090.0	1086.5	1081.2	1076.0	1070.7	1065.5	1064.5
20°	1076.6	1074.6	1072.6	1070.7	1068.7	1064.5	1058.2	1051.8	1045.4	1039.1	1038.1
22.5°	1053.7	1051.7	1049.7	1047.8	1045.8	1041.5	1034.7	1028.1	1021.4	1014.8	1012.8
25°	1019.4	1016.4	1013.4	1010.5	1007.5	1002.3	995.0	987.6	980.2	972.9	970.3
27.5°	980.1	976.5	972.8	969.2	965.6	959.8	952.0	944.1	936.3	928.3	924.7
30°	951.4	947.6	943.9	940.1	936.3	930.2	922.0	913.6	905.3	896.9	892.3
32.5°	923.5	919.1	914.7	910.3	905.9	899.4	891.0	882.4	873.9	865.4	860.4
35°	878.1	873.3	868.6	863.8	859.0	852.1	843.3	834.3	825.4	816.4	810.6
37.5°	833.5	827.8	822.0	816.1	810.4	802.9	793.7	784.4	775.2	765.9	759.1
40°	802.1	796.2	790.1	784.2	778.3	770.5	761.0	751.4	741.9	732.4	724.8
42.5°	769.2	763.1	757.0	750.8	744.7	736.8	726.9	717.0	707.1	697.3	690.1
45°	718.9	713.2	707.4	701.6	695.9	687.5	676.6	665.7	654.8	643.9	635.8
47.5°	666.9	660.8	654.7	648.7	642.6	634.0	623.0	612.0	601.0	590.0	581.8
50°	634.0	627.4	620.9	614.3	607.8	598.8	587.5	576.2	564.8	553.5	545.2
52.5°	598.2	591.5	584.8	578.1	571.4	562.7	552.0	541.3	530.5	519.9	510.9
55°	545.4	539.1	532.8	526.4	520.0	511.3	500.2	489.0	477.9	466.7	457.8
57.5°	492.1	485.3	478.5	471.7	465.0	456.2	445.5	434.7	424.0	413.3	404.6
60°	457.8	450.9	443.9	437.0	430.0	421.2	410.4	399.7	389.0	378.2	369.5
62.5°	421.4	414.7	408.1	401.4	394.8	386.1	375.1	364.3	353.4	342.5	334.4
65°	369.3	362.6	355.8	349.0	342.2	333.6	323.1	312.5	302.0	291.5	283.5
67.5°	317.6	310.8	304.1	297.4	290.6	282.1	272.1	262.0	251.9	241.8	234.5
70°	282.6	275.8	269.1	262.3	255.5	247.2	237.3	227.3	217.4	207.4	201.3
72.5°	248.2	241.6	235.1	228.4	221.9	213.9	204.6	195.3	186.0	176.7	171.0
75°	196.7	190.8	184.8	178.8	172.9	165.7	157.4	149.0	140.7	132.3	127.9
77.5°	145.6	140.8	136.0	131.3	126.5	120.8	114.1	107.5	100.7	94.1	91.0
80°	116.2	111.5	106.7	101.9	97.2	92.0	86.4	80.8	75.3	69.7	67.9
82.5°	87.6	83.3	79.0	74.7	70.4	66.4	62.6	58.8	54.9	51.1	50.3
85°	49.2	45.6	42.0	38.5	34.9	32.5	31.6	30.6	29.6	28.6	28.4
87.5°	16.5	15.6	14.6	13.6	12.7	12.1	12.1	12.1	12.1	12.0	12.1
90°	0.4	1.1	1.8	2.5	3.2	3.8	4.4	5.0	5.6	6.2	6.6
92.5°	6.0	5.5	5.0	4.6	4.0	4.0	4.6	5.2	5.7	6.2	6.6
95°	22.2	22.0	21.7	21.4	21.2	19.4	16.1	12.8	9.6	6.2	6.6
97.5°	46.3	46.8	47.3	47.8	48.2	45.2	38.7	32.2	25.7	19.2	16.7
100°	65.0	65.3	65.6	65.9	66.1	66.4	66.7	67.1	67.4	67.8	54.8
102.5°	84.0	84.4	84.7	85.1	85.4	85.7	85.8	86.0	86.3	86.4	84.0
105°	114.5	114.9	115.2	115.5	115.9	116.1	116.1	116.1	116.1	116.1	116.1
107.5°	146.1	146.1	146.1	146.1	146.1	146.2	146.4	146.5	146.7	146.9	147.0
110°	166.7	166.7	166.7	166.7	166.7	166.8	166.9	167.1	167.3	167.5	167.2



TEST NUMBER: P333682-935

CATALOG NUMBER: S125RDIW-S850D470U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	186.1	186.2	186.4	186.7	186.8	187.0	187.1	187.3	187.4	187.4	187.1
115°	215.0	215.4	215.9	216.3	216.7	217.0	217.1	217.1	217.2	217.3	217.0
117.5°	245.0	245.0	245.0	245.0	245.0	245.1	245.4	245.7	246.1	246.4	246.0
120°	263.7	263.6	263.6	263.5	263.4	263.5	263.7	264.0	264.2	264.5	264.3
122.5°	280.3	280.5	280.9	281.2	281.5	281.7	281.9	282.0	282.1	282.2	282.1
125°	305.7	306.3	306.9	307.5	308.2	308.5	308.5	308.5	308.5	308.5	308.2
127.5°	330.1	330.6	331.1	331.5	331.9	332.1	332.0	332.0	331.9	331.8	331.7
130°	345.1	345.5	345.9	346.4	346.8	347.1	347.2	347.2	347.3	347.4	347.2
132.5°	360.1	360.6	361.1	361.5	362.1	362.2	362.1	361.9	361.6	361.4	361.4
135°	381.3	381.9	382.4	382.9	383.4	383.6	383.4	383.2	383.1	382.9	382.7
137.5°	400.9	401.3	401.7	402.3	402.7	402.9	402.7	402.5	402.3	402.2	402.3
140°	413.6	413.8	414.0	414.1	414.3	414.4	414.3	414.2	414.1	414.1	414.2
142.5°	425.2	425.3	425.4	425.5	425.6	425.7	425.9	425.9	426.1	426.2	426.2
145°	442.1	442.3	442.5	442.6	442.8	442.9	442.9	442.9	442.9	442.9	443.0
147.5°	456.9	456.8	456.8	456.8	456.8	456.8	456.9	457.0	457.1	457.2	457.3
150°	466.2	466.1	465.9	465.7	465.5	465.5	465.7	465.9	466.1	466.2	466.4
152.5°	475.3	474.9	474.5	474.2	473.7	473.6	473.8	474.0	474.2	474.3	474.5
155°	486.9	486.4	485.9	485.3	484.8	484.7	484.8	485.0	485.2	485.3	485.6
157.5°	495.8	495.5	495.2	494.9	494.6	494.5	494.5	494.5	494.5	494.6	494.8
160°	502.0	501.5	501.0	500.5	500.0	499.8	499.9	500.0	500.1	500.2	500.5
162.5°	507.0	506.5	506.0	505.5	505.0	504.8	504.9	505.0	505.1	505.1	505.6
165°	513.8	513.2	512.7	512.2	511.7	511.4	511.5	511.6	511.7	511.8	512.3
167.5°	518.8	518.2	517.7	517.1	516.6	516.3	516.4	516.5	516.6	516.7	517.4
170°	521.6	521.0	520.3	519.7	519.1	518.8	518.9	519.0	519.1	519.2	519.9
172.5°	523.4	522.8	522.2	521.6	521.0	520.8	520.9	521.1	521.2	521.4	522.0
175°	525.5	525.0	524.4	523.9	523.4	523.1	523.2	523.3	523.4	523.5	524.2
177.5°	526.4	526.0	525.6	525.1	524.7	524.5	524.6	524.7	524.8	524.9	525.3
180°	525.5	525.5	525.5	525.5	525.5	525.5	525.5	525.5	525.5	525.5	525.5



TEST NUMBER: P333682-935

CATALOG NUMBER: S125RDIW-S850D470U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0
2.5°	1179.9	1181.6	1183.1	1183.9	1183.7	1183.5	1183.4	1183.2
5°	1172.7	1174.7	1176.6	1177.5	1177.1	1176.6	1176.3	1175.9
7.5°	1158.1	1159.5	1160.9	1161.3	1160.9	1160.5	1160.0	1159.6
10°	1145.7	1146.3	1146.9	1146.9	1146.3	1145.7	1145.1	1144.6
12.5°	1128.3	1128.7	1129.1	1128.9	1128.0	1127.0	1126.2	1125.2
15°	1099.5	1099.2	1099.1	1098.1	1096.3	1094.5	1092.7	1090.9
17.5°	1063.5	1062.6	1061.5	1060.3	1058.9	1057.4	1055.9	1054.5
20°	1037.1	1036.0	1035.1	1033.7	1031.9	1030.1	1028.3	1026.6
22.5°	1010.8	1008.9	1006.9	1005.2	1003.8	1002.3	1000.8	999.4
25°	967.8	965.2	962.6	960.2	957.9	955.8	953.6	951.4
27.5°	921.1	917.5	913.9	911.0	909.0	906.8	904.7	902.6
30°	887.8	883.2	878.6	875.5	873.7	871.8	870.0	868.2
32.5°	855.3	850.2	845.2	841.5	839.3	837.1	834.7	832.5
35°	804.9	799.1	793.3	789.1	786.3	783.5	780.8	777.9
37.5°	752.2	745.2	738.3	733.5	730.8	728.1	725.4	722.7
40°	717.2	709.7	702.1	697.2	694.8	692.4	690.0	687.7
42.5°	682.9	675.6	668.4	663.0	659.5	656.0	652.5	649.0
45°	627.9	620.0	612.0	606.6	603.6	600.6	597.6	594.6
47.5°	573.6	565.4	557.2	551.5	548.2	544.9	541.6	538.3
50°	536.8	528.5	520.1	514.4	511.5	508.5	505.5	502.6
52.5°	502.0	492.9	484.0	477.9	475.0	472.0	469.1	466.1
55°	448.9	440.0	431.0	424.9	421.8	418.6	415.4	412.2
57.5°	395.8	387.1	378.3	372.6	369.7	366.9	364.1	361.3
60°	360.8	352.0	343.3	337.4	334.4	331.5	328.5	325.5
62.5°	326.2	318.1	310.0	304.5	301.5	298.5	295.6	292.6
65°	275.6	267.7	259.7	254.3	251.2	248.3	245.3	242.3
67.5°	227.2	220.0	212.7	207.8	205.5	203.1	200.7	198.4
70°	195.1	189.0	182.8	178.6	176.2	173.7	171.4	169.0
72.5°	165.3	159.6	153.9	150.3	148.7	147.1	145.6	144.0
75°	123.6	119.2	114.9	112.0	110.6	109.2	107.8	106.4
77.5°	87.9	84.9	81.8	79.8	78.8	77.7	76.7	75.7
80°	66.2	64.4	62.6	61.5	61.1	60.7	60.3	59.9
82.5°	49.5	48.6	47.8	47.3	47.0	46.8	46.6	46.3
85°	28.2	28.0	27.8	27.6	27.4	27.2	27.0	26.9
87.5°	12.1	12.2	12.3	12.3	12.2	12.1	12.0	11.9
90°	7.1	7.5	7.9	8.4	8.6	8.9	9.1	9.4
92.5°	7.1	7.5	7.9	8.3	8.4	8.5	8.6	8.7
95°	7.1	7.5	7.9	8.2	8.2	8.2	8.2	8.2
97.5°	14.3	11.9	9.4	8.2	8.2	8.2	8.2	8.2
100°	42.0	29.1	16.2	9.6	9.2	8.9	8.5	8.2
102.5°	81.6	79.1	76.7	72.6	66.6	60.8	54.8	49.0
105°	116.1	116.1	116.1	116.1	116.0	115.9	115.8	115.7
107.5°	147.0	147.0	147.0	146.9	146.6	146.4	146.1	145.9
110°	166.9	166.7	166.4	166.3	166.4	166.5	166.6	166.7





TEST NUMBER: P333682-935

CATALOG NUMBER: S125RDIW-S850D470U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	186.8	186.4	186.1	185.9	185.8	185.6	185.5	185.4
115°	216.6	216.3	215.9	215.5	215.0	214.5	214.0	213.4
117.5°	245.5	245.0	244.6	244.3	244.0	243.8	243.6	243.4
120°	264.2	264.0	263.8	263.5	263.0	262.6	262.2	261.7
122.5°	281.9	281.7	281.5	281.2	280.7	280.2	279.7	279.2
125°	307.8	307.5	307.1	306.8	306.5	306.3	306.0	305.7
127.5°	331.5	331.3	331.1	330.7	330.0	329.4	328.7	328.1
130°	346.9	346.6	346.4	346.0	345.6	345.2	344.7	344.3
132.5°	361.4	361.3	361.3	361.0	360.6	360.2	359.7	359.3
135°	382.5	382.4	382.2	381.9	381.3	380.8	380.3	379.8
137.5°	402.3	402.3	402.3	402.2	401.7	401.2	400.8	400.4
140°	414.4	414.6	414.7	414.6	414.1	413.5	413.0	412.5
142.5°	426.3	426.3	426.4	426.1	425.6	425.1	424.6	424.0
145°	443.1	443.2	443.2	443.0	442.5	442.0	441.4	440.9
147.5°	457.4	457.5	457.6	457.4	456.8	456.2	455.5	454.9
150°	466.6	466.7	466.9	466.7	466.0	465.3	464.6	463.9
152.5°	474.7	474.8	475.0	474.8	474.2	473.6	472.9	472.3
155°	485.9	486.1	486.4	486.1	485.4	484.7	484.1	483.4
157.5°	495.1	495.3	495.6	495.4	494.7	494.0	493.4	492.7
160°	500.8	501.2	501.5	501.4	500.7	500.0	499.3	498.6
162.5°	506.1	506.6	507.0	507.0	506.2	505.4	504.6	503.9
165°	512.9	513.4	513.9	513.8	513.2	512.4	511.7	511.0
167.5°	518.0	518.6	519.2	519.2	518.3	517.5	516.8	516.0
170°	520.6	521.3	522.0	521.9	521.2	520.4	519.6	518.8
172.5°	522.6	523.2	523.9	523.8	523.1	522.3	521.5	520.7
175°	524.9	525.6	526.2	526.2	525.5	524.7	523.9	523.1
177.5°	525.8	526.2	526.8	526.8	526.2	525.6	525.0	524.5
180°	525.5	525.5	525.5	525.5	525.5	525.5	525.5	525.5

(END OF REPORT)