

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333470-840

Luminaire Tested: **S125DIW-S1270D770U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333470-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1270D770U840-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8280.6 lumens
Efficiency: N/A
Efficacy: 138.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 59.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333470-840

CATALOG NUMBER: S125DIW-S1270D770U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

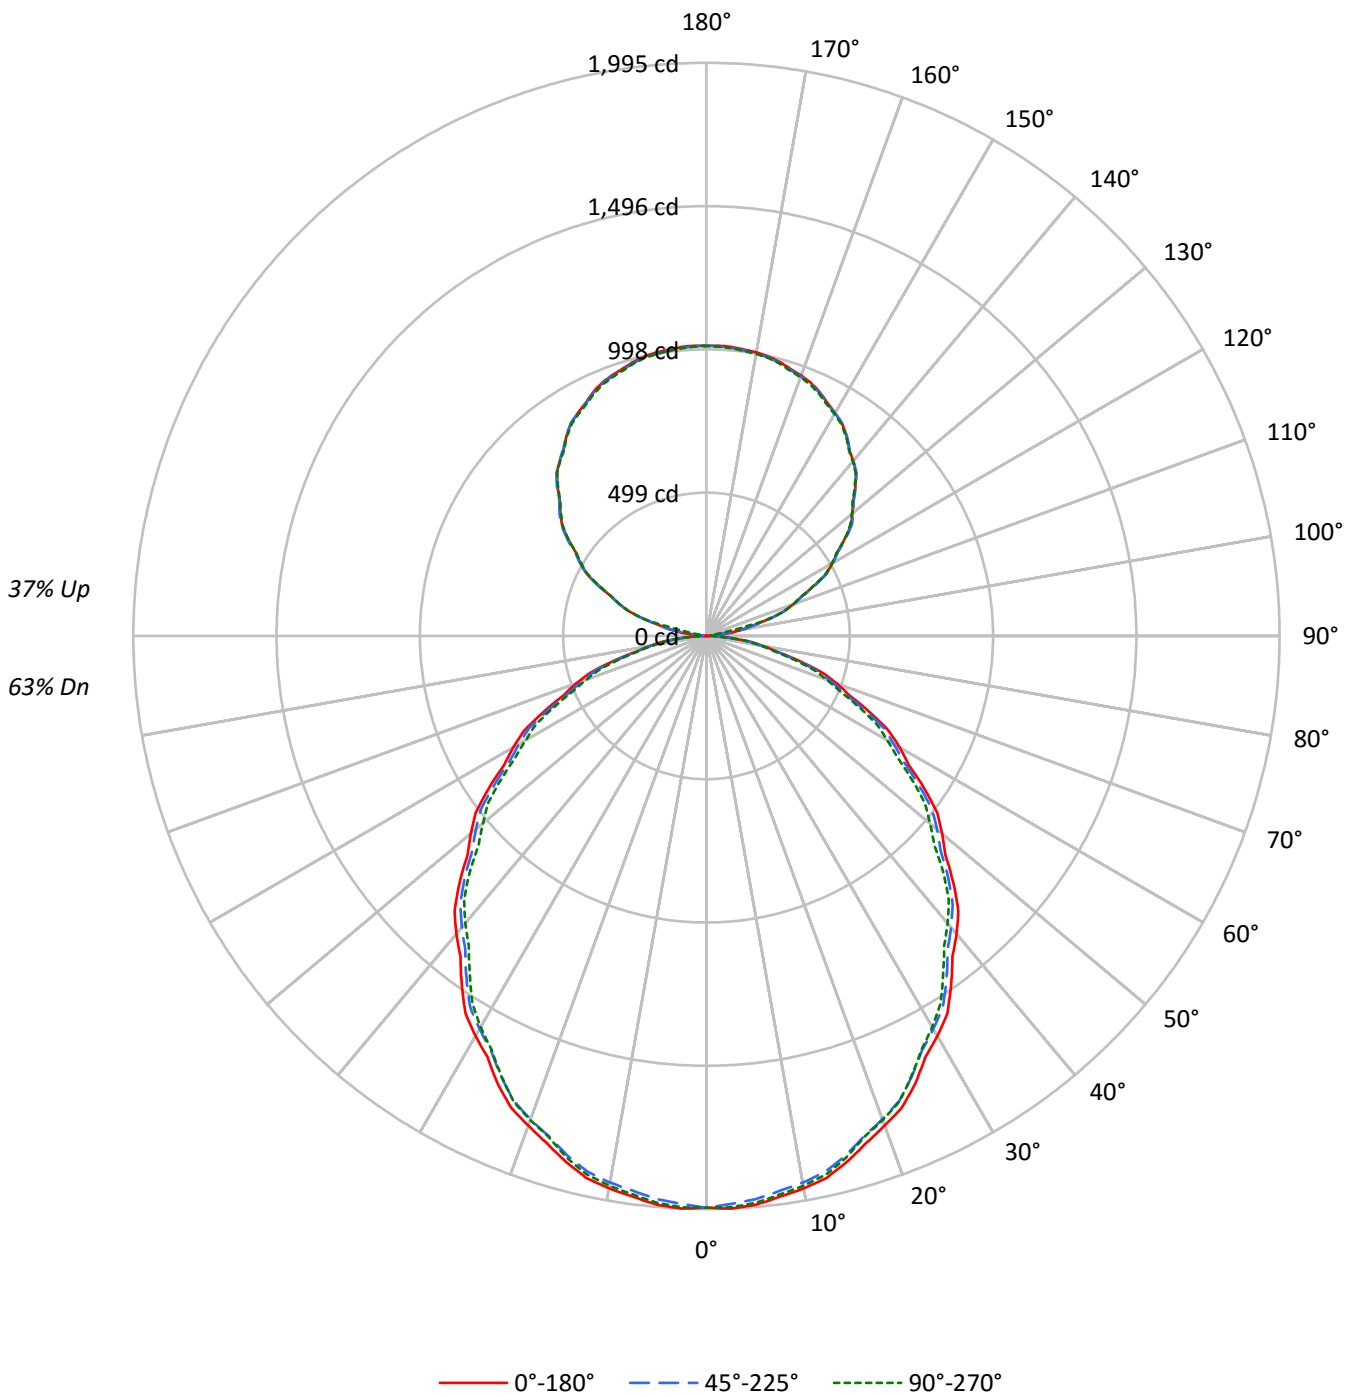



TEST NUMBER: P333470-840

CATALOG NUMBER: S125DIW-S1270D770U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	79	79	79	68	68	68	63
1	101	96	92	88	94	90	87	84	79	77	74	69	67	65	60	58	57	53
2	92	84	78	72	85	79	73	69	69	65	61	61	57	54	53	50	48	44
3	83	74	66	60	78	69	63	57	61	56	52	54	49	46	46	43	41	37
4	76	65	57	51	71	62	54	49	54	49	44	48	43	39	42	38	35	32
5	70	58	50	44	66	55	47	42	49	43	38	43	38	34	37	34	31	28
6	65	52	44	38	60	49	42	36	44	38	33	39	34	30	34	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29	35	30	27	31	27	24	22
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	29	25	22	19
9	52	39	32	26	49	37	30	25	33	28	23	30	25	21	26	22	19	17
10	49	36	29	24	45	34	28	23	31	25	21	28	23	19	24	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	12853	12853	12853
5°	12882	12759	12841
10°	12804	12669	12742
15°	12664	12517	12570
20°	12466	12304	12325
25°	12252	12050	12039
30°	11989	11777	11718
35°	11706	11483	11321
40°	11415	11163	11005
45°	11102	10872	10656
50°	10758	10520	10203
55°	10424	10124	9839
60°	10026	9722	9376
65°	9553	9239	8926
70°	9098	8682	8384
75°	8289	8015	7738
80°	7375	7260	7089
85°	6417	6536	6180



TEST NUMBER: P333470-840

CATALOG NUMBER: S125DIW-S1270D770U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	187.6	2.3
10°-20°	530.1	6.4
20°-30°	782.7	9.5
30°-40°	913.3	11.0
40°-50°	917.2	11.1
50°-60°	805.1	9.7
60°-70°	599.9	7.2
70°-80°	343.0	4.1
80°-90°	101.9	1.2
90°-100°	36.7	0.4
100°-110°	226.1	2.7
110°-120°	410.0	5.0
120°-130°	526.2	6.4
130°-140°	566.0	6.8
140°-150°	531.3	6.4
150°-160°	429.7	5.2
160°-170°	277.9	3.4
170°-180°	95.9	1.2
0°-30°	1500.4	18.1
0°-40°	2413.6	29.1
0°-60°	4136.0	49.9
0°-90°	5180.9	62.6
90°-120°	672.8	8.1
90°-150°	2296.2	27.7
90°-180°	3100.0	37.4
0°-180°	8280.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1990	1990	1990	1990	1990	
5°	1987	1983	1968	1981	1981	188
15°	1894	1889	1872	1880	1880	534
25°	1719	1711	1691	1694	1689	791
35°	1485	1478	1456	1448	1436	928
45°	1216	1208	1190	1172	1167	936
55°	926	920	899	885	874	826
65°	625	621	605	591	584	620
75°	332	329	321	316	310	354
85°	87	88	88	86	83	97
90°	1	7	12	16	18	6
95°	43	39	12	16	16	54
105°	220	223	223	223	222	233
115°	413	417	418	414	410	409
125°	587	592	593	590	587	524
135°	733	737	736	734	730	564
145°	849	851	851	851	847	531
155°	935	931	932	934	929	431
165°	987	983	983	987	982	279
175°	1010	1005	1006	1011	1005	96
180°	1010	1010	1010	1010	1010	



TEST NUMBER: P333470-840

CATALOG NUMBER: S125DIW-S1270D770U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1990.1	1990.1	1990.1	1990.1	1990.1	1990.1	1990.1	1990.1	1990.1	1990.1	1990.1
2.5°	1995.2	1994.4	1993.6	1992.7	1991.9	1990.0	1987.2	1984.4	1981.7	1978.8	1981.7
5°	1987.0	1986.3	1985.6	1984.9	1984.2	1982.2	1978.6	1975.1	1971.7	1968.1	1971.3
7.5°	1968.7	1968.0	1967.3	1966.6	1965.9	1963.7	1959.8	1956.0	1952.2	1948.3	1951.4
10°	1952.4	1951.7	1951.0	1950.3	1949.5	1947.3	1943.5	1939.6	1935.7	1931.9	1934.7
12.5°	1932.2	1931.0	1929.8	1928.4	1927.2	1924.8	1921.2	1917.6	1914.1	1910.5	1912.8
15°	1894.1	1893.1	1892.0	1891.0	1890.0	1887.4	1883.6	1879.8	1875.9	1872.1	1873.8
17.5°	1850.4	1848.9	1847.2	1845.7	1844.2	1841.4	1837.4	1833.4	1829.5	1825.4	1827.7
20°	1813.8	1813.1	1812.4	1811.7	1811.0	1808.4	1803.8	1799.3	1794.7	1790.2	1792.6
22.5°	1777.3	1776.0	1774.7	1773.5	1772.2	1769.5	1765.2	1761.0	1756.7	1752.4	1754.0
25°	1719.4	1717.6	1715.9	1714.1	1712.3	1709.2	1704.7	1700.1	1695.6	1691.0	1691.7
27.5°	1651.6	1650.6	1649.5	1648.5	1647.5	1644.6	1639.9	1635.2	1630.5	1625.8	1626.0
30°	1607.6	1606.5	1605.5	1604.4	1603.4	1600.2	1595.0	1589.7	1584.5	1579.2	1578.5
32.5°	1559.7	1558.1	1556.5	1554.9	1553.3	1550.1	1545.4	1540.8	1536.0	1531.4	1530.1
35°	1484.7	1483.4	1482.0	1480.6	1479.1	1476.0	1471.1	1466.2	1461.3	1456.4	1454.7
37.5°	1406.9	1405.2	1403.5	1401.7	1400.0	1396.7	1392.2	1387.6	1382.9	1378.4	1375.7
40°	1354.0	1352.3	1350.6	1348.8	1347.1	1343.7	1338.9	1333.9	1329.1	1324.1	1321.0
42.5°	1297.4	1296.0	1294.4	1292.9	1291.5	1288.3	1283.4	1278.5	1273.6	1268.7	1265.9
45°	1215.5	1214.2	1212.7	1211.3	1209.9	1207.1	1203.0	1198.7	1194.6	1190.3	1186.1
47.5°	1127.3	1127.4	1127.5	1127.5	1127.6	1125.1	1120.1	1115.1	1110.0	1105.0	1100.8
50°	1070.7	1069.6	1068.5	1067.5	1066.4	1063.8	1059.7	1055.4	1051.3	1047.0	1042.5
52.5°	1012.7	1012.0	1011.2	1010.4	1009.7	1007.0	1002.5	998.0	993.6	989.1	985.1
55°	925.8	924.7	923.7	922.6	921.6	918.7	913.7	908.9	903.9	899.1	895.9
57.5°	834.1	833.6	833.0	832.5	831.9	829.6	825.5	821.3	817.2	813.0	809.0
60°	776.2	774.9	773.5	772.0	770.6	768.0	764.2	760.3	756.5	752.7	749.1
62.5°	715.8	714.7	713.6	712.4	711.2	709.1	705.8	702.5	699.2	695.9	692.2
65°	625.1	624.4	623.7	623.0	622.3	620.0	616.1	612.3	608.4	604.6	601.5
67.5°	537.2	535.7	534.3	532.8	531.4	529.2	526.3	523.4	520.6	517.7	515.0
70°	481.8	480.1	478.3	476.6	474.8	472.3	469.2	466.1	462.9	459.8	457.7
72.5°	421.3	420.1	419.0	417.8	416.6	415.0	412.9	410.9	408.9	406.9	404.5
75°	332.2	331.5	330.8	330.1	329.4	328.2	326.5	324.7	323.0	321.2	320.1
77.5°	250.0	249.7	249.4	249.2	248.9	248.3	247.3	246.3	245.3	244.4	243.8
80°	198.3	198.3	198.3	198.3	198.3	198.0	197.3	196.6	195.9	195.2	194.9
82.5°	153.0	152.5	151.9	151.4	150.8	150.5	150.3	150.2	150.1	149.9	149.3
85°	86.6	86.9	87.3	87.7	88.0	88.2	88.2	88.2	88.2	88.2	87.9
87.5°	34.1	34.4	34.7	34.9	35.2	35.3	35.2	35.2	35.1	35.1	35.3
90°	0.7	2.1	3.4	4.7	6.1	7.3	8.5	9.7	10.8	12.0	12.8
92.5°	11.5	10.6	9.7	8.7	7.8	7.9	8.9	9.9	10.9	12.0	12.8
95°	42.6	42.1	41.6	41.2	40.7	37.3	30.9	24.6	18.3	12.0	12.8
97.5°	89.1	90.0	90.9	91.7	92.6	86.8	74.3	61.8	49.3	36.9	32.1
100°	124.9	125.4	125.9	126.4	126.9	127.5	128.3	128.9	129.6	130.2	105.4
102.5°	161.5	162.1	162.8	163.4	164.0	164.5	164.9	165.3	165.7	166.1	161.5
105°	219.9	220.7	221.4	222.0	222.7	223.0	223.0	223.0	223.0	223.0	223.0
107.5°	280.7	280.7	280.7	280.7	280.7	280.9	281.2	281.6	282.0	282.3	282.3
110°	320.2	320.2	320.2	320.2	320.2	320.4	320.7	321.1	321.4	321.7	321.2



TEST NUMBER: P333470-840

CATALOG NUMBER: S125DIW-S1270D770U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	357.4	357.8	358.2	358.6	359.0	359.3	359.5	359.7	359.9	360.1	359.4
115°	413.0	413.8	414.8	415.6	416.4	416.9	417.1	417.2	417.4	417.6	416.9
117.5°	470.7	470.6	470.6	470.6	470.5	470.8	471.5	472.1	472.7	473.3	472.5
120°	506.5	506.4	506.2	506.0	505.9	506.0	506.5	507.1	507.6	508.1	507.8
122.5°	538.3	539.0	539.6	540.2	540.9	541.3	541.5	541.7	542.0	542.2	541.9
125°	587.4	588.5	589.8	590.9	592.1	592.6	592.6	592.6	592.6	592.6	592.0
127.5°	634.2	635.1	635.9	636.7	637.5	637.9	637.8	637.7	637.6	637.5	637.1
130°	663.0	663.8	664.6	665.5	666.3	666.8	666.9	667.1	667.3	667.4	666.9
132.5°	691.7	692.7	693.7	694.6	695.6	695.9	695.5	695.1	694.8	694.4	694.3
135°	732.6	733.6	734.6	735.6	736.6	736.9	736.6	736.2	735.9	735.6	735.2
137.5°	770.1	771.0	771.8	772.7	773.6	773.9	773.6	773.3	773.0	772.6	772.7
140°	794.7	795.0	795.4	795.7	796.0	796.1	795.9	795.8	795.6	795.4	795.8
142.5°	816.8	817.0	817.2	817.4	817.6	817.8	818.1	818.3	818.5	818.8	818.8
145°	849.3	849.6	850.0	850.3	850.6	850.8	850.8	850.8	850.8	850.8	850.9
147.5°	877.8	877.7	877.6	877.6	877.5	877.6	877.8	877.9	878.1	878.3	878.5
150°	895.6	895.3	895.0	894.6	894.3	894.3	894.6	895.0	895.3	895.6	896.1
152.5°	913.0	912.3	911.6	910.9	910.1	909.9	910.3	910.6	910.9	911.2	911.6
155°	935.3	934.3	933.3	932.3	931.4	931.0	931.4	931.7	932.0	932.3	932.8
157.5°	952.5	952.0	951.4	950.8	950.2	949.9	949.9	950.0	950.0	950.0	950.6
160°	964.5	963.5	962.5	961.5	960.6	960.1	960.3	960.5	960.6	960.8	961.5
162.5°	974.1	973.1	972.1	971.1	970.1	969.7	969.9	970.1	970.2	970.4	971.3
165°	986.9	985.9	985.0	984.0	983.0	982.6	982.7	982.9	983.1	983.2	984.2
167.5°	996.5	995.5	994.5	993.5	992.4	992.0	992.2	992.3	992.5	992.7	993.8
170°	1002.0	1000.8	999.6	998.5	997.2	996.7	996.9	997.1	997.2	997.4	998.8
172.5°	1005.5	1004.4	1003.2	1002.0	1000.9	1000.5	1000.8	1001.1	1001.4	1001.7	1002.8
175°	1009.5	1008.5	1007.4	1006.4	1005.4	1005.0	1005.2	1005.3	1005.5	1005.7	1007.0
177.5°	1011.2	1010.4	1009.7	1008.9	1008.0	1007.6	1007.8	1007.9	1008.0	1008.2	1009.2
180°	1009.5	1009.5	1009.5	1009.5	1009.5	1009.5	1009.5	1009.5	1009.5	1009.5	1009.5



TEST NUMBER: P333470-840

CATALOG NUMBER: S125DIW-S1270D770U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1990.1	1990.1	1990.1	1990.1	1990.1	1990.1	1990.1	1990.1
2.5°	1984.4	1987.2	1990.0	1991.3	1991.0	1990.7	1990.4	1990.1
5°	1974.4	1977.6	1980.7	1982.2	1981.8	1981.5	1981.1	1980.7
7.5°	1954.4	1957.5	1960.6	1962.0	1961.7	1961.3	1961.0	1960.6
10°	1937.5	1940.4	1943.1	1944.3	1944.0	1943.6	1943.3	1943.0
12.5°	1915.0	1917.2	1919.5	1920.6	1920.5	1920.4	1920.4	1920.3
15°	1875.6	1877.3	1879.1	1880.0	1880.0	1880.0	1880.0	1880.0
17.5°	1829.8	1832.0	1834.1	1834.3	1832.6	1830.9	1829.1	1827.4
20°	1795.1	1797.6	1800.0	1800.4	1798.6	1796.9	1795.1	1793.3
22.5°	1755.7	1757.3	1758.9	1759.1	1757.9	1756.7	1755.4	1754.3
25°	1692.4	1693.1	1693.8	1693.6	1692.6	1691.5	1690.5	1689.4
27.5°	1626.1	1626.3	1626.4	1625.9	1624.9	1623.9	1622.8	1621.7
30°	1577.8	1577.1	1576.4	1575.6	1574.5	1573.5	1572.4	1571.3
32.5°	1528.8	1527.6	1526.3	1524.7	1522.9	1521.0	1519.0	1517.2
35°	1452.9	1451.2	1449.5	1447.1	1444.3	1441.6	1438.8	1435.9
37.5°	1373.1	1370.6	1368.0	1365.8	1364.2	1362.6	1361.0	1359.4
40°	1317.9	1314.7	1311.5	1309.5	1308.4	1307.4	1306.3	1305.3
42.5°	1263.0	1260.1	1257.3	1255.1	1253.4	1251.8	1250.2	1248.6
45°	1181.9	1177.7	1173.6	1170.9	1169.8	1168.8	1167.7	1166.7
47.5°	1096.4	1092.2	1087.9	1084.6	1082.1	1079.6	1077.2	1074.8
50°	1037.9	1033.4	1028.9	1025.3	1022.9	1020.5	1018.0	1015.5
52.5°	981.1	977.1	973.1	969.8	967.0	964.3	961.6	958.9
55°	892.7	889.6	886.5	883.6	881.2	878.8	876.3	873.8
57.5°	805.0	800.9	796.9	794.2	792.8	791.5	790.1	788.8
60°	745.6	742.1	738.6	735.7	733.2	730.7	728.3	725.9
62.5°	688.3	684.6	680.9	678.0	676.1	674.2	672.3	670.4
65°	598.3	595.1	592.0	589.8	588.3	586.9	585.5	584.1
67.5°	512.4	509.7	507.1	505.3	504.4	503.6	502.8	501.9
70°	455.6	453.4	451.3	449.6	448.2	446.8	445.5	444.0
72.5°	402.1	399.7	397.4	395.5	394.0	392.6	391.2	389.8
75°	319.1	318.0	317.0	315.8	314.4	313.0	311.5	310.1
77.5°	243.1	242.5	241.9	241.1	240.0	239.0	238.1	237.1
80°	194.5	194.2	193.8	193.3	192.6	191.9	191.2	190.6
82.5°	148.7	148.0	147.3	147.0	146.8	146.7	146.5	146.4
85°	87.5	87.2	86.7	86.2	85.5	84.8	84.1	83.4
87.5°	35.4	35.6	35.9	35.6	35.2	34.7	34.2	33.8
90°	13.6	14.4	15.2	16.0	16.5	17.0	17.5	18.0
92.5°	13.6	14.4	15.2	15.9	16.1	16.3	16.6	16.8
95°	13.6	14.4	15.2	15.8	15.8	15.8	15.8	15.8
97.5°	27.5	22.7	18.1	15.8	15.8	15.8	15.8	15.8
100°	80.7	55.8	31.1	18.4	17.7	17.1	16.4	15.8
102.5°	156.7	152.1	147.3	139.4	128.1	116.7	105.4	94.1
105°	223.0	223.0	223.0	222.9	222.8	222.6	222.4	222.3
107.5°	282.4	282.4	282.4	282.2	281.7	281.1	280.6	280.1
110°	320.7	320.2	319.7	319.6	319.7	319.9	320.1	320.2



TEST NUMBER: P333470-840

CATALOG NUMBER: S125DIW-S1270D770U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	358.8	358.2	357.5	357.1	356.9	356.7	356.4	356.2
115°	416.2	415.6	414.9	414.0	413.0	412.0	411.0	410.0
117.5°	471.6	470.8	469.9	469.3	468.8	468.4	468.0	467.6
120°	507.5	507.1	506.8	506.1	505.3	504.5	503.7	502.8
122.5°	541.5	541.2	540.9	540.2	539.3	538.3	537.3	536.3
125°	591.3	590.7	590.0	589.4	588.9	588.3	587.9	587.4
127.5°	636.8	636.4	636.1	635.3	634.0	632.8	631.6	630.4
130°	666.5	666.0	665.5	664.8	664.0	663.2	662.3	661.5
132.5°	694.2	694.1	694.0	693.6	692.7	691.9	691.1	690.2
135°	734.9	734.6	734.3	733.6	732.6	731.5	730.5	729.5
137.5°	772.8	772.8	773.0	772.5	771.6	770.8	769.9	769.1
140°	796.1	796.4	796.8	796.4	795.4	794.5	793.5	792.4
142.5°	818.9	819.0	819.0	818.6	817.6	816.6	815.6	814.6
145°	851.1	851.3	851.4	851.0	850.0	849.0	848.1	847.1
147.5°	878.7	878.9	879.1	878.6	877.5	876.3	875.0	873.8
150°	896.4	896.7	897.1	896.6	895.1	893.8	892.5	891.2
152.5°	911.9	912.2	912.6	912.1	910.9	909.8	908.6	907.4
155°	933.3	933.8	934.3	933.9	932.6	931.3	930.0	928.6
157.5°	951.1	951.6	952.1	951.7	950.4	949.1	947.8	946.4
160°	962.1	962.8	963.4	963.1	961.8	960.5	959.2	957.8
162.5°	972.2	973.1	974.1	973.8	972.4	970.9	969.5	968.0
165°	985.2	986.2	987.2	987.0	985.7	984.4	983.1	981.7
167.5°	995.0	996.2	997.4	997.3	995.8	994.3	992.8	991.3
170°	1000.1	1001.5	1002.8	1002.7	1001.2	999.7	998.2	996.7
172.5°	1004.0	1005.2	1006.4	1006.2	1004.8	1003.3	1001.8	1000.3
175°	1008.4	1009.7	1011.0	1010.9	1009.5	1007.9	1006.4	1004.9
177.5°	1010.1	1011.0	1012.0	1011.9	1010.8	1009.8	1008.7	1007.6
180°	1009.5	1009.5	1009.5	1009.5	1009.5	1009.5	1009.5	1009.5

(END OF REPORT)