

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333357-840

Luminaire Tested: **S125DIW-S375D1050U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333357-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S375D1050U840-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5207.1 lumens
Efficiency: N/A
Efficacy: 137.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 38
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333357-840

CATALOG NUMBER: S125DIW-S375D1050U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

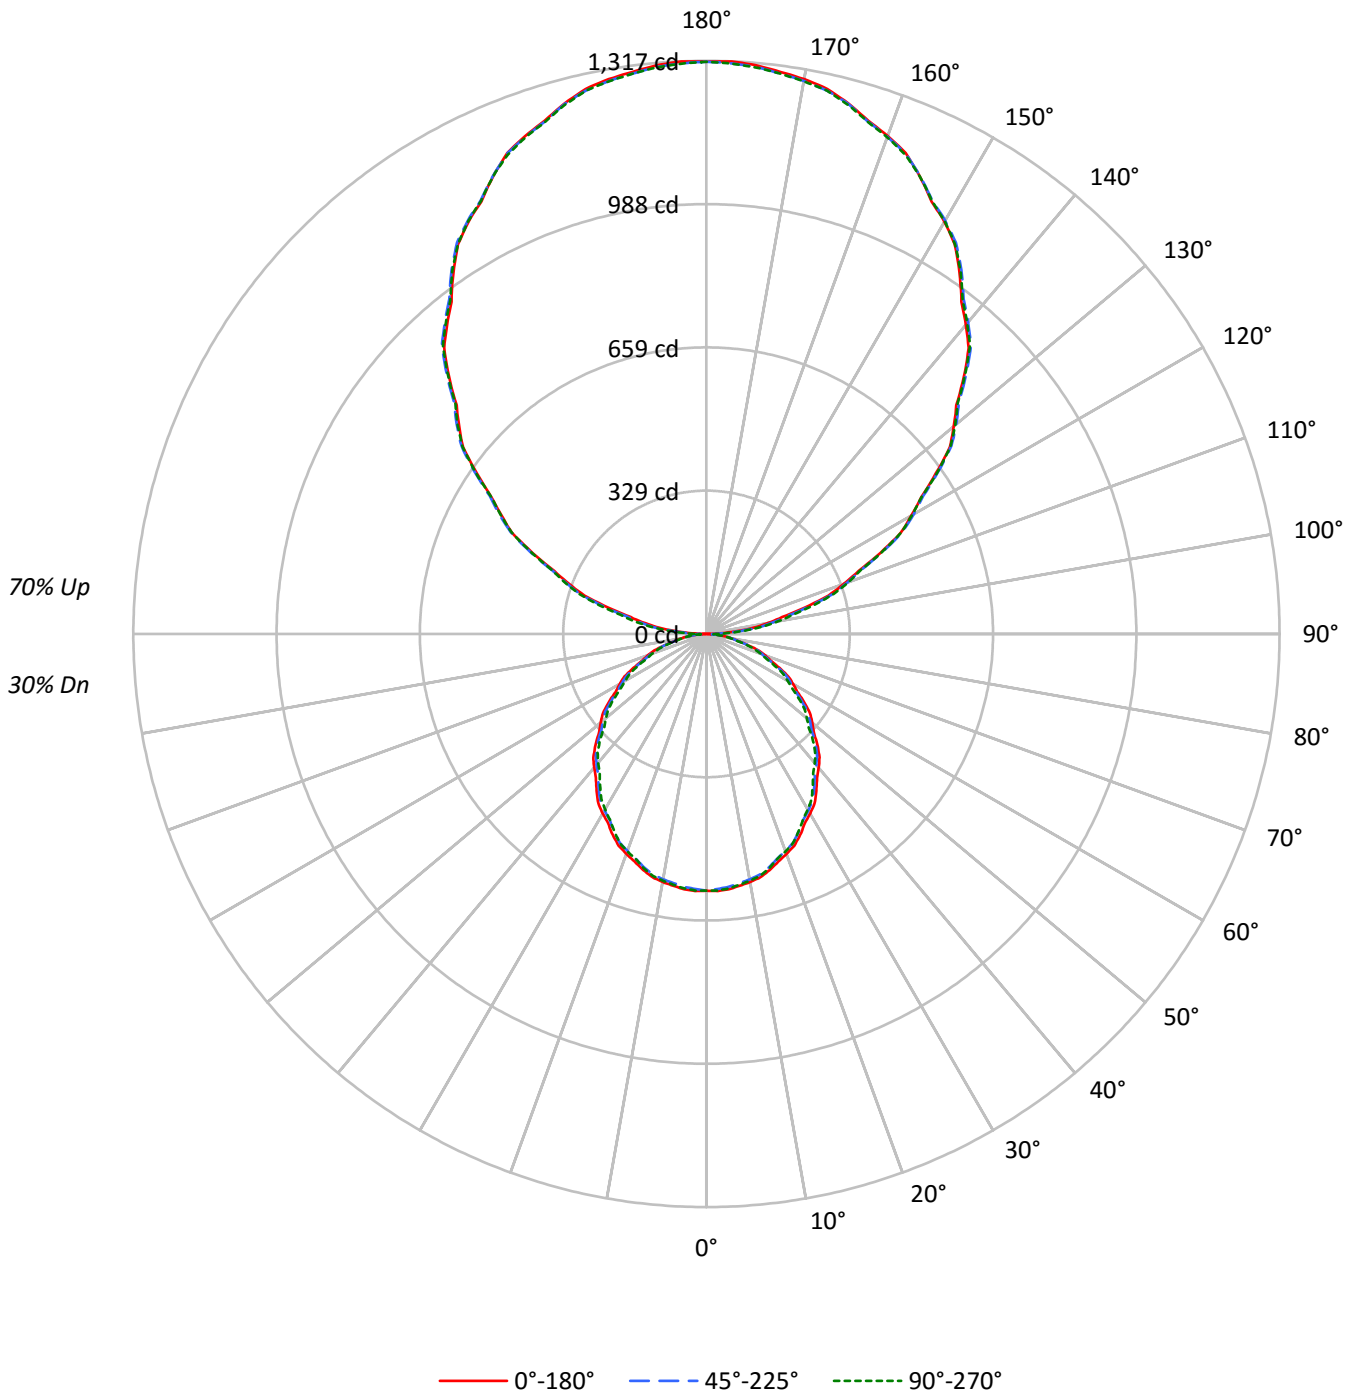



TEST NUMBER: P333357-840

CATALOG NUMBER: S125DIW-S375D1050U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20						20							20
RC	80					70						30							10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50
RCR																			
0	102	102	102	102		92	92	92	92		72	72	72		54	54	54		37
1	93	89	85	82		83	80	77	74		63	61	59		47	46	45		33
2	85	78	72	67		76	70	65	60		55	52	49		41	39	37		29
3	77	68	61	55		69	61	55	50		48	44	41		37	34	31		26
4	71	60	53	47		63	54	48	43		43	38	35		33	29	27		23
5	65	53	46	40		58	48	41	36		38	33	30		29	26	23		21
6	59	48	40	34		53	43	36	31		34	29	26		26	23	20		19
7	55	43	35	30		49	39	32	27		31	26	23		24	20	18		17
8	51	39	31	26		45	35	29	24		28	23	20		22	18	16		16
9	47	35	28	23		42	32	26	21		26	21	18		20	17	14		14
10	44	32	25	21		39	29	23	19		24	19	16		18	15	13		13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3810	3810	3810
5°	3818	3782	3806
10°	3796	3756	3777
15°	3754	3710	3726
20°	3696	3647	3654
25°	3632	3572	3569
30°	3554	3491	3473
35°	3470	3404	3356
40°	3384	3309	3262
45°	3291	3222	3159
50°	3189	3118	3024
55°	3090	3001	2916
60°	2971	2882	2780
65°	2832	2740	2647
70°	2696	2574	2485
75°	2458	2376	2293
80°	2187	2153	2101
85°	1904	1941	1830



TEST NUMBER: P333357-840

CATALOG NUMBER: S125DIW-S375D1050U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	55.6	1.1
10°-20°	157.1	3.0
20°-30°	232.0	4.5
30°-40°	270.7	5.2
40°-50°	271.9	5.2
50°-60°	238.7	4.6
60°-70°	177.8	3.4
70°-80°	101.7	2.0
80°-90°	32.4	0.6
90°-100°	88.1	1.7
100°-110°	260.1	5.0
110°-120°	440.5	8.5
120°-130°	579.7	11.1
130°-140°	649.6	12.5
140°-150°	636.6	12.2
150°-160°	534.7	10.3
160°-170°	355.4	6.8
170°-180°	124.4	2.4
0°-30°	444.7	8.5
0°-40°	715.5	13.7
0°-60°	1226.0	23.5
0°-90°	1538.0	29.5
90°-120°	788.6	15.1
90°-150°	2654.6	51.0
90°-180°	3669.0	70.5
0°-180°	5207.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	590	590	590	590	590	
5°	589	588	583	587	587	56
15°	562	560	555	557	557	158
25°	510	507	501	502	501	234
35°	440	438	432	429	426	275
45°	360	358	353	348	346	278
55°	274	273	266	262	259	245
65°	185	184	179	175	173	184
75°	98	98	95	94	92	105
85°	26	26	26	26	25	29
90°	1	9	16	21	24	5
95°	67	69	79	86	88	71
105°	233	238	245	251	254	249
115°	441	445	447	446	445	436
125°	644	649	651	649	648	576
135°	837	843	844	844	840	645
145°	1014	1018	1021	1021	1018	634
155°	1160	1160	1161	1165	1160	534
165°	1262	1260	1261	1264	1259	356
175°	1312	1308	1308	1313	1307	125
180°	1315	1315	1315	1315	1315	



TEST NUMBER: P333357-840

CATALOG NUMBER: S125DIW-S375D1050U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0
2.5°	591.4	591.2	591.0	590.7	590.5	589.9	589.1	588.2	587.4	586.5	587.4
5°	589.0	588.8	588.5	588.3	588.1	587.5	586.5	585.5	584.4	583.4	584.3
7.5°	583.6	583.4	583.2	583.0	582.8	582.1	581.0	579.8	578.7	577.5	578.5
10°	578.8	578.6	578.3	578.1	577.9	577.2	576.1	574.9	573.8	572.7	573.5
12.5°	572.8	572.4	572.0	571.7	571.3	570.6	569.5	568.5	567.3	566.3	566.9
15°	561.5	561.2	560.9	560.6	560.2	559.5	558.4	557.2	556.0	554.9	555.4
17.5°	548.5	548.1	547.5	547.1	546.6	545.8	544.6	543.5	542.3	541.1	541.8
20°	537.7	537.5	537.2	537.0	536.8	536.0	534.7	533.3	532.0	530.7	531.4
22.5°	526.8	526.4	526.0	525.7	525.3	524.5	523.2	522.0	520.7	519.5	520.0
25°	509.7	509.2	508.6	508.1	507.6	506.6	505.3	503.9	502.6	501.3	501.5
27.5°	489.6	489.3	489.0	488.7	488.4	487.5	486.1	484.7	483.3	481.9	482.0
30°	476.6	476.3	475.8	475.5	475.2	474.3	472.8	471.2	469.7	468.1	467.9
32.5°	462.3	461.8	461.4	460.9	460.4	459.5	458.1	456.7	455.3	453.9	453.5
35°	440.1	439.7	439.3	438.9	438.5	437.5	436.1	434.6	433.1	431.7	431.2
37.5°	417.1	416.6	416.1	415.5	415.0	414.0	412.6	411.3	409.9	408.6	407.8
40°	401.4	400.8	400.3	399.8	399.3	398.3	396.9	395.5	393.9	392.5	391.6
42.5°	384.6	384.2	383.7	383.2	382.8	381.9	380.4	379.0	377.5	376.1	375.3
45°	360.3	359.9	359.5	359.1	358.6	357.8	356.6	355.4	354.1	352.8	351.6
47.5°	334.2	334.2	334.2	334.3	334.3	333.6	332.0	330.5	329.0	327.5	326.3
50°	317.4	317.1	316.8	316.4	316.1	315.4	314.1	312.9	311.6	310.3	309.0
52.5°	300.2	299.9	299.7	299.5	299.3	298.5	297.2	295.9	294.5	293.2	292.1
55°	274.4	274.1	273.8	273.5	273.2	272.3	270.8	269.4	267.9	266.5	265.6
57.5°	247.3	247.1	246.9	246.8	246.6	245.9	244.7	243.5	242.3	241.1	239.8
60°	230.0	229.6	229.2	228.8	228.4	227.6	226.5	225.4	224.2	223.1	222.1
62.5°	212.2	211.9	211.5	211.2	210.9	210.2	209.2	208.2	207.2	206.3	205.2
65°	185.3	185.1	184.9	184.7	184.5	183.8	182.7	181.5	180.4	179.3	178.2
67.5°	159.3	158.9	158.3	157.9	157.5	156.8	156.0	155.1	154.3	153.5	152.7
70°	142.8	142.3	141.8	141.3	140.8	140.0	139.1	138.1	137.2	136.3	135.6
72.5°	124.9	124.5	124.2	123.8	123.5	123.0	122.4	121.8	121.2	120.6	119.9
75°	98.5	98.3	98.1	97.9	97.7	97.3	96.7	96.2	95.7	95.2	94.9
77.5°	74.1	74.0	73.9	73.8	73.8	73.6	73.3	73.0	72.7	72.4	72.2
80°	58.8	58.8	58.8	58.8	58.8	58.7	58.5	58.3	58.1	57.9	57.8
82.5°	45.3	45.2	45.0	44.8	44.7	44.6	44.5	44.5	44.4	44.4	44.2
85°	25.7	25.8	25.9	26.0	26.1	26.2	26.2	26.2	26.2	26.2	26.1
87.5°	10.3	10.6	11.0	11.4	11.7	12.0	12.3	12.5	12.7	13.0	13.2
90°	1.0	2.8	4.6	6.5	8.3	10.0	11.6	13.2	14.7	16.4	17.5
92.5°	24.7	26.1	27.3	28.6	29.9	31.5	33.4	35.3	37.4	39.3	40.8
95°	66.6	67.0	67.5	67.9	68.4	69.7	72.0	74.2	76.5	78.8	80.4
97.5°	110.5	110.7	110.9	111.1	111.3	112.9	116.0	119.2	122.3	125.4	126.9
100°	143.3	143.3	143.3	143.3	143.3	144.7	147.6	150.7	153.6	156.5	158.6
102.5°	178.4	179.4	180.3	181.2	182.1	183.3	184.8	186.3	187.8	189.3	191.6
105°	233.3	234.4	235.6	236.7	237.8	239.1	240.4	241.9	243.2	244.6	245.9
107.5°	293.9	295.0	296.2	297.3	298.4	299.5	300.5	301.6	302.7	303.7	304.4
110°	335.6	336.8	337.9	339.0	340.2	341.1	341.7	342.4	343.2	343.9	344.5



TEST NUMBER: P333357-840

CATALOG NUMBER: S125DIW-S375D1050U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	378.2	378.8	379.4	380.0	380.5	381.3	382.1	383.0	383.8	384.8	385.1
115°	441.0	441.9	442.8	443.7	444.6	445.4	445.8	446.3	446.7	447.2	447.0
117.5°	504.0	504.4	504.8	505.2	505.7	506.1	506.5	507.0	507.4	507.8	508.0
120°	543.3	544.5	545.6	546.7	547.9	548.6	548.8	549.1	549.3	549.5	549.5
122.5°	585.9	586.3	586.7	587.1	587.5	588.0	588.7	589.3	589.9	590.5	590.3
125°	643.6	645.0	646.3	647.7	649.0	649.8	650.2	650.4	650.6	650.8	650.4
127.5°	705.0	705.8	706.6	707.3	708.1	708.6	708.9	709.2	709.4	709.7	709.5
130°	741.8	743.0	744.2	745.3	746.4	747.2	747.7	748.1	748.6	749.0	748.8
132.5°	778.7	780.5	782.4	784.3	786.2	787.1	787.0	786.9	786.8	786.7	786.5
135°	837.0	838.4	839.7	841.1	842.5	843.2	843.5	843.7	843.9	844.1	844.1
137.5°	891.9	893.2	894.5	895.9	897.2	898.1	898.6	899.1	899.6	900.1	900.3
140°	927.1	928.2	929.4	930.5	931.6	932.5	933.2	933.9	934.5	935.2	935.7
142.5°	962.3	963.2	964.2	965.1	966.1	967.0	967.9	968.8	969.6	970.5	970.7
145°	1014.0	1014.9	1015.8	1016.7	1017.6	1018.4	1019.2	1019.9	1020.6	1021.2	1021.2
147.5°	1062.0	1062.5	1063.0	1063.4	1063.9	1064.5	1065.0	1065.5	1066.1	1066.6	1067.2
150°	1093.9	1093.7	1093.4	1093.2	1093.0	1093.3	1094.2	1095.1	1096.0	1096.9	1096.9
152.5°	1120.0	1120.3	1120.6	1121.1	1121.4	1121.7	1122.1	1122.4	1122.8	1123.2	1123.7
155°	1160.3	1160.3	1160.3	1160.3	1160.3	1160.4	1160.7	1160.9	1161.1	1161.4	1162.4
157.5°	1196.4	1195.9	1195.4	1194.9	1194.4	1194.3	1194.5	1194.7	1195.0	1195.2	1196.1
160°	1217.7	1217.0	1216.3	1215.7	1215.0	1214.8	1215.0	1215.2	1215.4	1215.7	1216.6
162.5°	1236.5	1236.0	1235.5	1235.0	1234.5	1234.3	1234.4	1234.4	1234.5	1234.5	1235.6
165°	1261.7	1261.2	1260.7	1260.3	1259.8	1259.7	1260.0	1260.2	1260.4	1260.6	1261.5
167.5°	1282.9	1282.0	1281.1	1280.2	1279.3	1278.9	1278.9	1278.9	1278.9	1278.9	1280.2
170°	1294.4	1293.5	1292.6	1291.7	1290.8	1290.3	1290.3	1290.3	1290.3	1290.3	1291.7
172.5°	1302.6	1301.7	1300.8	1299.9	1299.0	1298.5	1298.5	1298.5	1298.5	1298.5	1299.9
175°	1311.8	1310.9	1310.0	1309.1	1308.2	1307.7	1307.7	1307.7	1307.7	1307.7	1309.1
177.5°	1316.6	1315.8	1315.0	1314.3	1313.6	1313.1	1312.9	1312.8	1312.6	1312.4	1313.5
180°	1314.8	1314.8	1314.8	1314.8	1314.8	1314.8	1314.8	1314.8	1314.8	1314.8	1314.8



TEST NUMBER: P333357-840

CATALOG NUMBER: S125DIW-S375D1050U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	590.0	590.0	590.0	590.0	590.0	590.0	590.0	590.0
2.5°	588.2	589.1	589.9	590.3	590.2	590.1	590.1	590.0
5°	585.2	586.2	587.1	587.5	587.4	587.3	587.2	587.1
7.5°	579.4	580.3	581.2	581.6	581.5	581.4	581.3	581.2
10°	574.3	575.1	576.0	576.3	576.2	576.1	576.0	575.9
12.5°	567.6	568.4	569.0	569.3	569.3	569.3	569.3	569.2
15°	555.9	556.4	557.0	557.2	557.2	557.2	557.2	557.2
17.5°	542.4	543.0	543.7	543.7	543.2	542.7	542.2	541.7
20°	532.1	532.8	533.5	533.7	533.1	532.6	532.1	531.6
22.5°	520.4	520.9	521.4	521.4	521.1	520.7	520.4	520.0
25°	501.7	501.9	502.1	502.0	501.7	501.4	501.1	500.8
27.5°	482.0	482.0	482.1	482.0	481.6	481.3	481.0	480.7
30°	467.7	467.5	467.3	467.1	466.8	466.5	466.1	465.7
32.5°	453.2	452.8	452.4	452.0	451.4	450.8	450.3	449.7
35°	430.7	430.2	429.6	429.0	428.2	427.3	426.5	425.7
37.5°	407.1	406.3	405.5	404.9	404.3	403.9	403.4	402.9
40°	390.6	389.7	388.8	388.2	387.9	387.5	387.2	386.9
42.5°	374.4	373.5	372.6	372.0	371.5	371.0	370.6	370.1
45°	350.3	349.1	347.9	347.1	346.8	346.5	346.2	345.9
47.5°	325.0	323.8	322.4	321.4	320.7	320.0	319.3	318.6
50°	307.7	306.3	305.0	304.0	303.2	302.5	301.7	301.0
52.5°	290.8	289.6	288.4	287.5	286.7	285.9	285.1	284.3
55°	264.6	263.7	262.8	262.0	261.3	260.4	259.7	259.0
57.5°	238.6	237.4	236.2	235.4	235.0	234.6	234.2	233.8
60°	221.1	219.9	218.9	218.0	217.3	216.6	215.9	215.2
62.5°	204.1	202.9	201.8	201.0	200.5	199.9	199.2	198.7
65°	177.3	176.4	175.5	174.8	174.4	174.0	173.6	173.2
67.5°	151.9	151.1	150.3	149.8	149.6	149.3	149.1	148.8
70°	135.0	134.4	133.8	133.3	132.9	132.5	132.0	131.6
72.5°	119.2	118.5	117.8	117.2	116.8	116.4	115.9	115.5
75°	94.6	94.3	93.9	93.6	93.2	92.8	92.4	91.9
77.5°	72.1	71.9	71.7	71.5	71.2	70.9	70.6	70.3
80°	57.7	57.6	57.5	57.3	57.1	56.9	56.7	56.5
82.5°	44.0	43.8	43.7	43.5	43.5	43.5	43.4	43.4
85°	26.0	25.9	25.8	25.5	25.3	25.1	24.9	24.7
87.5°	13.4	13.6	13.9	14.0	13.9	13.9	13.9	13.8
90°	18.7	19.8	20.9	21.8	22.5	23.2	23.8	24.5
92.5°	42.3	43.8	45.3	46.3	46.8	47.3	47.8	48.3
95°	82.0	83.5	85.1	86.1	86.6	87.1	87.6	88.0
97.5°	128.5	130.0	131.5	132.3	132.6	132.9	133.2	133.4
100°	160.7	162.7	164.7	166.0	166.4	166.9	167.3	167.8
102.5°	193.8	196.0	198.2	199.7	200.3	201.0	201.6	202.2
105°	247.3	248.6	250.0	251.1	251.8	252.4	253.1	253.8
107.5°	305.1	305.8	306.4	306.8	306.7	306.7	306.6	306.6
110°	345.2	345.9	346.6	346.8	346.6	346.3	346.1	345.9



TEST NUMBER: P333357-840

CATALOG NUMBER: S125DIW-S375D1050U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	385.4	385.7	386.0	386.0	385.6	385.2	384.8	384.4
115°	446.7	446.5	446.3	446.1	445.8	445.6	445.4	445.1
117.5°	508.1	508.3	508.5	508.1	507.2	506.2	505.3	504.4
120°	549.5	549.5	549.5	549.1	548.2	547.2	546.3	545.4
122.5°	590.1	589.9	589.7	589.3	588.5	587.7	587.0	586.3
125°	649.8	649.4	648.9	648.6	648.4	648.1	647.9	647.7
127.5°	709.2	709.0	708.8	708.5	708.0	707.6	707.1	706.7
130°	748.6	748.3	748.1	747.8	747.3	746.9	746.4	746.0
132.5°	786.2	786.0	785.8	785.4	784.7	784.1	783.5	782.7
135°	844.1	844.1	844.1	843.7	842.8	841.9	841.0	840.1
137.5°	900.6	900.9	901.1	900.7	899.6	898.5	897.3	896.2
140°	936.1	936.6	937.1	936.8	935.6	934.4	933.3	932.2
142.5°	971.0	971.3	971.6	971.1	970.0	968.9	967.8	966.5
145°	1021.2	1021.2	1021.2	1020.9	1020.2	1019.5	1018.9	1018.1
147.5°	1067.7	1068.2	1068.8	1068.3	1066.8	1065.2	1063.7	1062.2
150°	1096.9	1096.9	1096.9	1096.7	1096.2	1095.8	1095.3	1094.9
152.5°	1124.2	1124.8	1125.3	1125.2	1124.4	1123.6	1122.7	1121.9
155°	1163.3	1164.2	1165.1	1164.9	1163.8	1162.7	1161.5	1160.3
157.5°	1197.0	1197.9	1198.8	1198.5	1197.0	1195.5	1194.0	1192.5
160°	1217.5	1218.4	1219.3	1219.1	1218.0	1216.9	1215.8	1214.6
162.5°	1236.7	1237.7	1238.8	1238.7	1237.4	1236.1	1234.8	1233.4
165°	1262.4	1263.3	1264.3	1264.0	1262.7	1261.3	1260.0	1258.6
167.5°	1281.6	1282.9	1284.3	1284.3	1282.9	1281.5	1280.1	1278.7
170°	1293.0	1294.4	1295.8	1295.7	1294.0	1292.5	1290.9	1289.3
172.5°	1301.2	1302.6	1303.9	1303.9	1302.5	1301.1	1299.7	1298.3
175°	1310.4	1311.8	1313.2	1313.0	1311.5	1309.9	1308.3	1306.7
177.5°	1314.6	1315.8	1316.8	1316.7	1315.5	1314.1	1312.9	1311.6
180°	1314.8	1314.8	1314.8	1314.8	1314.8	1314.8	1314.8	1314.8

(END OF REPORT)