

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333394-840

Luminaire Tested: **S125DIW-S610D1560U840-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333394-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S610D1560U840-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8852.2 lumens
Efficiency: N/A
Efficacy: 146.1 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 60.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

Luminous Intensity Polar Plot

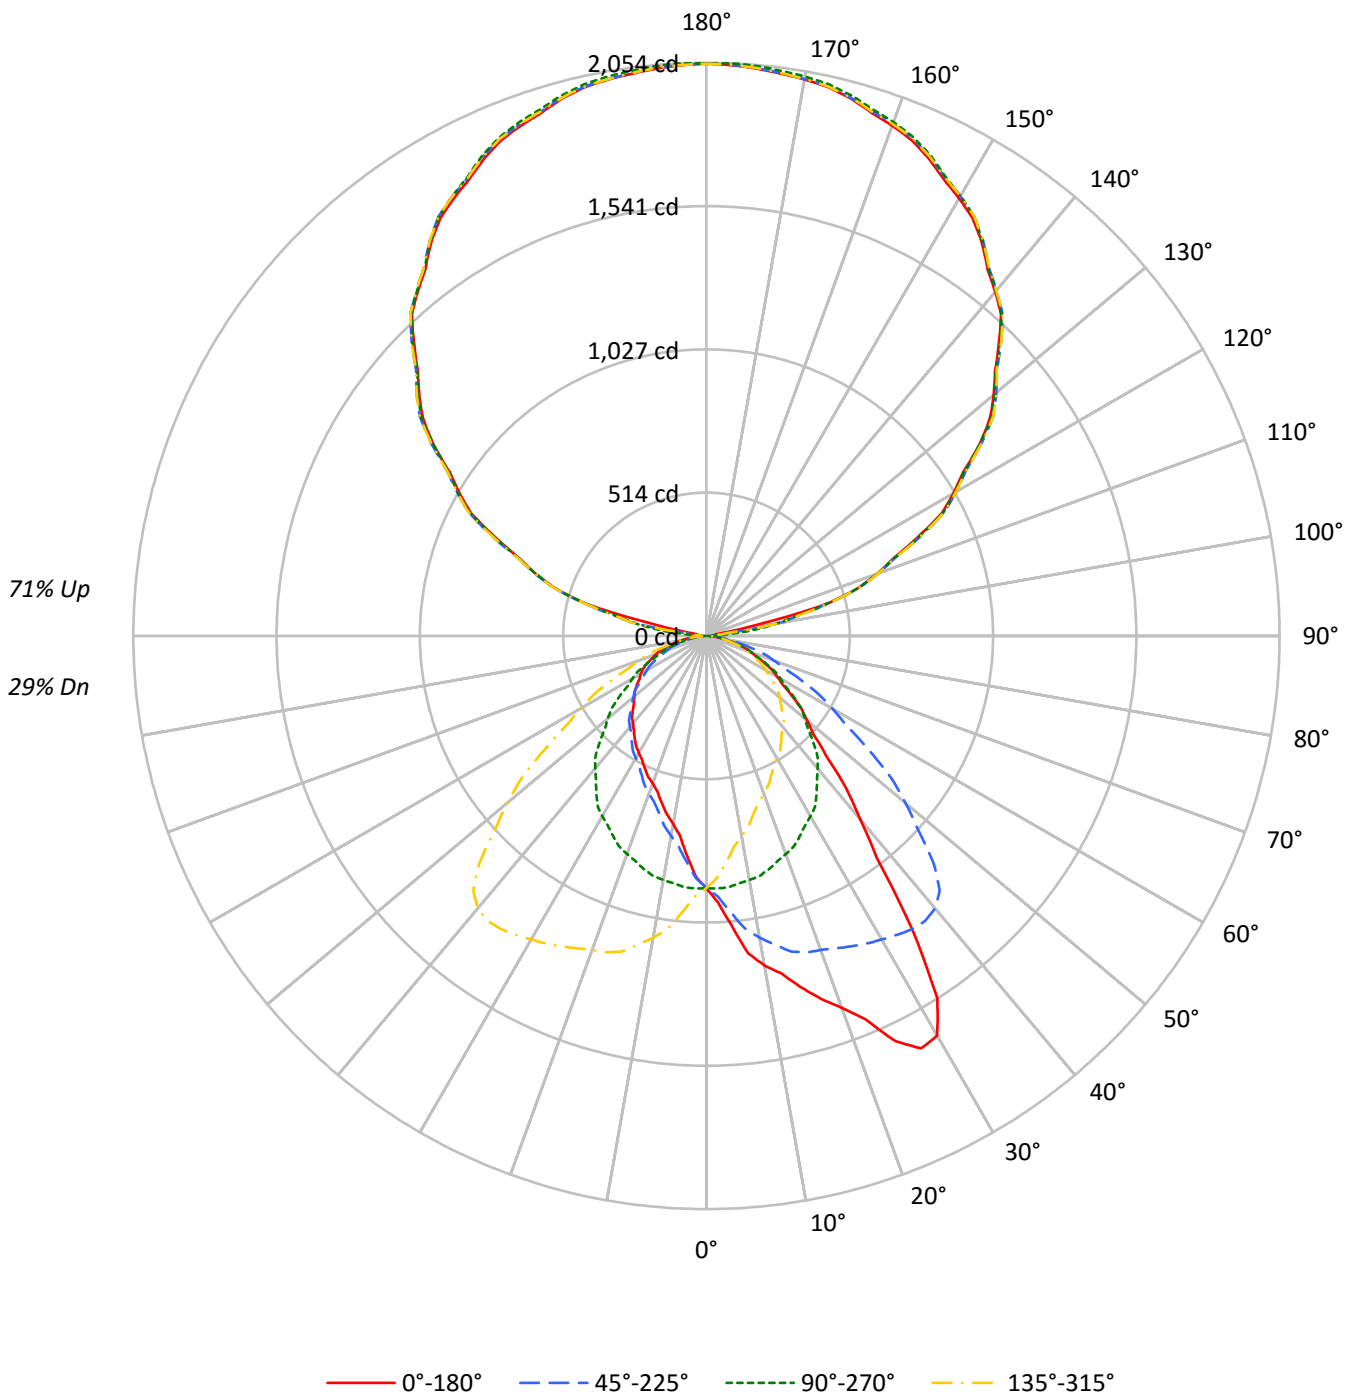



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	102	102	102	102	91	91	91	91	72	72	72	53	53	53	37	37	37	29					29			
1	93	89	85	82	83	80	77	74	63	61	59	47	46	45	33	32	31	25					25			
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	29	28	26	21					21			
3	77	68	61	56	69	62	56	51	49	45	41	37	34	32	26	24	23	18					18			
4	71	61	53	47	63	55	48	43	43	39	35	33	30	27	23	21	19	15					15			
5	65	54	46	40	58	49	42	37	39	34	30	29	26	23	21	19	17	13					13			
6	60	48	40	35	53	43	37	32	35	30	26	26	23	20	19	17	15	12					12			
7	55	43	36	30	49	39	33	28	31	26	23	24	21	18	17	15	13	10					10			
8	51	39	32	27	46	35	29	24	28	24	20	22	18	16	16	13	12	9					9			
9	47	36	28	24	42	32	26	22	26	21	18	20	17	14	14	12	11	8					8			
10	44	33	26	21	40	30	23	19	24	19	16	18	15	13	13	11	10	8					8			

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	5837	5837	5837	5837
5°	6760	5857	5128	5857
10°	7864	5827	4494	5827
15°	8705	5784	4145	5784
20°	9745	5716	3865	5716
25°	11416	5640	3729	5640
30°	12331	5565	3610	5565
35°	10138	5423	3533	5423
40°	7206	5227	3447	5227
45°	5536	4961	3399	4961
50°	4725	4633	3392	4633
55°	4208	4310	3422	4310
60°	3796	3959	3509	3959
65°	3506	3605	3599	3605
70°	3186	3238	3652	3238
75°	2815	2852	3618	2852
80°	2369	2325	3310	2325
85°	1875	1675	2675	1675



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	87.0	1.0
10°-20°	259.1	2.9
20°-30°	420.7	4.8
30°-40°	513.1	5.8
40°-50°	466.8	5.3
50°-60°	371.8	4.2
60°-70°	259.0	2.9
70°-80°	138.1	1.6
80°-90°	39.1	0.4
90°-100°	74.5	0.8
100°-110°	459.3	5.2
110°-120°	833.0	9.4
120°-130°	1069.1	12.1
130°-140°	1149.9	13.0
140°-150°	1079.3	12.2
150°-160°	873.1	9.9
160°-170°	564.7	6.4
170°-180°	194.8	2.2
0°-30°	766.7	8.7
0°-40°	1279.9	14.5
0°-60°	2118.5	23.9
0°-90°	2554.7	28.9
90°-120°	1366.8	15.4
90°-150°	4665.0	52.7
90°-180°	6298.0	71.1
0°-180°	8852.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	904	904	904	904	904	
5°	1043	903	791	903	1043	105
15°	1302	865	620	865	1302	373
25°	1602	791	523	791	1602	732
35°	1286	688	448	688	1286	787
45°	606	543	372	543	606	485
55°	374	383	304	383	374	337
65°	229	236	236	236	229	228
75°	113	114	145	114	113	121
85°	25	23	36	23	25	30
90°	36	2	36	2	36	17
95°	32	87	32	87	32	26
105°	452	447	452	447	452	408
115°	833	839	833	839	833	827
125°	1193	1193	1193	1193	1193	1062
135°	1482	1488	1482	1488	1482	1144
145°	1721	1726	1721	1726	1721	1075
155°	1886	1900	1886	1900	1886	869
165°	1994	2005	1994	2005	1994	563
175°	2042	2051	2042	2051	2042	194
180°	2051	2051	2051	2051	2051	



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8
2.5°	956.0	954.7	953.5	951.1	952.9	947.7	945.2	941.0	935.7	933.9	931.7
5°	1042.7	1044.6	1046.5	1038.4	1039.3	1033.9	1021.6	1011.6	1003.6	993.2	985.9
7.5°	1147.0	1142.5	1142.2	1136.9	1127.9	1120.7	1107.8	1091.4	1075.5	1057.4	1042.5
10°	1199.2	1199.6	1196.2	1190.0	1180.4	1173.5	1156.6	1140.5	1121.0	1097.9	1081.5
12.5°	1238.5	1240.1	1235.8	1227.5	1222.7	1207.3	1194.1	1174.9	1151.7	1133.3	1108.1
15°	1302.0	1297.8	1294.7	1284.3	1276.3	1260.2	1239.1	1219.1	1193.9	1170.4	1147.0
17.5°	1363.2	1366.7	1360.9	1351.4	1326.5	1307.6	1279.3	1252.0	1220.4	1189.1	1161.1
20°	1417.9	1421.0	1412.1	1395.6	1365.7	1346.9	1309.7	1274.3	1238.0	1197.7	1167.0
22.5°	1486.0	1483.6	1471.7	1446.5	1420.7	1385.8	1345.6	1302.6	1257.0	1211.4	1170.6
25°	1602.0	1585.9	1578.6	1547.5	1513.4	1462.4	1407.1	1344.2	1287.5	1227.2	1175.1
27.5°	1666.3	1661.2	1653.1	1631.4	1595.6	1541.1	1475.9	1399.3	1319.1	1243.1	1174.8
30°	1653.5	1654.2	1655.0	1648.0	1625.1	1584.0	1519.1	1436.6	1341.5	1256.0	1177.0
32.5°	1539.2	1553.2	1566.6	1582.4	1588.8	1580.9	1540.3	1465.8	1368.0	1270.7	1175.7
35°	1285.9	1290.1	1333.5	1376.4	1434.7	1480.1	1510.4	1477.3	1394.8	1283.2	1174.3
37.5°	1002.6	1023.4	1053.4	1102.0	1186.1	1261.4	1358.4	1402.9	1376.2	1287.3	1171.5
40°	854.7	873.9	893.4	942.9	1013.9	1105.2	1215.3	1309.3	1331.2	1274.3	1162.4
42.5°	740.5	755.8	777.5	814.7	873.9	954.8	1060.1	1182.9	1258.4	1237.0	1143.1
45°	606.1	615.7	632.6	662.2	705.1	768.4	861.2	995.5	1112.5	1151.2	1097.1
47.5°	518.8	518.8	531.9	552.3	583.3	637.0	705.7	810.9	935.8	1028.3	1024.0
50°	470.3	468.4	478.8	496.4	521.0	556.6	622.3	706.3	826.4	931.1	960.2
52.5°	428.6	428.8	435.2	448.2	468.8	499.3	548.3	624.0	726.6	834.0	889.0
55°	373.7	372.1	379.4	388.2	403.2	423.1	458.5	516.3	599.6	705.5	776.8
57.5°	323.4	327.5	330.4	336.6	349.0	362.3	392.1	434.6	500.7	591.6	667.0
60°	293.9	298.1	300.3	306.5	316.5	328.0	351.0	385.6	441.2	519.5	594.2
62.5°	267.4	270.7	271.6	277.0	285.2	296.4	314.5	343.5	387.5	455.9	529.2
65°	229.4	229.4	231.0	236.7	240.5	250.5	264.3	285.4	320.7	374.1	436.6
67.5°	192.7	194.6	194.2	196.7	200.3	208.0	217.9	235.3	261.5	300.3	350.4
70°	168.7	170.4	170.0	171.9	175.7	180.7	188.7	205.2	224.0	257.4	300.3
72.5°	147.3	147.9	146.9	149.5	151.8	156.1	165.1	173.9	191.5	219.6	255.0
75°	112.8	113.5	114.3	115.8	118.2	120.5	125.0	133.9	145.4	166.5	189.1
77.5°	84.5	83.1	84.9	84.7	86.0	87.8	91.8	96.5	105.9	119.3	136.8
80°	63.7	64.0	64.0	64.4	66.3	67.6	71.0	74.4	81.7	91.7	103.9
82.5°	46.5	47.5	46.9	47.6	49.2	50.0	51.9	54.7	59.0	66.9	75.7
85°	25.3	23.4	24.1	24.9	24.9	25.3	26.9	28.0	30.3	33.3	36.9
87.5°	14.6	15.0	15.1	14.9	15.0	14.8	15.7	15.3	16.0	16.6	17.3
90°	36.5	35.4	34.4	33.4	32.4	31.1	29.4	27.7	26.1	24.3	21.9
92.5°	34.0	33.6	33.1	32.6	32.1	31.1	29.4	27.7	26.1	24.3	22.2
95°	31.9	31.9	31.9	31.9	31.9	31.1	29.4	27.7	26.1	24.3	37.2
97.5°	31.9	31.9	31.9	31.9	31.9	36.7	46.3	55.7	65.2	74.8	100.2
100°	31.9	33.3	34.6	36.0	37.4	63.2	113.5	163.8	214.2	264.5	263.2
102.5°	191.3	214.2	237.2	260.1	283.2	299.4	308.9	318.4	328.0	337.5	336.7
105°	451.5	451.8	452.2	452.5	452.8	453.0	453.0	453.0	453.0	453.0	453.0
107.5°	569.2	570.2	571.2	572.2	573.2	573.7	573.6	573.6	573.5	573.4	572.8
110°	650.7	650.4	649.9	649.6	649.3	649.6	650.7	651.7	652.7	653.7	653.0



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	723.6	724.1	724.6	725.1	725.5	726.4	727.7	728.9	730.2	731.5	731.1
115°	833.0	835.1	837.1	839.2	841.2	842.8	844.2	845.6	846.9	848.3	848.0
117.5°	949.8	950.7	951.6	952.5	953.3	954.6	956.4	958.2	959.9	961.7	960.4
120°	1021.6	1023.3	1024.9	1026.6	1028.3	1029.6	1030.2	1030.9	1031.6	1032.2	1031.2
122.5°	1089.6	1091.7	1093.6	1095.6	1097.5	1098.8	1099.5	1100.1	1100.9	1101.6	1101.1
125°	1193.4	1194.4	1195.4	1196.4	1197.4	1198.6	1199.9	1201.3	1202.6	1204.0	1204.0
127.5°	1280.6	1283.1	1285.7	1288.1	1290.6	1292.2	1293.0	1293.7	1294.4	1295.3	1295.5
130°	1343.8	1345.5	1347.3	1349.0	1350.6	1352.0	1353.0	1354.0	1355.0	1356.0	1355.6
132.5°	1402.2	1403.9	1405.6	1407.3	1409.0	1410.0	1410.2	1410.4	1410.6	1410.8	1411.5
135°	1482.2	1484.2	1486.2	1488.2	1490.3	1491.7	1492.4	1493.0	1493.7	1494.4	1495.0
137.5°	1562.5	1564.2	1566.0	1567.7	1569.5	1570.3	1570.1	1570.0	1569.9	1569.7	1570.3
140°	1609.9	1611.9	1614.0	1616.0	1618.0	1618.7	1618.0	1617.3	1616.7	1616.0	1616.3
142.5°	1654.9	1656.9	1658.9	1660.9	1663.0	1664.0	1663.9	1663.7	1663.6	1663.4	1662.9
145°	1720.9	1722.9	1725.0	1727.0	1729.0	1729.8	1729.5	1729.2	1728.8	1728.5	1728.5
147.5°	1775.3	1777.8	1780.2	1782.6	1785.0	1786.0	1785.6	1785.2	1784.8	1784.4	1784.0
150°	1810.6	1813.3	1815.9	1818.7	1821.4	1822.4	1821.7	1821.0	1820.4	1819.7	1819.0
152.5°	1843.4	1845.8	1848.3	1850.7	1853.1	1854.0	1853.3	1852.7	1852.0	1851.3	1850.7
155°	1886.5	1889.3	1892.0	1894.7	1897.3	1898.2	1897.2	1896.2	1895.2	1894.2	1893.5
157.5°	1922.8	1925.4	1928.1	1930.9	1933.6	1934.4	1933.3	1932.2	1931.2	1930.1	1930.0
160°	1945.9	1948.5	1951.3	1954.0	1956.7	1957.3	1956.0	1954.6	1953.3	1952.0	1951.6
162.5°	1966.5	1969.5	1972.5	1975.5	1978.4	1978.9	1977.1	1975.2	1973.3	1971.4	1971.1
165°	1994.5	1997.2	1999.9	2002.7	2005.3	2005.7	2003.7	2001.6	1999.5	1997.5	1997.2
167.5°	2014.0	2017.0	2020.0	2023.1	2026.1	2026.4	2024.0	2021.5	2019.1	2016.7	2016.4
170°	2024.9	2027.9	2031.0	2034.1	2037.1	2037.2	2034.6	2031.8	2029.1	2026.4	2026.1
172.5°	2032.3	2035.3	2038.3	2041.3	2044.4	2044.7	2042.3	2039.8	2037.4	2035.0	2034.4
175°	2041.6	2044.7	2047.7	2050.7	2053.8	2054.0	2051.2	2048.5	2045.9	2043.2	2042.9
177.5°	2047.1	2049.2	2051.4	2053.6	2055.8	2055.9	2054.0	2052.1	2050.2	2048.3	2048.0
180°	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8
2.5°	929.9	927.8	925.3	921.0	915.7	913.0	908.8	905.9	900.4	895.9	890.9
5°	977.0	967.1	958.0	946.0	933.0	924.5	914.5	903.4	891.9	880.0	867.0
7.5°	1025.9	1008.4	989.2	968.5	948.4	929.8	912.0	894.6	878.4	858.7	842.0
10°	1058.8	1036.5	1012.8	984.7	957.6	933.7	909.6	888.5	867.0	843.9	823.6
12.5°	1091.7	1062.0	1028.4	997.6	964.9	936.2	907.8	880.8	853.8	828.3	804.7
15°	1114.8	1088.7	1057.6	1013.9	977.0	937.6	900.0	865.1	832.4	804.1	774.2
17.5°	1130.0	1096.5	1063.1	1021.2	972.9	928.7	886.1	846.2	809.4	773.4	744.6
20°	1132.9	1098.3	1063.4	1022.4	972.9	922.2	879.7	831.7	792.1	755.0	719.6
22.5°	1132.0	1092.8	1054.8	1012.5	964.3	917.7	866.2	817.3	774.4	737.8	700.9
25°	1123.3	1081.5	1033.9	991.3	943.7	894.2	842.0	791.4	747.7	705.9	669.4
27.5°	1116.0	1061.8	1007.9	958.3	912.3	867.0	817.1	765.2	716.7	674.3	640.0
30°	1107.1	1047.6	987.0	935.2	888.1	843.9	796.8	746.2	695.5	654.1	617.2
32.5°	1099.1	1029.9	965.9	909.5	859.6	816.7	773.2	725.0	675.3	633.2	596.4
35°	1083.8	1003.6	930.3	866.6	813.2	769.2	732.8	687.8	642.2	601.5	566.2
37.5°	1064.2	969.1	890.4	823.6	765.2	718.7	684.8	650.4	606.5	567.3	535.4
40°	1048.8	944.5	861.2	792.9	732.4	684.0	652.6	620.0	583.5	547.0	513.3
42.5°	1029.5	922.4	831.7	758.3	698.3	651.2	618.1	590.5	558.4	524.3	493.0
45°	994.0	882.3	784.2	705.1	644.5	598.0	563.9	543.2	519.1	486.9	460.4
47.5°	941.7	834.2	732.7	651.1	588.5	545.5	513.5	493.6	476.7	452.7	428.7
50°	895.3	798.3	695.5	614.6	552.0	508.7	479.2	461.1	446.6	428.1	407.8
52.5°	843.5	753.2	659.0	579.0	517.1	474.3	445.4	429.5	417.4	404.1	384.2
55°	761.1	684.4	596.9	521.0	463.8	422.0	396.7	382.8	372.8	362.9	350.6
57.5°	670.3	610.4	532.8	463.4	410.8	372.7	349.1	335.7	327.9	322.8	315.6
60°	606.5	555.1	488.4	425.1	373.7	339.9	316.9	306.5	300.0	295.8	290.4
62.5°	547.2	505.0	443.2	385.5	340.5	308.6	288.0	278.0	271.8	269.7	265.2
65°	460.0	427.4	376.4	328.4	290.0	262.8	245.5	235.9	232.1	229.7	230.1
67.5°	374.0	354.1	313.2	272.3	241.6	218.7	204.9	197.5	195.6	192.6	192.5
70°	321.4	306.5	272.0	236.3	209.0	191.5	179.2	171.5	169.6	168.0	167.6
72.5°	275.1	262.1	232.1	203.5	179.0	163.5	153.4	148.8	145.6	144.7	144.6
75°	206.8	199.4	175.7	153.1	136.2	125.4	118.6	114.3	112.0	111.6	112.0
77.5°	147.0	140.7	125.5	109.5	98.9	90.7	84.8	83.4	80.8	80.9	80.5
80°	110.5	106.2	96.6	84.0	75.2	68.3	65.2	62.5	61.8	60.6	61.8
82.5°	80.1	75.5	69.1	61.0	53.7	49.6	46.5	45.6	45.1	44.6	44.8
85°	39.5	39.9	36.1	29.9	26.9	24.5	22.6	22.6	22.2	21.9	22.2
87.5°	17.5	16.4	14.6	13.2	11.1	9.7	8.8	8.6	8.2	8.5	9.3
90°	19.6	17.3	14.8	12.3	9.6	7.0	4.2	1.5	4.2	7.0	9.6
92.5°	20.1	18.1	16.0	15.9	17.8	19.6	21.5	23.4	21.5	19.6	17.8
95°	50.0	62.8	75.6	82.6	83.6	84.6	85.6	86.6	85.6	84.6	83.6
97.5°	125.6	151.0	176.4	188.2	186.4	184.5	182.7	180.9	182.7	184.5	186.4
100°	261.9	260.4	259.1	257.9	256.9	255.9	254.9	253.9	254.9	255.9	256.9
102.5°	335.9	335.1	334.3	333.2	331.9	330.6	329.3	328.1	329.3	330.6	331.9
105°	453.0	453.0	453.0	452.3	451.0	449.7	448.3	447.0	448.3	449.7	451.0
107.5°	572.1	571.4	570.7	570.4	570.4	570.4	570.4	570.4	570.4	570.4	570.4
110°	652.4	651.7	651.0	650.7	650.7	650.7	650.7	650.7	650.7	650.7	650.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	730.7	730.3	729.9	729.3	728.5	727.7	726.9	726.1	726.9	727.7	728.5
115°	847.6	847.3	846.9	845.9	844.2	842.5	840.8	839.2	840.8	842.5	844.2
117.5°	959.1	957.9	956.5	955.9	956.0	956.0	956.1	956.2	956.1	956.0	956.0
120°	1030.2	1029.2	1028.1	1027.8	1028.1	1028.5	1028.9	1029.2	1028.9	1028.5	1028.1
122.5°	1100.6	1100.1	1099.6	1098.7	1097.5	1096.2	1094.9	1093.7	1094.9	1096.2	1097.5
125°	1204.0	1204.0	1204.0	1202.9	1200.4	1198.1	1195.7	1193.4	1195.7	1198.1	1200.4
127.5°	1295.7	1295.9	1296.1	1295.3	1293.6	1291.9	1290.2	1288.5	1290.2	1291.9	1293.6
130°	1355.3	1355.0	1354.6	1353.6	1352.0	1350.3	1348.6	1346.9	1348.6	1350.3	1352.0
132.5°	1412.2	1413.0	1413.7	1413.1	1411.2	1409.2	1407.2	1405.2	1407.2	1409.2	1411.2
135°	1495.7	1496.4	1497.0	1496.4	1494.4	1492.4	1490.3	1488.2	1490.3	1492.4	1494.4
137.5°	1570.9	1571.6	1572.2	1571.7	1569.8	1568.1	1566.3	1564.6	1566.3	1568.1	1569.8
140°	1616.7	1617.0	1617.3	1617.2	1616.5	1615.8	1615.2	1614.5	1615.2	1615.8	1616.5
142.5°	1662.4	1662.0	1661.5	1661.0	1660.6	1660.2	1659.8	1659.4	1659.8	1660.2	1660.6
145°	1728.5	1728.5	1728.5	1728.2	1727.5	1726.8	1726.1	1725.5	1726.1	1726.8	1727.5
147.5°	1783.6	1783.2	1782.8	1782.6	1782.8	1782.9	1783.0	1783.2	1783.0	1782.9	1782.8
150°	1818.4	1817.7	1816.9	1816.9	1817.7	1818.4	1819.0	1819.7	1819.0	1818.4	1817.7
152.5°	1850.0	1849.3	1848.6	1849.0	1850.5	1852.0	1853.5	1854.9	1853.5	1852.0	1850.5
155°	1892.8	1892.2	1891.5	1892.2	1894.2	1896.2	1898.2	1900.3	1898.2	1896.2	1894.2
157.5°	1930.0	1929.9	1929.8	1930.4	1931.6	1932.8	1934.0	1935.2	1934.0	1932.8	1931.6
160°	1951.3	1951.0	1950.6	1951.5	1953.5	1955.5	1957.5	1959.5	1957.5	1955.5	1953.5
162.5°	1970.8	1970.3	1970.0	1970.9	1972.9	1975.0	1977.0	1979.0	1977.0	1975.0	1972.9
165°	1996.9	1996.5	1996.2	1997.0	1999.0	2001.0	2003.2	2005.2	2003.2	2001.0	1999.0
167.5°	2016.0	2015.7	2015.4	2016.2	2018.3	2020.4	2022.6	2024.6	2022.6	2020.4	2018.3
170°	2025.8	2025.4	2025.1	2026.1	2028.4	2030.8	2033.2	2035.6	2033.2	2030.8	2028.4
172.5°	2033.8	2033.2	2032.6	2033.4	2035.8	2038.1	2040.5	2042.9	2040.5	2038.1	2035.8
175°	2042.5	2042.1	2041.8	2042.7	2044.7	2046.7	2048.7	2050.7	2048.7	2046.7	2044.7
177.5°	2047.8	2047.5	2047.2	2047.9	2049.5	2051.1	2052.8	2054.4	2052.8	2051.1	2049.5
180°	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8
2.5°	888.2	884.7	882.0	875.9	872.5	867.9	864.2	868.2	863.9	865.8	863.0
5°	860.5	849.7	842.0	830.9	821.3	812.5	806.0	804.9	801.7	800.2	795.7
7.5°	827.2	813.7	800.5	786.0	773.7	761.2	753.2	746.6	742.3	736.5	732.6
10°	807.5	789.5	774.2	756.5	741.1	727.7	717.0	711.7	706.6	699.3	696.7
12.5°	783.3	764.7	745.9	727.0	712.4	697.3	688.1	680.0	676.6	668.3	667.5
15°	754.2	726.2	707.8	688.6	668.2	656.0	648.3	639.5	635.7	630.0	625.7
17.5°	719.5	694.5	671.5	651.7	634.2	623.9	614.3	608.2	601.7	597.9	591.0
20°	694.4	670.6	647.5	626.4	613.0	601.2	593.5	587.7	580.8	578.9	572.0
22.5°	673.2	646.9	624.8	607.1	592.5	579.1	570.8	566.8	562.1	556.1	554.8
25°	638.7	611.5	592.7	575.0	562.0	549.8	544.0	539.0	534.4	530.2	528.7
27.5°	608.9	584.6	562.3	546.3	535.0	523.8	518.8	512.7	509.3	505.9	501.8
30°	588.1	563.2	543.6	528.3	515.9	506.0	500.6	496.4	493.3	490.3	488.0
32.5°	566.6	543.5	524.5	509.6	497.3	489.8	484.9	482.0	478.6	474.9	472.0
35°	538.3	512.9	494.5	481.4	471.8	466.1	460.7	458.1	454.2	454.2	451.1
37.5°	506.2	484.3	468.1	456.2	447.6	442.4	436.7	434.8	432.3	430.7	429.7
40°	487.2	466.9	451.5	439.6	430.4	426.2	421.6	418.5	417.0	415.1	414.3
42.5°	467.6	448.2	433.4	422.4	414.4	410.8	406.6	404.5	401.3	398.8	398.4
45°	437.7	418.9	405.5	396.7	389.8	385.6	382.8	378.3	376.7	373.7	373.2
47.5°	409.4	391.3	378.2	370.9	364.9	361.4	357.2	352.6	350.8	349.3	349.2
50°	388.2	371.7	359.4	352.5	346.8	341.8	337.6	334.6	333.4	333.4	334.2
52.5°	366.8	352.7	342.2	333.9	328.4	323.1	319.2	317.3	315.6	317.4	318.8
55°	335.3	321.1	313.5	305.4	300.0	293.9	292.0	291.1	290.0	293.1	294.6
57.5°	301.9	292.1	283.1	275.1	270.2	266.7	264.1	263.7	265.8	267.2	272.3
60°	280.8	269.3	261.3	255.1	249.3	247.0	246.3	245.5	247.0	251.3	257.8
62.5°	257.5	248.1	239.4	234.9	230.7	226.8	226.6	227.1	230.1	235.0	241.6
65°	223.3	215.2	209.4	204.1	200.7	198.3	199.1	200.7	204.1	210.7	217.9
67.5°	188.5	183.0	177.8	173.5	170.2	170.2	171.0	173.3	177.3	184.8	191.5
70°	166.1	160.0	155.7	153.8	151.2	149.7	151.9	155.7	159.2	166.1	171.9
72.5°	143.7	138.5	135.2	133.9	132.7	131.5	132.3	136.4	141.1	148.0	154.7
75°	110.5	108.6	106.2	104.7	103.6	104.3	105.1	109.0	112.8	120.1	127.7
77.5°	80.7	78.7	77.3	76.9	76.2	76.6	78.8	81.6	85.4	90.7	96.5
80°	61.0	60.2	59.5	59.1	59.1	59.5	62.5	64.4	67.9	72.9	77.5
82.5°	44.4	43.9	43.8	43.7	44.0	44.1	45.9	48.5	51.3	55.1	59.1
85°	23.4	22.6	23.8	24.1	23.4	24.5	25.3	26.9	28.0	29.9	31.8
87.5°	10.1	11.2	11.4	12.2	12.7	13.7	13.8	15.3	16.4	17.3	17.3
90°	12.3	14.8	17.3	19.6	21.9	24.3	26.1	27.7	29.4	31.1	32.4
92.5°	15.9	16.0	18.1	20.1	22.2	24.3	26.1	27.7	29.4	31.1	32.1
95°	82.6	75.6	62.8	50.0	37.2	24.3	26.1	27.7	29.4	31.1	31.9
97.5°	188.2	176.4	151.0	125.6	100.2	74.8	65.2	55.7	46.3	36.7	31.9
100°	257.9	259.1	260.4	261.9	263.2	264.5	214.2	163.8	113.5	63.2	37.4
102.5°	333.2	334.3	335.1	335.9	336.7	337.5	328.0	318.4	308.9	299.4	283.2
105°	452.3	453.0	453.0	453.0	453.0	453.0	453.0	453.0	453.0	453.0	452.8
107.5°	570.4	570.7	571.4	572.1	572.8	573.4	573.5	573.6	573.6	573.7	573.2
110°	650.7	651.0	651.7	652.4	653.0	653.7	652.7	651.7	650.7	649.6	649.3



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	729.3	729.9	730.3	730.7	731.1	731.5	730.2	728.9	727.7	726.4	725.5
115°	845.9	846.9	847.3	847.6	848.0	848.3	846.9	845.6	844.2	842.8	841.2
117.5°	955.9	956.5	957.9	959.1	960.4	961.7	959.9	958.2	956.4	954.6	953.3
120°	1027.8	1028.1	1029.2	1030.2	1031.2	1032.2	1031.6	1030.9	1030.2	1029.6	1028.3
122.5°	1098.7	1099.6	1100.1	1100.6	1101.1	1101.6	1100.9	1100.1	1099.5	1098.8	1097.5
125°	1202.9	1204.0	1204.0	1204.0	1204.0	1204.0	1202.6	1201.3	1199.9	1198.6	1197.4
127.5°	1295.3	1296.1	1295.9	1295.7	1295.5	1295.3	1294.4	1293.7	1293.0	1292.2	1290.6
130°	1353.6	1354.6	1355.0	1355.3	1355.6	1356.0	1355.0	1354.0	1353.0	1352.0	1350.6
132.5°	1413.1	1413.7	1413.0	1412.2	1411.5	1410.8	1410.6	1410.4	1410.2	1410.0	1409.0
135°	1496.4	1497.0	1496.4	1495.7	1495.0	1494.4	1493.7	1493.0	1492.4	1491.7	1490.3
137.5°	1571.7	1572.2	1571.6	1570.9	1570.3	1569.7	1569.9	1570.0	1570.1	1570.3	1569.5
140°	1617.2	1617.3	1617.0	1616.7	1616.3	1616.0	1616.7	1617.3	1618.0	1618.7	1618.0
142.5°	1661.0	1661.5	1662.0	1662.4	1662.9	1663.4	1663.6	1663.7	1663.9	1664.0	1663.0
145°	1728.2	1728.5	1728.5	1728.5	1728.5	1728.5	1728.8	1729.2	1729.5	1729.8	1729.0
147.5°	1782.6	1782.8	1783.2	1783.6	1784.0	1784.4	1784.8	1785.2	1785.6	1786.0	1785.0
150°	1816.9	1816.9	1817.7	1818.4	1819.0	1819.7	1820.4	1821.0	1821.7	1822.4	1821.4
152.5°	1849.0	1848.6	1849.3	1850.0	1850.7	1851.3	1852.0	1852.7	1853.3	1854.0	1853.1
155°	1892.2	1891.5	1892.2	1892.8	1893.5	1894.2	1895.2	1896.2	1897.2	1898.2	1897.3
157.5°	1930.4	1929.8	1929.9	1930.0	1930.0	1930.1	1931.2	1932.2	1933.3	1934.4	1933.6
160°	1951.5	1950.6	1951.0	1951.3	1951.6	1952.0	1953.3	1954.6	1956.0	1957.3	1956.7
162.5°	1970.9	1970.0	1970.3	1970.8	1971.1	1971.4	1973.3	1975.2	1977.1	1978.9	1978.4
165°	1997.0	1996.2	1996.5	1996.9	1997.2	1997.5	1999.5	2001.6	2003.7	2005.7	2005.3
167.5°	2016.2	2015.4	2015.7	2016.0	2016.4	2016.7	2019.1	2021.5	2024.0	2026.4	2026.1
170°	2026.1	2025.1	2025.4	2025.8	2026.1	2026.4	2029.1	2031.8	2034.6	2037.2	2037.1
172.5°	2033.4	2032.6	2033.2	2033.8	2034.4	2035.0	2037.4	2039.8	2042.3	2044.7	2044.4
175°	2042.7	2041.8	2042.1	2042.5	2042.9	2043.2	2045.9	2048.5	2051.2	2054.0	2053.8
177.5°	2047.9	2047.2	2047.5	2047.8	2048.0	2048.3	2050.2	2052.1	2054.0	2055.9	2055.8
180°	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8
2.5°	861.1	863.3	861.5	863.9	861.5	863.3	861.1	863.0	865.8	863.9	868.2
5°	793.8	790.2	792.5	791.0	792.5	790.2	793.8	795.7	800.2	801.7	804.9
7.5°	731.4	728.1	724.4	722.6	724.4	728.1	731.4	732.6	736.5	742.3	746.6
10°	692.5	688.2	687.8	685.2	687.8	688.2	692.5	696.7	699.3	706.6	711.7
12.5°	663.9	659.9	655.6	654.5	655.6	659.9	663.9	667.5	668.3	676.6	680.0
15°	623.4	620.4	617.6	620.0	617.6	620.4	623.4	625.7	630.0	635.7	639.5
17.5°	589.7	587.1	586.7	583.9	586.7	587.1	589.7	591.0	597.9	601.7	608.2
20°	568.6	566.6	567.3	562.4	567.3	566.6	568.6	572.0	578.9	580.8	587.7
22.5°	551.7	547.9	547.4	546.4	547.4	547.9	551.7	554.8	556.1	562.1	566.8
25°	525.2	523.3	521.4	523.3	521.4	523.3	525.2	528.7	530.2	534.4	539.0
27.5°	502.1	499.8	499.3	499.5	499.3	499.8	502.1	501.8	505.9	509.3	512.7
30°	488.0	484.1	484.5	484.1	484.5	484.1	488.0	488.0	490.3	493.3	496.4
32.5°	472.6	470.0	469.5	468.8	469.5	470.0	472.6	472.0	474.9	478.6	482.0
35°	450.0	450.0	448.1	448.1	448.1	450.0	450.0	451.1	454.2	454.2	458.1
37.5°	428.7	428.4	427.2	427.4	427.2	428.4	428.7	429.7	430.7	432.3	434.8
40°	412.7	412.4	411.2	408.9	411.2	412.4	412.7	414.3	415.1	417.0	418.5
42.5°	397.5	396.2	395.6	394.9	395.6	396.2	397.5	398.4	398.8	401.3	404.5
45°	373.2	373.2	372.5	372.1	372.5	373.2	373.2	373.2	373.7	376.7	378.3
47.5°	349.8	350.5	351.9	351.7	351.9	350.5	349.8	349.2	349.3	350.8	352.6
50°	335.7	336.1	337.2	337.6	337.2	336.1	335.7	334.2	333.4	333.4	334.6
52.5°	320.0	322.2	323.7	323.5	323.7	322.2	320.0	318.8	317.4	315.6	317.3
55°	298.1	300.7	303.5	303.9	303.5	300.7	298.1	294.6	293.1	290.0	291.1
57.5°	276.4	280.1	283.0	283.9	283.0	280.1	276.4	272.3	267.2	265.8	263.7
60°	261.7	266.6	270.0	271.7	270.0	266.6	261.7	257.8	251.3	247.0	245.5
62.5°	247.5	253.1	256.6	256.9	256.6	253.1	247.5	241.6	235.0	230.1	227.1
65°	224.4	230.1	233.3	235.5	233.3	230.1	224.4	217.9	210.7	204.1	200.7
67.5°	199.5	205.3	208.7	210.6	208.7	205.3	199.5	191.5	184.8	177.3	173.3
70°	181.5	187.2	191.8	193.4	191.8	187.2	181.5	171.9	166.1	159.2	155.7
72.5°	163.7	168.7	172.5	174.3	172.5	168.7	163.7	154.7	148.0	141.1	136.4
75°	132.7	139.7	143.1	145.0	143.1	139.7	132.7	127.7	120.1	112.8	109.0
77.5°	102.4	108.7	110.7	111.7	110.7	108.7	102.4	96.5	90.7	85.4	81.6
80°	82.1	85.9	88.7	89.0	88.7	85.9	82.1	77.5	72.9	67.9	64.4
82.5°	63.1	66.2	67.2	68.2	67.2	66.2	63.1	59.1	55.1	51.3	48.5
85°	34.5	36.1	36.5	36.1	36.5	36.1	34.5	31.8	29.9	28.0	26.9
87.5°	18.1	18.0	18.2	19.0	18.2	18.0	18.1	17.3	17.3	16.4	15.3
90°	33.4	34.4	35.4	36.5	35.4	34.4	33.4	32.4	31.1	29.4	27.7
92.5°	32.6	33.1	33.6	34.0	33.6	33.1	32.6	32.1	31.1	29.4	27.7
95°	31.9	31.9	31.9	31.9	31.9	31.9	31.9	31.9	31.1	29.4	27.7
97.5°	31.9	31.9	31.9	31.9	31.9	31.9	31.9	31.9	36.7	46.3	55.7
100°	36.0	34.6	33.3	31.9	33.3	34.6	36.0	37.4	63.2	113.5	163.8
102.5°	260.1	237.2	214.2	191.3	214.2	237.2	260.1	283.2	299.4	308.9	318.4
105°	452.5	452.2	451.8	451.5	451.8	452.2	452.5	452.8	453.0	453.0	453.0
107.5°	572.2	571.2	570.2	569.2	570.2	571.2	572.2	573.2	573.7	573.6	573.6
110°	649.6	649.9	650.4	650.7	650.4	649.9	649.6	649.3	649.6	650.7	651.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	725.1	724.6	724.1	723.6	724.1	724.6	725.1	725.5	726.4	727.7	728.9
115°	839.2	837.1	835.1	833.0	835.1	837.1	839.2	841.2	842.8	844.2	845.6
117.5°	952.5	951.6	950.7	949.8	950.7	951.6	952.5	953.3	954.6	956.4	958.2
120°	1026.6	1024.9	1023.3	1021.6	1023.3	1024.9	1026.6	1028.3	1029.6	1030.2	1030.9
122.5°	1095.6	1093.6	1091.7	1089.6	1091.7	1093.6	1095.6	1097.5	1098.8	1099.5	1100.1
125°	1196.4	1195.4	1194.4	1193.4	1194.4	1195.4	1196.4	1197.4	1198.6	1199.9	1201.3
127.5°	1288.1	1285.7	1283.1	1280.6	1283.1	1285.7	1288.1	1290.6	1292.2	1293.0	1293.7
130°	1349.0	1347.3	1345.5	1343.8	1345.5	1347.3	1349.0	1350.6	1352.0	1353.0	1354.0
132.5°	1407.3	1405.6	1403.9	1402.2	1403.9	1405.6	1407.3	1409.0	1410.0	1410.2	1410.4
135°	1488.2	1486.2	1484.2	1482.2	1484.2	1486.2	1488.2	1490.3	1491.7	1492.4	1493.0
137.5°	1567.7	1566.0	1564.2	1562.5	1564.2	1566.0	1567.7	1569.5	1570.3	1570.1	1570.0
140°	1616.0	1614.0	1611.9	1609.9	1611.9	1614.0	1616.0	1618.0	1618.7	1618.0	1617.3
142.5°	1660.9	1658.9	1656.9	1654.9	1656.9	1658.9	1660.9	1663.0	1664.0	1663.9	1663.7
145°	1727.0	1725.0	1722.9	1720.9	1722.9	1725.0	1727.0	1729.0	1729.8	1729.5	1729.2
147.5°	1782.6	1780.2	1777.8	1775.3	1777.8	1780.2	1782.6	1785.0	1786.0	1785.6	1785.2
150°	1818.7	1815.9	1813.3	1810.6	1813.3	1815.9	1818.7	1821.4	1822.4	1821.7	1821.0
152.5°	1850.7	1848.3	1845.8	1843.4	1845.8	1848.3	1850.7	1853.1	1854.0	1853.3	1852.7
155°	1894.7	1892.0	1889.3	1886.5	1889.3	1892.0	1894.7	1897.3	1898.2	1897.2	1896.2
157.5°	1930.9	1928.1	1925.4	1922.8	1925.4	1928.1	1930.9	1933.6	1934.4	1933.3	1932.2
160°	1954.0	1951.3	1948.5	1945.9	1948.5	1951.3	1954.0	1956.7	1957.3	1956.0	1954.6
162.5°	1975.5	1972.5	1969.5	1966.5	1969.5	1972.5	1975.5	1978.4	1978.9	1977.1	1975.2
165°	2002.7	1999.9	1997.2	1994.5	1997.2	1999.9	2002.7	2005.3	2005.7	2003.7	2001.6
167.5°	2023.1	2020.0	2017.0	2014.0	2017.0	2020.0	2023.1	2026.1	2026.4	2024.0	2021.5
170°	2034.1	2031.0	2027.9	2024.9	2027.9	2031.0	2034.1	2037.1	2037.2	2034.6	2031.8
172.5°	2041.3	2038.3	2035.3	2032.3	2035.3	2038.3	2041.3	2044.4	2044.7	2042.3	2039.8
175°	2050.7	2047.7	2044.7	2041.6	2044.7	2047.7	2050.7	2053.8	2054.0	2051.2	2048.5
177.5°	2053.6	2051.4	2049.2	2047.1	2049.2	2051.4	2053.6	2055.8	2055.9	2054.0	2052.1
180°	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8
2.5°	864.2	867.9	872.5	875.9	882.0	884.7	888.2	890.9	895.9	900.4	905.9
5°	806.0	812.5	821.3	830.9	842.0	849.7	860.5	867.0	880.0	891.9	903.4
7.5°	753.2	761.2	773.7	786.0	800.5	813.7	827.2	842.0	858.7	878.4	894.6
10°	717.0	727.7	741.1	756.5	774.2	789.5	807.5	823.6	843.9	867.0	888.5
12.5°	688.1	697.3	712.4	727.0	745.9	764.7	783.3	804.7	828.3	853.8	880.8
15°	648.3	656.0	668.2	688.6	707.8	726.2	754.2	774.2	804.1	832.4	865.1
17.5°	614.3	623.9	634.2	651.7	671.5	694.5	719.5	744.6	773.4	809.4	846.2
20°	593.5	601.2	613.0	626.4	647.5	670.6	694.4	719.6	755.0	792.1	831.7
22.5°	570.8	579.1	592.5	607.1	624.8	646.9	673.2	700.9	737.8	774.4	817.3
25°	544.0	549.8	562.0	575.0	592.7	611.5	638.7	669.4	705.9	747.7	791.4
27.5°	518.8	523.8	535.0	546.3	562.3	584.6	608.9	640.0	674.3	716.7	765.2
30°	500.6	506.0	515.9	528.3	543.6	563.2	588.1	617.2	654.1	695.5	746.2
32.5°	484.9	489.8	497.3	509.6	524.5	543.5	566.6	596.4	633.2	675.3	725.0
35°	460.7	466.1	471.8	481.4	494.5	512.9	538.3	566.2	601.5	642.2	687.8
37.5°	436.7	442.4	447.6	456.2	468.1	484.3	506.2	535.4	567.3	606.5	650.4
40°	421.6	426.2	430.4	439.6	451.5	466.9	487.2	513.3	547.0	583.5	620.0
42.5°	406.6	410.8	414.4	422.4	433.4	448.2	467.6	493.0	524.3	558.4	590.5
45°	382.8	385.6	389.8	396.7	405.5	418.9	437.7	460.4	486.9	519.1	543.2
47.5°	357.2	361.4	364.9	370.9	378.2	391.3	409.4	428.7	452.7	476.7	493.6
50°	337.6	341.8	346.8	352.5	359.4	371.7	388.2	407.8	428.1	446.6	461.1
52.5°	319.2	323.1	328.4	333.9	342.2	352.7	366.8	384.2	404.1	417.4	429.5
55°	292.0	293.9	300.0	305.4	313.5	321.1	335.3	350.6	362.9	372.8	382.8
57.5°	264.1	266.7	270.2	275.1	283.1	292.1	301.9	315.6	322.8	327.9	335.7
60°	246.3	247.0	249.3	255.1	261.3	269.3	280.8	290.4	295.8	300.0	306.5
62.5°	226.6	226.8	230.7	234.9	239.4	248.1	257.5	265.2	269.7	271.8	278.0
65°	199.1	198.3	200.7	204.1	209.4	215.2	223.3	230.1	229.7	232.1	235.9
67.5°	171.0	170.2	170.2	173.5	177.8	183.0	188.5	192.5	192.6	195.6	197.5
70°	151.9	149.7	151.2	153.8	155.7	160.0	166.1	167.6	168.0	169.6	171.5
72.5°	132.3	131.5	132.7	133.9	135.2	138.5	143.7	144.6	144.7	145.6	148.8
75°	105.1	104.3	103.6	104.7	106.2	108.6	110.5	112.0	111.6	112.0	114.3
77.5°	78.8	76.6	76.2	76.9	77.3	78.7	80.7	80.5	80.9	80.8	83.4
80°	62.5	59.5	59.1	59.1	59.5	60.2	61.0	61.8	60.6	61.8	62.5
82.5°	45.9	44.1	44.0	43.7	43.8	43.9	44.4	44.8	44.6	45.1	45.6
85°	25.3	24.5	23.4	24.1	23.8	22.6	23.4	22.2	21.9	22.2	22.6
87.5°	13.8	13.7	12.7	12.2	11.4	11.2	10.1	9.3	8.5	8.2	8.6
90°	26.1	24.3	21.9	19.6	17.3	14.8	12.3	9.6	7.0	4.2	1.5
92.5°	26.1	24.3	22.2	20.1	18.1	16.0	15.9	17.8	19.6	21.5	23.4
95°	26.1	24.3	37.2	50.0	62.8	75.6	82.6	83.6	84.6	85.6	86.6
97.5°	65.2	74.8	100.2	125.6	151.0	176.4	188.2	186.4	184.5	182.7	180.9
100°	214.2	264.5	263.2	261.9	260.4	259.1	257.9	256.9	255.9	254.9	253.9
102.5°	328.0	337.5	336.7	335.9	335.1	334.3	333.2	331.9	330.6	329.3	328.1
105°	453.0	453.0	453.0	453.0	453.0	453.0	452.3	451.0	449.7	448.3	447.0
107.5°	573.5	573.4	572.8	572.1	571.4	570.7	570.4	570.4	570.4	570.4	570.4
110°	652.7	653.7	653.0	652.4	651.7	651.0	650.7	650.7	650.7	650.7	650.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	730.2	731.5	731.1	730.7	730.3	729.9	729.3	728.5	727.7	726.9	726.1
115°	846.9	848.3	848.0	847.6	847.3	846.9	845.9	844.2	842.5	840.8	839.2
117.5°	959.9	961.7	960.4	959.1	957.9	956.5	955.9	956.0	956.0	956.1	956.2
120°	1031.6	1032.2	1031.2	1030.2	1029.2	1028.1	1027.8	1028.1	1028.5	1028.9	1029.2
122.5°	1100.9	1101.6	1101.1	1100.6	1100.1	1099.6	1098.7	1097.5	1096.2	1094.9	1093.7
125°	1202.6	1204.0	1204.0	1204.0	1204.0	1204.0	1202.9	1200.4	1198.1	1195.7	1193.4
127.5°	1294.4	1295.3	1295.5	1295.7	1295.9	1296.1	1295.3	1293.6	1291.9	1290.2	1288.5
130°	1355.0	1356.0	1355.6	1355.3	1355.0	1354.6	1353.6	1352.0	1350.3	1348.6	1346.9
132.5°	1410.6	1410.8	1411.5	1412.2	1413.0	1413.7	1413.1	1411.2	1409.2	1407.2	1405.2
135°	1493.7	1494.4	1495.0	1495.7	1496.4	1497.0	1496.4	1494.4	1492.4	1490.3	1488.2
137.5°	1569.9	1569.7	1570.3	1570.9	1571.6	1572.2	1571.7	1569.8	1568.1	1566.3	1564.6
140°	1616.7	1616.0	1616.3	1616.7	1617.0	1617.3	1617.2	1616.5	1615.8	1615.2	1614.5
142.5°	1663.6	1663.4	1662.9	1662.4	1662.0	1661.5	1661.0	1660.6	1660.2	1659.8	1659.4
145°	1728.8	1728.5	1728.5	1728.5	1728.5	1728.5	1728.2	1727.5	1726.8	1726.1	1725.5
147.5°	1784.8	1784.4	1784.0	1783.6	1783.2	1782.8	1782.6	1782.8	1782.9	1783.0	1783.2
150°	1820.4	1819.7	1819.0	1818.4	1817.7	1816.9	1816.9	1817.7	1818.4	1819.0	1819.7
152.5°	1852.0	1851.3	1850.7	1850.0	1849.3	1848.6	1849.0	1850.5	1852.0	1853.5	1854.9
155°	1895.2	1894.2	1893.5	1892.8	1892.2	1891.5	1892.2	1894.2	1896.2	1898.2	1900.3
157.5°	1931.2	1930.1	1930.0	1930.0	1929.9	1929.8	1930.4	1931.6	1932.8	1934.0	1935.2
160°	1953.3	1952.0	1951.6	1951.3	1951.0	1950.6	1951.5	1953.5	1955.5	1957.5	1959.5
162.5°	1973.3	1971.4	1971.1	1970.8	1970.3	1970.0	1970.9	1972.9	1975.0	1977.0	1979.0
165°	1999.5	1997.5	1997.2	1996.9	1996.5	1996.2	1997.0	1999.0	2001.0	2003.2	2005.2
167.5°	2019.1	2016.7	2016.4	2016.0	2015.7	2015.4	2016.2	2018.3	2020.4	2022.6	2024.6
170°	2029.1	2026.4	2026.1	2025.8	2025.4	2025.1	2026.1	2028.4	2030.8	2033.2	2035.6
172.5°	2037.4	2035.0	2034.4	2033.8	2033.2	2032.6	2033.4	2035.8	2038.1	2040.5	2042.9
175°	2045.9	2043.2	2042.9	2042.5	2042.1	2041.8	2042.7	2044.7	2046.7	2048.7	2050.7
177.5°	2050.2	2048.3	2048.0	2047.8	2047.5	2047.2	2047.9	2049.5	2051.1	2052.8	2054.4
180°	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8	903.8
2.5°	908.8	913.0	915.7	921.0	925.3	927.8	929.9	931.7	933.9	935.7	941.0
5°	914.5	924.5	933.0	946.0	958.0	967.1	977.0	985.9	993.2	1003.6	1011.6
7.5°	912.0	929.8	948.4	968.5	989.2	1008.4	1025.9	1042.5	1057.4	1075.5	1091.4
10°	909.6	933.7	957.6	984.7	1012.8	1036.5	1058.8	1081.5	1097.9	1121.0	1140.5
12.5°	907.8	936.2	964.9	997.6	1028.4	1062.0	1091.7	1108.1	1133.3	1151.7	1174.9
15°	900.0	937.6	977.0	1013.9	1057.6	1088.7	1114.8	1147.0	1170.4	1193.9	1219.1
17.5°	886.1	928.7	972.9	1021.2	1063.1	1096.5	1130.0	1161.1	1189.1	1220.4	1252.0
20°	879.7	922.2	972.9	1022.4	1063.4	1098.3	1132.9	1167.0	1197.7	1238.0	1274.3
22.5°	866.2	917.7	964.3	1012.5	1054.8	1092.8	1132.0	1170.6	1211.4	1257.0	1302.6
25°	842.0	894.2	943.7	991.3	1033.9	1081.5	1123.3	1175.1	1227.2	1287.5	1344.2
27.5°	817.1	867.0	912.3	958.3	1007.9	1061.8	1116.0	1174.8	1243.1	1319.1	1399.3
30°	796.8	843.9	888.1	935.2	987.0	1047.6	1107.1	1177.0	1256.0	1341.5	1436.6
32.5°	773.2	816.7	859.6	909.5	965.9	1029.9	1099.1	1175.7	1270.7	1368.0	1465.8
35°	732.8	769.2	813.2	866.6	930.3	1003.6	1083.8	1174.3	1283.2	1394.8	1477.3
37.5°	684.8	718.7	765.2	823.6	890.4	969.1	1064.2	1171.5	1287.3	1376.2	1402.9
40°	652.6	684.0	732.4	792.9	861.2	944.5	1048.8	1162.4	1274.3	1331.2	1309.3
42.5°	618.1	651.2	698.3	758.3	831.7	922.4	1029.5	1143.1	1237.0	1258.4	1182.9
45°	563.9	598.0	644.5	705.1	784.2	882.3	994.0	1097.1	1151.2	1112.5	995.5
47.5°	513.5	545.5	588.5	651.1	732.7	834.2	941.7	1024.0	1028.3	935.8	810.9
50°	479.2	508.7	552.0	614.6	695.5	798.3	895.3	960.2	931.1	826.4	706.3
52.5°	445.4	474.3	517.1	579.0	659.0	753.2	843.5	889.0	834.0	726.6	624.0
55°	396.7	422.0	463.8	521.0	596.9	684.4	761.1	776.8	705.5	599.6	516.3
57.5°	349.1	372.7	410.8	463.4	532.8	610.4	670.3	667.0	591.6	500.7	434.6
60°	316.9	339.9	373.7	425.1	488.4	555.1	606.5	594.2	519.5	441.2	385.6
62.5°	288.0	308.6	340.5	385.5	443.2	505.0	547.2	529.2	455.9	387.5	343.5
65°	245.5	262.8	290.0	328.4	376.4	427.4	460.0	436.6	374.1	320.7	285.4
67.5°	204.9	218.7	241.6	272.3	313.2	354.1	374.0	350.4	300.3	261.5	235.3
70°	179.2	191.5	209.0	236.3	272.0	306.5	321.4	300.3	257.4	224.0	205.2
72.5°	153.4	163.5	179.0	203.5	232.1	262.1	275.1	255.0	219.6	191.5	173.9
75°	118.6	125.4	136.2	153.1	175.7	199.4	206.8	189.1	166.5	145.4	133.9
77.5°	84.8	90.7	98.9	109.5	125.5	140.7	147.0	136.8	119.3	105.9	96.5
80°	65.2	68.3	75.2	84.0	96.6	106.2	110.5	103.9	91.7	81.7	74.4
82.5°	46.5	49.6	53.7	61.0	69.1	75.5	80.1	75.7	66.9	59.0	54.7
85°	22.6	24.5	26.9	29.9	36.1	39.9	39.5	36.9	33.3	30.3	28.0
87.5°	8.8	9.7	11.1	13.2	14.6	16.4	17.5	17.3	16.6	16.0	15.3
90°	4.2	7.0	9.6	12.3	14.8	17.3	19.6	21.9	24.3	26.1	27.7
92.5°	21.5	19.6	17.8	15.9	16.0	18.1	20.1	22.2	24.3	26.1	27.7
95°	85.6	84.6	83.6	82.6	75.6	62.8	50.0	37.2	24.3	26.1	27.7
97.5°	182.7	184.5	186.4	188.2	176.4	151.0	125.6	100.2	74.8	65.2	55.7
100°	254.9	255.9	256.9	257.9	259.1	260.4	261.9	263.2	264.5	214.2	163.8
102.5°	329.3	330.6	331.9	333.2	334.3	335.1	335.9	336.7	337.5	328.0	318.4
105°	448.3	449.7	451.0	452.3	453.0	453.0	453.0	453.0	453.0	453.0	453.0
107.5°	570.4	570.4	570.4	570.4	570.7	571.4	572.1	572.8	573.4	573.5	573.6
110°	650.7	650.7	650.7	650.7	651.0	651.7	652.4	653.0	653.7	652.7	651.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	726.9	727.7	728.5	729.3	729.9	730.3	730.7	731.1	731.5	730.2	728.9
115°	840.8	842.5	844.2	845.9	846.9	847.3	847.6	848.0	848.3	846.9	845.6
117.5°	956.1	956.0	956.0	955.9	956.5	957.9	959.1	960.4	961.7	959.9	958.2
120°	1028.9	1028.5	1028.1	1027.8	1028.1	1029.2	1030.2	1031.2	1032.2	1031.6	1030.9
122.5°	1094.9	1096.2	1097.5	1098.7	1099.6	1100.1	1100.6	1101.1	1101.6	1100.9	1100.1
125°	1195.7	1198.1	1200.4	1202.9	1204.0	1204.0	1204.0	1204.0	1204.0	1202.6	1201.3
127.5°	1290.2	1291.9	1293.6	1295.3	1296.1	1295.9	1295.7	1295.5	1295.3	1294.4	1293.7
130°	1348.6	1350.3	1352.0	1353.6	1354.6	1355.0	1355.3	1355.6	1356.0	1355.0	1354.0
132.5°	1407.2	1409.2	1411.2	1413.1	1413.7	1413.0	1412.2	1411.5	1410.8	1410.6	1410.4
135°	1490.3	1492.4	1494.4	1496.4	1497.0	1496.4	1495.7	1495.0	1494.4	1493.7	1493.0
137.5°	1566.3	1568.1	1569.8	1571.7	1572.2	1571.6	1570.9	1570.3	1569.7	1569.9	1570.0
140°	1615.2	1615.8	1616.5	1617.2	1617.3	1617.0	1616.7	1616.3	1616.0	1616.7	1617.3
142.5°	1659.8	1660.2	1660.6	1661.0	1661.5	1662.0	1662.4	1662.9	1663.4	1663.6	1663.7
145°	1726.1	1726.8	1727.5	1728.2	1728.5	1728.5	1728.5	1728.5	1728.5	1728.8	1729.2
147.5°	1783.0	1782.9	1782.8	1782.6	1782.8	1783.2	1783.6	1784.0	1784.4	1784.8	1785.2
150°	1819.0	1818.4	1817.7	1816.9	1816.9	1817.7	1818.4	1819.0	1819.7	1820.4	1821.0
152.5°	1853.5	1852.0	1850.5	1849.0	1848.6	1849.3	1850.0	1850.7	1851.3	1852.0	1852.7
155°	1898.2	1896.2	1894.2	1892.2	1891.5	1892.2	1892.8	1893.5	1894.2	1895.2	1896.2
157.5°	1934.0	1932.8	1931.6	1930.4	1929.8	1929.9	1930.0	1930.0	1930.1	1931.2	1932.2
160°	1957.5	1955.5	1953.5	1951.5	1950.6	1951.0	1951.3	1951.6	1952.0	1953.3	1954.6
162.5°	1977.0	1975.0	1972.9	1970.9	1970.0	1970.3	1970.8	1971.1	1971.4	1973.3	1975.2
165°	2003.2	2001.0	1999.0	1997.0	1996.2	1996.5	1996.9	1997.2	1997.5	1999.5	2001.6
167.5°	2022.6	2020.4	2018.3	2016.2	2015.4	2015.7	2016.0	2016.4	2016.7	2019.1	2021.5
170°	2033.2	2030.8	2028.4	2026.1	2025.1	2025.4	2025.8	2026.1	2026.4	2029.1	2031.8
172.5°	2040.5	2038.1	2035.8	2033.4	2032.6	2033.2	2033.8	2034.4	2035.0	2037.4	2039.8
175°	2048.7	2046.7	2044.7	2042.7	2041.8	2042.1	2042.5	2042.9	2043.2	2045.9	2048.5
177.5°	2052.8	2051.1	2049.5	2047.9	2047.2	2047.5	2047.8	2048.0	2048.3	2050.2	2052.1
180°	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	903.8	903.8	903.8	903.8	903.8	903.8	903.8
2.5°	945.2	947.7	952.9	951.1	953.5	954.7	956.0
5°	1021.6	1033.9	1039.3	1038.4	1046.5	1044.6	1042.7
7.5°	1107.8	1120.7	1127.9	1136.9	1142.2	1142.5	1147.0
10°	1156.6	1173.5	1180.4	1190.0	1196.2	1199.6	1199.2
12.5°	1194.1	1207.3	1222.7	1227.5	1235.8	1240.1	1238.5
15°	1239.1	1260.2	1276.3	1284.3	1294.7	1297.8	1302.0
17.5°	1279.3	1307.6	1326.5	1351.4	1360.9	1366.7	1363.2
20°	1309.7	1346.9	1365.7	1395.6	1412.1	1421.0	1417.9
22.5°	1345.6	1385.8	1420.7	1446.5	1471.7	1483.6	1486.0
25°	1407.1	1462.4	1513.4	1547.5	1578.6	1585.9	1602.0
27.5°	1475.9	1541.1	1595.6	1631.4	1653.1	1661.2	1666.3
30°	1519.1	1584.0	1625.1	1648.0	1655.0	1654.2	1653.5
32.5°	1540.3	1580.9	1588.8	1582.4	1566.6	1553.2	1539.2
35°	1510.4	1480.1	1434.7	1376.4	1333.5	1290.1	1285.9
37.5°	1358.4	1261.4	1186.1	1102.0	1053.4	1023.4	1002.6
40°	1215.3	1105.2	1013.9	942.9	893.4	873.9	854.7
42.5°	1060.1	954.8	873.9	814.7	777.5	755.8	740.5
45°	861.2	768.4	705.1	662.2	632.6	615.7	606.1
47.5°	705.7	637.0	583.3	552.3	531.9	518.8	518.8
50°	622.3	556.6	521.0	496.4	478.8	468.4	470.3
52.5°	548.3	499.3	468.8	448.2	435.2	428.8	428.6
55°	458.5	423.1	403.2	388.2	379.4	372.1	373.7
57.5°	392.1	362.3	349.0	336.6	330.4	327.5	323.4
60°	351.0	328.0	316.5	306.5	300.3	298.1	293.9
62.5°	314.5	296.4	285.2	277.0	271.6	270.7	267.4
65°	264.3	250.5	240.5	236.7	231.0	229.4	229.4
67.5°	217.9	208.0	200.3	196.7	194.2	194.6	192.7
70°	188.7	180.7	175.7	171.9	170.0	170.4	168.7
72.5°	165.1	156.1	151.8	149.5	146.9	147.9	147.3
75°	125.0	120.5	118.2	115.8	114.3	113.5	112.8
77.5°	91.8	87.8	86.0	84.7	84.9	83.1	84.5
80°	71.0	67.6	66.3	64.4	64.0	64.0	63.7
82.5°	51.9	50.0	49.2	47.6	46.9	47.5	46.5
85°	26.9	25.3	24.9	24.9	24.1	23.4	25.3
87.5°	15.7	14.8	15.0	14.9	15.1	15.0	14.6
90°	29.4	31.1	32.4	33.4	34.4	35.4	36.5
92.5°	29.4	31.1	32.1	32.6	33.1	33.6	34.0
95°	29.4	31.1	31.9	31.9	31.9	31.9	31.9
97.5°	46.3	36.7	31.9	31.9	31.9	31.9	31.9
100°	113.5	63.2	37.4	36.0	34.6	33.3	31.9
102.5°	308.9	299.4	283.2	260.1	237.2	214.2	191.3
105°	453.0	453.0	452.8	452.5	452.2	451.8	451.5
107.5°	573.6	573.7	573.2	572.2	571.2	570.2	569.2
110°	650.7	649.6	649.3	649.6	649.9	650.4	650.7



TEST NUMBER: P333394-840

CATALOG NUMBER: S125DIW-S610D1560U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	727.7	726.4	725.5	725.1	724.6	724.1	723.6
115°	844.2	842.8	841.2	839.2	837.1	835.1	833.0
117.5°	956.4	954.6	953.3	952.5	951.6	950.7	949.8
120°	1030.2	1029.6	1028.3	1026.6	1024.9	1023.3	1021.6
122.5°	1099.5	1098.8	1097.5	1095.6	1093.6	1091.7	1089.6
125°	1199.9	1198.6	1197.4	1196.4	1195.4	1194.4	1193.4
127.5°	1293.0	1292.2	1290.6	1288.1	1285.7	1283.1	1280.6
130°	1353.0	1352.0	1350.6	1349.0	1347.3	1345.5	1343.8
132.5°	1410.2	1410.0	1409.0	1407.3	1405.6	1403.9	1402.2
135°	1492.4	1491.7	1490.3	1488.2	1486.2	1484.2	1482.2
137.5°	1570.1	1570.3	1569.5	1567.7	1566.0	1564.2	1562.5
140°	1618.0	1618.7	1618.0	1616.0	1614.0	1611.9	1609.9
142.5°	1663.9	1664.0	1663.0	1660.9	1658.9	1656.9	1654.9
145°	1729.5	1729.8	1729.0	1727.0	1725.0	1722.9	1720.9
147.5°	1785.6	1786.0	1785.0	1782.6	1780.2	1777.8	1775.3
150°	1821.7	1822.4	1821.4	1818.7	1815.9	1813.3	1810.6
152.5°	1853.3	1854.0	1853.1	1850.7	1848.3	1845.8	1843.4
155°	1897.2	1898.2	1897.3	1894.7	1892.0	1889.3	1886.5
157.5°	1933.3	1934.4	1933.6	1930.9	1928.1	1925.4	1922.8
160°	1956.0	1957.3	1956.7	1954.0	1951.3	1948.5	1945.9
162.5°	1977.1	1978.9	1978.4	1975.5	1972.5	1969.5	1966.5
165°	2003.7	2005.7	2005.3	2002.7	1999.9	1997.2	1994.5
167.5°	2024.0	2026.4	2026.1	2023.1	2020.0	2017.0	2014.0
170°	2034.6	2037.2	2037.1	2034.1	2031.0	2027.9	2024.9
172.5°	2042.3	2044.7	2044.4	2041.3	2038.3	2035.3	2032.3
175°	2051.2	2054.0	2053.8	2050.7	2047.7	2044.7	2041.6
177.5°	2054.0	2055.9	2055.8	2053.6	2051.4	2049.2	2047.1
180°	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7

(END OF REPORT)