

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333737-840

Luminaire Tested: **S125RDIW-S1270D1560U840-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333737-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10433.7 lumens
Efficiency: N/A
Efficacy: 125.9 lumens/watt
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

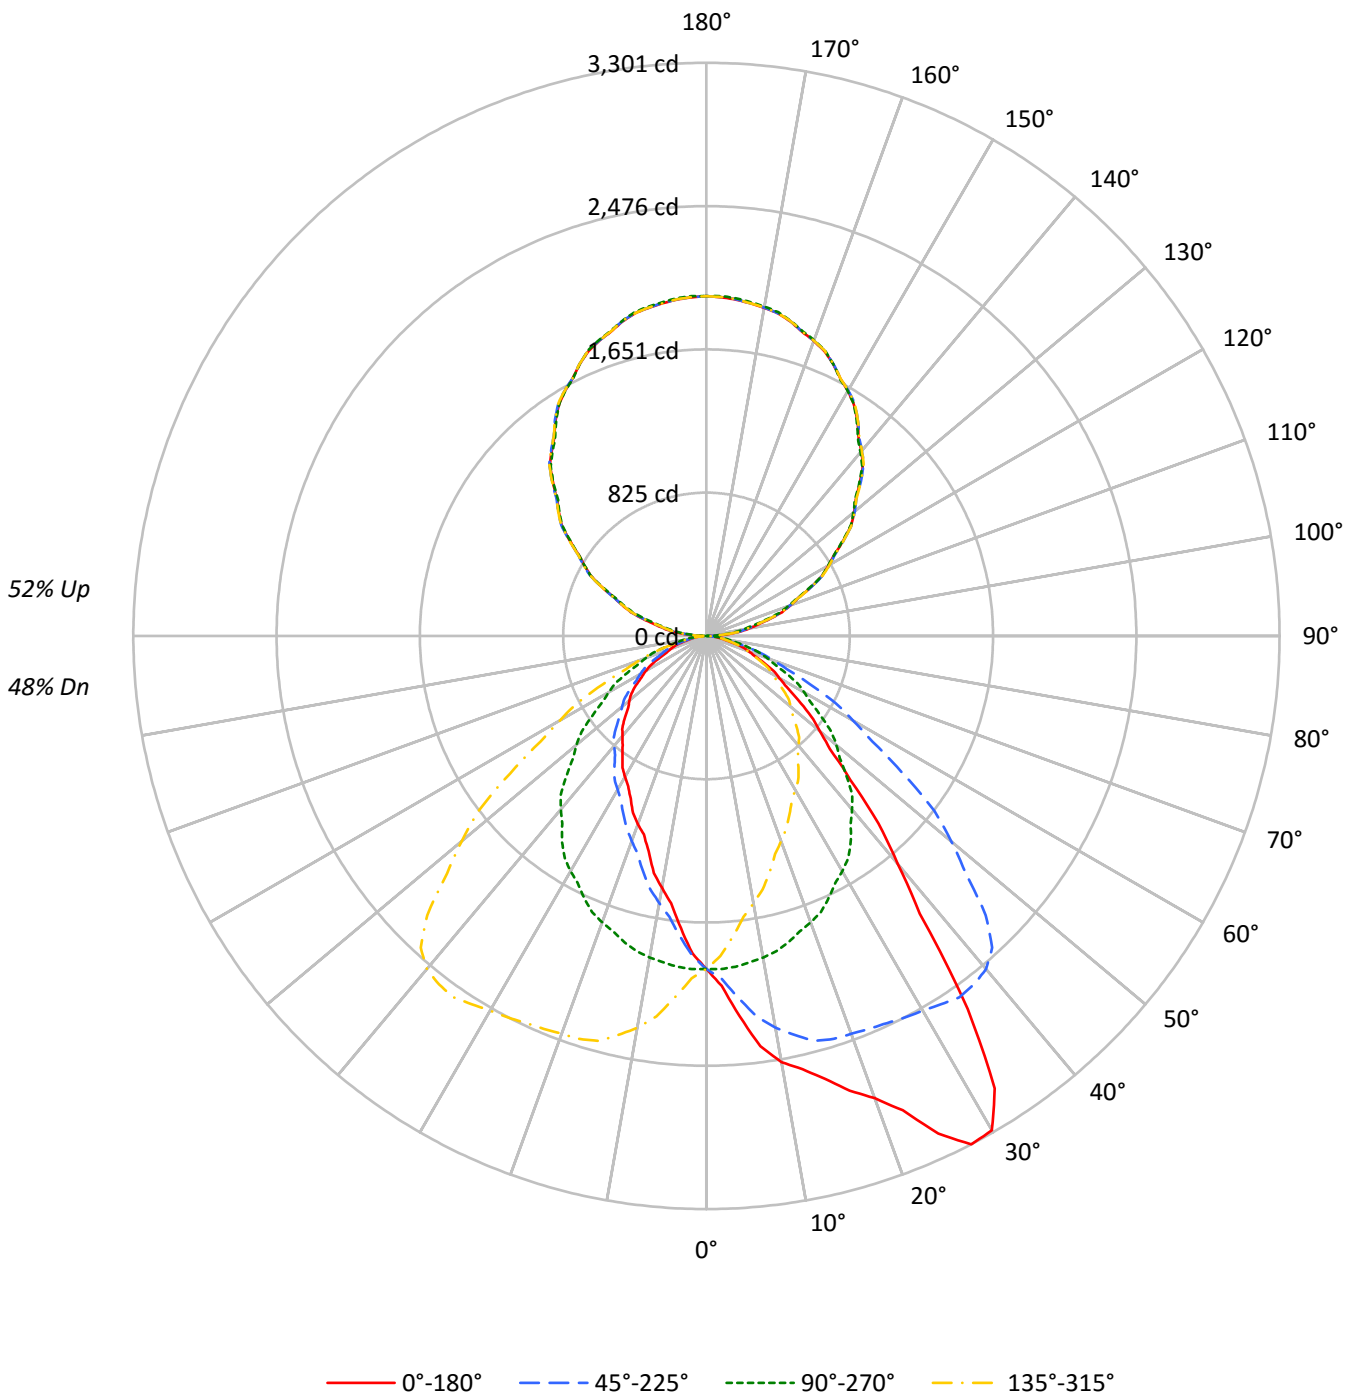



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	98	98	98	98	82	82	82	67	67	67	54	54	54	48				48
1	98	94	90	86	90	86	83	80	73	70	68	60	58	57	48	47	46				41	
2	89	82	76	71	82	76	71	66	64	60	57	53	50	48	43	41	40				35	
3	82	72	65	60	75	67	61	56	57	52	48	47	44	41	38	36	34				30	
4	75	64	57	51	69	60	53	48	51	45	41	42	38	35	34	32	30				26	
5	69	57	49	44	63	53	46	41	45	40	36	38	34	31	31	28	26				23	
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23				20	
7	59	47	39	33	54	43	36	31	37	32	28	31	27	24	26	23	20				18	
8	54	42	35	29	50	39	33	28	34	28	25	29	25	21	24	21	18				16	
9	51	39	31	26	47	36	29	25	31	26	22	26	22	19	22	19	17				14	
10	47	35	28	24	44	33	27	22	29	23	20	24	20	17	20	17	15				13	

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12385	12385	12385	12385
5°	14249	12401	10952	12401
10°	16344	12338	9664	12338
15°	17653	12211	8590	12211
20°	19467	12065	7932	12065
25°	22528	11870	7360	11870
30°	24515	11665	6986	11665
35°	20679	11427	6641	11427
40°	14441	10997	6345	10997
45°	10714	10418	6054	10418
50°	8542	9815	5805	9815
55°	7250	9067	5584	9067
60°	6263	8400	5227	8400
65°	5582	7674	4499	7674
70°	4904	7030	4101	7030
75°	4245	6089	3850	6089
80°	3217	5121	3217	5121
85°	2690	4024	3031	4024



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	183.9	1.8
10°-20°	538.9	5.2
20°-30°	854.5	8.2
30°-40°	1030.4	9.9
40°-50°	920.2	8.8
50°-60°	705.7	6.8
60°-70°	458.6	4.4
70°-80°	223.0	2.1
80°-90°	57.5	0.6
90°-100°	131.1	1.3
100°-110°	387.1	3.7
110°-120°	655.6	6.3
120°-130°	862.9	8.3
130°-140°	966.8	9.3
140°-150°	947.6	9.1
150°-160°	795.9	7.6
160°-170°	529.1	5.1
170°-180°	185.2	1.8
0°-30°	1577.3	15.1
0°-40°	2607.7	25.0
0°-60°	4233.5	40.6
0°-90°	4972.5	47.7
90°-120°	1173.8	11.3
90°-150°	3951.1	37.9
90°-180°	5461.0	52.3
0°-180°	10433.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1918	1918	1918	1918	1918	
5°	2198	1913	1689	1913	2198	220
15°	2640	1826	1285	1826	2640	757
25°	3161	1666	1033	1666	3161	1452
35°	2623	1449	842	1449	2623	1584
45°	1173	1141	663	1141	1173	936
55°	644	805	496	805	644	584
65°	365	502	294	502	365	363
75°	170	244	154	244	170	181
85°	36	54	41	54	36	43
90°	37	2	37	2	37	23
95°	131	99	131	99	131	133
105°	378	347	378	347	378	400
115°	663	656	663	656	663	655
125°	964	958	964	958	964	861
135°	1250	1246	1250	1246	1250	965
145°	1515	1509	1515	1509	1515	946
155°	1727	1727	1727	1727	1727	795
165°	1873	1878	1873	1878	1873	528
175°	1945	1953	1945	1953	1945	185
180°	1957	1957	1957	1957	1957	



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6
2.5°	2017.1	2015.9	2018.4	2011.4	2012.1	2001.4	2001.4	1993.2	1982.5	1974.3	1970.5
5°	2197.9	2199.5	2196.3	2184.4	2176.7	2164.8	2151.4	2127.8	2108.1	2089.2	2074.3
7.5°	2384.0	2385.1	2374.7	2371.1	2351.2	2336.7	2306.9	2274.8	2246.3	2210.2	2182.4
10°	2492.2	2491.5	2480.4	2471.8	2454.5	2432.5	2403.4	2365.5	2330.2	2290.8	2253.0
12.5°	2555.3	2553.2	2549.7	2539.2	2523.1	2503.7	2478.9	2441.8	2398.1	2355.0	2310.9
15°	2640.3	2634.7	2624.5	2611.1	2588.3	2565.5	2537.9	2504.9	2463.2	2414.4	2373.4
17.5°	2745.4	2745.6	2729.9	2711.3	2680.3	2640.0	2597.5	2544.1	2487.4	2433.7	2390.1
20°	2832.4	2829.9	2814.3	2778.0	2742.6	2692.2	2643.4	2578.1	2508.8	2438.7	2384.4
22.5°	2957.1	2950.9	2934.6	2887.0	2832.1	2767.1	2692.5	2612.7	2529.0	2449.4	2378.1
25°	3161.4	3156.6	3124.4	3069.3	2992.1	2892.2	2794.6	2685.1	2564.8	2460.0	2373.4
27.5°	3301.2	3296.0	3272.1	3226.3	3155.1	3049.9	2917.8	2771.6	2621.2	2477.2	2352.3
30°	3287.3	3299.1	3296.0	3274.8	3221.3	3126.7	3004.8	2840.2	2661.5	2492.2	2343.5
32.5°	3089.6	3100.2	3127.9	3169.6	3172.7	3134.9	3043.8	2891.8	2706.8	2514.4	2336.5
35°	2622.9	2637.2	2690.7	2774.9	2885.1	2977.2	2996.1	2914.3	2748.1	2541.1	2326.2
37.5°	2016.5	2094.0	2139.0	2227.7	2394.2	2563.6	2726.5	2786.5	2715.8	2530.1	2309.4
40°	1712.9	1731.8	1812.1	1912.1	2052.2	2228.6	2460.8	2628.5	2633.9	2504.9	2282.9
42.5°	1466.1	1490.1	1545.1	1625.0	1744.9	1921.3	2161.0	2382.3	2484.8	2435.6	2248.3
45°	1173.0	1191.0	1231.2	1292.6	1384.7	1530.3	1736.6	1992.4	2195.5	2275.0	2155.4
47.5°	963.5	973.3	1008.2	1055.0	1123.2	1229.3	1389.0	1611.0	1854.6	2025.5	2008.6
50°	850.2	861.2	888.0	923.4	980.9	1070.6	1198.1	1383.1	1634.3	1842.8	1884.6
52.5°	762.0	771.1	787.8	821.3	868.8	937.8	1040.7	1208.0	1434.0	1655.8	1752.3
55°	643.9	650.3	663.6	682.5	720.3	769.9	858.8	974.5	1157.2	1380.8	1522.5
57.5°	546.6	549.8	558.3	575.7	601.9	638.1	702.4	800.4	931.4	1132.8	1289.1
60°	484.9	488.1	499.1	510.9	531.4	564.4	614.8	683.3	809.2	975.3	1133.6
62.5°	435.8	437.7	442.4	454.2	472.2	497.7	537.3	593.2	693.4	839.3	988.8
65°	365.3	366.1	367.6	377.1	388.1	407.0	432.9	472.3	547.9	658.1	790.3
67.5°	297.6	298.6	304.2	307.5	319.0	328.9	344.2	374.3	427.5	501.8	604.6
70°	259.7	259.0	264.5	268.4	272.4	284.2	294.4	318.8	351.8	408.6	494.3
72.5°	224.5	222.5	224.8	226.2	231.5	239.4	249.7	264.7	290.1	329.2	394.9
75°	170.1	170.9	170.9	172.4	176.3	179.5	182.6	190.5	204.7	230.7	266.1
77.5°	119.4	118.1	121.4	121.9	124.2	127.6	130.4	133.5	139.4	150.1	168.3
80°	86.5	86.5	87.4	89.8	89.0	90.5	94.4	97.7	104.7	111.0	117.2
82.5°	66.4	65.8	66.6	67.1	67.0	68.5	69.9	70.5	73.2	76.3	80.8
85°	36.3	36.3	37.0	37.0	37.8	37.8	38.6	38.6	38.6	39.4	40.2
87.5°	21.2	20.3	19.5	19.3	19.7	20.7	19.8	18.8	18.5	18.1	18.3
90°	36.6	35.5	34.5	33.5	32.5	31.1	29.5	27.8	26.1	24.3	22.0
92.5°	71.9	71.1	70.4	69.7	68.9	67.5	65.1	62.9	60.7	58.5	55.5
95°	131.0	130.3	129.7	129.0	128.3	126.7	124.4	122.0	119.7	117.2	113.9
97.5°	198.6	198.2	197.8	197.4	197.0	195.6	193.4	191.2	188.9	186.7	182.1
100°	249.7	249.1	248.4	247.7	247.1	245.2	242.2	239.1	236.1	233.0	228.6
102.5°	300.9	300.0	299.0	298.1	297.2	295.0	291.8	288.4	285.1	281.8	279.5
105°	377.7	376.7	375.7	374.7	373.7	372.1	370.1	368.1	366.1	364.1	361.9
107.5°	456.3	456.4	456.5	456.5	456.6	456.1	455.0	454.0	453.0	452.0	450.5
110°	514.8	515.1	515.4	515.8	516.1	515.8	514.8	513.8	512.7	511.7	510.7



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	572.1	572.7	573.3	573.9	574.5	574.5	574.1	573.6	573.1	572.7	571.4
115°	662.6	662.9	663.2	663.6	663.9	664.2	664.6	664.9	665.2	665.6	664.9
117.5°	750.8	752.2	753.6	754.9	756.3	756.8	756.6	756.3	756.0	755.8	755.1
120°	811.8	813.1	814.5	815.9	817.2	817.9	817.9	817.9	817.9	817.9	817.5
122.5°	872.7	873.7	874.8	876.0	877.1	877.7	878.0	878.3	878.5	878.8	877.9
125°	964.1	964.4	964.7	965.1	965.4	965.9	966.6	967.3	968.0	968.7	968.4
127.5°	1051.8	1052.5	1053.2	1053.8	1054.5	1055.0	1055.4	1055.7	1056.0	1056.4	1056.0
130°	1110.3	1111.0	1111.7	1112.4	1113.0	1113.5	1113.9	1114.2	1114.5	1114.9	1114.2
132.5°	1165.1	1166.1	1167.0	1168.0	1168.9	1169.5	1169.9	1170.2	1170.5	1170.9	1171.0
135°	1250.4	1251.7	1253.1	1254.5	1255.9	1256.5	1256.5	1256.5	1256.5	1256.5	1256.2
137.5°	1333.8	1335.5	1337.3	1339.0	1340.7	1341.3	1340.9	1340.5	1340.1	1339.7	1338.9
140°	1387.5	1389.2	1390.9	1392.6	1394.2	1394.7	1394.1	1393.4	1392.7	1392.1	1391.1
142.5°	1438.7	1440.4	1442.1	1443.7	1445.4	1446.1	1445.6	1445.2	1444.8	1444.4	1443.2
145°	1515.4	1516.4	1517.4	1518.4	1519.4	1519.9	1519.9	1519.9	1519.9	1519.9	1518.9
147.5°	1580.9	1583.3	1585.5	1587.8	1590.1	1590.8	1590.0	1589.2	1588.4	1587.6	1586.8
150°	1629.6	1630.3	1631.0	1631.6	1632.3	1632.7	1632.7	1632.7	1632.7	1632.7	1631.3
152.5°	1669.9	1671.1	1672.3	1673.5	1674.8	1675.0	1674.2	1673.3	1672.5	1671.7	1671.1
155°	1727.2	1728.8	1730.5	1732.2	1733.9	1734.0	1732.7	1731.3	1730.0	1728.7	1728.3
157.5°	1774.9	1777.2	1779.4	1781.6	1783.9	1784.3	1783.0	1781.6	1780.3	1778.9	1778.6
160°	1807.9	1809.6	1811.2	1812.9	1814.6	1814.8	1813.4	1812.1	1810.7	1809.4	1809.1
162.5°	1835.8	1837.9	1839.8	1841.8	1843.7	1843.9	1842.3	1840.7	1839.1	1837.3	1837.3
165°	1873.3	1875.4	1877.4	1879.5	1881.5	1881.8	1880.5	1879.1	1877.7	1876.4	1876.0
167.5°	1903.2	1905.3	1907.4	1909.5	1911.6	1911.6	1909.6	1907.5	1905.5	1903.5	1903.5
170°	1919.0	1921.4	1923.8	1926.1	1928.5	1928.6	1926.6	1924.6	1922.6	1920.6	1920.6
172.5°	1932.5	1934.5	1936.6	1938.7	1940.9	1940.9	1938.8	1936.8	1934.8	1932.8	1932.8
175°	1944.9	1947.3	1949.6	1952.1	1954.4	1954.6	1952.6	1950.6	1948.4	1946.4	1946.4
177.5°	1952.3	1954.1	1956.0	1957.9	1959.8	1959.9	1958.3	1956.7	1955.1	1953.5	1953.7
180°	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6
2.5°	1970.5	1966.1	1957.9	1950.4	1941.0	1932.8	1927.0	1920.2	1911.4	1900.7	1891.8
5°	2057.7	2040.4	2017.6	1997.9	1972.8	1953.1	1932.6	1912.9	1893.2	1868.0	1846.0
7.5°	2154.4	2118.7	2083.9	2040.1	2000.4	1965.0	1931.0	1896.5	1862.8	1827.0	1792.6
10°	2213.6	2170.3	2122.3	2067.2	2016.8	1968.8	1924.7	1881.4	1835.7	1795.6	1752.3
12.5°	2269.1	2213.1	2158.2	2088.6	2028.1	1969.4	1913.4	1859.4	1810.6	1758.5	1712.0
15°	2319.1	2264.0	2202.6	2117.6	2033.4	1962.5	1896.3	1826.3	1765.6	1707.5	1655.5
17.5°	2338.4	2280.7	2209.4	2127.7	2035.6	1946.4	1861.3	1784.4	1713.1	1645.3	1586.8
20°	2330.9	2275.0	2201.8	2123.8	2025.5	1932.6	1840.5	1755.4	1676.0	1604.3	1542.2
22.5°	2312.7	2254.8	2184.1	2101.8	2008.4	1910.0	1811.5	1720.8	1637.5	1563.4	1495.5
25°	2285.2	2206.6	2134.1	2053.8	1964.9	1867.2	1765.6	1665.7	1576.8	1501.2	1427.2
27.5°	2256.7	2158.5	2066.4	1986.6	1892.6	1805.5	1707.6	1605.1	1511.6	1434.6	1358.7
30°	2230.9	2120.7	2019.1	1928.6	1839.7	1757.1	1664.2	1564.2	1468.1	1388.7	1311.5
32.5°	2198.8	2081.6	1970.0	1865.6	1779.9	1697.9	1613.8	1518.2	1424.7	1342.6	1264.3
35°	2158.5	2008.9	1887.7	1776.8	1681.4	1601.9	1526.4	1449.3	1355.5	1270.5	1194.2
37.5°	2105.6	1935.9	1795.6	1674.7	1574.3	1494.4	1434.7	1364.2	1278.7	1197.3	1126.5
40°	2073.5	1883.0	1729.5	1609.8	1504.3	1420.1	1364.2	1304.4	1226.5	1150.1	1079.2
42.5°	2030.6	1834.5	1662.7	1538.0	1431.9	1350.8	1294.3	1242.0	1176.7	1104.8	1028.9
45°	1946.7	1740.5	1560.2	1426.4	1319.4	1239.8	1187.1	1140.6	1091.1	1024.9	958.8
47.5°	1837.4	1642.4	1453.8	1307.7	1202.9	1129.0	1077.8	1041.2	1005.7	949.5	885.2
50°	1750.0	1561.9	1377.6	1235.9	1124.1	1054.1	1006.0	976.9	944.6	893.4	839.9
52.5°	1646.7	1478.6	1298.3	1153.4	1047.9	982.3	936.1	907.1	880.4	838.7	787.7
55°	1483.9	1336.7	1171.3	1039.9	943.1	877.0	832.8	805.3	789.6	754.2	714.0
57.5°	1296.1	1190.5	1044.8	918.1	832.4	767.1	734.8	711.3	693.6	668.5	640.2
60°	1165.1	1091.1	960.4	839.9	761.2	699.0	669.9	650.3	633.7	612.5	590.4
62.5°	1032.2	978.4	864.6	761.2	688.8	636.7	609.5	591.7	572.6	558.3	536.8
65°	854.1	806.1	727.4	646.3	579.4	537.7	518.0	502.2	490.4	474.6	459.7
67.5°	664.4	644.9	590.6	534.6	486.7	449.5	432.5	421.5	407.3	397.9	387.6
70°	547.9	538.5	499.9	462.9	418.0	392.8	377.1	372.3	355.1	345.6	338.5
72.5°	444.6	440.2	418.0	392.3	360.7	338.6	324.2	318.8	307.8	300.2	295.7
75°	304.7	306.2	302.3	285.8	274.0	259.7	247.2	244.0	236.2	229.8	225.9
77.5°	192.7	200.8	201.1	200.3	195.5	186.9	181.7	179.4	171.6	169.3	168.3
80°	132.3	140.9	148.8	147.9	146.4	144.1	140.2	137.7	133.8	131.5	129.9
82.5°	88.2	96.2	102.8	107.0	106.7	104.4	101.7	100.6	99.8	98.1	97.8
85°	41.7	43.3	45.6	51.2	55.1	55.8	55.1	54.3	51.9	52.7	53.5
87.5°	18.4	18.0	18.1	17.6	16.5	19.0	20.4	20.5	19.7	19.0	18.3
90°	19.6	17.3	14.8	12.3	9.7	7.0	4.2	1.5	4.2	7.0	9.7
92.5°	52.6	49.8	46.9	44.4	42.5	40.7	38.8	36.9	38.8	40.7	42.5
95°	110.5	107.1	103.7	101.7	101.0	100.4	99.7	99.0	99.7	100.4	101.0
97.5°	177.4	172.7	168.0	165.6	165.3	165.0	164.7	164.5	164.7	165.0	165.3
100°	224.2	219.8	215.4	213.2	213.2	213.2	213.2	213.2	213.2	213.2	213.2
102.5°	277.3	275.1	272.9	271.0	269.6	268.3	267.0	265.6	267.0	268.3	269.6
105°	359.9	357.9	355.9	354.1	352.3	350.6	348.9	347.3	348.9	350.6	352.3
107.5°	448.9	447.4	445.9	444.1	442.5	440.8	439.1	437.4	439.1	440.8	442.5
110°	509.7	508.7	507.7	506.3	504.6	502.9	501.3	499.6	501.3	502.9	504.6



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	570.1	568.8	567.5	566.4	565.5	564.7	563.8	562.9	563.8	564.7	565.5
115°	664.2	663.6	662.9	661.9	660.5	659.1	657.8	656.4	657.8	659.1	660.5
117.5°	754.5	753.9	753.3	752.7	752.0	751.4	750.8	750.2	750.8	751.4	752.0
120°	817.2	816.9	816.5	815.5	813.9	812.1	810.4	808.7	810.4	812.1	813.9
122.5°	877.1	876.2	875.3	874.5	873.9	873.3	872.7	872.1	872.7	873.3	873.9
125°	968.0	967.7	967.3	966.1	964.1	962.1	960.0	958.0	960.0	962.1	964.1
127.5°	1055.6	1055.2	1054.8	1054.0	1052.8	1051.7	1050.6	1049.4	1050.6	1051.7	1052.8
130°	1113.5	1112.9	1112.2	1111.0	1109.2	1107.6	1105.9	1104.2	1105.9	1107.6	1109.2
132.5°	1171.1	1171.3	1171.4	1170.1	1167.4	1164.6	1161.8	1159.0	1161.8	1164.6	1167.4
135°	1255.9	1255.5	1255.2	1253.9	1251.9	1249.9	1247.9	1245.9	1247.9	1249.9	1251.9
137.5°	1338.2	1337.5	1336.7	1335.3	1333.3	1331.4	1329.5	1327.5	1329.5	1331.4	1333.3
140°	1390.1	1389.0	1388.0	1386.6	1384.9	1383.2	1381.6	1379.9	1381.6	1383.2	1384.9
142.5°	1441.9	1440.6	1439.3	1437.9	1436.5	1435.1	1433.7	1432.3	1433.7	1435.1	1436.5
145°	1517.9	1516.9	1515.9	1514.8	1513.4	1512.1	1510.7	1509.3	1510.7	1512.1	1513.4
147.5°	1586.0	1585.2	1584.4	1583.6	1582.9	1582.1	1581.3	1580.6	1581.3	1582.1	1582.9
150°	1630.0	1628.6	1627.3	1626.8	1627.1	1627.5	1627.8	1628.1	1627.8	1627.5	1627.1
152.5°	1670.6	1670.1	1669.5	1669.0	1668.5	1668.1	1667.6	1667.1	1667.6	1668.1	1668.5
155°	1728.0	1727.7	1727.3	1727.2	1727.2	1727.2	1727.2	1727.2	1727.2	1727.2	1727.2
157.5°	1778.3	1777.9	1777.6	1777.8	1778.5	1779.3	1780.0	1780.7	1780.0	1779.3	1778.5
160°	1808.7	1808.4	1808.1	1808.4	1809.4	1810.4	1811.4	1812.4	1811.4	1810.4	1809.4
162.5°	1837.2	1837.1	1837.1	1837.4	1838.3	1839.0	1839.7	1840.5	1839.7	1839.0	1838.3
165°	1875.7	1875.4	1875.0	1875.2	1875.9	1876.5	1877.2	1877.9	1877.2	1876.5	1875.9
167.5°	1903.5	1903.5	1903.5	1904.2	1905.5	1906.9	1908.2	1909.6	1908.2	1906.9	1905.5
170°	1920.6	1920.6	1920.6	1921.3	1922.6	1923.9	1925.3	1926.6	1925.3	1923.9	1922.6
172.5°	1932.8	1932.8	1932.8	1933.4	1934.8	1936.1	1937.5	1938.8	1937.5	1936.1	1934.8
175°	1946.4	1946.4	1946.4	1947.1	1948.4	1949.8	1951.2	1952.6	1951.2	1949.8	1948.4
177.5°	1954.0	1954.3	1954.5	1955.2	1956.3	1957.4	1958.4	1959.5	1958.4	1957.4	1956.3
180°	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6
2.5°	1885.5	1876.7	1870.4	1857.7	1849.0	1845.2	1838.3	1836.3	1843.3	1838.3	1837.7
5°	1829.5	1806.6	1788.6	1770.4	1750.7	1738.2	1719.3	1716.1	1711.4	1704.2	1702.7
7.5°	1762.2	1732.5	1709.2	1679.3	1653.3	1632.3	1608.7	1597.5	1591.4	1582.3	1570.0
10°	1716.9	1681.4	1650.0	1620.0	1587.8	1561.9	1538.2	1520.0	1508.2	1497.2	1492.6
12.5°	1672.1	1636.1	1595.8	1559.6	1523.6	1494.4	1468.2	1456.5	1443.4	1430.5	1419.5
15°	1602.8	1554.7	1510.7	1468.9	1438.2	1406.7	1381.5	1364.2	1344.5	1339.1	1317.8
17.5°	1529.0	1482.0	1430.4	1386.4	1350.8	1316.2	1288.5	1268.8	1254.1	1233.8	1224.0
20°	1483.1	1427.2	1376.8	1336.7	1297.3	1256.4	1228.0	1211.5	1197.3	1180.8	1173.0
22.5°	1434.0	1379.4	1327.7	1280.6	1240.6	1200.3	1180.1	1163.1	1146.9	1131.7	1121.3
25°	1361.9	1306.8	1252.4	1203.7	1162.0	1132.8	1109.1	1089.4	1080.9	1065.9	1054.8
27.5°	1290.5	1231.9	1175.6	1126.9	1094.2	1065.4	1046.0	1030.5	1014.8	1001.8	992.2
30°	1244.6	1184.8	1123.4	1084.8	1050.2	1022.6	1001.3	986.3	974.5	962.7	955.6
32.5°	1198.6	1136.9	1082.4	1040.7	1007.9	984.1	962.3	948.0	935.5	922.4	914.1
35°	1124.9	1062.0	1017.8	976.9	944.6	922.6	907.7	887.2	877.0	867.5	858.8
37.5°	1056.4	997.8	950.2	914.2	886.3	864.3	845.0	833.9	821.3	812.8	805.7
40°	1006.0	952.5	909.2	871.4	851.0	826.6	808.5	794.3	784.9	773.9	766.0
42.5°	960.7	911.0	868.9	835.0	809.4	788.8	771.3	757.1	745.2	737.3	730.6
45°	896.7	847.1	806.1	774.6	751.0	731.3	713.2	706.1	690.3	681.0	677.8
47.5°	830.3	786.0	746.4	717.4	693.2	674.6	657.6	643.2	634.5	625.2	620.2
50°	785.7	743.2	706.1	677.8	654.2	633.7	617.9	608.5	596.7	588.0	581.8
52.5°	740.9	701.6	664.6	637.4	617.0	596.5	579.0	569.5	558.3	552.8	548.4
55°	677.0	635.3	603.8	577.0	555.7	536.8	520.4	510.9	503.8	498.3	496.8
57.5°	604.6	571.5	542.2	518.2	496.0	478.3	463.8	454.8	448.6	447.8	443.0
60°	557.3	527.5	500.7	474.6	455.8	439.3	426.7	416.5	410.1	409.3	407.8
62.5°	510.1	481.4	456.6	433.7	416.8	400.8	388.9	377.4	373.7	369.7	366.2
65°	440.0	414.0	393.6	375.5	357.4	344.0	332.2	325.1	316.5	311.7	303.1
67.5°	371.2	351.1	331.4	316.2	301.9	289.2	279.4	268.9	263.1	259.3	253.0
70°	325.9	310.1	290.4	274.0	263.0	252.7	244.8	233.0	229.0	225.9	222.8
72.5°	283.1	269.2	252.7	239.3	228.3	218.6	209.5	204.0	200.2	196.9	195.1
75°	222.8	209.4	195.2	185.8	177.9	170.1	165.3	161.4	159.8	159.1	155.8
77.5°	163.6	156.5	145.1	137.6	132.4	129.3	125.0	123.0	122.8	119.4	118.3
80°	125.1	121.2	111.8	108.7	104.7	101.6	99.2	95.2	91.3	89.8	87.4
82.5°	93.0	89.1	85.3	80.3	77.0	75.1	72.7	71.3	71.8	69.6	68.5
85°	49.6	45.6	44.1	43.3	41.7	43.3	42.5	41.7	40.9	40.2	40.9
87.5°	18.2	18.7	18.6	20.3	18.9	20.0	20.3	20.0	20.4	20.7	20.4
90°	12.3	14.8	17.3	19.6	22.0	24.3	26.1	27.8	29.5	31.1	32.5
92.5°	44.4	46.9	49.8	52.6	55.5	58.5	60.7	62.9	65.1	67.5	68.9
95°	101.7	103.7	107.1	110.5	113.9	117.2	119.7	122.0	124.4	126.7	128.3
97.5°	165.6	168.0	172.7	177.4	182.1	186.7	188.9	191.2	193.4	195.6	197.0
100°	213.2	215.4	219.8	224.2	228.6	233.0	236.1	239.1	242.2	245.2	247.1
102.5°	271.0	272.9	275.1	277.3	279.5	281.8	285.1	288.4	291.8	295.0	297.2
105°	354.1	355.9	357.9	359.9	361.9	364.1	366.1	368.1	370.1	372.1	373.7
107.5°	444.1	445.9	447.4	448.9	450.5	452.0	453.0	454.0	455.0	456.1	456.6
110°	506.3	507.7	508.7	509.7	510.7	511.7	512.7	513.8	514.8	515.8	516.1



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	566.4	567.5	568.8	570.1	571.4	572.7	573.1	573.6	574.1	574.5	574.5
115°	661.9	662.9	663.6	664.2	664.9	665.6	665.2	664.9	664.6	664.2	663.9
117.5°	752.7	753.3	753.9	754.5	755.1	755.8	756.0	756.3	756.6	756.8	756.3
120°	815.5	816.5	816.9	817.2	817.5	817.9	817.9	817.9	817.9	817.9	817.2
122.5°	874.5	875.3	876.2	877.1	877.9	878.8	878.5	878.3	878.0	877.7	877.1
125°	966.1	967.3	967.7	968.0	968.4	968.7	968.0	967.3	966.6	965.9	965.4
127.5°	1054.0	1054.8	1055.2	1055.6	1056.0	1056.4	1056.0	1055.7	1055.4	1055.0	1054.5
130°	1111.0	1112.2	1112.9	1113.5	1114.2	1114.9	1114.5	1114.2	1113.9	1113.5	1113.0
132.5°	1170.1	1171.4	1171.3	1171.1	1171.0	1170.9	1170.5	1170.2	1169.9	1169.5	1168.9
135°	1253.9	1255.2	1255.5	1255.9	1256.2	1256.5	1256.5	1256.5	1256.5	1256.5	1255.9
137.5°	1335.3	1336.7	1337.5	1338.2	1338.9	1339.7	1340.1	1340.5	1340.9	1341.3	1340.7
140°	1386.6	1388.0	1389.0	1390.1	1391.1	1392.1	1392.7	1393.4	1394.1	1394.7	1394.2
142.5°	1437.9	1439.3	1440.6	1441.9	1443.2	1444.4	1444.8	1445.2	1445.6	1446.1	1445.4
145°	1514.8	1515.9	1516.9	1517.9	1518.9	1519.9	1519.9	1519.9	1519.9	1519.9	1519.4
147.5°	1583.6	1584.4	1585.2	1586.0	1586.8	1587.6	1588.4	1589.2	1590.0	1590.8	1590.1
150°	1626.8	1627.3	1628.6	1630.0	1631.3	1632.7	1632.7	1632.7	1632.7	1632.7	1632.3
152.5°	1669.0	1669.5	1670.1	1670.6	1671.1	1671.7	1672.5	1673.3	1674.2	1675.0	1674.8
155°	1727.2	1727.3	1727.7	1728.0	1728.3	1728.7	1730.0	1731.3	1732.7	1734.0	1733.9
157.5°	1777.8	1777.6	1777.9	1778.3	1778.6	1778.9	1780.3	1781.6	1783.0	1784.3	1783.9
160°	1808.4	1808.1	1808.4	1808.7	1809.1	1809.4	1810.7	1812.1	1813.4	1814.8	1814.6
162.5°	1837.4	1837.1	1837.1	1837.2	1837.3	1837.3	1839.1	1840.7	1842.3	1843.9	1843.7
165°	1875.2	1875.0	1875.4	1875.7	1876.0	1876.4	1877.7	1879.1	1880.5	1881.8	1881.5
167.5°	1904.2	1903.5	1903.5	1903.5	1903.5	1903.5	1905.5	1907.5	1909.6	1911.6	1911.6
170°	1921.3	1920.6	1920.6	1920.6	1920.6	1920.6	1922.6	1924.6	1926.6	1928.6	1928.5
172.5°	1933.4	1932.8	1932.8	1932.8	1932.8	1932.8	1934.8	1936.8	1938.8	1940.9	1940.9
175°	1947.1	1946.4	1946.4	1946.4	1946.4	1946.4	1948.4	1950.6	1952.6	1954.6	1954.4
177.5°	1955.2	1954.5	1954.3	1954.0	1953.7	1953.5	1955.1	1956.7	1958.3	1959.9	1959.8
180°	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6
2.5°	1837.0	1830.1	1828.2	1830.7	1828.2	1830.1	1837.0	1837.7	1838.3	1843.3	1836.3
5°	1694.9	1687.0	1690.9	1689.3	1690.9	1687.0	1694.9	1702.7	1704.2	1711.4	1716.1
7.5°	1569.8	1560.0	1549.6	1553.0	1549.6	1560.0	1569.8	1570.0	1582.3	1591.4	1597.5
10°	1482.3	1474.4	1469.7	1473.6	1469.7	1474.4	1482.3	1492.6	1497.2	1508.2	1520.0
12.5°	1408.7	1403.9	1399.8	1398.1	1399.8	1403.9	1408.7	1419.5	1430.5	1443.4	1456.5
15°	1308.3	1298.9	1294.9	1284.8	1294.9	1298.9	1308.3	1317.8	1339.1	1344.5	1364.2
17.5°	1215.9	1212.7	1202.5	1198.1	1202.5	1212.7	1215.9	1224.0	1233.8	1254.1	1268.8
20°	1161.1	1158.0	1147.7	1154.1	1147.7	1158.0	1161.1	1173.0	1180.8	1197.3	1211.5
22.5°	1115.8	1108.8	1105.5	1103.7	1105.5	1108.8	1115.8	1121.3	1131.7	1146.9	1163.1
25°	1051.7	1041.5	1037.5	1032.8	1037.5	1041.5	1051.7	1054.8	1065.9	1080.9	1089.4
27.5°	987.7	982.3	977.0	975.8	977.0	982.3	987.7	992.2	1001.8	1014.8	1030.5
30°	946.2	940.7	936.8	936.8	936.8	940.7	946.2	955.6	962.7	974.5	986.3
32.5°	909.1	904.8	900.9	900.3	900.9	904.8	909.1	914.1	922.4	935.5	948.0
35°	855.0	848.6	847.1	842.3	847.1	848.6	855.0	858.8	867.5	877.0	887.2
37.5°	798.7	793.5	793.3	792.8	793.3	793.5	798.7	805.7	812.8	821.3	833.9
40°	762.8	758.8	758.1	752.6	758.1	758.8	762.8	766.0	773.9	784.9	794.3
42.5°	724.4	722.4	719.6	717.3	719.6	722.4	724.4	730.6	737.3	745.2	757.1
45°	672.3	666.7	666.7	662.8	666.7	666.7	672.3	677.8	681.0	690.3	706.1
47.5°	618.4	614.2	614.6	610.6	614.6	614.2	618.4	620.2	625.2	634.5	643.2
50°	582.5	580.2	579.4	577.8	579.4	580.2	582.5	581.8	588.0	596.7	608.5
52.5°	546.6	545.5	548.6	545.0	548.6	545.5	546.6	548.4	552.8	558.3	569.5
55°	498.3	495.9	500.7	495.9	500.7	495.9	498.3	496.8	498.3	503.8	510.9
57.5°	442.7	440.5	444.7	442.4	444.7	440.5	442.7	443.0	447.8	448.6	454.8
60°	406.2	401.5	403.8	404.7	403.8	401.5	406.2	407.8	409.3	410.1	416.5
62.5°	362.7	359.9	361.6	358.0	361.6	359.9	362.7	366.2	369.7	373.7	377.4
65°	301.5	299.1	296.0	294.4	296.0	299.1	301.5	303.1	311.7	316.5	325.1
67.5°	253.3	247.6	247.5	248.7	247.5	247.6	253.3	253.0	259.3	263.1	268.9
70°	218.0	218.0	217.2	217.2	217.2	218.0	218.0	222.8	225.9	229.0	233.0
72.5°	193.5	192.9	191.5	190.9	191.5	192.9	193.5	195.1	196.9	200.2	204.0
75°	155.8	156.6	155.1	154.3	155.1	156.6	155.8	155.8	159.1	159.8	161.4
77.5°	115.1	111.8	113.5	111.8	113.5	111.8	115.1	118.3	119.4	122.8	123.0
80°	87.4	86.5	89.0	86.5	89.0	86.5	87.4	87.4	89.8	91.3	95.2
82.5°	69.1	68.4	69.5	67.7	69.5	68.4	69.1	68.5	69.6	71.8	71.3
85°	41.7	40.9	40.2	40.9	40.2	40.9	41.7	40.9	40.2	40.9	41.7
87.5°	21.2	20.8	21.0	21.2	21.0	20.8	21.2	20.4	20.7	20.4	20.0
90°	33.5	34.5	35.5	36.6	35.5	34.5	33.5	32.5	31.1	29.5	27.8
92.5°	69.7	70.4	71.1	71.9	71.1	70.4	69.7	68.9	67.5	65.1	62.9
95°	129.0	129.7	130.3	131.0	130.3	129.7	129.0	128.3	126.7	124.4	122.0
97.5°	197.4	197.8	198.2	198.6	198.2	197.8	197.4	197.0	195.6	193.4	191.2
100°	247.7	248.4	249.1	249.7	249.1	248.4	247.7	247.1	245.2	242.2	239.1
102.5°	298.1	299.0	300.0	300.9	300.0	299.0	298.1	297.2	295.0	291.8	288.4
105°	374.7	375.7	376.7	377.7	376.7	375.7	374.7	373.7	372.1	370.1	368.1
107.5°	456.5	456.5	456.4	456.3	456.4	456.5	456.5	456.6	456.1	455.0	454.0
110°	515.8	515.4	515.1	514.8	515.1	515.4	515.8	516.1	515.8	514.8	513.8



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	573.9	573.3	572.7	572.1	572.7	573.3	573.9	574.5	574.5	574.1	573.6
115°	663.6	663.2	662.9	662.6	662.9	663.2	663.6	663.9	664.2	664.6	664.9
117.5°	754.9	753.6	752.2	750.8	752.2	753.6	754.9	756.3	756.8	756.6	756.3
120°	815.9	814.5	813.1	811.8	813.1	814.5	815.9	817.2	817.9	817.9	817.9
122.5°	876.0	874.8	873.7	872.7	873.7	874.8	876.0	877.1	877.7	878.0	878.3
125°	965.1	964.7	964.4	964.1	964.4	964.7	965.1	965.4	965.9	966.6	967.3
127.5°	1053.8	1053.2	1052.5	1051.8	1052.5	1053.2	1053.8	1054.5	1055.0	1055.4	1055.7
130°	1112.4	1111.7	1111.0	1110.3	1111.0	1111.7	1112.4	1113.0	1113.5	1113.9	1114.2
132.5°	1168.0	1167.0	1166.1	1165.1	1166.1	1167.0	1168.0	1168.9	1169.5	1169.9	1170.2
135°	1254.5	1253.1	1251.7	1250.4	1251.7	1253.1	1254.5	1255.9	1256.5	1256.5	1256.5
137.5°	1339.0	1337.3	1335.5	1333.8	1335.5	1337.3	1339.0	1340.7	1341.3	1340.9	1340.5
140°	1392.6	1390.9	1389.2	1387.5	1389.2	1390.9	1392.6	1394.2	1394.7	1394.1	1393.4
142.5°	1443.7	1442.1	1440.4	1438.7	1440.4	1442.1	1443.7	1445.4	1446.1	1445.6	1445.2
145°	1518.4	1517.4	1516.4	1515.4	1516.4	1517.4	1518.4	1519.4	1519.9	1519.9	1519.9
147.5°	1587.8	1585.5	1583.3	1580.9	1583.3	1585.5	1587.8	1590.1	1590.8	1590.0	1589.2
150°	1631.6	1631.0	1630.3	1629.6	1630.3	1631.0	1631.6	1632.3	1632.7	1632.7	1632.7
152.5°	1673.5	1672.3	1671.1	1669.9	1671.1	1672.3	1673.5	1674.8	1675.0	1674.2	1673.3
155°	1732.2	1730.5	1728.8	1727.2	1728.8	1730.5	1732.2	1733.9	1734.0	1732.7	1731.3
157.5°	1781.6	1779.4	1777.2	1774.9	1777.2	1779.4	1781.6	1783.9	1784.3	1783.0	1781.6
160°	1812.9	1811.2	1809.6	1807.9	1809.6	1811.2	1812.9	1814.6	1814.8	1813.4	1812.1
162.5°	1841.8	1839.8	1837.9	1835.8	1837.9	1839.8	1841.8	1843.7	1843.9	1842.3	1840.7
165°	1879.5	1877.4	1875.4	1873.3	1875.4	1877.4	1879.5	1881.5	1881.8	1880.5	1879.1
167.5°	1909.5	1907.4	1905.3	1903.2	1905.3	1907.4	1909.5	1911.6	1911.6	1909.6	1907.5
170°	1926.1	1923.8	1921.4	1919.0	1921.4	1923.8	1926.1	1928.5	1928.6	1926.6	1924.6
172.5°	1938.7	1936.6	1934.5	1932.5	1934.5	1936.6	1938.7	1940.9	1940.9	1938.8	1936.8
175°	1952.1	1949.6	1947.3	1944.9	1947.3	1949.6	1952.1	1954.4	1954.6	1952.6	1950.6
177.5°	1957.9	1956.0	1954.1	1952.3	1954.1	1956.0	1957.9	1959.8	1959.9	1958.3	1956.7
180°	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6
2.5°	1838.3	1845.2	1849.0	1857.7	1870.4	1876.7	1885.5	1891.8	1900.7	1911.4	1920.2
5°	1719.3	1738.2	1750.7	1770.4	1788.6	1806.6	1829.5	1846.0	1868.0	1893.2	1912.9
7.5°	1608.7	1632.3	1653.3	1679.3	1709.2	1732.5	1762.2	1792.6	1827.0	1862.8	1896.5
10°	1538.2	1561.9	1587.8	1620.0	1650.0	1681.4	1716.9	1752.3	1795.6	1835.7	1881.4
12.5°	1468.2	1494.4	1523.6	1559.6	1595.8	1636.1	1672.1	1712.0	1758.5	1810.6	1859.4
15°	1381.5	1406.7	1438.2	1468.9	1510.7	1554.7	1602.8	1655.5	1707.5	1765.6	1826.3
17.5°	1288.5	1316.2	1350.8	1386.4	1430.4	1482.0	1529.0	1586.8	1645.3	1713.1	1784.4
20°	1228.0	1256.4	1297.3	1336.7	1376.8	1427.2	1483.1	1542.2	1604.3	1676.0	1755.4
22.5°	1180.1	1200.3	1240.6	1280.6	1327.7	1379.4	1434.0	1495.5	1563.4	1637.5	1720.8
25°	1109.1	1132.8	1162.0	1203.7	1252.4	1306.8	1361.9	1427.2	1501.2	1576.8	1665.7
27.5°	1046.0	1065.4	1094.2	1126.9	1175.6	1231.9	1290.5	1358.7	1434.6	1511.6	1605.1
30°	1001.3	1022.6	1050.2	1084.8	1123.4	1184.8	1244.6	1311.5	1388.7	1468.1	1564.2
32.5°	962.3	984.1	1007.9	1040.7	1082.4	1136.9	1198.6	1264.3	1342.6	1424.7	1518.2
35°	907.7	922.6	944.6	976.9	1017.8	1062.0	1124.9	1194.2	1270.5	1355.5	1449.3
37.5°	845.0	864.3	886.3	914.2	950.2	997.8	1056.4	1126.5	1197.3	1278.7	1364.2
40°	808.5	826.6	851.0	871.4	909.2	952.5	1006.0	1079.2	1150.1	1226.5	1304.4
42.5°	771.3	788.8	809.4	835.0	868.9	911.0	960.7	1028.9	1104.8	1176.7	1242.0
45°	713.2	731.3	751.0	774.6	806.1	847.1	896.7	958.8	1024.9	1091.1	1140.6
47.5°	657.6	674.6	693.2	717.4	746.4	786.0	830.3	885.2	949.5	1005.7	1041.2
50°	617.9	633.7	654.2	677.8	706.1	743.2	785.7	839.9	893.4	944.6	976.9
52.5°	579.0	596.5	617.0	637.4	664.6	701.6	740.9	787.7	838.7	880.4	907.1
55°	520.4	536.8	555.7	577.0	603.8	635.3	677.0	714.0	754.2	789.6	805.3
57.5°	463.8	478.3	496.0	518.2	542.2	571.5	604.6	640.2	668.5	693.6	711.3
60°	426.7	439.3	455.8	474.6	500.7	527.5	557.3	590.4	612.5	633.7	650.3
62.5°	388.9	400.8	416.8	433.7	456.6	481.4	510.1	536.8	558.3	572.6	591.7
65°	332.2	344.0	357.4	375.5	393.6	414.0	440.0	459.7	474.6	490.4	502.2
67.5°	279.4	289.2	301.9	316.2	331.4	351.1	371.2	387.6	397.9	407.3	421.5
70°	244.8	252.7	263.0	274.0	290.4	310.1	325.9	338.5	345.6	355.1	372.3
72.5°	209.5	218.6	228.3	239.3	252.7	269.2	283.1	295.7	300.2	307.8	318.8
75°	165.3	170.1	177.9	185.8	195.2	209.4	222.8	225.9	229.8	236.2	244.0
77.5°	125.0	129.3	132.4	137.6	145.1	156.5	163.6	168.3	169.3	171.6	179.4
80°	99.2	101.6	104.7	108.7	111.8	121.2	125.1	129.9	131.5	133.8	137.7
82.5°	72.7	75.1	77.0	80.3	85.3	89.1	93.0	97.8	98.1	99.8	100.6
85°	42.5	43.3	41.7	43.3	44.1	45.6	49.6	53.5	52.7	51.9	54.3
87.5°	20.3	20.0	18.9	20.3	18.6	18.7	18.2	18.3	19.0	19.7	20.5
90°	26.1	24.3	22.0	19.6	17.3	14.8	12.3	9.7	7.0	4.2	1.5
92.5°	60.7	58.5	55.5	52.6	49.8	46.9	44.4	42.5	40.7	38.8	36.9
95°	119.7	117.2	113.9	110.5	107.1	103.7	101.7	101.0	100.4	99.7	99.0
97.5°	188.9	186.7	182.1	177.4	172.7	168.0	165.6	165.3	165.0	164.7	164.5
100°	236.1	233.0	228.6	224.2	219.8	215.4	213.2	213.2	213.2	213.2	213.2
102.5°	285.1	281.8	279.5	277.3	275.1	272.9	271.0	269.6	268.3	267.0	265.6
105°	366.1	364.1	361.9	359.9	357.9	355.9	354.1	352.3	350.6	348.9	347.3
107.5°	453.0	452.0	450.5	448.9	447.4	445.9	444.1	442.5	440.8	439.1	437.4
110°	512.7	511.7	510.7	509.7	508.7	507.7	506.3	504.6	502.9	501.3	499.6



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	573.1	572.7	571.4	570.1	568.8	567.5	566.4	565.5	564.7	563.8	562.9
115°	665.2	665.6	664.9	664.2	663.6	662.9	661.9	660.5	659.1	657.8	656.4
117.5°	756.0	755.8	755.1	754.5	753.9	753.3	752.7	752.0	751.4	750.8	750.2
120°	817.9	817.9	817.5	817.2	816.9	816.5	815.5	813.9	812.1	810.4	808.7
122.5°	878.5	878.8	877.9	877.1	876.2	875.3	874.5	873.9	873.3	872.7	872.1
125°	968.0	968.7	968.4	968.0	967.7	967.3	966.1	964.1	962.1	960.0	958.0
127.5°	1056.0	1056.4	1056.0	1055.6	1055.2	1054.8	1054.0	1052.8	1051.7	1050.6	1049.4
130°	1114.5	1114.9	1114.2	1113.5	1112.9	1112.2	1111.0	1109.2	1107.6	1105.9	1104.2
132.5°	1170.5	1170.9	1171.0	1171.1	1171.3	1171.4	1170.1	1167.4	1164.6	1161.8	1159.0
135°	1256.5	1256.5	1256.2	1255.9	1255.5	1255.2	1253.9	1251.9	1249.9	1247.9	1245.9
137.5°	1340.1	1339.7	1338.9	1338.2	1337.5	1336.7	1335.3	1333.3	1331.4	1329.5	1327.5
140°	1392.7	1392.1	1391.1	1390.1	1389.0	1388.0	1386.6	1384.9	1383.2	1381.6	1379.9
142.5°	1444.8	1444.4	1443.2	1441.9	1440.6	1439.3	1437.9	1436.5	1435.1	1433.7	1432.3
145°	1519.9	1519.9	1518.9	1517.9	1516.9	1515.9	1514.8	1513.4	1512.1	1510.7	1509.3
147.5°	1588.4	1587.6	1586.8	1586.0	1585.2	1584.4	1583.6	1582.9	1582.1	1581.3	1580.6
150°	1632.7	1632.7	1631.3	1630.0	1628.6	1627.3	1626.8	1627.1	1627.5	1627.8	1628.1
152.5°	1672.5	1671.7	1671.1	1670.6	1670.1	1669.5	1669.0	1668.5	1668.1	1667.6	1667.1
155°	1730.0	1728.7	1728.3	1728.0	1727.7	1727.3	1727.2	1727.2	1727.2	1727.2	1727.2
157.5°	1780.3	1778.9	1778.6	1778.3	1777.9	1777.6	1777.8	1778.5	1779.3	1780.0	1780.7
160°	1810.7	1809.4	1809.1	1808.7	1808.4	1808.1	1808.4	1809.4	1810.4	1811.4	1812.4
162.5°	1839.1	1837.3	1837.3	1837.2	1837.1	1837.1	1837.4	1838.3	1839.0	1839.7	1840.5
165°	1877.7	1876.4	1876.0	1875.7	1875.4	1875.0	1875.2	1875.9	1876.5	1877.2	1877.9
167.5°	1905.5	1903.5	1903.5	1903.5	1903.5	1903.5	1904.2	1905.5	1906.9	1908.2	1909.6
170°	1922.6	1920.6	1920.6	1920.6	1920.6	1920.6	1921.3	1922.6	1923.9	1925.3	1926.6
172.5°	1934.8	1932.8	1932.8	1932.8	1932.8	1932.8	1933.4	1934.8	1936.1	1937.5	1938.8
175°	1948.4	1946.4	1946.4	1946.4	1946.4	1946.4	1947.1	1948.4	1949.8	1951.2	1952.6
177.5°	1955.1	1953.5	1953.7	1954.0	1954.3	1954.5	1955.2	1956.3	1957.4	1958.4	1959.5
180°	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6
2.5°	1927.0	1932.8	1941.0	1950.4	1957.9	1966.1	1970.5	1970.5	1974.3	1982.5	1993.2
5°	1932.6	1953.1	1972.8	1997.9	2017.6	2040.4	2057.7	2074.3	2089.2	2108.1	2127.8
7.5°	1931.0	1965.0	2000.4	2040.1	2083.9	2118.7	2154.4	2182.4	2210.2	2246.3	2274.8
10°	1924.7	1968.8	2016.8	2067.2	2122.3	2170.3	2213.6	2253.0	2290.8	2330.2	2365.5
12.5°	1913.4	1969.4	2028.1	2088.6	2158.2	2213.1	2269.1	2310.9	2355.0	2398.1	2441.8
15°	1896.3	1962.5	2033.4	2117.6	2202.6	2264.0	2319.1	2373.4	2414.4	2463.2	2504.9
17.5°	1861.3	1946.4	2035.6	2127.7	2209.4	2280.7	2338.4	2390.1	2433.7	2487.4	2544.1
20°	1840.5	1932.6	2025.5	2123.8	2201.8	2275.0	2330.9	2384.4	2438.7	2508.8	2578.1
22.5°	1811.5	1910.0	2008.4	2101.8	2184.1	2254.8	2312.7	2378.1	2449.4	2529.0	2612.7
25°	1765.6	1867.2	1964.9	2053.8	2134.1	2206.6	2285.2	2373.4	2460.0	2564.8	2685.1
27.5°	1707.6	1805.5	1892.6	1986.6	2066.4	2158.5	2256.7	2352.3	2477.2	2621.2	2771.6
30°	1664.2	1757.1	1839.7	1928.6	2019.1	2120.7	2230.9	2343.5	2492.2	2661.5	2840.2
32.5°	1613.8	1697.9	1779.9	1865.6	1970.0	2081.6	2198.8	2336.5	2514.4	2706.8	2891.8
35°	1526.4	1601.9	1681.4	1776.8	1887.7	2008.9	2158.5	2326.2	2541.1	2748.1	2914.3
37.5°	1434.7	1494.4	1574.3	1674.7	1795.6	1935.9	2105.6	2309.4	2530.1	2715.8	2786.5
40°	1364.2	1420.1	1504.3	1609.8	1729.5	1883.0	2073.5	2282.9	2504.9	2633.9	2628.5
42.5°	1294.3	1350.8	1431.9	1538.0	1662.7	1834.5	2030.6	2248.3	2435.6	2484.8	2382.3
45°	1187.1	1239.8	1319.4	1426.4	1560.2	1740.5	1946.7	2155.4	2275.0	2195.5	1992.4
47.5°	1077.8	1129.0	1202.9	1307.7	1453.8	1642.4	1837.4	2008.6	2025.5	1854.6	1611.0
50°	1006.0	1054.1	1124.1	1235.9	1377.6	1561.9	1750.0	1884.6	1842.8	1634.3	1383.1
52.5°	936.1	982.3	1047.9	1153.4	1298.3	1478.6	1646.7	1752.3	1655.8	1434.0	1208.0
55°	832.8	877.0	943.1	1039.9	1171.3	1336.7	1483.9	1522.5	1380.8	1157.2	974.5
57.5°	734.8	767.1	832.4	918.1	1044.8	1190.5	1296.1	1289.1	1132.8	931.4	800.4
60°	669.9	699.0	761.2	839.9	960.4	1091.1	1165.1	1133.6	975.3	809.2	683.3
62.5°	609.5	636.7	688.8	761.2	864.6	978.4	1032.2	988.8	839.3	693.4	593.2
65°	518.0	537.7	579.4	646.3	727.4	806.1	854.1	790.3	658.1	547.9	472.3
67.5°	432.5	449.5	486.7	534.6	590.6	644.9	664.4	604.6	501.8	427.5	374.3
70°	377.1	392.8	418.0	462.9	499.9	538.5	547.9	494.3	408.6	351.8	318.8
72.5°	324.2	338.6	360.7	392.3	418.0	440.2	444.6	394.9	329.2	290.1	264.7
75°	247.2	259.7	274.0	285.8	302.3	306.2	304.7	266.1	230.7	204.7	190.5
77.5°	181.7	186.9	195.5	200.3	201.1	200.8	192.7	168.3	150.1	139.4	133.5
80°	140.2	144.1	146.4	147.9	148.8	140.9	132.3	117.2	111.0	104.7	97.7
82.5°	101.7	104.4	106.7	107.0	102.8	96.2	88.2	80.8	76.3	73.2	70.5
85°	55.1	55.8	55.1	51.2	45.6	43.3	41.7	40.2	39.4	38.6	38.6
87.5°	20.4	19.0	16.5	17.6	18.1	18.0	18.4	18.3	18.1	18.5	18.8
90°	4.2	7.0	9.7	12.3	14.8	17.3	19.6	22.0	24.3	26.1	27.8
92.5°	38.8	40.7	42.5	44.4	46.9	49.8	52.6	55.5	58.5	60.7	62.9
95°	99.7	100.4	101.0	101.7	103.7	107.1	110.5	113.9	117.2	119.7	122.0
97.5°	164.7	165.0	165.3	165.6	168.0	172.7	177.4	182.1	186.7	188.9	191.2
100°	213.2	213.2	213.2	213.2	215.4	219.8	224.2	228.6	233.0	236.1	239.1
102.5°	267.0	268.3	269.6	271.0	272.9	275.1	277.3	279.5	281.8	285.1	288.4
105°	348.9	350.6	352.3	354.1	355.9	357.9	359.9	361.9	364.1	366.1	368.1
107.5°	439.1	440.8	442.5	444.1	445.9	447.4	448.9	450.5	452.0	453.0	454.0
110°	501.3	502.9	504.6	506.3	507.7	508.7	509.7	510.7	511.7	512.7	513.8



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	563.8	564.7	565.5	566.4	567.5	568.8	570.1	571.4	572.7	573.1	573.6
115°	657.8	659.1	660.5	661.9	662.9	663.6	664.2	664.9	665.6	665.2	664.9
117.5°	750.8	751.4	752.0	752.7	753.3	753.9	754.5	755.1	755.8	756.0	756.3
120°	810.4	812.1	813.9	815.5	816.5	816.9	817.2	817.5	817.9	817.9	817.9
122.5°	872.7	873.3	873.9	874.5	875.3	876.2	877.1	877.9	878.8	878.5	878.3
125°	960.0	962.1	964.1	966.1	967.3	967.7	968.0	968.4	968.7	968.0	967.3
127.5°	1050.6	1051.7	1052.8	1054.0	1054.8	1055.2	1055.6	1056.0	1056.4	1056.0	1055.7
130°	1105.9	1107.6	1109.2	1111.0	1112.2	1112.9	1113.5	1114.2	1114.9	1114.5	1114.2
132.5°	1161.8	1164.6	1167.4	1170.1	1171.4	1171.3	1171.1	1171.0	1170.9	1170.5	1170.2
135°	1247.9	1249.9	1251.9	1253.9	1255.2	1255.5	1255.9	1256.2	1256.5	1256.5	1256.5
137.5°	1329.5	1331.4	1333.3	1335.3	1336.7	1337.5	1338.2	1338.9	1339.7	1340.1	1340.5
140°	1381.6	1383.2	1384.9	1386.6	1388.0	1389.0	1390.1	1391.1	1392.1	1392.7	1393.4
142.5°	1433.7	1435.1	1436.5	1437.9	1439.3	1440.6	1441.9	1443.2	1444.4	1444.8	1445.2
145°	1510.7	1512.1	1513.4	1514.8	1515.9	1516.9	1517.9	1518.9	1519.9	1519.9	1519.9
147.5°	1581.3	1582.1	1582.9	1583.6	1584.4	1585.2	1586.0	1586.8	1587.6	1588.4	1589.2
150°	1627.8	1627.5	1627.1	1626.8	1627.3	1628.6	1630.0	1631.3	1632.7	1632.7	1632.7
152.5°	1667.6	1668.1	1668.5	1669.0	1669.5	1670.1	1670.6	1671.1	1671.7	1672.5	1673.3
155°	1727.2	1727.2	1727.2	1727.2	1727.3	1727.7	1728.0	1728.3	1728.7	1730.0	1731.3
157.5°	1780.0	1779.3	1778.5	1777.8	1777.6	1777.9	1778.3	1778.6	1778.9	1780.3	1781.6
160°	1811.4	1810.4	1809.4	1808.4	1808.1	1808.4	1808.7	1809.1	1809.4	1810.7	1812.1
162.5°	1839.7	1839.0	1838.3	1837.4	1837.1	1837.1	1837.2	1837.3	1837.3	1839.1	1840.7
165°	1877.2	1876.5	1875.9	1875.2	1875.0	1875.4	1875.7	1876.0	1876.4	1877.7	1879.1
167.5°	1908.2	1906.9	1905.5	1904.2	1903.5	1903.5	1903.5	1903.5	1903.5	1905.5	1907.5
170°	1925.3	1923.9	1922.6	1921.3	1920.6	1920.6	1920.6	1920.6	1920.6	1922.6	1924.6
172.5°	1937.5	1936.1	1934.8	1933.4	1932.8	1932.8	1932.8	1932.8	1932.8	1934.8	1936.8
175°	1951.2	1949.8	1948.4	1947.1	1946.4	1946.4	1946.4	1946.4	1946.4	1948.4	1950.6
177.5°	1958.4	1957.4	1956.3	1955.2	1954.5	1954.3	1954.0	1953.7	1953.5	1955.1	1956.7
180°	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6	1917.6
2.5°	2001.4	2001.4	2012.1	2011.4	2018.4	2015.9	2017.1
5°	2151.4	2164.8	2176.7	2184.4	2196.3	2199.5	2197.9
7.5°	2306.9	2336.7	2351.2	2371.1	2374.7	2385.1	2384.0
10°	2403.4	2432.5	2454.5	2471.8	2480.4	2491.5	2492.2
12.5°	2478.9	2503.7	2523.1	2539.2	2549.7	2553.2	2555.3
15°	2537.9	2565.5	2588.3	2611.1	2624.5	2634.7	2640.3
17.5°	2597.5	2640.0	2680.3	2711.3	2729.9	2745.6	2745.4
20°	2643.4	2692.2	2742.6	2778.0	2814.3	2829.9	2832.4
22.5°	2692.5	2767.1	2832.1	2887.0	2934.6	2950.9	2957.1
25°	2794.6	2892.2	2992.1	3069.3	3124.4	3156.6	3161.4
27.5°	2917.8	3049.9	3155.1	3226.3	3272.1	3296.0	3301.2
30°	3004.8	3126.7	3221.3	3274.8	3296.0	3299.1	3287.3
32.5°	3043.8	3134.9	3172.7	3169.6	3127.9	3100.2	3089.6
35°	2996.1	2977.2	2885.1	2774.9	2690.7	2637.2	2622.9
37.5°	2726.5	2563.6	2394.2	2227.7	2139.0	2094.0	2016.5
40°	2460.8	2228.6	2052.2	1912.1	1812.1	1731.8	1712.9
42.5°	2161.0	1921.3	1744.9	1625.0	1545.1	1490.1	1466.1
45°	1736.6	1530.3	1384.7	1292.6	1231.2	1191.0	1173.0
47.5°	1389.0	1229.3	1123.2	1055.0	1008.2	973.3	963.5
50°	1198.1	1070.6	980.9	923.4	888.0	861.2	850.2
52.5°	1040.7	937.8	868.8	821.3	787.8	771.1	762.0
55°	858.8	769.9	720.3	682.5	663.6	650.3	643.9
57.5°	702.4	638.1	601.9	575.7	558.3	549.8	546.6
60°	614.8	564.4	531.4	510.9	499.1	488.1	484.9
62.5°	537.3	497.7	472.2	454.2	442.4	437.7	435.8
65°	432.9	407.0	388.1	377.1	367.6	366.1	365.3
67.5°	344.2	328.9	319.0	307.5	304.2	298.6	297.6
70°	294.4	284.2	272.4	268.4	264.5	259.0	259.7
72.5°	249.7	239.4	231.5	226.2	224.8	222.5	224.5
75°	182.6	179.5	176.3	172.4	170.9	170.9	170.1
77.5°	130.4	127.6	124.2	121.9	121.4	118.1	119.4
80°	94.4	90.5	89.0	89.8	87.4	86.5	86.5
82.5°	69.9	68.5	67.0	67.1	66.6	65.8	66.4
85°	38.6	37.8	37.8	37.0	37.0	36.3	36.3
87.5°	19.8	20.7	19.7	19.3	19.5	20.3	21.2
90°	29.5	31.1	32.5	33.5	34.5	35.5	36.6
92.5°	65.1	67.5	68.9	69.7	70.4	71.1	71.9
95°	124.4	126.7	128.3	129.0	129.7	130.3	131.0
97.5°	193.4	195.6	197.0	197.4	197.8	198.2	198.6
100°	242.2	245.2	247.1	247.7	248.4	249.1	249.7
102.5°	291.8	295.0	297.2	298.1	299.0	300.0	300.9
105°	370.1	372.1	373.7	374.7	375.7	376.7	377.7
107.5°	455.0	456.1	456.6	456.5	456.5	456.4	456.3
110°	514.8	515.8	516.1	515.8	515.4	515.1	514.8



TEST NUMBER: P333737-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	574.1	574.5	574.5	573.9	573.3	572.7	572.1
115°	664.6	664.2	663.9	663.6	663.2	662.9	662.6
117.5°	756.6	756.8	756.3	754.9	753.6	752.2	750.8
120°	817.9	817.9	817.2	815.9	814.5	813.1	811.8
122.5°	878.0	877.7	877.1	876.0	874.8	873.7	872.7
125°	966.6	965.9	965.4	965.1	964.7	964.4	964.1
127.5°	1055.4	1055.0	1054.5	1053.8	1053.2	1052.5	1051.8
130°	1113.9	1113.5	1113.0	1112.4	1111.7	1111.0	1110.3
132.5°	1169.9	1169.5	1168.9	1168.0	1167.0	1166.1	1165.1
135°	1256.5	1256.5	1255.9	1254.5	1253.1	1251.7	1250.4
137.5°	1340.9	1341.3	1340.7	1339.0	1337.3	1335.5	1333.8
140°	1394.1	1394.7	1394.2	1392.6	1390.9	1389.2	1387.5
142.5°	1445.6	1446.1	1445.4	1443.7	1442.1	1440.4	1438.7
145°	1519.9	1519.9	1519.4	1518.4	1517.4	1516.4	1515.4
147.5°	1590.0	1590.8	1590.1	1587.8	1585.5	1583.3	1580.9
150°	1632.7	1632.7	1632.3	1631.6	1631.0	1630.3	1629.6
152.5°	1674.2	1675.0	1674.8	1673.5	1672.3	1671.1	1669.9
155°	1732.7	1734.0	1733.9	1732.2	1730.5	1728.8	1727.2
157.5°	1783.0	1784.3	1783.9	1781.6	1779.4	1777.2	1774.9
160°	1813.4	1814.8	1814.6	1812.9	1811.2	1809.6	1807.9
162.5°	1842.3	1843.9	1843.7	1841.8	1839.8	1837.9	1835.8
165°	1880.5	1881.8	1881.5	1879.5	1877.4	1875.4	1873.3
167.5°	1909.6	1911.6	1911.6	1909.5	1907.4	1905.3	1903.2
170°	1926.6	1928.6	1928.5	1926.1	1923.8	1921.4	1919.0
172.5°	1938.8	1940.9	1940.9	1938.7	1936.6	1934.5	1932.5
175°	1952.6	1954.6	1954.4	1952.1	1949.6	1947.3	1944.9
177.5°	1958.3	1959.9	1959.8	1957.9	1956.0	1954.1	1952.3
180°	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1	1957.1

(END OF REPORT)