

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333738-840

Luminaire Tested: **S125RDIW-S1270D1560U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333738-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIW-S1270D1560U840-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1560 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11226.7 lumens
Efficiency: N/A
Efficacy: 135.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 82.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333738-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

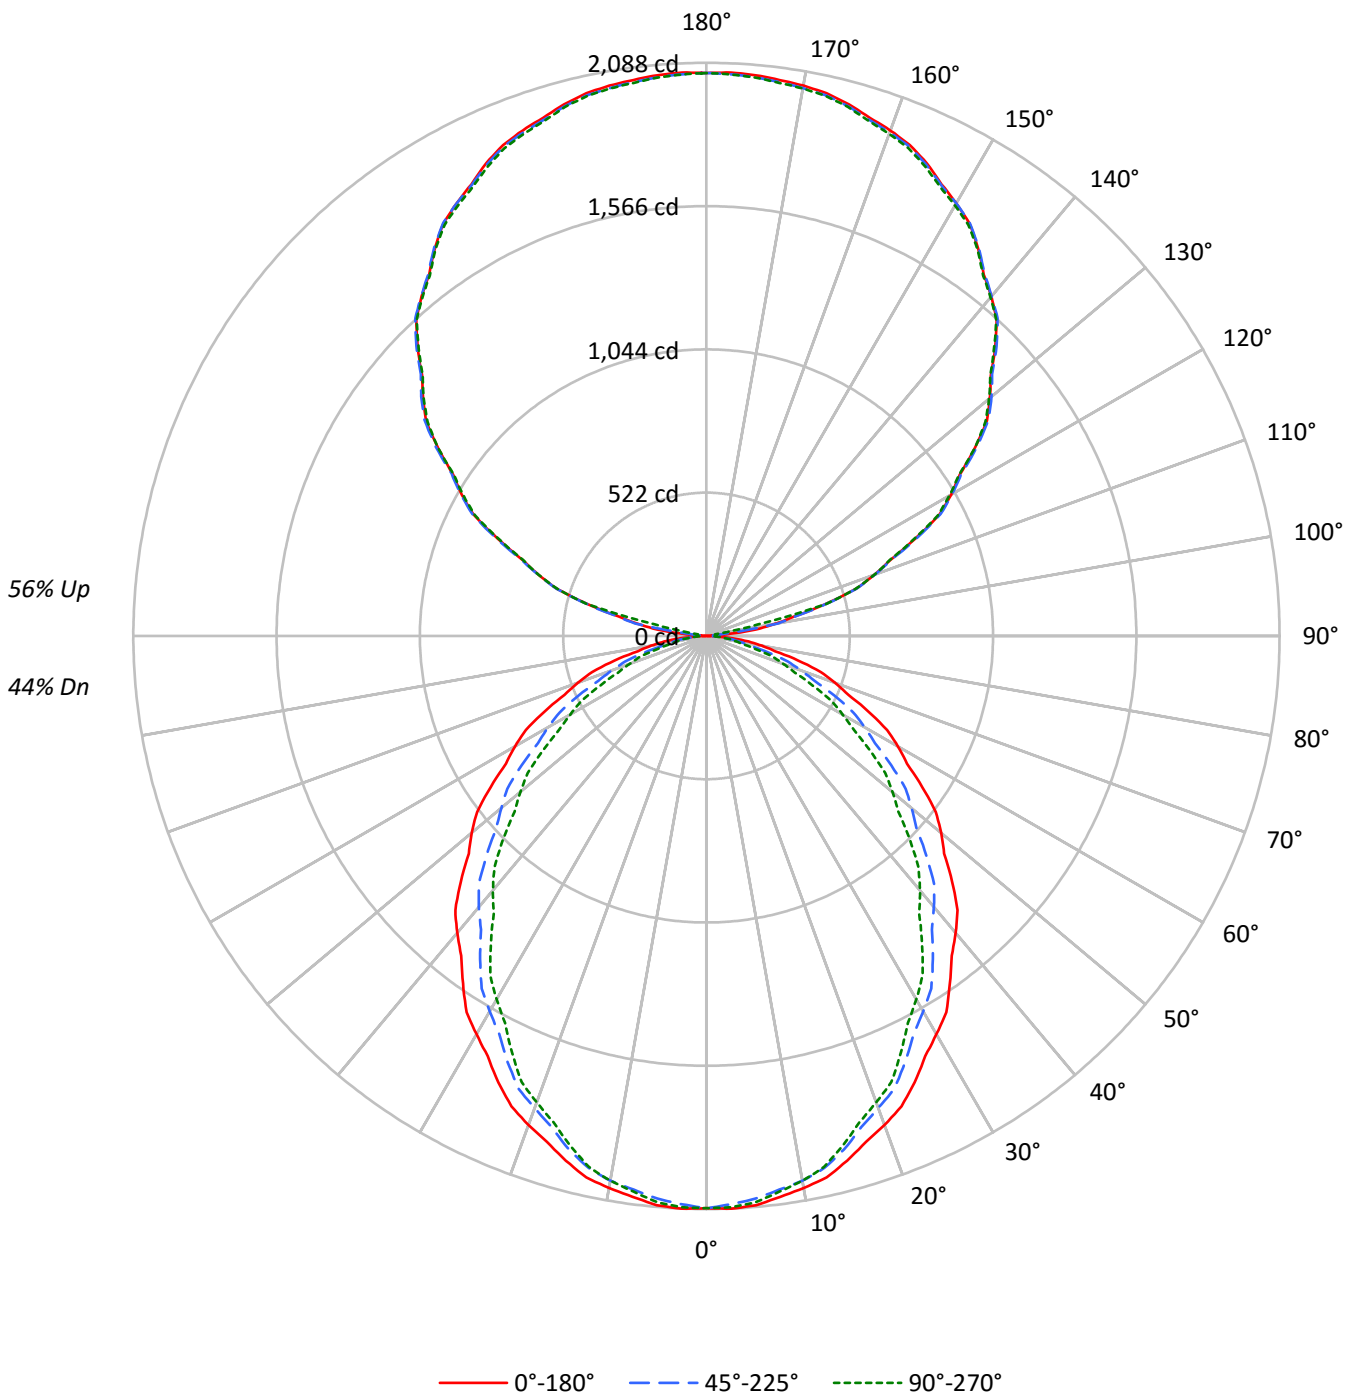



TEST NUMBER: P333738-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44
1	97	92	89	85	88	85	82	79	70	68	66	57	56	54	45	44	43	37
2	88	81	75	70	80	74	69	65	62	58	55	50	48	45	40	38	37	32
3	80	71	64	58	73	65	59	54	55	50	46	45	41	39	35	33	31	27
4	74	63	55	49	67	58	51	46	49	44	40	40	36	33	32	29	27	23
5	68	56	48	42	62	52	45	40	44	38	34	36	32	29	29	26	24	20
6	62	50	43	37	57	47	40	34	39	34	30	32	28	25	26	23	21	18
7	58	46	38	32	53	42	35	30	36	30	26	30	25	22	24	21	19	16
8	53	41	34	29	49	38	32	27	32	27	23	27	23	20	22	19	17	14
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	20	17	15	13
10	46	35	28	23	43	32	26	21	27	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13464	13464	13464
5°	13494	13341	13422
10°	13392	13217	13217
15°	13233	12948	12843
20°	13029	12575	12423
25°	12790	12207	11938
30°	12493	11777	11401
35°	12191	11334	10800
40°	11907	10871	10208
45°	11562	10355	9563
50°	11216	9792	8890
55°	10815	9254	8173
60°	10413	8603	7403
65°	9938	7844	6521
70°	9396	6898	5620
75°	8644	5814	4674
80°	7613	4567	3924
85°	6417	3735	3505



TEST NUMBER: P333738-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	196.0	1.7
10°-20°	547.8	4.9
20°-30°	794.4	7.1
30°-40°	905.3	8.1
40°-50°	882.5	7.9
50°-60°	742.8	6.6
60°-70°	520.7	4.6
70°-80°	267.7	2.4
80°-90°	71.9	0.6
90°-100°	74.5	0.7
100°-110°	459.3	4.1
110°-120°	833.0	7.4
120°-130°	1069.1	9.5
130°-140°	1149.9	10.2
140°-150°	1079.3	9.6
150°-160°	873.1	7.8
160°-170°	564.7	5.0
170°-180°	194.8	1.7
0°-30°	1538.2	13.7
0°-40°	2443.5	21.8
0°-60°	4068.9	36.2
0°-90°	4929.1	43.9
90°-120°	1366.8	12.2
90°-150°	4665.0	41.6
90°-180°	6298.0	56.1
0°-180°	11226.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2085	2085	2085	2085	2085	
5°	2082	2075	2058	2073	2070	197
15°	1979	1968	1937	1934	1921	558
25°	1795	1769	1713	1693	1675	826
35°	1546	1507	1438	1393	1370	968
45°	1266	1218	1134	1073	1047	976
55°	960	908	822	754	726	859
65°	650	595	513	452	427	644
75°	346	298	233	200	187	367
85°	87	59	50	49	47	97
90°	2	14	24	32	36	8
95°	87	79	24	32	32	110
105°	447	453	453	453	452	474
115°	839	846	848	842	833	832
125°	1193	1203	1204	1198	1193	1065
135°	1488	1497	1494	1491	1482	1147
145°	1726	1728	1728	1729	1721	1079
155°	1900	1892	1894	1898	1886	875
165°	2005	1997	1998	2006	1994	566
175°	2051	2042	2043	2054	2042	195
180°	2051	2051	2051	2051	2051	



TEST NUMBER: P333738-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7
2.5°	2088.4	2087.6	2086.7	2085.9	2085.1	2083.3	2080.4	2077.6	2074.9	2072.0	2074.9
5°	2081.5	2080.1	2078.7	2077.3	2075.9	2073.3	2069.4	2065.6	2061.7	2057.9	2061.3
7.5°	2061.0	2059.7	2058.4	2057.0	2055.7	2052.8	2048.1	2043.5	2038.9	2034.3	2036.7
10°	2042.1	2041.0	2040.0	2039.0	2037.9	2035.0	2030.0	2025.2	2020.2	2015.4	2016.4
12.5°	2020.7	2019.4	2018.0	2016.7	2015.4	2011.4	2004.9	1998.3	1991.7	1985.1	1985.9
15°	1979.1	1977.0	1975.0	1972.9	1970.8	1966.0	1958.6	1951.4	1944.0	1936.6	1936.3
17.5°	1932.2	1929.0	1925.8	1922.6	1919.3	1913.1	1903.9	1894.6	1885.4	1876.1	1874.4
20°	1895.7	1892.2	1888.6	1885.2	1881.7	1874.3	1863.2	1852.0	1840.8	1829.6	1827.9
22.5°	1855.4	1851.9	1848.4	1844.9	1841.4	1833.8	1822.0	1810.3	1798.5	1786.8	1783.3
25°	1794.9	1789.7	1784.4	1779.2	1773.9	1764.8	1751.9	1739.0	1726.0	1713.0	1708.5
27.5°	1725.7	1719.3	1712.9	1706.6	1700.2	1690.1	1676.2	1662.3	1648.5	1634.7	1628.3
30°	1675.3	1668.6	1661.9	1655.4	1648.7	1638.0	1623.3	1608.6	1593.9	1579.2	1571.1
32.5°	1626.2	1618.4	1610.6	1602.9	1595.1	1583.7	1568.7	1553.8	1538.7	1523.8	1514.9
35°	1546.2	1537.7	1529.3	1521.0	1512.6	1500.5	1484.7	1469.1	1453.3	1437.5	1427.3
37.5°	1467.7	1457.5	1447.3	1437.1	1426.8	1413.6	1397.5	1381.2	1364.9	1348.7	1336.6
40°	1412.3	1401.8	1391.3	1380.8	1370.4	1356.7	1339.9	1323.1	1306.3	1289.5	1276.3
42.5°	1354.4	1343.6	1332.8	1322.0	1311.3	1297.2	1279.9	1262.5	1245.2	1227.8	1215.1
45°	1265.9	1255.8	1245.6	1235.5	1225.3	1210.6	1191.3	1172.2	1152.9	1133.7	1119.6
47.5°	1174.3	1163.6	1152.9	1142.2	1131.5	1116.4	1097.0	1077.6	1058.2	1038.8	1024.4
50°	1116.3	1104.8	1093.2	1081.7	1070.2	1054.4	1034.4	1014.5	994.5	974.6	959.9
52.5°	1053.3	1041.5	1029.7	1017.8	1006.0	990.7	971.9	953.1	934.2	915.4	899.6
55°	960.5	949.3	938.1	926.9	915.6	900.3	880.7	861.1	841.5	821.9	806.2
57.5°	866.6	854.6	842.6	830.7	818.7	803.3	784.5	765.5	746.6	727.7	712.4
60°	806.2	793.9	781.6	769.4	757.2	741.5	722.7	703.8	684.9	666.0	650.7
62.5°	741.9	730.2	718.5	706.8	695.2	679.7	660.6	641.4	622.2	603.0	588.8
65°	650.3	638.3	626.5	614.6	602.7	587.4	569.0	550.4	531.8	513.3	499.3
67.5°	559.3	547.3	535.4	523.6	511.7	496.9	479.1	461.3	443.5	425.8	412.9
70°	497.6	485.6	473.7	461.8	450.0	435.3	417.8	400.3	382.7	365.3	354.5
72.5°	437.1	425.5	413.8	402.2	390.6	376.6	360.2	343.9	327.5	311.1	301.1
75°	346.4	335.9	325.4	314.9	304.4	291.9	277.1	262.5	247.7	233.0	225.3
77.5°	256.3	247.9	239.5	231.2	222.8	212.7	200.9	189.1	177.4	165.6	160.3
80°	204.7	196.3	187.9	179.5	171.1	162.0	152.2	142.4	132.6	122.8	119.7
82.5°	154.3	146.7	139.2	131.6	124.1	116.9	110.2	103.5	96.7	90.1	88.6
85°	86.6	80.3	74.0	67.7	61.4	57.4	55.6	53.9	52.1	50.4	50.0
87.5°	29.3	27.9	26.5	25.0	23.6	23.0	23.2	23.3	23.5	23.7	24.1
90°	1.5	4.2	7.0	9.6	12.3	14.8	17.3	19.6	21.9	24.3	26.1
92.5°	23.4	21.5	19.6	17.8	15.9	16.0	18.1	20.1	22.2	24.3	26.1
95°	86.6	85.6	84.6	83.6	82.6	75.6	62.8	50.0	37.2	24.3	26.1
97.5°	180.9	182.7	184.5	186.4	188.2	176.4	151.0	125.6	100.2	74.8	65.2
100°	253.9	254.9	255.9	256.9	257.9	259.1	260.4	261.9	263.2	264.5	214.2
102.5°	328.1	329.3	330.6	331.9	333.2	334.3	335.1	335.9	336.7	337.5	328.0
105°	447.0	448.3	449.7	451.0	452.3	453.0	453.0	453.0	453.0	453.0	453.0
107.5°	570.4	570.4	570.4	570.4	570.4	570.7	571.4	572.1	572.8	573.4	573.5
110°	650.7	650.7	650.7	650.7	650.7	651.0	651.7	652.4	653.0	653.7	652.7



TEST NUMBER: P333738-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	726.1	726.9	727.7	728.5	729.3	729.9	730.3	730.7	731.1	731.5	730.2
115°	839.2	840.8	842.5	844.2	845.9	846.9	847.3	847.6	848.0	848.3	846.9
117.5°	956.2	956.1	956.0	956.0	955.9	956.5	957.9	959.1	960.4	961.7	959.9
120°	1029.2	1028.9	1028.5	1028.1	1027.8	1028.1	1029.2	1030.2	1031.2	1032.2	1031.6
122.5°	1093.7	1094.9	1096.2	1097.5	1098.7	1099.6	1100.1	1100.6	1101.1	1101.6	1100.9
125°	1193.4	1195.7	1198.1	1200.4	1202.9	1204.0	1204.0	1204.0	1204.0	1204.0	1202.6
127.5°	1288.5	1290.2	1291.9	1293.6	1295.3	1296.1	1295.9	1295.7	1295.5	1295.3	1294.4
130°	1346.9	1348.6	1350.3	1352.0	1353.6	1354.6	1355.0	1355.3	1355.6	1356.0	1355.0
132.5°	1405.2	1407.2	1409.2	1411.2	1413.1	1413.7	1413.0	1412.2	1411.5	1410.8	1410.6
135°	1488.2	1490.3	1492.4	1494.4	1496.4	1497.0	1496.4	1495.7	1495.0	1494.4	1493.7
137.5°	1564.6	1566.3	1568.1	1569.8	1571.7	1572.2	1571.6	1570.9	1570.3	1569.7	1569.9
140°	1614.5	1615.2	1615.8	1616.5	1617.2	1617.3	1617.0	1616.7	1616.3	1616.0	1616.7
142.5°	1659.4	1659.8	1660.2	1660.6	1661.0	1661.5	1662.0	1662.4	1662.9	1663.4	1663.6
145°	1725.5	1726.1	1726.8	1727.5	1728.2	1728.5	1728.5	1728.5	1728.5	1728.5	1728.8
147.5°	1783.2	1783.0	1782.9	1782.8	1782.6	1782.8	1783.2	1783.6	1784.0	1784.4	1784.8
150°	1819.7	1819.0	1818.4	1817.7	1816.9	1816.9	1817.7	1818.4	1819.0	1819.7	1820.4
152.5°	1854.9	1853.5	1852.0	1850.5	1849.0	1848.6	1849.3	1850.0	1850.7	1851.3	1852.0
155°	1900.3	1898.2	1896.2	1894.2	1892.2	1891.5	1892.2	1892.8	1893.5	1894.2	1895.2
157.5°	1935.2	1934.0	1932.8	1931.6	1930.4	1929.8	1929.9	1930.0	1930.0	1930.1	1931.2
160°	1959.5	1957.5	1955.5	1953.5	1951.5	1950.6	1951.0	1951.3	1951.6	1952.0	1953.3
162.5°	1979.0	1977.0	1975.0	1972.9	1970.9	1970.0	1970.3	1970.8	1971.1	1971.4	1973.3
165°	2005.2	2003.2	2001.0	1999.0	1997.0	1996.2	1996.5	1996.9	1997.2	1997.5	1999.5
167.5°	2024.6	2022.6	2020.4	2018.3	2016.2	2015.4	2015.7	2016.0	2016.4	2016.7	2019.1
170°	2035.6	2033.2	2030.8	2028.4	2026.1	2025.1	2025.4	2025.8	2026.1	2026.4	2029.1
172.5°	2042.9	2040.5	2038.1	2035.8	2033.4	2032.6	2033.2	2033.8	2034.4	2035.0	2037.4
175°	2050.7	2048.7	2046.7	2044.7	2042.7	2041.8	2042.1	2042.5	2042.9	2043.2	2045.9
177.5°	2054.4	2052.8	2051.1	2049.5	2047.9	2047.2	2047.5	2047.8	2048.0	2048.3	2050.2
180°	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7



TEST NUMBER: P333738-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7	2084.7
2.5°	2077.6	2080.4	2083.3	2084.5	2084.3	2084.0	2083.7	2083.4
5°	2064.9	2068.4	2071.8	2073.3	2072.5	2071.8	2071.1	2070.4
7.5°	2039.1	2041.6	2044.1	2044.9	2044.1	2043.4	2042.6	2041.8
10°	2017.4	2018.5	2019.5	2019.5	2018.5	2017.4	2016.4	2015.4
12.5°	1986.7	1987.4	1988.2	1987.8	1986.2	1984.6	1983.0	1981.4
15°	1935.9	1935.6	1935.2	1933.5	1930.4	1927.2	1924.0	1920.9
17.5°	1872.7	1870.9	1869.2	1867.0	1864.4	1861.8	1859.3	1856.6
20°	1826.0	1824.3	1822.6	1820.1	1816.9	1813.8	1810.7	1807.6
22.5°	1779.9	1776.5	1773.0	1770.0	1767.5	1764.8	1762.2	1759.7
25°	1703.9	1699.4	1694.9	1690.6	1686.8	1682.9	1679.1	1675.3
27.5°	1621.9	1615.6	1609.2	1604.2	1600.4	1596.7	1593.0	1589.3
30°	1563.2	1555.1	1547.0	1541.5	1538.3	1535.1	1532.0	1528.8
32.5°	1506.0	1497.1	1488.2	1481.8	1477.8	1473.8	1469.9	1465.8
35°	1417.2	1407.0	1396.9	1389.4	1384.5	1379.6	1374.7	1369.8
37.5°	1324.3	1312.2	1300.0	1291.5	1286.8	1282.0	1277.3	1272.5
40°	1262.9	1249.6	1236.4	1227.6	1223.4	1219.2	1215.0	1210.8
42.5°	1202.3	1189.6	1176.9	1167.4	1161.2	1155.1	1148.9	1142.8
45°	1105.6	1091.7	1077.6	1068.0	1062.8	1057.5	1052.3	1047.0
47.5°	1010.1	995.6	981.2	971.1	965.2	959.5	953.6	947.9
50°	945.2	930.5	915.8	905.8	900.6	895.3	890.1	884.8
52.5°	883.7	868.0	852.1	841.6	836.4	831.1	825.9	820.6
55°	790.4	774.7	758.9	748.2	742.7	737.0	731.4	725.9
57.5°	696.9	681.6	666.1	656.0	651.0	646.0	641.1	636.1
60°	635.2	619.9	604.4	594.1	588.9	583.6	578.3	573.1
62.5°	574.5	560.2	545.9	536.1	530.9	525.6	520.4	515.1
65°	485.3	471.3	457.3	447.7	442.4	437.2	431.9	426.7
67.5°	400.1	387.3	374.6	366.0	361.8	357.6	353.5	349.2
70°	343.6	332.8	321.9	314.4	310.1	306.0	301.7	297.6
72.5°	291.1	281.1	271.0	264.7	261.9	259.1	256.3	253.5
75°	217.6	210.0	202.3	197.1	194.7	192.3	189.9	187.3
77.5°	154.8	149.5	144.1	140.5	138.7	136.8	135.0	133.2
80°	116.5	113.4	110.2	108.3	107.6	106.8	106.2	105.5
82.5°	87.2	85.6	84.2	83.2	82.8	82.4	82.0	81.6
85°	49.7	49.4	49.0	48.7	48.3	48.0	47.6	47.3
87.5°	24.4	24.7	25.1	25.2	25.1	25.0	25.0	24.9
90°	27.7	29.4	31.1	32.4	33.4	34.4	35.4	36.5
92.5°	27.7	29.4	31.1	32.1	32.6	33.1	33.6	34.0
95°	27.7	29.4	31.1	31.9	31.9	31.9	31.9	31.9
97.5°	55.7	46.3	36.7	31.9	31.9	31.9	31.9	31.9
100°	163.8	113.5	63.2	37.4	36.0	34.6	33.3	31.9
102.5°	318.4	308.9	299.4	283.2	260.1	237.2	214.2	191.3
105°	453.0	453.0	453.0	452.8	452.5	452.2	451.8	451.5
107.5°	573.6	573.6	573.7	573.2	572.2	571.2	570.2	569.2
110°	651.7	650.7	649.6	649.3	649.6	649.9	650.4	650.7



TEST NUMBER: P333738-840

CATALOG NUMBER: S125RDIW-S1270D1560U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	728.9	727.7	726.4	725.5	725.1	724.6	724.1	723.6
115°	845.6	844.2	842.8	841.2	839.2	837.1	835.1	833.0
117.5°	958.2	956.4	954.6	953.3	952.5	951.6	950.7	949.8
120°	1030.9	1030.2	1029.6	1028.3	1026.6	1024.9	1023.3	1021.6
122.5°	1100.1	1099.5	1098.8	1097.5	1095.6	1093.6	1091.7	1089.6
125°	1201.3	1199.9	1198.6	1197.4	1196.4	1195.4	1194.4	1193.4
127.5°	1293.7	1293.0	1292.2	1290.6	1288.1	1285.7	1283.1	1280.6
130°	1354.0	1353.0	1352.0	1350.6	1349.0	1347.3	1345.5	1343.8
132.5°	1410.4	1410.2	1410.0	1409.0	1407.3	1405.6	1403.9	1402.2
135°	1493.0	1492.4	1491.7	1490.3	1488.2	1486.2	1484.2	1482.2
137.5°	1570.0	1570.1	1570.3	1569.5	1567.7	1566.0	1564.2	1562.5
140°	1617.3	1618.0	1618.7	1618.0	1616.0	1614.0	1611.9	1609.9
142.5°	1663.7	1663.9	1664.0	1663.0	1660.9	1658.9	1656.9	1654.9
145°	1729.2	1729.5	1729.8	1729.0	1727.0	1725.0	1722.9	1720.9
147.5°	1785.2	1785.6	1786.0	1785.0	1782.6	1780.2	1777.8	1775.3
150°	1821.0	1821.7	1822.4	1821.4	1818.7	1815.9	1813.3	1810.6
152.5°	1852.7	1853.3	1854.0	1853.1	1850.7	1848.3	1845.8	1843.4
155°	1896.2	1897.2	1898.2	1897.3	1894.7	1892.0	1889.3	1886.5
157.5°	1932.2	1933.3	1934.4	1933.6	1930.9	1928.1	1925.4	1922.8
160°	1954.6	1956.0	1957.3	1956.7	1954.0	1951.3	1948.5	1945.9
162.5°	1975.2	1977.1	1978.9	1978.4	1975.5	1972.5	1969.5	1966.5
165°	2001.6	2003.7	2005.7	2005.3	2002.7	1999.9	1997.2	1994.5
167.5°	2021.5	2024.0	2026.4	2026.1	2023.1	2020.0	2017.0	2014.0
170°	2031.8	2034.6	2037.2	2037.1	2034.1	2031.0	2027.9	2024.9
172.5°	2039.8	2042.3	2044.7	2044.4	2041.3	2038.3	2035.3	2032.3
175°	2048.5	2051.2	2054.0	2053.8	2050.7	2047.7	2044.7	2041.6
177.5°	2052.1	2054.0	2055.9	2055.8	2053.6	2051.4	2049.2	2047.1
180°	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7	2050.7

(END OF REPORT)