

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333447-940

Luminaire Tested: **S125DIW-S1090D1050U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333447-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1090D1050U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1050 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7201.7 lumens
Efficiency: N/A
Efficacy: 117.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 61.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333447-940

CATALOG NUMBER: S125DIW-S1090D1050U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

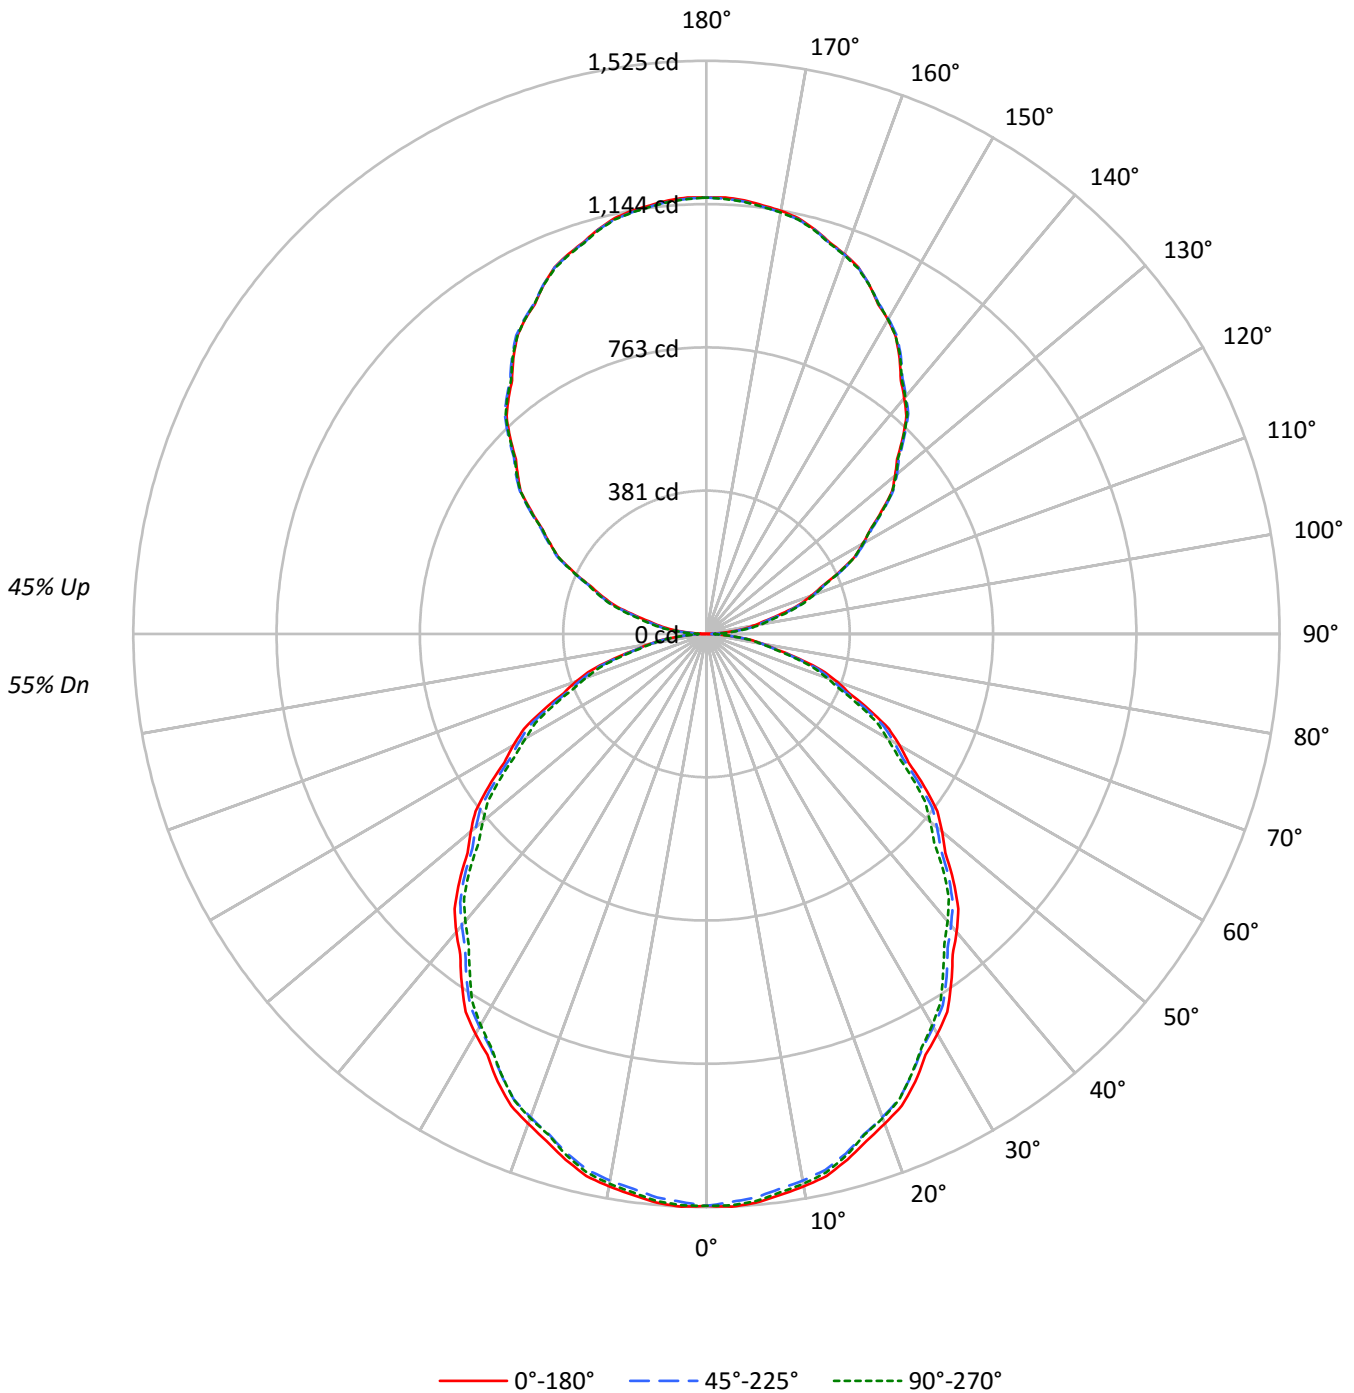



TEST NUMBER: P333447-940

CATALOG NUMBER: S125DIW-S1090D1050U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	94	90	87	92	88	84	81	75	73	71	64	62	61	54	52	51	46
2	90	82	76	71	83	77	71	67	66	62	58	56	53	51	47	45	43	39
3	82	72	65	59	76	68	61	56	58	53	49	50	46	43	42	39	37	33
4	75	64	56	50	69	60	53	47	52	46	42	44	40	37	37	34	32	28
5	69	57	49	43	64	53	46	41	46	41	36	40	35	32	34	30	27	24
6	64	51	43	37	59	48	41	35	42	36	32	36	31	28	30	27	24	21
7	59	46	38	33	54	43	36	31	38	32	28	33	28	25	28	24	21	19
8	55	42	34	29	51	39	32	27	35	29	25	30	25	22	26	22	19	17
9	51	38	31	26	47	36	29	25	32	26	22	28	23	20	24	20	17	15
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9827	9827	9827
5°	9849	9756	9818
10°	9789	9686	9742
15°	9682	9570	9610
20°	9531	9407	9423
25°	9368	9213	9204
30°	9165	9004	8959
35°	8949	8779	8656
40°	8728	8535	8413
45°	8488	8312	8147
50°	8225	8043	7801
55°	7970	7739	7523
60°	7665	7432	7167
65°	7303	7065	6825
70°	6956	6637	6411
75°	6338	6128	5916
80°	5642	5553	5415
85°	4905	4994	4728



TEST NUMBER: P333447-940

CATALOG NUMBER: S125DIW-S1090D1050U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	143.5	2.0
10°-20°	405.3	5.6
20°-30°	598.4	8.3
30°-40°	698.2	9.7
40°-50°	701.3	9.7
50°-60°	615.6	8.5
60°-70°	458.7	6.4
70°-80°	262.3	3.6
80°-90°	78.8	1.1
90°-100°	77.8	1.1
100°-110°	229.6	3.2
110°-120°	388.9	5.4
120°-130°	511.9	7.1
130°-140°	573.6	8.0
140°-150°	562.1	7.8
150°-160°	472.2	6.6
160°-170°	313.9	4.4
170°-180°	109.8	1.5
0°-30°	1147.1	15.9
0°-40°	1845.3	25.6
0°-60°	3162.2	43.9
0°-90°	3961.9	55.0
90°-120°	696.4	9.7
90°-150°	2344.0	32.5
90°-180°	3240.0	45.0
0°-180°	7201.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1522	1522	1522	1522	1522	
5°	1519	1516	1505	1515	1514	144
15°	1448	1444	1431	1437	1437	408
25°	1315	1308	1293	1295	1292	605
35°	1135	1130	1114	1107	1098	710
45°	929	924	910	896	892	716
55°	708	703	687	677	668	632
65°	478	475	462	452	447	474
75°	254	251	246	242	237	271
85°	66	67	67	66	64	74
90°	1	8	14	19	22	7
95°	59	61	70	76	78	63
105°	206	211	216	221	224	220
115°	389	393	395	394	393	385
125°	568	573	575	573	572	509
135°	739	744	745	745	742	569
145°	895	899	902	902	899	560
155°	1025	1025	1026	1029	1025	472
165°	1114	1112	1113	1116	1111	314
175°	1158	1155	1155	1160	1154	110
180°	1161	1161	1161	1161	1161	



TEST NUMBER: P333447-940

CATALOG NUMBER: S125DIW-S1090D1050U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6
2.5°	1525.4	1524.8	1524.1	1523.5	1522.9	1521.4	1519.3	1517.2	1515.0	1512.9	1515.0
5°	1519.2	1518.7	1518.1	1517.6	1517.1	1515.5	1512.8	1510.1	1507.4	1504.8	1507.2
7.5°	1505.2	1504.7	1504.1	1503.6	1503.1	1501.3	1498.3	1495.4	1492.5	1489.5	1491.9
10°	1492.7	1492.2	1491.7	1491.1	1490.6	1488.8	1485.9	1482.9	1480.0	1477.0	1479.2
12.5°	1477.3	1476.3	1475.3	1474.4	1473.5	1471.6	1468.8	1466.2	1463.4	1460.6	1462.4
15°	1448.1	1447.3	1446.5	1445.7	1444.9	1443.1	1440.1	1437.2	1434.2	1431.3	1432.6
17.5°	1414.7	1413.5	1412.3	1411.1	1410.0	1407.8	1404.8	1401.8	1398.7	1395.6	1397.3
20°	1386.8	1386.3	1385.7	1385.2	1384.6	1382.6	1379.1	1375.6	1372.2	1368.7	1370.6
22.5°	1358.8	1357.9	1356.9	1355.9	1355.0	1352.8	1349.6	1346.3	1343.1	1339.8	1341.0
25°	1314.6	1313.2	1311.9	1310.5	1309.2	1306.8	1303.3	1299.8	1296.4	1292.9	1293.4
27.5°	1262.8	1261.9	1261.1	1260.3	1259.5	1257.4	1253.7	1250.2	1246.6	1243.0	1243.1
30°	1229.0	1228.2	1227.4	1226.6	1225.8	1223.4	1219.4	1215.4	1211.4	1207.4	1206.8
32.5°	1192.5	1191.2	1190.0	1188.7	1187.6	1185.2	1181.5	1177.9	1174.4	1170.8	1169.8
35°	1135.1	1134.1	1133.0	1131.9	1130.9	1128.5	1124.7	1121.0	1117.2	1113.5	1112.1
37.5°	1075.7	1074.3	1073.0	1071.7	1070.3	1067.9	1064.3	1060.9	1057.3	1053.8	1051.8
40°	1035.3	1033.9	1032.6	1031.3	1029.9	1027.3	1023.6	1019.8	1016.1	1012.4	1010.0
42.5°	991.9	990.8	989.7	988.6	987.4	985.0	981.2	977.5	973.7	970.0	967.8
45°	929.3	928.3	927.2	926.1	925.1	922.9	919.7	916.5	913.3	910.1	906.9
47.5°	861.9	861.9	862.0	862.1	862.1	860.2	856.4	852.5	848.6	844.8	841.5
50°	818.6	817.8	817.0	816.2	815.4	813.3	810.1	806.9	803.7	800.5	797.0
52.5°	774.3	773.6	773.1	772.5	772.0	769.9	766.5	763.0	759.6	756.2	753.1
55°	707.8	707.0	706.2	705.4	704.6	702.3	698.6	694.8	691.1	687.3	684.9
57.5°	637.8	637.3	636.9	636.5	636.1	634.3	631.1	627.9	624.8	621.6	618.5
60°	593.4	592.4	591.3	590.2	589.2	587.2	584.2	581.3	578.4	575.4	572.7
62.5°	547.2	546.4	545.5	544.7	543.9	542.2	539.6	537.1	534.6	532.1	529.1
65°	477.9	477.3	476.8	476.3	475.7	474.0	471.1	468.1	465.2	462.3	459.9
67.5°	410.7	409.6	408.5	407.3	406.3	404.6	402.3	400.2	398.0	395.8	393.8
70°	368.4	367.0	365.7	364.4	363.0	361.1	358.7	356.3	353.9	351.5	349.9
72.5°	322.2	321.2	320.3	319.4	318.5	317.3	315.8	314.1	312.6	311.0	309.2
75°	254.0	253.4	252.9	252.4	251.8	250.9	249.6	248.3	246.9	245.6	244.8
77.5°	191.2	190.9	190.7	190.6	190.3	189.8	189.0	188.3	187.6	186.8	186.4
80°	151.7	151.7	151.7	151.7	151.7	151.4	150.9	150.3	149.8	149.3	149.0
82.5°	117.0	116.5	116.2	115.7	115.3	115.0	114.9	114.9	114.7	114.6	114.1
85°	66.2	66.4	66.7	67.0	67.2	67.4	67.4	67.4	67.4	67.4	67.1
87.5°	26.2	26.5	26.8	27.1	27.5	27.6	27.7	27.8	27.8	27.9	28.1
90°	0.9	2.5	4.1	5.7	7.3	8.8	10.3	11.7	13.0	14.4	15.4
92.5°	21.8	23.0	24.1	25.2	26.4	27.8	29.5	31.2	33.0	34.7	36.0
95°	58.8	59.1	59.6	59.9	60.4	61.5	63.6	65.5	67.6	69.6	71.0
97.5°	97.6	97.7	97.9	98.1	98.3	99.7	102.5	105.2	108.0	110.8	112.1
100°	126.5	126.5	126.5	126.5	126.5	127.8	130.4	133.0	135.6	138.2	140.1
102.5°	157.6	158.4	159.2	160.0	160.8	161.8	163.2	164.5	165.9	167.2	169.2
105°	206.0	207.0	208.0	209.0	210.0	211.2	212.3	213.6	214.7	216.0	217.1
107.5°	259.5	260.5	261.5	262.5	263.5	264.5	265.4	266.4	267.2	268.1	268.8
110°	296.3	297.4	298.4	299.3	300.4	301.2	301.8	302.4	303.0	303.6	304.2



TEST NUMBER: P333447-940

CATALOG NUMBER: S125DIW-S1090D1050U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	333.9	334.5	335.0	335.6	336.0	336.7	337.4	338.2	338.9	339.7	340.0
115°	389.4	390.2	391.0	391.8	392.6	393.2	393.6	394.0	394.4	394.8	394.7
117.5°	445.1	445.4	445.8	446.1	446.6	446.9	447.3	447.6	448.0	448.4	448.5
120°	479.7	480.8	481.8	482.8	483.8	484.4	484.6	484.8	485.0	485.2	485.2
122.5°	517.4	517.7	518.1	518.4	518.8	519.2	519.8	520.3	520.8	521.4	521.2
125°	568.3	569.5	570.7	571.9	573.1	573.8	574.1	574.3	574.4	574.6	574.3
127.5°	622.5	623.2	623.9	624.6	625.3	625.7	626.0	626.2	626.4	626.7	626.5
130°	655.1	656.0	657.1	658.1	659.1	659.8	660.2	660.6	661.0	661.4	661.2
132.5°	687.6	689.2	690.9	692.5	694.2	695.0	694.9	694.8	694.7	694.6	694.5
135°	739.0	740.3	741.5	742.7	744.0	744.6	744.8	745.0	745.2	745.4	745.4
137.5°	787.6	788.7	789.9	791.0	792.2	793.0	793.4	793.9	794.3	794.8	795.0
140°	818.6	819.6	820.6	821.6	822.6	823.4	824.0	824.7	825.2	825.8	826.3
142.5°	849.7	850.5	851.4	852.2	853.1	853.9	854.6	855.4	856.1	856.9	857.1
145°	895.4	896.2	897.0	897.8	898.6	899.3	899.9	900.5	901.2	901.7	901.7
147.5°	937.7	938.2	938.6	939.0	939.4	940.0	940.4	940.8	941.4	941.8	942.4
150°	965.9	965.7	965.5	965.3	965.1	965.4	966.2	967.0	967.8	968.6	968.6
152.5°	989.0	989.3	989.5	989.9	990.2	990.4	990.8	991.0	991.4	991.8	992.2
155°	1024.6	1024.6	1024.6	1024.6	1024.6	1024.7	1024.9	1025.1	1025.3	1025.6	1026.4
157.5°	1056.4	1056.0	1055.5	1055.1	1054.6	1054.5	1054.7	1054.9	1055.2	1055.3	1056.1
160°	1075.2	1074.6	1074.0	1073.4	1072.8	1072.6	1072.8	1073.0	1073.2	1073.4	1074.2
162.5°	1091.8	1091.4	1090.9	1090.5	1090.0	1089.8	1089.9	1089.9	1090.0	1090.0	1091.0
165°	1114.1	1113.7	1113.2	1112.9	1112.4	1112.3	1112.6	1112.8	1112.9	1113.1	1113.9
167.5°	1132.8	1132.0	1131.2	1130.4	1129.6	1129.3	1129.3	1129.3	1129.3	1129.3	1130.4
170°	1143.0	1142.2	1141.4	1140.6	1139.8	1139.3	1139.3	1139.3	1139.3	1139.3	1140.6
172.5°	1150.2	1149.4	1148.6	1147.8	1147.0	1146.6	1146.6	1146.6	1146.6	1146.6	1147.8
175°	1158.3	1157.5	1156.7	1155.9	1155.1	1154.7	1154.7	1154.7	1154.7	1154.7	1155.9
177.5°	1162.5	1161.8	1161.2	1160.6	1159.9	1159.5	1159.3	1159.2	1159.0	1158.9	1159.8
180°	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0



TEST NUMBER: P333447-940

CATALOG NUMBER: S125DIW-S1090D1050U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6	1521.6
2.5°	1517.2	1519.3	1521.4	1522.4	1522.2	1522.0	1521.8	1521.6
5°	1509.6	1512.0	1514.4	1515.5	1515.2	1514.9	1514.7	1514.4
7.5°	1494.2	1496.6	1499.0	1500.0	1499.8	1499.5	1499.2	1499.0
10°	1481.3	1483.5	1485.6	1486.6	1486.3	1486.0	1485.8	1485.5
12.5°	1464.1	1465.8	1467.5	1468.4	1468.3	1468.2	1468.2	1468.1
15°	1434.0	1435.3	1436.6	1437.3	1437.3	1437.3	1437.3	1437.3
17.5°	1399.0	1400.6	1402.3	1402.5	1401.1	1399.8	1398.5	1397.1
20°	1372.4	1374.3	1376.2	1376.4	1375.1	1373.8	1372.4	1371.1
22.5°	1342.3	1343.5	1344.7	1344.9	1344.0	1343.1	1342.2	1341.2
25°	1294.0	1294.5	1295.0	1294.9	1294.1	1293.2	1292.4	1291.6
27.5°	1243.2	1243.3	1243.5	1243.1	1242.3	1241.5	1240.7	1239.9
30°	1206.3	1205.8	1205.2	1204.6	1203.8	1203.0	1202.2	1201.4
32.5°	1168.9	1167.9	1167.0	1165.7	1164.3	1162.9	1161.4	1159.9
35°	1110.8	1109.5	1108.1	1106.4	1104.3	1102.2	1100.0	1097.9
37.5°	1049.8	1047.8	1045.9	1044.3	1043.0	1041.8	1040.5	1039.4
40°	1007.5	1005.1	1002.7	1001.1	1000.3	999.5	998.7	997.9
42.5°	965.6	963.4	961.3	959.5	958.3	957.1	955.8	954.6
45°	903.7	900.4	897.2	895.2	894.4	893.6	892.8	892.0
47.5°	838.3	835.0	831.8	829.2	827.3	825.5	823.6	821.7
50°	793.5	790.1	786.6	783.9	782.0	780.2	778.3	776.4
52.5°	750.1	747.1	744.0	741.5	739.3	737.3	735.2	733.1
55°	682.5	680.1	677.7	675.6	673.7	671.8	669.9	668.1
57.5°	615.5	612.3	609.2	607.2	606.2	605.1	604.1	603.1
60°	570.1	567.4	564.7	562.4	560.5	558.7	556.8	554.9
62.5°	526.3	523.4	520.5	518.4	516.9	515.5	514.0	512.6
65°	457.4	455.0	452.6	450.8	449.8	448.7	447.6	446.6
67.5°	391.7	389.7	387.6	386.3	385.7	385.0	384.4	383.8
70°	348.3	346.7	345.1	343.8	342.7	341.6	340.5	339.5
72.5°	307.5	305.6	303.8	302.4	301.3	300.2	299.2	298.1
75°	244.0	243.2	242.4	241.4	240.3	239.2	238.2	237.1
77.5°	185.8	185.4	184.9	184.3	183.5	182.8	182.0	181.3
80°	148.7	148.5	148.2	147.8	147.2	146.7	146.2	145.6
82.5°	113.6	113.2	112.7	112.4	112.3	112.2	112.1	111.9
85°	66.9	66.6	66.3	65.9	65.4	64.8	64.3	63.8
87.5°	28.4	28.5	28.7	28.7	28.4	28.1	27.7	27.5
90°	16.5	17.5	18.5	19.3	19.9	20.5	21.0	21.7
92.5°	37.4	38.7	40.0	40.8	41.3	41.7	42.2	42.6
95°	72.4	73.7	75.2	76.1	76.5	76.9	77.3	77.7
97.5°	113.4	114.8	116.1	116.8	117.1	117.3	117.6	117.8
100°	141.9	143.7	145.4	146.6	147.0	147.4	147.8	148.2
102.5°	171.1	173.1	175.0	176.3	176.8	177.5	178.0	178.5
105°	218.4	219.5	220.8	221.7	222.3	222.8	223.5	224.1
107.5°	269.4	270.0	270.5	270.9	270.8	270.8	270.7	270.7
110°	304.8	305.4	306.0	306.2	306.0	305.8	305.6	305.4



TEST NUMBER: P333447-940

CATALOG NUMBER: S125DIW-S1090D1050U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	340.3	340.5	340.8	340.8	340.5	340.1	339.7	339.4
115°	394.4	394.2	394.0	393.9	393.6	393.4	393.2	393.1
117.5°	448.6	448.8	449.0	448.6	447.8	447.0	446.2	445.4
120°	485.2	485.2	485.2	484.8	484.0	483.2	482.4	481.6
122.5°	521.0	520.8	520.7	520.3	519.7	519.0	518.4	517.7
125°	573.8	573.5	573.0	572.7	572.6	572.3	572.1	571.9
127.5°	626.2	626.1	625.9	625.6	625.2	624.8	624.4	624.0
130°	661.0	660.8	660.6	660.3	659.9	659.5	659.1	658.7
132.5°	694.2	694.0	693.8	693.5	692.9	692.3	691.8	691.2
135°	745.4	745.4	745.4	745.0	744.2	743.4	742.6	741.8
137.5°	795.2	795.5	795.7	795.3	794.3	793.4	792.3	791.3
140°	826.6	827.1	827.4	827.2	826.2	825.1	824.1	823.1
142.5°	857.4	857.6	857.9	857.5	856.5	855.5	854.5	853.5
145°	901.7	901.7	901.7	901.4	900.8	900.2	899.6	899.0
147.5°	942.8	943.3	943.8	943.3	942.0	940.6	939.2	937.9
150°	968.6	968.6	968.6	968.4	968.0	967.6	967.1	966.8
152.5°	992.7	993.2	993.6	993.5	992.8	992.1	991.3	990.6
155°	1027.2	1028.0	1028.8	1028.6	1027.6	1026.6	1025.6	1024.6
157.5°	1056.9	1057.7	1058.5	1058.3	1056.9	1055.6	1054.3	1053.0
160°	1075.0	1075.8	1076.7	1076.5	1075.5	1074.5	1073.5	1072.5
162.5°	1092.0	1092.9	1093.9	1093.8	1092.6	1091.5	1090.3	1089.1
165°	1114.7	1115.5	1116.3	1116.2	1115.0	1113.7	1112.6	1111.3
167.5°	1131.7	1132.8	1134.1	1134.1	1132.8	1131.6	1130.3	1129.1
170°	1141.7	1143.0	1144.2	1144.1	1142.6	1141.3	1139.9	1138.4
172.5°	1149.0	1150.2	1151.4	1151.4	1150.1	1148.9	1147.6	1146.4
175°	1157.1	1158.3	1159.6	1159.4	1158.1	1156.6	1155.2	1153.8
177.5°	1160.8	1161.8	1162.7	1162.6	1161.5	1160.4	1159.3	1158.2
180°	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0	1161.0

(END OF REPORT)