

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333461-940

Luminaire Tested: **S125DIW-S1270D470U940-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333461-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1270D470U940-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6071.6 lumens
Efficiency: N/A
Efficacy: 115.9 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 52.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

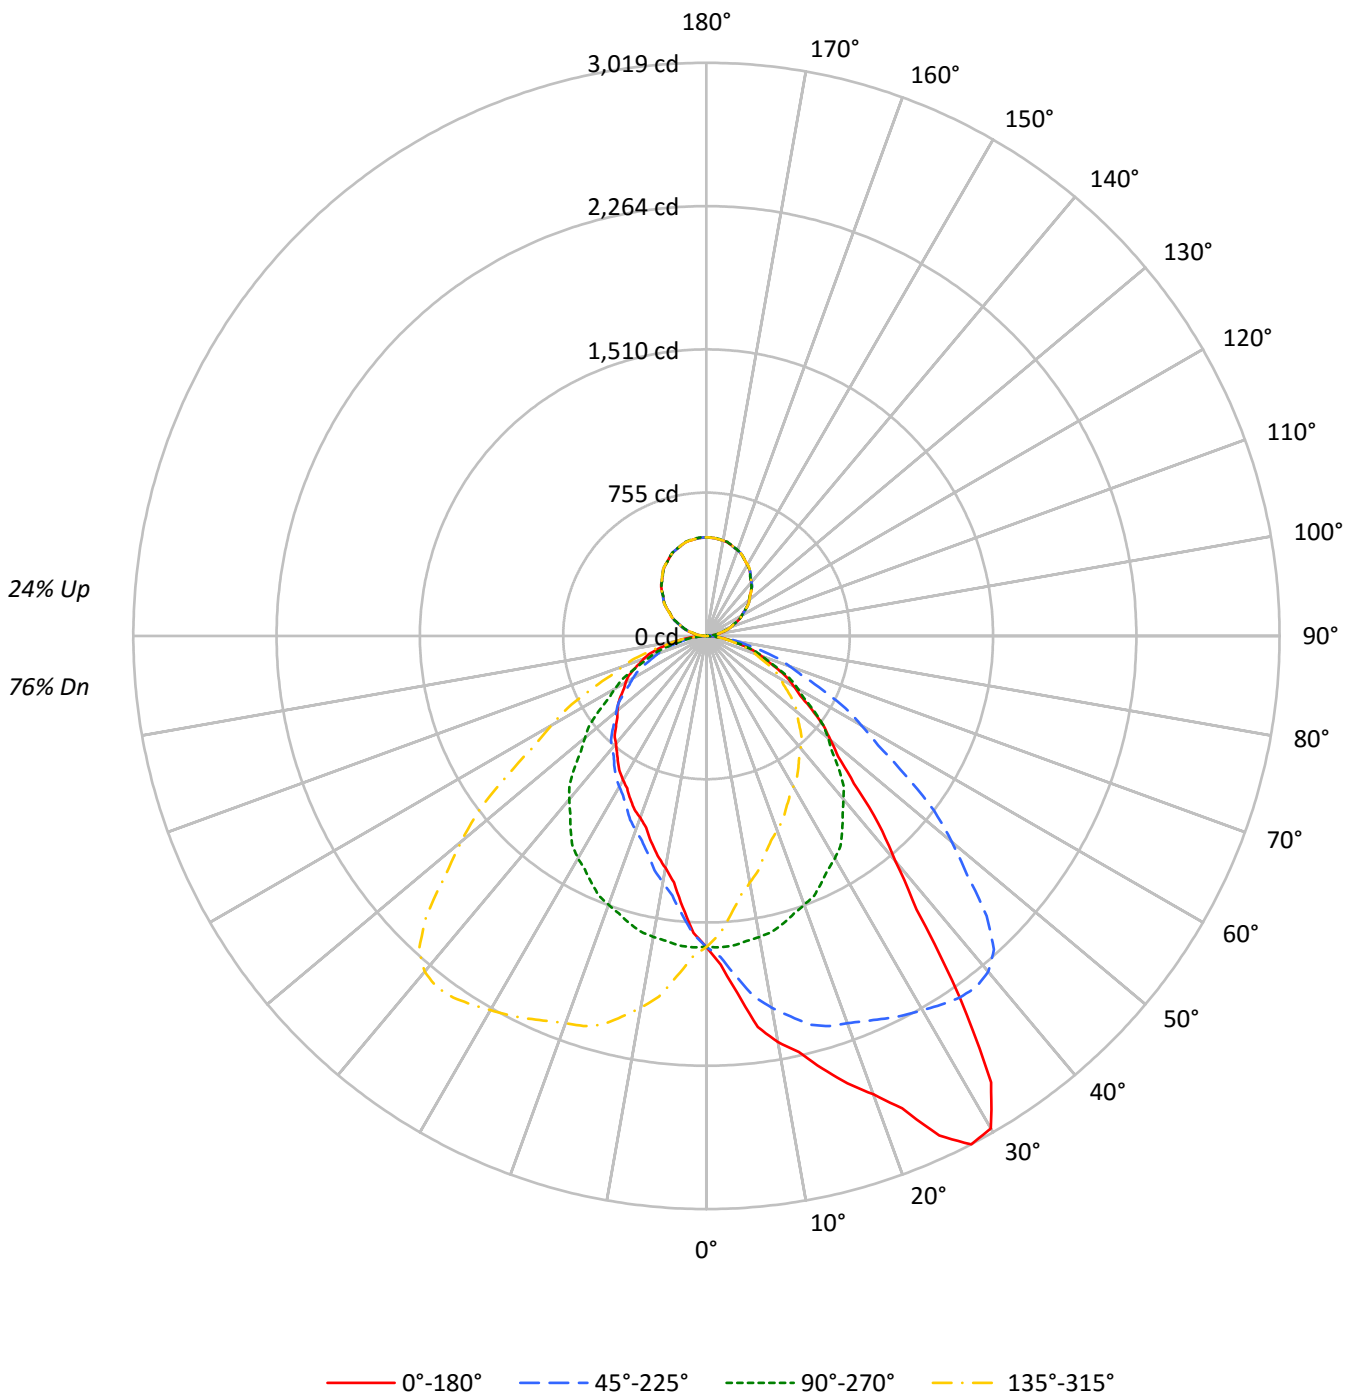



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	98	98	98	89	89	89	80	80	80	76
1	104	100	96	92	99	95	92	88	87	84	81	79	77	75	71	70	68	65
2	95	87	81	76	90	84	78	73	76	72	68	69	66	63	63	61	58	55
3	87	77	70	64	82	74	67	62	68	62	57	62	57	54	56	53	50	47
4	80	69	60	54	76	66	58	53	60	54	49	55	50	46	50	46	43	40
5	73	61	53	47	70	59	51	45	54	48	43	50	44	40	46	41	38	35
6	68	55	47	41	64	53	45	40	49	42	38	45	40	35	41	37	33	31
7	63	50	42	36	60	48	40	35	44	38	33	41	36	31	38	33	30	27
8	58	46	38	32	56	44	36	31	41	34	30	38	32	28	35	30	27	24
9	54	42	34	29	52	40	33	28	37	31	27	35	29	25	32	27	24	22
10	51	38	31	26	49	37	30	25	34	28	24	32	27	23	30	25	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	10577	10577	10577	10577
5°	12248	10613	9292	10613
10°	14250	10558	8141	10558
15°	15774	10480	7511	10480
20°	17657	10357	7003	10357
25°	20685	10219	6757	10219
30°	22342	10082	6542	10082
35°	18370	9826	6401	9826
40°	13057	9470	6247	9470
45°	10030	8990	6158	8990
50°	8562	8395	6146	8395
55°	7624	7812	6199	7812
60°	6877	7174	6356	7174
65°	6353	6533	6522	6533
70°	5776	5867	6617	5867
75°	5100	5168	6558	5168
80°	4292	4214	5995	4214
85°	3394	3038	4846	3038



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.7	2.6
10°-20°	469.4	7.7
20°-30°	762.2	12.6
30°-40°	929.8	15.3
40°-50°	845.8	13.9
50°-60°	673.7	11.1
60°-70°	469.3	7.7
70°-80°	250.2	4.1
80°-90°	64.3	1.1
90°-100°	34.8	0.6
100°-110°	102.7	1.7
110°-120°	174.0	2.9
120°-130°	229.0	3.8
130°-140°	256.6	4.2
140°-150°	251.5	4.1
150°-160°	211.2	3.5
160°-170°	140.4	2.3
170°-180°	49.1	0.8
0°-30°	1389.3	22.9
0°-40°	2319.0	38.2
0°-60°	3838.6	63.2
0°-90°	4622.4	76.1
90°-120°	311.5	5.1
90°-150°	1048.5	17.3
90°-180°	1449.0	23.9
0°-180°	6071.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1638	1638	1638	1638	1638	
5°	1889	1637	1433	1637	1889	190
15°	2359	1567	1123	1567	2359	675
25°	2903	1434	948	1434	2903	1326
35°	2330	1246	812	1246	2330	1426
45°	1098	984	674	984	1098	879
55°	677	694	550	694	677	610
65°	416	428	427	428	416	413
75°	204	207	263	207	204	220
85°	46	41	65	41	46	53
90°	10	0	10	0	10	7
95°	35	26	35	26	35	35
105°	100	92	100	92	100	106
115°	176	174	176	174	176	174
125°	256	254	256	254	256	228
135°	332	331	332	331	332	256
145°	402	401	402	401	402	251
155°	458	458	458	458	458	211
165°	497	498	497	498	497	140
175°	516	518	516	518	516	49
180°	519	519	519	519	519	



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1732.2	1730.0	1727.8	1723.3	1726.6	1717.2	1712.7	1705.0	1695.5	1692.2	1688.3
5°	1889.3	1892.7	1896.2	1881.7	1883.0	1873.3	1851.1	1833.0	1818.4	1799.7	1786.5
7.5°	2078.4	2070.2	2069.5	2060.0	2043.8	2030.7	2007.3	1977.5	1948.8	1916.0	1888.9
10°	2172.9	2173.6	2167.4	2156.2	2138.9	2126.4	2095.8	2066.5	2031.1	1989.4	1959.5
12.5°	2244.1	2247.0	2239.1	2224.1	2215.5	2187.5	2163.6	2128.9	2086.7	2053.3	2007.9
15°	2359.2	2351.5	2346.0	2327.2	2312.7	2283.4	2245.2	2209.0	2163.2	2120.8	2078.4
17.5°	2470.1	2476.3	2465.8	2448.7	2403.4	2369.4	2318.1	2268.5	2211.4	2154.6	2104.0
20°	2569.1	2574.7	2558.7	2528.8	2474.6	2440.5	2373.1	2309.2	2243.1	2170.2	2114.5
22.5°	2692.6	2688.2	2666.6	2621.1	2574.1	2511.1	2438.2	2360.3	2277.6	2195.1	2121.2
25°	2902.8	2873.5	2860.3	2804.1	2742.2	2649.7	2549.7	2435.6	2332.8	2223.7	2129.1
27.5°	3019.2	3010.1	2995.3	2956.2	2891.1	2792.2	2674.2	2535.3	2390.2	2252.5	2128.7
30°	2995.9	2997.3	2998.7	2986.2	2944.5	2870.1	2752.6	2603.2	2430.8	2275.8	2132.6
32.5°	2789.1	2814.3	2838.6	2867.2	2878.9	2864.5	2791.0	2656.0	2478.6	2302.5	2130.4
35°	2330.0	2337.6	2416.2	2494.0	2599.7	2681.7	2736.7	2676.8	2527.4	2325.1	2127.7
37.5°	1816.8	1854.3	1908.6	1996.6	2149.1	2285.6	2461.2	2542.0	2493.8	2332.5	2122.9
40°	1548.7	1583.5	1618.9	1708.6	1837.2	2002.6	2202.1	2372.4	2412.0	2309.2	2106.2
42.5°	1341.8	1369.4	1408.7	1476.1	1583.6	1730.1	1920.7	2143.3	2280.2	2241.3	2071.2
45°	1098.2	1115.6	1146.2	1199.8	1277.6	1392.3	1560.5	1803.8	2015.8	2086.0	1988.0
47.5°	940.0	940.0	963.7	1000.7	1056.9	1154.3	1278.7	1469.4	1695.8	1863.3	1855.6
50°	852.2	848.7	867.5	899.5	944.0	1008.6	1127.5	1279.7	1497.3	1687.0	1739.8
52.5°	776.6	776.9	788.5	812.2	849.4	904.6	993.5	1130.7	1316.5	1511.3	1610.9
55°	677.1	674.2	687.4	703.5	730.6	766.7	830.6	935.6	1086.5	1278.3	1407.6
57.5°	585.9	593.5	598.8	609.9	632.4	656.6	710.5	787.6	907.2	1071.8	1208.5
60°	532.4	540.1	544.3	555.4	573.5	594.3	636.1	698.6	799.4	941.2	1076.7
62.5°	484.6	490.6	492.0	502.0	516.7	537.1	569.9	622.4	702.0	826.1	958.9
65°	415.7	415.7	418.5	428.9	435.9	453.9	478.9	517.2	581.1	677.7	791.0
67.5°	349.2	352.6	351.9	356.4	362.8	376.9	394.8	426.4	473.8	544.3	634.9
70°	305.9	308.6	307.9	311.4	318.3	327.4	342.0	371.8	405.9	466.5	544.3
72.5°	266.9	268.0	266.3	270.8	275.0	282.9	299.2	315.1	347.0	398.1	462.0
75°	204.4	205.7	207.1	209.9	214.1	218.3	226.6	242.6	263.4	301.7	342.7
77.5°	153.2	150.5	153.9	153.5	155.9	159.1	166.4	174.9	192.0	216.2	247.9
80°	115.4	116.1	116.1	116.8	120.3	122.3	128.6	134.8	148.0	166.1	188.4
82.5°	84.3	86.1	85.0	86.2	89.1	90.6	94.1	99.2	106.9	121.1	137.2
85°	45.8	42.4	43.8	45.2	45.2	45.8	48.7	50.7	54.9	60.5	66.7
87.5°	15.2	16.3	16.9	16.8	17.3	17.2	19.4	19.3	20.9	22.4	24.5
90°	9.7	9.5	9.2	8.9	8.6	8.3	7.8	7.4	7.0	6.5	5.8
92.5°	19.1	18.9	18.6	18.5	18.3	17.9	17.3	16.7	16.1	15.5	14.7
95°	34.8	34.6	34.4	34.2	34.1	33.6	33.0	32.4	31.7	31.1	30.2
97.5°	52.7	52.6	52.5	52.3	52.3	51.9	51.4	50.7	50.1	49.6	48.3
100°	66.3	66.1	65.9	65.7	65.5	65.1	64.3	63.5	62.7	61.8	60.6
102.5°	79.9	79.6	79.4	79.1	78.8	78.3	77.4	76.5	75.6	74.7	74.2
105°	100.2	100.0	99.7	99.4	99.2	98.7	98.2	97.6	97.1	96.6	96.0
107.5°	121.1	121.1	121.1	121.2	121.2	121.0	120.7	120.5	120.2	119.9	119.6
110°	136.6	136.7	136.8	136.9	137.0	136.9	136.6	136.3	136.1	135.8	135.5



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	151.8	151.9	152.1	152.3	152.5	152.5	152.3	152.2	152.1	151.9	151.6
115°	175.8	175.9	176.0	176.1	176.2	176.3	176.4	176.5	176.6	176.6	176.5
117.5°	199.2	199.6	200.0	200.4	200.7	200.8	200.7	200.7	200.6	200.5	200.4
120°	215.4	215.8	216.2	216.5	216.9	217.0	217.0	217.0	217.0	217.0	217.0
122.5°	231.6	231.8	232.2	232.5	232.7	232.9	233.0	233.1	233.1	233.2	233.0
125°	255.8	255.9	256.0	256.1	256.2	256.4	256.5	256.7	256.9	257.1	257.0
127.5°	279.1	279.3	279.5	279.6	279.8	280.0	280.1	280.2	280.3	280.4	280.2
130°	294.6	294.8	295.0	295.2	295.3	295.5	295.6	295.7	295.8	295.9	295.7
132.5°	309.2	309.4	309.7	310.0	310.2	310.3	310.4	310.5	310.6	310.7	310.8
135°	331.8	332.2	332.5	332.9	333.2	333.4	333.4	333.4	333.4	333.4	333.3
137.5°	353.9	354.4	354.9	355.3	355.8	356.0	355.8	355.7	355.6	355.5	355.3
140°	368.2	368.6	369.1	369.5	370.0	370.1	370.0	369.8	369.6	369.4	369.2
142.5°	381.7	382.2	382.6	383.1	383.5	383.7	383.6	383.5	383.4	383.3	383.0
145°	402.2	402.4	402.7	403.0	403.2	403.3	403.3	403.3	403.3	403.3	403.1
147.5°	419.5	420.1	420.7	421.3	422.0	422.1	422.0	421.7	421.5	421.3	421.1
150°	432.5	432.7	432.8	433.0	433.2	433.3	433.3	433.3	433.3	433.3	432.9
152.5°	443.1	443.4	443.8	444.1	444.4	444.4	444.3	444.1	443.8	443.6	443.4
155°	458.3	458.8	459.2	459.7	460.1	460.1	459.8	459.4	459.1	458.7	458.6
157.5°	471.0	471.6	472.2	472.8	473.4	473.5	473.1	472.8	472.4	472.1	472.0
160°	479.7	480.2	480.6	481.1	481.5	481.6	481.3	480.9	480.5	480.1	480.0
162.5°	487.1	487.7	488.2	488.7	489.3	489.3	488.8	488.5	488.0	487.6	487.6
165°	497.1	497.7	498.2	498.7	499.3	499.4	499.0	498.6	498.3	497.9	497.8
167.5°	505.1	505.6	506.1	506.7	507.3	507.3	506.8	506.2	505.7	505.2	505.2
170°	509.3	509.9	510.5	511.1	511.8	511.8	511.2	510.7	510.1	509.6	509.6
172.5°	512.8	513.4	513.9	514.4	515.1	515.1	514.5	514.0	513.4	512.9	512.9
175°	516.1	516.7	517.4	518.0	518.6	518.7	518.2	517.5	517.0	516.5	516.5
177.5°	518.1	518.5	519.1	519.6	520.0	520.1	519.7	519.2	518.8	518.4	518.4
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1685.0	1681.1	1676.6	1668.8	1659.4	1654.4	1646.5	1641.6	1631.6	1623.2	1614.4
5°	1770.4	1752.4	1735.7	1714.1	1690.5	1675.2	1657.2	1637.0	1616.1	1594.6	1570.9
7.5°	1859.0	1827.0	1792.2	1754.9	1718.3	1684.6	1652.5	1621.0	1591.5	1555.9	1525.8
10°	1918.5	1878.2	1835.1	1784.3	1735.0	1691.9	1648.1	1609.9	1570.9	1529.2	1492.4
12.5°	1978.0	1924.3	1863.4	1807.7	1748.4	1696.3	1644.8	1596.0	1547.0	1500.8	1457.9
15°	2020.0	1972.7	1916.4	1837.2	1770.4	1698.9	1630.8	1567.4	1508.4	1457.0	1402.8
17.5°	2047.6	1986.7	1926.3	1850.2	1762.8	1682.7	1605.5	1533.1	1466.5	1401.3	1349.1
20°	2052.6	1990.1	1926.8	1852.4	1762.8	1671.1	1593.8	1507.0	1435.4	1368.0	1304.0
22.5°	2051.0	1980.0	1911.3	1834.7	1747.2	1662.7	1569.4	1480.9	1403.1	1336.9	1270.1
25°	2035.2	1959.5	1873.3	1796.2	1709.9	1620.3	1525.8	1434.0	1354.8	1279.0	1213.0
27.5°	2022.2	1924.0	1826.3	1736.3	1653.1	1570.9	1480.4	1386.4	1298.6	1221.8	1159.6
30°	2006.1	1898.4	1788.5	1694.7	1609.2	1529.2	1443.8	1352.0	1260.3	1185.2	1118.5
32.5°	1991.6	1866.1	1750.2	1648.0	1557.5	1479.7	1400.9	1313.6	1223.5	1147.4	1080.6
35°	1963.7	1818.4	1685.6	1570.2	1473.6	1393.7	1327.7	1246.3	1163.6	1089.9	1026.0
37.5°	1928.2	1755.9	1613.4	1492.4	1386.4	1302.3	1240.7	1178.3	1098.9	1028.0	970.1
40°	1900.4	1711.4	1560.5	1436.8	1327.0	1239.4	1182.4	1123.3	1057.3	991.2	930.1
42.5°	1865.4	1671.3	1507.2	1373.9	1265.2	1179.9	1120.1	1069.9	1011.6	950.1	893.3
45°	1801.0	1598.7	1420.8	1277.6	1167.8	1083.7	1021.8	984.3	940.5	882.1	834.1
47.5°	1706.4	1511.5	1327.5	1179.7	1066.4	988.5	930.5	894.5	863.6	820.2	776.7
50°	1622.4	1446.5	1260.3	1113.6	1000.2	921.7	868.2	835.5	809.1	775.7	738.9
52.5°	1528.4	1364.8	1194.1	1049.1	936.8	859.4	807.0	778.3	756.3	732.4	696.1
55°	1379.1	1240.1	1081.6	944.0	840.3	764.6	718.7	693.8	675.6	657.5	635.3
57.5°	1214.6	1105.9	965.5	839.7	744.3	675.4	632.6	608.2	594.1	584.9	571.8
60°	1098.9	1005.8	884.8	770.2	677.1	615.9	574.2	555.4	543.6	535.9	526.2
62.5°	991.7	915.2	803.2	698.5	617.0	559.1	521.9	503.6	492.4	488.7	480.6
65°	833.4	774.4	681.9	595.0	525.5	476.2	444.9	427.5	420.5	416.3	417.1
67.5°	677.6	641.6	567.3	493.2	437.7	396.4	371.3	358.0	354.5	348.9	348.8
70°	582.5	555.4	492.8	428.2	378.8	346.9	324.6	310.7	307.2	304.4	303.8
72.5°	498.6	474.7	420.5	368.7	324.3	296.2	277.9	269.6	263.9	262.2	262.1
75°	374.7	361.5	318.3	277.3	246.7	227.3	214.8	207.1	203.0	202.2	203.0
77.5°	266.4	254.9	227.5	198.4	179.1	164.3	153.7	151.1	146.4	146.5	145.8
80°	200.2	192.5	175.1	152.2	136.3	123.8	118.2	113.3	111.9	109.9	111.9
82.5°	145.2	137.0	125.1	110.5	97.3	89.8	84.3	82.8	81.9	80.9	81.3
85°	71.6	72.3	65.4	54.2	48.7	44.5	41.0	41.0	40.3	39.6	40.3
87.5°	25.5	24.3	21.9	20.2	17.2	15.4	14.7	15.1	13.6	13.2	13.8
90°	5.2	4.5	3.9	3.3	2.6	1.9	1.2	0.4	1.2	1.9	2.6
92.5°	14.0	13.2	12.4	11.8	11.3	10.8	10.3	9.8	10.3	10.8	11.3
95°	29.3	28.4	27.6	27.0	26.8	26.7	26.5	26.3	26.5	26.7	26.8
97.5°	47.1	45.8	44.6	44.0	43.9	43.8	43.7	43.6	43.7	43.8	43.9
100°	59.5	58.3	57.2	56.6	56.6	56.6	56.6	56.6	56.6	56.6	56.6
102.5°	73.6	73.0	72.4	72.0	71.6	71.2	70.8	70.4	70.8	71.2	71.6
105°	95.5	95.0	94.4	94.0	93.5	93.0	92.6	92.1	92.6	93.0	93.5
107.5°	119.1	118.7	118.3	117.9	117.4	117.0	116.5	116.1	116.5	117.0	117.4
110°	135.3	135.0	134.7	134.4	133.9	133.5	133.0	132.6	133.0	133.5	133.9



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	151.3	151.0	150.6	150.3	150.1	149.8	149.6	149.4	149.6	149.8	150.1
115°	176.3	176.1	175.9	175.7	175.3	175.0	174.5	174.2	174.5	175.0	175.3
117.5°	200.2	200.1	199.9	199.7	199.6	199.4	199.2	199.1	199.2	199.4	199.6
120°	216.9	216.8	216.7	216.4	216.0	215.5	215.1	214.6	215.1	215.5	216.0
122.5°	232.7	232.5	232.3	232.0	231.9	231.8	231.6	231.4	231.6	231.8	231.9
125°	256.9	256.8	256.7	256.4	255.8	255.3	254.8	254.2	254.8	255.3	255.8
127.5°	280.1	280.0	279.9	279.7	279.4	279.1	278.7	278.5	278.7	279.1	279.4
130°	295.5	295.3	295.2	294.8	294.4	293.9	293.5	293.0	293.5	293.9	294.4
132.5°	310.8	310.9	310.9	310.5	309.8	309.1	308.3	307.6	308.3	309.1	309.8
135°	333.2	333.1	333.1	332.8	332.3	331.7	331.2	330.6	331.2	331.7	332.3
137.5°	355.1	354.9	354.7	354.4	353.8	353.3	352.8	352.2	352.8	353.3	353.8
140°	368.9	368.6	368.4	367.9	367.5	367.0	366.6	366.1	366.6	367.0	367.5
142.5°	382.6	382.3	381.9	381.6	381.2	380.8	380.4	380.0	380.4	380.8	381.2
145°	402.8	402.5	402.3	402.0	401.6	401.3	400.9	400.6	400.9	401.3	401.6
147.5°	420.9	420.6	420.4	420.3	420.0	419.8	419.6	419.5	419.6	419.8	420.0
150°	432.6	432.2	431.9	431.7	431.8	431.9	431.9	432.0	431.9	431.9	431.8
152.5°	443.4	443.2	443.0	442.9	442.7	442.6	442.6	442.4	442.6	442.6	442.7
155°	458.5	458.4	458.3	458.3	458.3	458.3	458.3	458.3	458.3	458.3	458.3
157.5°	471.9	471.8	471.7	471.7	472.0	472.2	472.3	472.5	472.3	472.2	472.0
160°	479.9	479.8	479.7	479.8	480.1	480.4	480.7	481.0	480.7	480.4	480.1
162.5°	487.5	487.5	487.5	487.6	487.8	488.0	488.2	488.4	488.2	488.0	487.8
165°	497.8	497.7	497.6	497.6	497.8	497.9	498.1	498.3	498.1	497.9	497.8
167.5°	505.2	505.2	505.2	505.3	505.7	506.0	506.4	506.8	506.4	506.0	505.7
170°	509.6	509.6	509.6	509.8	510.1	510.5	510.9	511.2	510.9	510.5	510.1
172.5°	512.9	512.9	512.9	513.1	513.4	513.8	514.2	514.5	514.2	513.8	513.4
175°	516.5	516.5	516.5	516.7	517.0	517.4	517.7	518.2	517.7	517.4	517.0
177.5°	518.5	518.6	518.6	518.8	519.2	519.4	519.7	520.0	519.7	519.4	519.2
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1609.3	1603.2	1598.2	1587.1	1580.9	1572.6	1565.9	1573.2	1565.4	1568.7	1563.7
5°	1559.2	1539.6	1525.8	1505.6	1488.3	1472.2	1460.4	1458.3	1452.8	1450.0	1441.6
7.5°	1498.8	1474.4	1450.5	1424.2	1401.9	1379.2	1364.8	1352.8	1344.9	1334.4	1327.4
10°	1463.2	1430.6	1402.8	1370.7	1342.9	1318.7	1299.1	1289.4	1280.4	1267.2	1262.3
12.5°	1419.2	1385.5	1351.6	1317.4	1290.7	1263.6	1246.9	1232.2	1225.9	1211.0	1209.5
15°	1366.5	1315.8	1282.5	1247.7	1210.9	1188.7	1174.7	1158.8	1151.8	1141.4	1133.7
17.5°	1303.8	1258.4	1216.7	1180.7	1149.1	1130.4	1113.1	1102.2	1090.2	1083.4	1070.9
20°	1258.1	1215.0	1173.3	1135.1	1110.8	1089.2	1075.3	1064.9	1052.4	1048.9	1036.4
22.5°	1219.8	1172.2	1132.2	1100.1	1073.5	1049.2	1034.2	1027.1	1018.5	1007.8	1005.2
25°	1157.4	1108.0	1074.0	1042.0	1018.3	996.1	985.7	976.6	968.3	960.6	957.9
27.5°	1103.4	1059.4	1018.9	990.0	969.4	949.1	940.0	929.0	922.8	916.7	909.2
30°	1065.6	1020.4	985.0	957.2	935.0	916.9	907.1	899.5	893.9	888.3	884.2
32.5°	1026.7	984.8	950.5	923.3	901.0	887.3	878.8	873.3	867.2	860.5	855.2
35°	975.3	929.3	896.0	872.4	855.0	844.5	834.8	829.9	823.0	823.0	817.4
37.5°	917.3	877.6	848.2	826.6	811.0	801.7	791.2	787.8	783.4	780.4	778.6
40°	882.8	846.0	818.1	796.6	779.9	772.2	763.9	758.4	755.5	752.1	750.7
42.5°	847.2	812.0	785.3	765.4	751.0	744.5	736.6	732.8	727.2	722.6	721.8
45°	793.1	759.0	734.8	718.7	706.2	698.6	693.8	685.4	682.6	677.1	676.4
47.5°	741.8	709.2	685.3	672.2	661.2	655.0	647.3	638.9	635.8	632.9	632.7
50°	703.5	673.6	651.3	638.8	628.4	619.4	611.7	606.1	604.0	604.0	605.5
52.5°	664.5	639.1	620.2	604.8	595.0	585.4	578.4	575.0	571.8	575.2	577.7
55°	607.5	581.8	567.9	553.3	543.6	532.4	529.0	527.6	525.5	531.1	533.9
57.5°	547.2	529.1	512.8	498.4	489.6	483.2	478.5	477.7	481.6	484.2	493.2
60°	508.8	487.9	473.4	462.3	451.8	447.6	446.3	444.9	447.6	455.3	467.1
62.5°	466.5	449.6	433.9	425.5	417.9	411.0	410.6	411.5	417.1	425.8	437.7
65°	404.6	389.9	379.5	369.8	363.6	359.4	360.8	363.6	369.8	381.7	394.8
67.5°	341.6	331.5	322.3	314.3	308.4	308.4	309.8	313.9	321.3	334.9	347.0
70°	301.0	289.9	282.2	278.7	273.8	271.1	275.3	282.2	288.5	301.0	311.4
72.5°	260.4	250.9	245.0	242.6	240.5	238.3	239.7	247.2	255.7	268.1	280.3
75°	200.2	196.7	192.5	189.8	187.7	189.0	190.5	197.4	204.4	217.6	231.5
77.5°	146.2	142.5	140.0	139.3	138.2	138.8	142.8	147.9	154.7	164.3	174.9
80°	110.5	109.1	107.7	107.0	107.0	107.7	113.3	116.8	123.1	132.1	140.4
82.5°	80.5	79.6	79.4	79.3	79.8	79.9	83.3	87.8	93.0	99.8	107.0
85°	42.4	41.0	43.1	43.8	42.4	44.5	45.8	48.7	50.7	54.2	57.7
87.5°	14.5	15.8	15.3	16.1	16.1	17.4	16.9	19.3	20.5	21.7	21.2
90°	3.3	3.9	4.5	5.2	5.8	6.5	7.0	7.4	7.8	8.3	8.6
92.5°	11.8	12.4	13.2	14.0	14.7	15.5	16.1	16.7	17.3	17.9	18.3
95°	27.0	27.6	28.4	29.3	30.2	31.1	31.7	32.4	33.0	33.6	34.1
97.5°	44.0	44.6	45.8	47.1	48.3	49.6	50.1	50.7	51.4	51.9	52.3
100°	56.6	57.2	58.3	59.5	60.6	61.8	62.7	63.5	64.3	65.1	65.5
102.5°	72.0	72.4	73.0	73.6	74.2	74.7	75.6	76.5	77.4	78.3	78.8
105°	94.0	94.4	95.0	95.5	96.0	96.6	97.1	97.6	98.2	98.7	99.2
107.5°	117.9	118.3	118.7	119.1	119.6	119.9	120.2	120.5	120.7	121.0	121.2
110°	134.4	134.7	135.0	135.3	135.5	135.8	136.1	136.3	136.6	136.9	137.0



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	150.3	150.6	151.0	151.3	151.6	151.9	152.1	152.2	152.3	152.5	152.5
115°	175.7	175.9	176.1	176.3	176.5	176.6	176.6	176.5	176.4	176.3	176.2
117.5°	199.7	199.9	200.1	200.2	200.4	200.5	200.6	200.7	200.7	200.8	200.7
120°	216.4	216.7	216.8	216.9	217.0	217.0	217.0	217.0	217.0	217.0	216.9
122.5°	232.0	232.3	232.5	232.7	233.0	233.2	233.1	233.1	233.0	232.9	232.7
125°	256.4	256.7	256.8	256.9	257.0	257.1	256.9	256.7	256.5	256.4	256.2
127.5°	279.7	279.9	280.0	280.1	280.2	280.4	280.3	280.2	280.1	280.0	279.8
130°	294.8	295.2	295.3	295.5	295.7	295.9	295.8	295.7	295.6	295.5	295.3
132.5°	310.5	310.9	310.9	310.8	310.8	310.7	310.6	310.5	310.4	310.3	310.2
135°	332.8	333.1	333.1	333.2	333.3	333.4	333.4	333.4	333.4	333.4	333.2
137.5°	354.4	354.7	354.9	355.1	355.3	355.5	355.6	355.7	355.8	356.0	355.8
140°	367.9	368.4	368.6	368.9	369.2	369.4	369.6	369.8	370.0	370.1	370.0
142.5°	381.6	381.9	382.3	382.6	383.0	383.3	383.4	383.5	383.6	383.7	383.5
145°	402.0	402.3	402.5	402.8	403.1	403.3	403.3	403.3	403.3	403.3	403.2
147.5°	420.3	420.4	420.6	420.9	421.1	421.3	421.5	421.7	422.0	422.1	422.0
150°	431.7	431.9	432.2	432.6	432.9	433.3	433.3	433.3	433.3	433.3	433.2
152.5°	442.9	443.0	443.2	443.4	443.4	443.6	443.8	444.1	444.3	444.4	444.4
155°	458.3	458.3	458.4	458.5	458.6	458.7	459.1	459.4	459.8	460.1	460.1
157.5°	471.7	471.7	471.8	471.9	472.0	472.1	472.4	472.8	473.1	473.5	473.4
160°	479.8	479.7	479.8	479.9	480.0	480.1	480.5	480.9	481.3	481.6	481.5
162.5°	487.6	487.5	487.5	487.5	487.6	487.6	488.0	488.5	488.8	489.3	489.3
165°	497.6	497.6	497.7	497.8	497.8	497.9	498.3	498.6	499.0	499.4	499.3
167.5°	505.3	505.2	505.2	505.2	505.2	505.2	505.7	506.2	506.8	507.3	507.3
170°	509.8	509.6	509.6	509.6	509.6	509.6	510.1	510.7	511.2	511.8	511.8
172.5°	513.1	512.9	512.9	512.9	512.9	512.9	513.4	514.0	514.5	515.1	515.1
175°	516.7	516.5	516.5	516.5	516.5	516.5	517.0	517.5	518.2	518.7	518.6
177.5°	518.8	518.6	518.6	518.5	518.4	518.4	518.8	519.2	519.7	520.1	520.0
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1560.4	1564.2	1560.9	1565.4	1560.9	1564.2	1560.4	1563.7	1568.7	1565.4	1573.2
5°	1438.2	1431.9	1436.1	1433.3	1436.1	1431.9	1438.2	1441.6	1450.0	1452.8	1458.3
7.5°	1325.3	1319.3	1312.5	1309.3	1312.5	1319.3	1325.3	1327.4	1334.4	1344.9	1352.8
10°	1254.6	1247.1	1246.3	1241.4	1246.3	1247.1	1254.6	1262.3	1267.2	1280.4	1289.4
12.5°	1202.9	1195.9	1187.9	1185.9	1187.9	1195.9	1202.9	1209.5	1211.0	1225.9	1232.2
15°	1129.5	1124.0	1119.1	1123.3	1119.1	1124.0	1129.5	1133.7	1141.4	1151.8	1158.8
17.5°	1068.5	1063.9	1063.1	1057.9	1063.1	1063.9	1068.5	1070.9	1083.4	1090.2	1102.2
20°	1030.2	1026.7	1028.1	1019.0	1028.1	1026.7	1030.2	1036.4	1048.9	1052.4	1064.9
22.5°	999.6	992.7	991.9	990.2	991.9	992.7	999.6	1005.2	1007.8	1018.5	1027.1
25°	951.6	948.2	944.7	948.2	944.7	948.2	951.6	957.9	960.6	968.3	976.6
27.5°	909.7	905.6	904.6	905.0	904.6	905.6	909.7	909.2	916.7	922.8	929.0
30°	884.2	877.3	877.9	877.3	877.9	877.3	884.2	884.2	888.3	893.9	899.5
32.5°	856.4	851.7	850.7	849.4	850.7	851.7	856.4	855.2	860.5	867.2	873.3
35°	815.4	815.4	811.9	811.9	811.9	815.4	815.4	817.4	823.0	823.0	829.9
37.5°	776.9	776.1	774.1	774.4	774.1	776.1	776.9	778.6	780.4	783.4	787.8
40°	748.0	747.3	745.1	741.0	745.1	747.3	748.0	750.7	752.1	755.5	758.4
42.5°	720.1	717.7	716.8	715.4	716.8	717.7	720.1	721.8	722.6	727.2	732.8
45°	676.4	676.4	674.9	674.2	674.9	676.4	676.4	676.4	677.1	682.6	685.4
47.5°	633.8	635.1	637.7	637.3	637.7	635.1	633.8	632.7	632.9	635.8	638.9
50°	608.2	608.9	611.0	611.7	611.0	608.9	608.2	605.5	604.0	604.0	606.1
52.5°	579.9	583.9	586.6	586.1	586.6	583.9	579.9	577.7	575.2	571.8	575.0
55°	540.1	544.9	549.8	550.5	549.8	544.9	540.1	533.9	531.1	525.5	527.6
57.5°	500.8	507.6	512.7	514.3	512.7	507.6	500.8	493.2	484.2	481.6	477.7
60°	474.0	483.1	489.4	492.1	489.4	483.1	474.0	467.1	455.3	447.6	444.9
62.5°	448.4	458.6	464.8	465.5	464.8	458.6	448.4	437.7	425.8	417.1	411.5
65°	406.6	417.1	422.6	426.8	422.6	417.1	406.6	394.8	381.7	369.8	363.6
67.5°	361.6	372.0	378.2	381.5	378.2	372.0	361.6	347.0	334.9	321.3	313.9
70°	328.8	339.2	347.6	350.4	347.6	339.2	328.8	311.4	301.0	288.5	282.2
72.5°	296.5	305.9	312.5	315.8	312.5	305.9	296.5	280.3	268.1	255.7	247.2
75°	240.5	253.0	259.3	262.8	259.3	253.0	240.5	231.5	217.6	204.4	197.4
77.5°	185.5	196.9	200.6	202.4	200.6	196.9	185.5	174.9	164.3	154.7	147.9
80°	148.7	155.7	160.6	161.2	160.6	155.7	148.7	140.4	132.1	123.1	116.8
82.5°	114.3	120.1	121.6	123.4	121.6	120.1	114.3	107.0	99.8	93.0	87.8
85°	62.6	65.4	66.1	65.4	66.1	65.4	62.6	57.7	54.2	50.7	48.7
87.5°	22.4	21.8	21.9	23.1	21.9	21.8	22.4	21.2	21.7	20.5	19.3
90°	8.9	9.2	9.5	9.7	9.5	9.2	8.9	8.6	8.3	7.8	7.4
92.5°	18.5	18.6	18.9	19.1	18.9	18.6	18.5	18.3	17.9	17.3	16.7
95°	34.2	34.4	34.6	34.8	34.6	34.4	34.2	34.1	33.6	33.0	32.4
97.5°	52.3	52.5	52.6	52.7	52.6	52.5	52.3	52.3	51.9	51.4	50.7
100°	65.7	65.9	66.1	66.3	66.1	65.9	65.7	65.5	65.1	64.3	63.5
102.5°	79.1	79.4	79.6	79.9	79.6	79.4	79.1	78.8	78.3	77.4	76.5
105°	99.4	99.7	100.0	100.2	100.0	99.7	99.4	99.2	98.7	98.2	97.6
107.5°	121.2	121.1	121.1	121.1	121.1	121.1	121.2	121.2	121.0	120.7	120.5
110°	136.9	136.8	136.7	136.6	136.7	136.8	136.9	137.0	136.9	136.6	136.3



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	152.3	152.1	151.9	151.8	151.9	152.1	152.3	152.5	152.5	152.3	152.2
115°	176.1	176.0	175.9	175.8	175.9	176.0	176.1	176.2	176.3	176.4	176.5
117.5°	200.4	200.0	199.6	199.2	199.6	200.0	200.4	200.7	200.8	200.7	200.7
120°	216.5	216.2	215.8	215.4	215.8	216.2	216.5	216.9	217.0	217.0	217.0
122.5°	232.5	232.2	231.8	231.6	231.8	232.2	232.5	232.7	232.9	233.0	233.1
125°	256.1	256.0	255.9	255.8	255.9	256.0	256.1	256.2	256.4	256.5	256.7
127.5°	279.6	279.5	279.3	279.1	279.3	279.5	279.6	279.8	280.0	280.1	280.2
130°	295.2	295.0	294.8	294.6	294.8	295.0	295.2	295.3	295.5	295.6	295.7
132.5°	310.0	309.7	309.4	309.2	309.4	309.7	310.0	310.2	310.3	310.4	310.5
135°	332.9	332.5	332.2	331.8	332.2	332.5	332.9	333.2	333.4	333.4	333.4
137.5°	355.3	354.9	354.4	353.9	354.4	354.9	355.3	355.8	356.0	355.8	355.7
140°	369.5	369.1	368.6	368.2	368.6	369.1	369.5	370.0	370.1	370.0	369.8
142.5°	383.1	382.6	382.2	381.7	382.2	382.6	383.1	383.5	383.7	383.6	383.5
145°	403.0	402.7	402.4	402.2	402.4	402.7	403.0	403.2	403.3	403.3	403.3
147.5°	421.3	420.7	420.1	419.5	420.1	420.7	421.3	422.0	422.1	422.0	421.7
150°	433.0	432.8	432.7	432.5	432.7	432.8	433.0	433.2	433.3	433.3	433.3
152.5°	444.1	443.8	443.4	443.1	443.4	443.8	444.1	444.4	444.4	444.3	444.1
155°	459.7	459.2	458.8	458.3	458.8	459.2	459.7	460.1	460.1	459.8	459.4
157.5°	472.8	472.2	471.6	471.0	471.6	472.2	472.8	473.4	473.5	473.1	472.8
160°	481.1	480.6	480.2	479.7	480.2	480.6	481.1	481.5	481.6	481.3	480.9
162.5°	488.7	488.2	487.7	487.1	487.7	488.2	488.7	489.3	489.3	488.8	488.5
165°	498.7	498.2	497.7	497.1	497.7	498.2	498.7	499.3	499.4	499.0	498.6
167.5°	506.7	506.1	505.6	505.1	505.6	506.1	506.7	507.3	507.3	506.8	506.2
170°	511.1	510.5	509.9	509.3	509.9	510.5	511.1	511.8	511.8	511.2	510.7
172.5°	514.4	513.9	513.4	512.8	513.4	513.9	514.4	515.1	515.1	514.5	514.0
175°	518.0	517.4	516.7	516.1	516.7	517.4	518.0	518.6	518.7	518.2	517.5
177.5°	519.6	519.1	518.5	518.1	518.5	519.1	519.6	520.0	520.1	519.7	519.2
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1565.9	1572.6	1580.9	1587.1	1598.2	1603.2	1609.3	1614.4	1623.2	1631.6	1641.6
5°	1460.4	1472.2	1488.3	1505.6	1525.8	1539.6	1559.2	1570.9	1594.6	1616.1	1637.0
7.5°	1364.8	1379.2	1401.9	1424.2	1450.5	1474.4	1498.8	1525.8	1555.9	1591.5	1621.0
10°	1299.1	1318.7	1342.9	1370.7	1402.8	1430.6	1463.2	1492.4	1529.2	1570.9	1609.9
12.5°	1246.9	1263.6	1290.7	1317.4	1351.6	1385.5	1419.2	1457.9	1500.8	1547.0	1596.0
15°	1174.7	1188.7	1210.9	1247.7	1282.5	1315.8	1366.5	1402.8	1457.0	1508.4	1567.4
17.5°	1113.1	1130.4	1149.1	1180.7	1216.7	1258.4	1303.8	1349.1	1401.3	1466.5	1533.1
20°	1075.3	1089.2	1110.8	1135.1	1173.3	1215.0	1258.1	1304.0	1368.0	1435.4	1507.0
22.5°	1034.2	1049.2	1073.5	1100.1	1132.2	1172.2	1219.8	1270.1	1336.9	1403.1	1480.9
25°	985.7	996.1	1018.3	1042.0	1074.0	1108.0	1157.4	1213.0	1279.0	1354.8	1434.0
27.5°	940.0	949.1	969.4	990.0	1018.9	1059.4	1103.4	1159.6	1221.8	1298.6	1386.4
30°	907.1	916.9	935.0	957.2	985.0	1020.4	1065.6	1118.5	1185.2	1260.3	1352.0
32.5°	878.8	887.3	901.0	923.3	950.5	984.8	1026.7	1080.6	1147.4	1223.5	1313.6
35°	834.8	844.5	855.0	872.4	896.0	929.3	975.3	1026.0	1089.9	1163.6	1246.3
37.5°	791.2	801.7	811.0	826.6	848.2	877.6	917.3	970.1	1028.0	1098.9	1178.3
40°	763.9	772.2	779.9	796.6	818.1	846.0	882.8	930.1	991.2	1057.3	1123.3
42.5°	736.6	744.5	751.0	765.4	785.3	812.0	847.2	893.3	950.1	1011.6	1069.9
45°	693.8	698.6	706.2	718.7	734.8	759.0	793.1	834.1	882.1	940.5	984.3
47.5°	647.3	655.0	661.2	672.2	685.3	709.2	741.8	776.7	820.2	863.6	894.5
50°	611.7	619.4	628.4	638.8	651.3	673.6	703.5	738.9	775.7	809.1	835.5
52.5°	578.4	585.4	595.0	604.8	620.2	639.1	664.5	696.1	732.4	756.3	778.3
55°	529.0	532.4	543.6	553.3	567.9	581.8	607.5	635.3	657.5	675.6	693.8
57.5°	478.5	483.2	489.6	498.4	512.8	529.1	547.2	571.8	584.9	594.1	608.2
60°	446.3	447.6	451.8	462.3	473.4	487.9	508.8	526.2	535.9	543.6	555.4
62.5°	410.6	411.0	417.9	425.5	433.9	449.6	466.5	480.6	488.7	492.4	503.6
65°	360.8	359.4	363.6	369.8	379.5	389.9	404.6	417.1	416.3	420.5	427.5
67.5°	309.8	308.4	308.4	314.3	322.3	331.5	341.6	348.8	348.9	354.5	358.0
70°	275.3	271.1	273.8	278.7	282.2	289.9	301.0	303.8	304.4	307.2	310.7
72.5°	239.7	238.3	240.5	242.6	245.0	250.9	260.4	262.1	262.2	263.9	269.6
75°	190.5	189.0	187.7	189.8	192.5	196.7	200.2	203.0	202.2	203.0	207.1
77.5°	142.8	138.8	138.2	139.3	140.0	142.5	146.2	145.8	146.5	146.4	151.1
80°	113.3	107.7	107.0	107.0	107.7	109.1	110.5	111.9	109.9	111.9	113.3
82.5°	83.3	79.9	79.8	79.3	79.4	79.6	80.5	81.3	80.9	81.9	82.8
85°	45.8	44.5	42.4	43.8	43.1	41.0	42.4	40.3	39.6	40.3	41.0
87.5°	16.9	17.4	16.1	16.1	15.3	15.8	14.5	13.8	13.2	13.6	15.1
90°	7.0	6.5	5.8	5.2	4.5	3.9	3.3	2.6	1.9	1.2	0.4
92.5°	16.1	15.5	14.7	14.0	13.2	12.4	11.8	11.3	10.8	10.3	9.8
95°	31.7	31.1	30.2	29.3	28.4	27.6	27.0	26.8	26.7	26.5	26.3
97.5°	50.1	49.6	48.3	47.1	45.8	44.6	44.0	43.9	43.8	43.7	43.6
100°	62.7	61.8	60.6	59.5	58.3	57.2	56.6	56.6	56.6	56.6	56.6
102.5°	75.6	74.7	74.2	73.6	73.0	72.4	72.0	71.6	71.2	70.8	70.4
105°	97.1	96.6	96.0	95.5	95.0	94.4	94.0	93.5	93.0	92.6	92.1
107.5°	120.2	119.9	119.6	119.1	118.7	118.3	117.9	117.4	117.0	116.5	116.1
110°	136.1	135.8	135.5	135.3	135.0	134.7	134.4	133.9	133.5	133.0	132.6



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	152.1	151.9	151.6	151.3	151.0	150.6	150.3	150.1	149.8	149.6	149.4
115°	176.6	176.6	176.5	176.3	176.1	175.9	175.7	175.3	175.0	174.5	174.2
117.5°	200.6	200.5	200.4	200.2	200.1	199.9	199.7	199.6	199.4	199.2	199.1
120°	217.0	217.0	217.0	216.9	216.8	216.7	216.4	216.0	215.5	215.1	214.6
122.5°	233.1	233.2	233.0	232.7	232.5	232.3	232.0	231.9	231.8	231.6	231.4
125°	256.9	257.1	257.0	256.9	256.8	256.7	256.4	255.8	255.3	254.8	254.2
127.5°	280.3	280.4	280.2	280.1	280.0	279.9	279.7	279.4	279.1	278.7	278.5
130°	295.8	295.9	295.7	295.5	295.3	295.2	294.8	294.4	293.9	293.5	293.0
132.5°	310.6	310.7	310.8	310.8	310.9	310.9	310.5	309.8	309.1	308.3	307.6
135°	333.4	333.4	333.3	333.2	333.1	333.1	332.8	332.3	331.7	331.2	330.6
137.5°	355.6	355.5	355.3	355.1	354.9	354.7	354.4	353.8	353.3	352.8	352.2
140°	369.6	369.4	369.2	368.9	368.6	368.4	367.9	367.5	367.0	366.6	366.1
142.5°	383.4	383.3	383.0	382.6	382.3	381.9	381.6	381.2	380.8	380.4	380.0
145°	403.3	403.3	403.1	402.8	402.5	402.3	402.0	401.6	401.3	400.9	400.6
147.5°	421.5	421.3	421.1	420.9	420.6	420.4	420.3	420.0	419.8	419.6	419.5
150°	433.3	433.3	432.9	432.6	432.2	431.9	431.7	431.8	431.9	431.9	432.0
152.5°	443.8	443.6	443.4	443.4	443.2	443.0	442.9	442.7	442.6	442.6	442.4
155°	459.1	458.7	458.6	458.5	458.4	458.3	458.3	458.3	458.3	458.3	458.3
157.5°	472.4	472.1	472.0	471.9	471.8	471.7	471.7	472.0	472.2	472.3	472.5
160°	480.5	480.1	480.0	479.9	479.8	479.7	479.8	480.1	480.4	480.7	481.0
162.5°	488.0	487.6	487.6	487.5	487.5	487.5	487.6	487.8	488.0	488.2	488.4
165°	498.3	497.9	497.8	497.8	497.7	497.6	497.6	497.8	497.9	498.1	498.3
167.5°	505.7	505.2	505.2	505.2	505.2	505.2	505.3	505.7	506.0	506.4	506.8
170°	510.1	509.6	509.6	509.6	509.6	509.6	509.8	510.1	510.5	510.9	511.2
172.5°	513.4	512.9	512.9	512.9	512.9	512.9	513.1	513.4	513.8	514.2	514.5
175°	517.0	516.5	516.5	516.5	516.5	516.5	516.7	517.0	517.4	517.7	518.2
177.5°	518.8	518.4	518.4	518.5	518.6	518.6	518.8	519.2	519.4	519.7	520.0
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1646.5	1654.4	1659.4	1668.8	1676.6	1681.1	1685.0	1688.3	1692.2	1695.5	1705.0
5°	1657.2	1675.2	1690.5	1714.1	1735.7	1752.4	1770.4	1786.5	1799.7	1818.4	1833.0
7.5°	1652.5	1684.6	1718.3	1754.9	1792.2	1827.0	1859.0	1888.9	1916.0	1948.8	1977.5
10°	1648.1	1691.9	1735.0	1784.3	1835.1	1878.2	1918.5	1959.5	1989.4	2031.1	2066.5
12.5°	1644.8	1696.3	1748.4	1807.7	1863.4	1924.3	1978.0	2007.9	2053.3	2086.7	2128.9
15°	1630.8	1698.9	1770.4	1837.2	1916.4	1972.7	2020.0	2078.4	2120.8	2163.2	2209.0
17.5°	1605.5	1682.7	1762.8	1850.2	1926.3	1986.7	2047.6	2104.0	2154.6	2211.4	2268.5
20°	1593.8	1671.1	1762.8	1852.4	1926.8	1990.1	2052.6	2114.5	2170.2	2243.1	2309.2
22.5°	1569.4	1662.7	1747.2	1834.7	1911.3	1980.0	2051.0	2121.2	2195.1	2277.6	2360.3
25°	1525.8	1620.3	1709.9	1796.2	1873.3	1959.5	2035.2	2129.1	2223.7	2332.8	2435.6
27.5°	1480.4	1570.9	1653.1	1736.3	1826.3	1924.0	2022.2	2128.7	2252.5	2390.2	2535.3
30°	1443.8	1529.2	1609.2	1694.7	1788.5	1898.4	2006.1	2132.6	2275.8	2430.8	2603.2
32.5°	1400.9	1479.7	1557.5	1648.0	1750.2	1866.1	1991.6	2130.4	2302.5	2478.6	2656.0
35°	1327.7	1393.7	1473.6	1570.2	1685.6	1818.4	1963.7	2127.7	2325.1	2527.4	2676.8
37.5°	1240.7	1302.3	1386.4	1492.4	1613.4	1755.9	1928.2	2122.9	2332.5	2493.8	2542.0
40°	1182.4	1239.4	1327.0	1436.8	1560.5	1711.4	1900.4	2106.2	2309.2	2412.0	2372.4
42.5°	1120.1	1179.9	1265.2	1373.9	1507.2	1671.3	1865.4	2071.2	2241.3	2280.2	2143.3
45°	1021.8	1083.7	1167.8	1277.6	1420.8	1598.7	1801.0	1988.0	2086.0	2015.8	1803.8
47.5°	930.5	988.5	1066.4	1179.7	1327.5	1511.5	1706.4	1855.6	1863.3	1695.8	1469.4
50°	868.2	921.7	1000.2	1113.6	1260.3	1446.5	1622.4	1739.8	1687.0	1497.3	1279.7
52.5°	807.0	859.4	936.8	1049.1	1194.1	1364.8	1528.4	1610.9	1511.3	1316.5	1130.7
55°	718.7	764.6	840.3	944.0	1081.6	1240.1	1379.1	1407.6	1278.3	1086.5	935.6
57.5°	632.6	675.4	744.3	839.7	965.5	1105.9	1214.6	1208.5	1071.8	907.2	787.6
60°	574.2	615.9	677.1	770.2	884.8	1005.8	1098.9	1076.7	941.2	799.4	698.6
62.5°	521.9	559.1	617.0	698.5	803.2	915.2	991.7	958.9	826.1	702.0	622.4
65°	444.9	476.2	525.5	595.0	681.9	774.4	833.4	791.0	677.7	581.1	517.2
67.5°	371.3	396.4	437.7	493.2	567.3	641.6	677.6	634.9	544.3	473.8	426.4
70°	324.6	346.9	378.8	428.2	492.8	555.4	582.5	544.3	466.5	405.9	371.8
72.5°	277.9	296.2	324.3	368.7	420.5	474.7	498.6	462.0	398.1	347.0	315.1
75°	214.8	227.3	246.7	277.3	318.3	361.5	374.7	342.7	301.7	263.4	242.6
77.5°	153.7	164.3	179.1	198.4	227.5	254.9	266.4	247.9	216.2	192.0	174.9
80°	118.2	123.8	136.3	152.2	175.1	192.5	200.2	188.4	166.1	148.0	134.8
82.5°	84.3	89.8	97.3	110.5	125.1	137.0	145.2	137.2	121.1	106.9	99.2
85°	41.0	44.5	48.7	54.2	65.4	72.3	71.6	66.7	60.5	54.9	50.7
87.5°	14.7	15.4	17.2	20.2	21.9	24.3	25.5	24.5	22.4	20.9	19.3
90°	1.2	1.9	2.6	3.3	3.9	4.5	5.2	5.8	6.5	7.0	7.4
92.5°	10.3	10.8	11.3	11.8	12.4	13.2	14.0	14.7	15.5	16.1	16.7
95°	26.5	26.7	26.8	27.0	27.6	28.4	29.3	30.2	31.1	31.7	32.4
97.5°	43.7	43.8	43.9	44.0	44.6	45.8	47.1	48.3	49.6	50.1	50.7
100°	56.6	56.6	56.6	56.6	57.2	58.3	59.5	60.6	61.8	62.7	63.5
102.5°	70.8	71.2	71.6	72.0	72.4	73.0	73.6	74.2	74.7	75.6	76.5
105°	92.6	93.0	93.5	94.0	94.4	95.0	95.5	96.0	96.6	97.1	97.6
107.5°	116.5	117.0	117.4	117.9	118.3	118.7	119.1	119.6	119.9	120.2	120.5
110°	133.0	133.5	133.9	134.4	134.7	135.0	135.3	135.5	135.8	136.1	136.3



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	149.6	149.8	150.1	150.3	150.6	151.0	151.3	151.6	151.9	152.1	152.2
115°	174.5	175.0	175.3	175.7	175.9	176.1	176.3	176.5	176.6	176.6	176.5
117.5°	199.2	199.4	199.6	199.7	199.9	200.1	200.2	200.4	200.5	200.6	200.7
120°	215.1	215.5	216.0	216.4	216.7	216.8	216.9	217.0	217.0	217.0	217.0
122.5°	231.6	231.8	231.9	232.0	232.3	232.5	232.7	233.0	233.2	233.1	233.1
125°	254.8	255.3	255.8	256.4	256.7	256.8	256.9	257.0	257.1	256.9	256.7
127.5°	278.7	279.1	279.4	279.7	279.9	280.0	280.1	280.2	280.4	280.3	280.2
130°	293.5	293.9	294.4	294.8	295.2	295.3	295.5	295.7	295.9	295.8	295.7
132.5°	308.3	309.1	309.8	310.5	310.9	310.9	310.8	310.8	310.7	310.6	310.5
135°	331.2	331.7	332.3	332.8	333.1	333.1	333.2	333.3	333.4	333.4	333.4
137.5°	352.8	353.3	353.8	354.4	354.7	354.9	355.1	355.3	355.5	355.6	355.7
140°	366.6	367.0	367.5	367.9	368.4	368.6	368.9	369.2	369.4	369.6	369.8
142.5°	380.4	380.8	381.2	381.6	381.9	382.3	382.6	383.0	383.3	383.4	383.5
145°	400.9	401.3	401.6	402.0	402.3	402.5	402.8	403.1	403.3	403.3	403.3
147.5°	419.6	419.8	420.0	420.3	420.4	420.6	420.9	421.1	421.3	421.5	421.7
150°	431.9	431.9	431.8	431.7	431.9	432.2	432.6	432.9	433.3	433.3	433.3
152.5°	442.6	442.6	442.7	442.9	443.0	443.2	443.4	443.4	443.6	443.8	444.1
155°	458.3	458.3	458.3	458.3	458.3	458.4	458.5	458.6	458.7	459.1	459.4
157.5°	472.3	472.2	472.0	471.7	471.7	471.8	471.9	472.0	472.1	472.4	472.8
160°	480.7	480.4	480.1	479.8	479.7	479.8	479.9	480.0	480.1	480.5	480.9
162.5°	488.2	488.0	487.8	487.6	487.5	487.5	487.5	487.6	487.6	488.0	488.5
165°	498.1	497.9	497.8	497.6	497.6	497.7	497.8	497.8	497.9	498.3	498.6
167.5°	506.4	506.0	505.7	505.3	505.2	505.2	505.2	505.2	505.2	505.7	506.2
170°	510.9	510.5	510.1	509.8	509.6	509.6	509.6	509.6	509.6	510.1	510.7
172.5°	514.2	513.8	513.4	513.1	512.9	512.9	512.9	512.9	512.9	513.4	514.0
175°	517.7	517.4	517.0	516.7	516.5	516.5	516.5	516.5	516.5	517.0	517.5
177.5°	519.7	519.4	519.2	518.8	518.6	518.6	518.5	518.4	518.4	518.8	519.2
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7	1637.7
2.5°	1712.7	1717.2	1726.6	1723.3	1727.8	1730.0	1732.2
5°	1851.1	1873.3	1883.0	1881.7	1896.2	1892.7	1889.3
7.5°	2007.3	2030.7	2043.8	2060.0	2069.5	2070.2	2078.4
10°	2095.8	2126.4	2138.9	2156.2	2167.4	2173.6	2172.9
12.5°	2163.6	2187.5	2215.5	2224.1	2239.1	2247.0	2244.1
15°	2245.2	2283.4	2312.7	2327.2	2346.0	2351.5	2359.2
17.5°	2318.1	2369.4	2403.4	2448.7	2465.8	2476.3	2470.1
20°	2373.1	2440.5	2474.6	2528.8	2558.7	2574.7	2569.1
22.5°	2438.2	2511.1	2574.1	2621.1	2666.6	2688.2	2692.6
25°	2549.7	2649.7	2742.2	2804.1	2860.3	2873.5	2902.8
27.5°	2674.2	2792.2	2891.1	2956.2	2995.3	3010.1	3019.2
30°	2752.6	2870.1	2944.5	2986.2	2998.7	2997.3	2995.9
32.5°	2791.0	2864.5	2878.9	2867.2	2838.6	2814.3	2789.1
35°	2736.7	2681.7	2599.7	2494.0	2416.2	2337.6	2330.0
37.5°	2461.2	2285.6	2149.1	1996.6	1908.6	1854.3	1816.8
40°	2202.1	2002.6	1837.2	1708.6	1618.9	1583.5	1548.7
42.5°	1920.7	1730.1	1583.6	1476.1	1408.7	1369.4	1341.8
45°	1560.5	1392.3	1277.6	1199.8	1146.2	1115.6	1098.2
47.5°	1278.7	1154.3	1056.9	1000.7	963.7	940.0	940.0
50°	1127.5	1008.6	944.0	899.5	867.5	848.7	852.2
52.5°	993.5	904.6	849.4	812.2	788.5	776.9	776.6
55°	830.6	766.7	730.6	703.5	687.4	674.2	677.1
57.5°	710.5	656.6	632.4	609.9	598.8	593.5	585.9
60°	636.1	594.3	573.5	555.4	544.3	540.1	532.4
62.5°	569.9	537.1	516.7	502.0	492.0	490.6	484.6
65°	478.9	453.9	435.9	428.9	418.5	415.7	415.7
67.5°	394.8	376.9	362.8	356.4	351.9	352.6	349.2
70°	342.0	327.4	318.3	311.4	307.9	308.6	305.9
72.5°	299.2	282.9	275.0	270.8	266.3	268.0	266.9
75°	226.6	218.3	214.1	209.9	207.1	205.7	204.4
77.5°	166.4	159.1	155.9	153.5	153.9	150.5	153.2
80°	128.6	122.3	120.3	116.8	116.1	116.1	115.4
82.5°	94.1	90.6	89.1	86.2	85.0	86.1	84.3
85°	48.7	45.8	45.2	45.2	43.8	42.4	45.8
87.5°	19.4	17.2	17.3	16.8	16.9	16.3	15.2
90°	7.8	8.3	8.6	8.9	9.2	9.5	9.7
92.5°	17.3	17.9	18.3	18.5	18.6	18.9	19.1
95°	33.0	33.6	34.1	34.2	34.4	34.6	34.8
97.5°	51.4	51.9	52.3	52.3	52.5	52.6	52.7
100°	64.3	65.1	65.5	65.7	65.9	66.1	66.3
102.5°	77.4	78.3	78.8	79.1	79.4	79.6	79.9
105°	98.2	98.7	99.2	99.4	99.7	100.0	100.2
107.5°	120.7	121.0	121.2	121.2	121.1	121.1	121.1
110°	136.6	136.9	137.0	136.9	136.8	136.7	136.6



TEST NUMBER: P333461-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	152.3	152.5	152.5	152.3	152.1	151.9	151.8
115°	176.4	176.3	176.2	176.1	176.0	175.9	175.8
117.5°	200.7	200.8	200.7	200.4	200.0	199.6	199.2
120°	217.0	217.0	216.9	216.5	216.2	215.8	215.4
122.5°	233.0	232.9	232.7	232.5	232.2	231.8	231.6
125°	256.5	256.4	256.2	256.1	256.0	255.9	255.8
127.5°	280.1	280.0	279.8	279.6	279.5	279.3	279.1
130°	295.6	295.5	295.3	295.2	295.0	294.8	294.6
132.5°	310.4	310.3	310.2	310.0	309.7	309.4	309.2
135°	333.4	333.4	333.2	332.9	332.5	332.2	331.8
137.5°	355.8	356.0	355.8	355.3	354.9	354.4	353.9
140°	370.0	370.1	370.0	369.5	369.1	368.6	368.2
142.5°	383.6	383.7	383.5	383.1	382.6	382.2	381.7
145°	403.3	403.3	403.2	403.0	402.7	402.4	402.2
147.5°	422.0	422.1	422.0	421.3	420.7	420.1	419.5
150°	433.3	433.3	433.2	433.0	432.8	432.7	432.5
152.5°	444.3	444.4	444.4	444.1	443.8	443.4	443.1
155°	459.8	460.1	460.1	459.7	459.2	458.8	458.3
157.5°	473.1	473.5	473.4	472.8	472.2	471.6	471.0
160°	481.3	481.6	481.5	481.1	480.6	480.2	479.7
162.5°	488.8	489.3	489.3	488.7	488.2	487.7	487.1
165°	499.0	499.4	499.3	498.7	498.2	497.7	497.1
167.5°	506.8	507.3	507.3	506.7	506.1	505.6	505.1
170°	511.2	511.8	511.8	511.1	510.5	509.9	509.3
172.5°	514.5	515.1	515.1	514.4	513.9	513.4	512.8
175°	518.2	518.7	518.6	518.0	517.4	516.7	516.1
177.5°	519.7	520.1	520.0	519.6	519.1	518.5	518.1
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3

(END OF REPORT)