

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333465-940

Luminaire Tested: **S125DIW-S1270D470U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333465-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S1270D470U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6023.2 lumens
Efficiency: N/A
Efficacy: 114.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 52.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333465-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

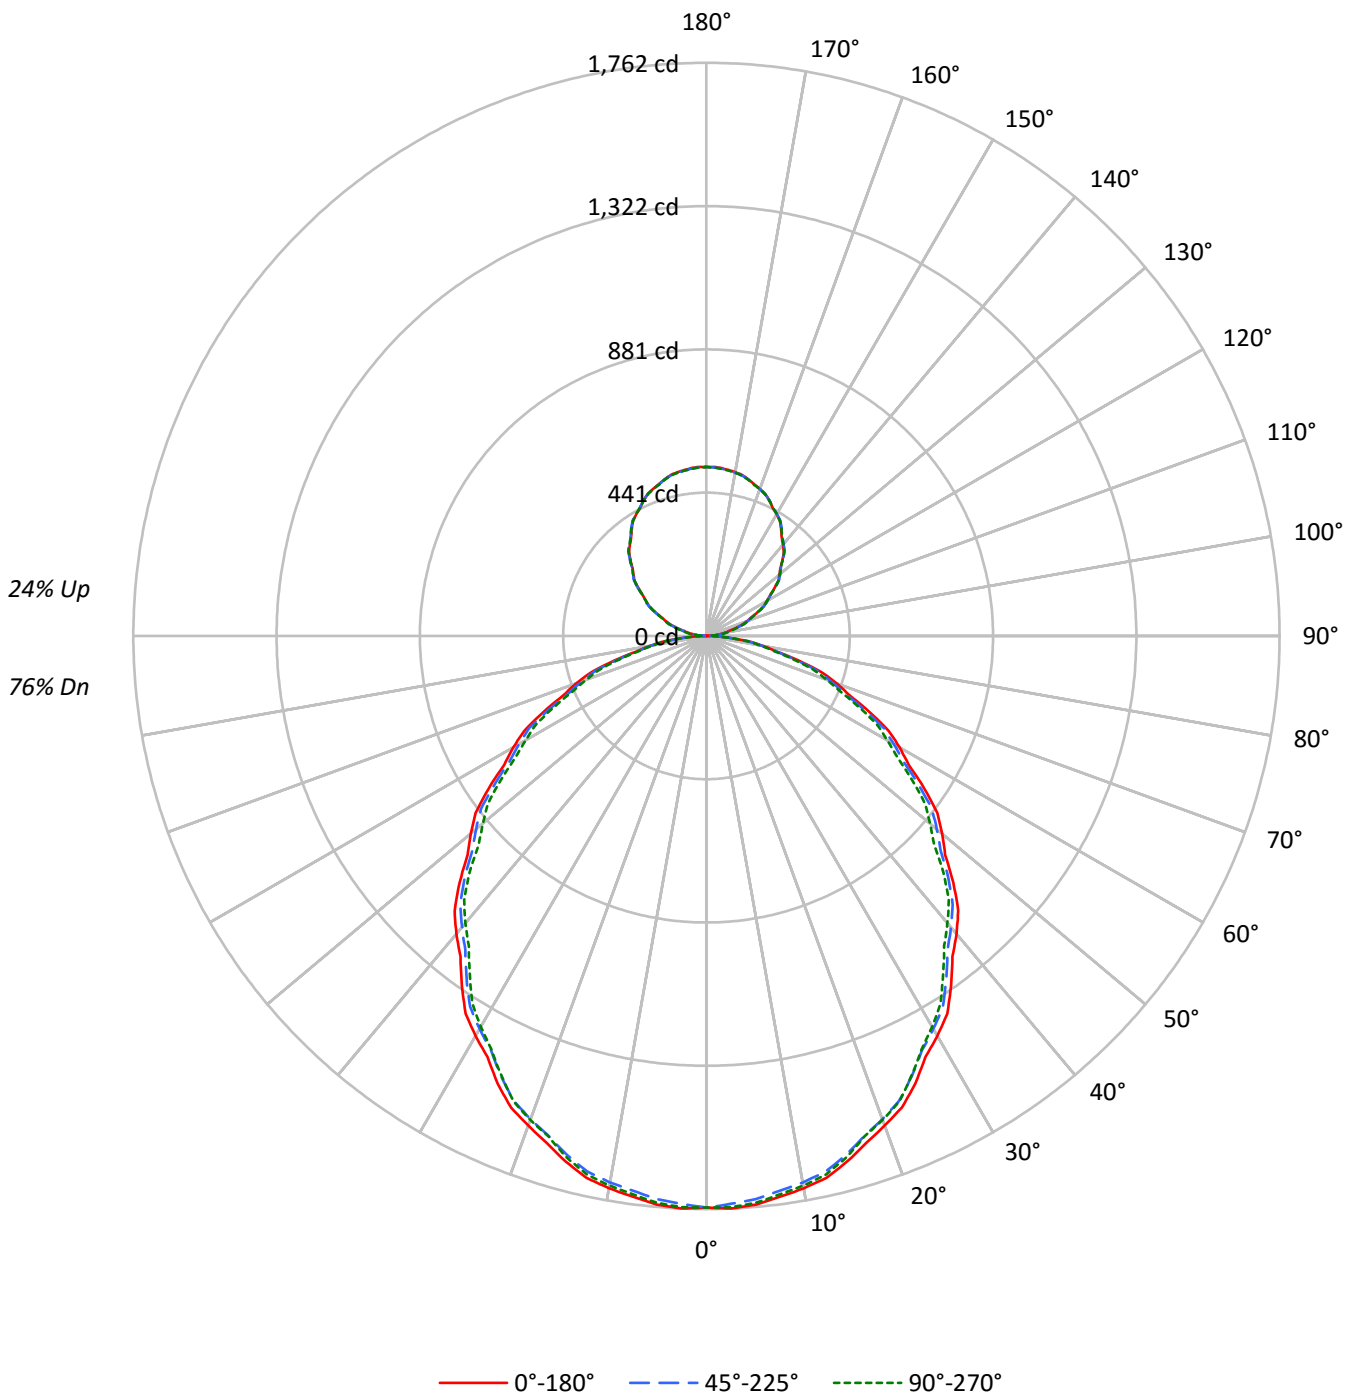



TEST NUMBER: P333465-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	98	98	98	88	88	88	80	80	80	76
1	104	99	95	91	98	94	91	87	86	83	80	78	76	74	71	69	67	64
2	94	86	80	74	89	82	77	72	75	71	67	68	65	61	62	59	57	53
3	86	76	68	62	82	73	66	60	66	61	56	60	56	52	55	51	48	45
4	79	67	59	53	75	64	57	51	59	53	48	54	49	45	49	45	42	39
5	72	60	52	45	69	58	50	44	53	46	41	48	43	39	44	40	36	34
6	67	54	46	40	63	52	44	38	48	41	36	44	38	34	40	36	32	29
7	62	49	41	35	59	47	39	34	43	37	32	40	34	30	37	32	28	26
8	58	45	37	31	55	43	35	30	40	33	29	37	31	27	34	29	26	23
9	54	41	33	28	51	39	32	27	37	30	26	34	28	24	31	27	23	21
10	50	38	30	25	48	36	29	25	34	28	23	31	26	22	29	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11349	11349	11349
5°	11374	11267	11339
10°	11305	11187	11252
15°	11183	11053	11099
20°	11008	10864	10883
25°	10819	10641	10630
30°	10586	10399	10347
35°	10336	10139	9996
40°	10080	9857	9716
45°	9803	9600	9409
50°	9499	9289	9010
55°	9205	8939	8688
60°	8853	8584	8280
65°	8436	8159	7882
70°	8033	7666	7404
75°	7321	7079	6832
80°	6512	6412	6259
85°	5669	5765	5461



TEST NUMBER: P333465-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	165.7	2.8
10°-20°	468.1	7.8
20°-30°	691.1	11.5
30°-40°	806.4	13.4
40°-50°	809.9	13.4
50°-60°	710.9	11.8
60°-70°	529.7	8.8
70°-80°	302.9	5.0
80°-90°	89.3	1.5
90°-100°	34.8	0.6
100°-110°	102.7	1.7
110°-120°	174.0	2.9
120°-130°	229.0	3.8
130°-140°	256.6	4.3
140°-150°	251.5	4.2
150°-160°	211.2	3.5
160°-170°	140.4	2.3
170°-180°	49.1	0.8
0°-30°	1324.8	22.0
0°-40°	2131.2	35.4
0°-60°	3652.1	60.6
0°-90°	4574.0	75.9
90°-120°	311.5	5.2
90°-150°	1048.5	17.4
90°-180°	1449.0	24.1
0°-180°	6023.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1757	1757	1757	1757	1757	
5°	1754	1751	1738	1750	1749	166
15°	1672	1668	1653	1660	1660	471
25°	1518	1511	1493	1496	1492	698
35°	1311	1305	1286	1279	1268	820
45°	1073	1067	1051	1035	1030	827
55°	818	812	794	781	772	730
65°	552	548	534	522	516	548
75°	293	290	284	279	274	313
85°	76	78	78	76	74	85
90°	0	4	6	8	10	6
95°	26	27	31	34	35	28
105°	92	94	97	99	100	98
115°	174	176	177	176	176	172
125°	254	257	257	256	256	228
135°	331	333	333	333	332	255
145°	401	402	403	403	402	250
155°	458	458	459	460	458	211
165°	498	498	498	499	497	141
175°	518	517	516	519	516	49
180°	519	519	519	519	519	



TEST NUMBER: P333465-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3
2.5°	1761.8	1761.0	1760.3	1759.5	1758.8	1757.2	1754.7	1752.2	1749.8	1747.3	1749.8
5°	1754.5	1753.9	1753.3	1752.7	1752.0	1750.2	1747.1	1744.0	1741.0	1737.9	1740.6
7.5°	1738.4	1737.8	1737.1	1736.5	1735.9	1733.9	1730.5	1727.2	1723.8	1720.4	1723.1
10°	1723.9	1723.3	1722.7	1722.1	1721.4	1719.5	1716.1	1712.7	1709.2	1705.8	1708.3
12.5°	1706.1	1705.0	1704.0	1702.8	1701.7	1699.6	1696.4	1693.3	1690.1	1686.9	1689.0
15°	1672.5	1671.6	1670.6	1669.7	1668.8	1666.6	1663.2	1659.8	1656.4	1653.1	1654.6
17.5°	1633.9	1632.5	1631.1	1629.8	1628.4	1625.9	1622.5	1618.9	1615.4	1611.9	1613.8
20°	1601.6	1601.0	1600.4	1599.7	1599.1	1596.8	1592.8	1588.8	1584.7	1580.7	1582.9
22.5°	1569.3	1568.3	1567.1	1566.0	1564.9	1562.5	1558.7	1555.0	1551.1	1547.4	1548.8
25°	1518.2	1516.6	1515.1	1513.6	1512.0	1509.2	1505.2	1501.2	1497.2	1493.2	1493.8
27.5°	1458.4	1457.5	1456.5	1455.6	1454.7	1452.2	1448.0	1443.9	1439.8	1435.6	1435.7
30°	1419.5	1418.5	1417.6	1416.7	1415.8	1413.0	1408.4	1403.7	1399.1	1394.5	1393.8
32.5°	1377.2	1375.8	1374.4	1373.0	1371.5	1368.8	1364.6	1360.5	1356.3	1352.2	1351.1
35°	1311.0	1309.8	1308.6	1307.3	1306.1	1303.3	1299.0	1294.7	1290.3	1286.0	1284.5
37.5°	1242.3	1240.8	1239.3	1237.7	1236.2	1233.3	1229.3	1225.2	1221.1	1217.1	1214.8
40°	1195.6	1194.1	1192.6	1191.0	1189.5	1186.5	1182.2	1177.9	1173.6	1169.2	1166.4
42.5°	1145.6	1144.3	1143.0	1141.7	1140.4	1137.6	1133.3	1128.9	1124.6	1120.3	1117.8
45°	1073.3	1072.1	1070.9	1069.6	1068.4	1065.9	1062.2	1058.5	1054.8	1051.1	1047.3
47.5°	995.4	995.5	995.6	995.6	995.7	993.5	989.1	984.6	980.2	975.7	972.0
50°	945.4	944.5	943.5	942.6	941.6	939.3	935.7	931.9	928.3	924.5	920.5
52.5°	894.2	893.6	892.9	892.2	891.5	889.2	885.2	881.3	877.4	873.3	869.9
55°	817.5	816.5	815.6	814.7	813.8	811.2	806.8	802.5	798.2	793.9	791.0
57.5°	736.6	736.1	735.6	735.1	734.6	732.5	728.9	725.2	721.6	717.9	714.3
60°	685.4	684.2	683.0	681.7	680.5	678.1	674.8	671.4	668.0	664.6	661.5
62.5°	632.0	631.1	630.1	629.0	628.0	626.2	623.2	620.3	617.4	614.5	611.2
65°	552.0	551.3	550.7	550.1	549.5	547.4	544.0	540.6	537.3	533.9	531.1
67.5°	474.4	473.1	471.8	470.5	469.2	467.3	464.8	462.2	459.7	457.1	454.8
70°	425.4	423.9	422.3	420.8	419.3	417.1	414.3	411.5	408.8	406.0	404.1
72.5°	372.0	371.0	370.0	368.9	367.8	366.4	364.6	362.8	361.1	359.3	357.1
75°	293.4	292.7	292.1	291.5	290.9	289.8	288.3	286.7	285.2	283.7	282.7
77.5°	220.8	220.5	220.3	220.1	219.8	219.3	218.4	217.5	216.6	215.8	215.3
80°	175.1	175.1	175.1	175.1	175.1	174.9	174.2	173.6	173.0	172.4	172.1
82.5°	135.1	134.6	134.1	133.7	133.1	132.9	132.7	132.6	132.5	132.3	131.8
85°	76.5	76.8	77.0	77.4	77.7	77.8	77.8	77.8	77.8	77.8	77.6
87.5°	30.1	30.2	30.4	30.6	30.7	30.7	30.6	30.5	30.3	30.2	30.3
90°	0.4	1.2	1.9	2.6	3.3	3.9	4.5	5.2	5.8	6.5	7.0
92.5°	9.8	10.3	10.8	11.3	11.8	12.4	13.2	14.0	14.7	15.5	16.1
95°	26.3	26.5	26.7	26.8	27.0	27.6	28.4	29.3	30.2	31.1	31.7
97.5°	43.6	43.7	43.8	43.9	44.0	44.6	45.8	47.1	48.3	49.6	50.1
100°	56.6	56.6	56.6	56.6	56.6	57.2	58.3	59.5	60.6	61.8	62.7
102.5°	70.4	70.8	71.2	71.6	72.0	72.4	73.0	73.6	74.2	74.7	75.6
105°	92.1	92.6	93.0	93.5	94.0	94.4	95.0	95.5	96.0	96.6	97.1
107.5°	116.1	116.5	117.0	117.4	117.9	118.3	118.7	119.1	119.6	119.9	120.2
110°	132.6	133.0	133.5	133.9	134.4	134.7	135.0	135.3	135.5	135.8	136.1



TEST NUMBER: P333465-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	149.4	149.6	149.8	150.1	150.3	150.6	151.0	151.3	151.6	151.9	152.1
115°	174.2	174.5	175.0	175.3	175.7	175.9	176.1	176.3	176.5	176.6	176.6
117.5°	199.1	199.2	199.4	199.6	199.7	199.9	200.1	200.2	200.4	200.5	200.6
120°	214.6	215.1	215.5	216.0	216.4	216.7	216.8	216.9	217.0	217.0	217.0
122.5°	231.4	231.6	231.8	231.9	232.0	232.3	232.5	232.7	233.0	233.2	233.1
125°	254.2	254.8	255.3	255.8	256.4	256.7	256.8	256.9	257.0	257.1	256.9
127.5°	278.5	278.7	279.1	279.4	279.7	279.9	280.0	280.1	280.2	280.4	280.3
130°	293.0	293.5	293.9	294.4	294.8	295.2	295.3	295.5	295.7	295.9	295.8
132.5°	307.6	308.3	309.1	309.8	310.5	310.9	310.9	310.8	310.8	310.7	310.6
135°	330.6	331.2	331.7	332.3	332.8	333.1	333.1	333.2	333.3	333.4	333.4
137.5°	352.2	352.8	353.3	353.8	354.4	354.7	354.9	355.1	355.3	355.5	355.6
140°	366.1	366.6	367.0	367.5	367.9	368.4	368.6	368.9	369.2	369.4	369.6
142.5°	380.0	380.4	380.8	381.2	381.6	381.9	382.3	382.6	383.0	383.3	383.4
145°	400.6	400.9	401.3	401.6	402.0	402.3	402.5	402.8	403.1	403.3	403.3
147.5°	419.5	419.6	419.8	420.0	420.3	420.4	420.6	420.9	421.1	421.3	421.5
150°	432.0	431.9	431.9	431.8	431.7	431.9	432.2	432.6	432.9	433.3	433.3
152.5°	442.4	442.6	442.6	442.7	442.9	443.0	443.2	443.4	443.4	443.6	443.8
155°	458.3	458.3	458.3	458.3	458.3	458.3	458.4	458.5	458.6	458.7	459.1
157.5°	472.5	472.3	472.2	472.0	471.7	471.7	471.8	471.9	472.0	472.1	472.4
160°	481.0	480.7	480.4	480.1	479.8	479.7	479.8	479.9	480.0	480.1	480.5
162.5°	488.4	488.2	488.0	487.8	487.6	487.5	487.5	487.5	487.6	487.6	488.0
165°	498.3	498.1	497.9	497.8	497.6	497.6	497.7	497.8	497.8	497.9	498.3
167.5°	506.8	506.4	506.0	505.7	505.3	505.2	505.2	505.2	505.2	505.2	505.7
170°	511.2	510.9	510.5	510.1	509.8	509.6	509.6	509.6	509.6	509.6	510.1
172.5°	514.5	514.2	513.8	513.4	513.1	512.9	512.9	512.9	512.9	512.9	513.4
175°	518.2	517.7	517.4	517.0	516.7	516.5	516.5	516.5	516.5	516.5	517.0
177.5°	520.0	519.7	519.4	519.2	518.8	518.6	518.6	518.5	518.4	518.4	518.8
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3



TEST NUMBER: P333465-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3	1757.3
2.5°	1752.2	1754.7	1757.2	1758.3	1758.1	1757.8	1757.6	1757.3
5°	1743.4	1746.2	1749.0	1750.2	1749.9	1749.6	1749.3	1749.0
7.5°	1725.7	1728.5	1731.2	1732.4	1732.1	1731.8	1731.5	1731.2
10°	1710.8	1713.3	1715.7	1716.8	1716.5	1716.2	1715.9	1715.7
12.5°	1691.0	1692.9	1694.9	1695.9	1695.8	1695.7	1695.7	1695.6
15°	1656.2	1657.7	1659.2	1660.0	1660.0	1660.0	1660.0	1660.0
17.5°	1615.7	1617.7	1619.5	1619.7	1618.2	1616.7	1615.1	1613.6
20°	1585.1	1587.2	1589.4	1589.7	1588.1	1586.6	1585.1	1583.5
22.5°	1550.2	1551.7	1553.1	1553.3	1552.2	1551.1	1550.1	1549.1
25°	1494.4	1495.0	1495.7	1495.5	1494.6	1493.6	1492.7	1491.7
27.5°	1435.8	1436.0	1436.1	1435.7	1434.8	1433.9	1432.9	1432.0
30°	1393.2	1392.6	1392.0	1391.2	1390.3	1389.4	1388.4	1387.5
32.5°	1350.0	1348.9	1347.7	1346.3	1344.7	1343.0	1341.3	1339.7
35°	1282.9	1281.4	1279.9	1277.8	1275.3	1272.9	1270.4	1267.9
37.5°	1212.5	1210.2	1207.9	1206.0	1204.6	1203.2	1201.8	1200.3
40°	1163.7	1160.9	1158.1	1156.3	1155.3	1154.4	1153.4	1152.5
42.5°	1115.3	1112.7	1110.2	1108.2	1106.8	1105.4	1103.9	1102.5
45°	1043.7	1039.9	1036.3	1033.9	1033.0	1032.1	1031.1	1030.2
47.5°	968.1	964.4	960.6	957.7	955.5	953.3	951.2	949.0
50°	916.5	912.5	908.5	905.4	903.2	901.1	898.9	896.7
52.5°	866.3	862.8	859.3	856.3	853.9	851.5	849.1	846.7
55°	788.3	785.5	782.7	780.2	778.1	776.0	773.7	771.6
57.5°	710.8	707.2	703.6	701.2	700.1	698.9	697.7	696.5
60°	658.4	655.3	652.2	649.6	647.4	645.2	643.1	641.0
62.5°	607.8	604.5	601.2	598.7	597.0	595.3	593.6	592.0
65°	528.3	525.5	522.7	520.8	519.5	518.3	517.0	515.8
67.5°	452.5	450.0	447.7	446.2	445.4	444.7	444.0	443.2
70°	402.3	400.4	398.5	397.0	395.7	394.5	393.3	392.1
72.5°	355.1	352.9	350.9	349.2	347.9	346.7	345.4	344.2
75°	281.8	280.8	279.9	278.8	277.6	276.3	275.1	273.8
77.5°	214.6	214.1	213.6	212.9	212.0	211.1	210.3	209.4
80°	171.7	171.5	171.1	170.7	170.0	169.4	168.8	168.3
82.5°	131.3	130.7	130.1	129.8	129.7	129.6	129.4	129.3
85°	77.2	77.0	76.6	76.2	75.5	74.9	74.3	73.7
87.5°	30.4	30.5	30.6	30.4	30.0	29.5	29.1	28.6
90°	7.4	7.8	8.3	8.6	8.9	9.2	9.5	9.7
92.5°	16.7	17.3	17.9	18.3	18.5	18.6	18.9	19.1
95°	32.4	33.0	33.6	34.1	34.2	34.4	34.6	34.8
97.5°	50.7	51.4	51.9	52.3	52.3	52.5	52.6	52.7
100°	63.5	64.3	65.1	65.5	65.7	65.9	66.1	66.3
102.5°	76.5	77.4	78.3	78.8	79.1	79.4	79.6	79.9
105°	97.6	98.2	98.7	99.2	99.4	99.7	100.0	100.2
107.5°	120.5	120.7	121.0	121.2	121.2	121.1	121.1	121.1
110°	136.3	136.6	136.9	137.0	136.9	136.8	136.7	136.6



TEST NUMBER: P333465-940

CATALOG NUMBER: S125DIW-S1270D470U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	152.2	152.3	152.5	152.5	152.3	152.1	151.9	151.8
115°	176.5	176.4	176.3	176.2	176.1	176.0	175.9	175.8
117.5°	200.7	200.7	200.8	200.7	200.4	200.0	199.6	199.2
120°	217.0	217.0	217.0	216.9	216.5	216.2	215.8	215.4
122.5°	233.1	233.0	232.9	232.7	232.5	232.2	231.8	231.6
125°	256.7	256.5	256.4	256.2	256.1	256.0	255.9	255.8
127.5°	280.2	280.1	280.0	279.8	279.6	279.5	279.3	279.1
130°	295.7	295.6	295.5	295.3	295.2	295.0	294.8	294.6
132.5°	310.5	310.4	310.3	310.2	310.0	309.7	309.4	309.2
135°	333.4	333.4	333.4	333.2	332.9	332.5	332.2	331.8
137.5°	355.7	355.8	356.0	355.8	355.3	354.9	354.4	353.9
140°	369.8	370.0	370.1	370.0	369.5	369.1	368.6	368.2
142.5°	383.5	383.6	383.7	383.5	383.1	382.6	382.2	381.7
145°	403.3	403.3	403.3	403.2	403.0	402.7	402.4	402.2
147.5°	421.7	422.0	422.1	422.0	421.3	420.7	420.1	419.5
150°	433.3	433.3	433.3	433.2	433.0	432.8	432.7	432.5
152.5°	444.1	444.3	444.4	444.4	444.1	443.8	443.4	443.1
155°	459.4	459.8	460.1	460.1	459.7	459.2	458.8	458.3
157.5°	472.8	473.1	473.5	473.4	472.8	472.2	471.6	471.0
160°	480.9	481.3	481.6	481.5	481.1	480.6	480.2	479.7
162.5°	488.5	488.8	489.3	489.3	488.7	488.2	487.7	487.1
165°	498.6	499.0	499.4	499.3	498.7	498.2	497.7	497.1
167.5°	506.2	506.8	507.3	507.3	506.7	506.1	505.6	505.1
170°	510.7	511.2	511.8	511.8	511.1	510.5	509.9	509.3
172.5°	514.0	514.5	515.1	515.1	514.4	513.9	513.4	512.8
175°	517.5	518.2	518.7	518.6	518.0	517.4	516.7	516.1
177.5°	519.2	519.7	520.1	520.0	519.6	519.1	518.5	518.1
180°	519.3	519.3	519.3	519.3	519.3	519.3	519.3	519.3

(END OF REPORT)