

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333369-940

Luminaire Tested: **S125DIW-S375D1560U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333369-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S375D1560U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6181.5 lumens
Efficiency: N/A
Efficacy: 115.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 53.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333369-940

CATALOG NUMBER: S125DIW-S375D1560U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

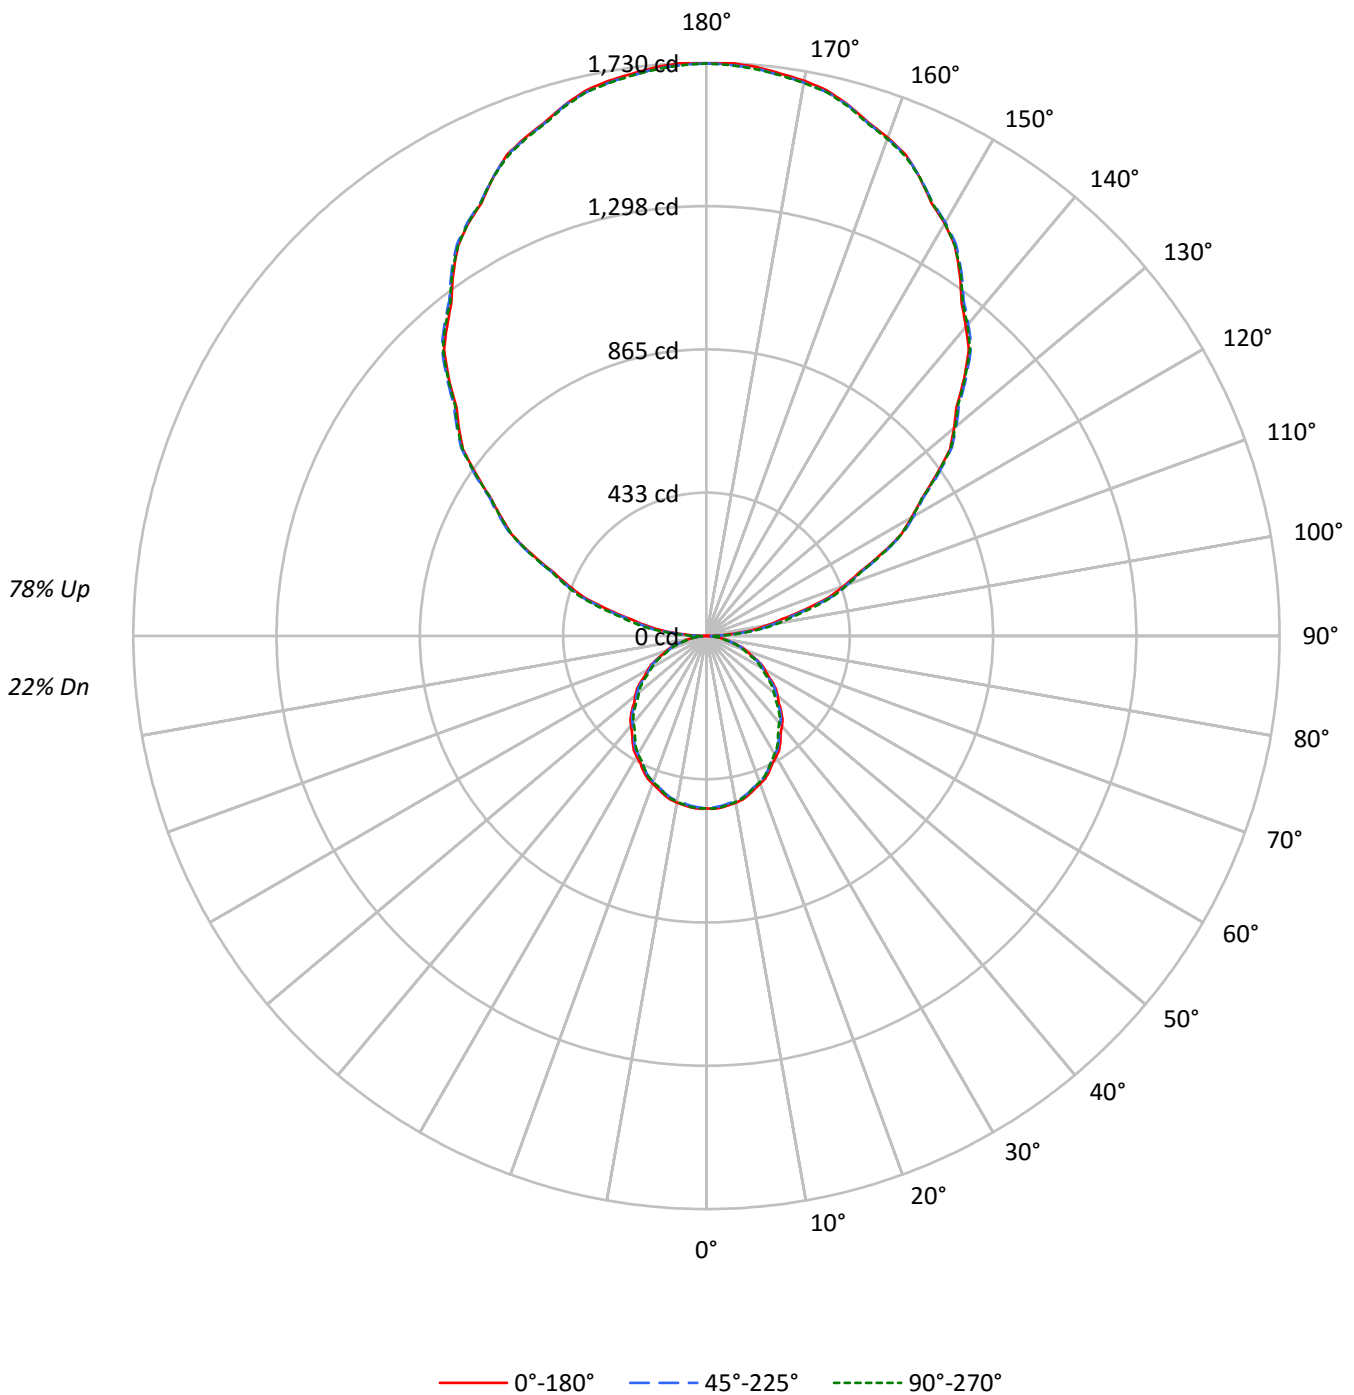



TEST NUMBER: P333369-940

CATALOG NUMBER: S125DIW-S375D1560U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	100	100	100	100	89	89	89	89	68	68	68	48	48	48	30	30	30	22				
1	91	87	84	80	81	78	74	72	59	57	55	42	41	40	27	26	26	18				
2	83	76	70	65	74	68	63	59	52	48	46	37	35	33	23	22	21	15				
3	76	67	60	54	67	59	54	49	46	42	38	33	30	28	21	19	18	13				
4	69	59	51	46	61	53	46	41	40	36	32	29	26	24	19	17	16	11				
5	63	52	45	39	56	47	40	35	36	31	28	26	23	21	17	15	14	10				
6	58	47	39	34	51	42	35	30	32	28	24	23	20	18	15	13	12	9				
7	54	42	34	29	47	38	31	26	29	24	21	21	18	16	14	12	11	8				
8	50	38	31	26	44	34	28	23	26	22	19	19	16	14	13	11	9	7				
9	46	35	27	23	41	31	25	20	24	20	16	18	15	12	12	10	8	6				
10	43	31	25	20	38	28	22	18	22	18	15	16	13	11	11	9	8	6				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3364	3364	3364
5°	3371	3339	3361
10°	3351	3316	3335
15°	3315	3276	3290
20°	3263	3221	3226
25°	3207	3154	3151
30°	3138	3082	3067
35°	3064	3005	2964
40°	2989	2922	2880
45°	2906	2846	2789
50°	2816	2753	2671
55°	2728	2649	2575
60°	2623	2545	2454
65°	2500	2419	2337
70°	2381	2274	2194
75°	2168	2099	2024
80°	1930	1901	1852
85°	1675	1712	1615



TEST NUMBER: P333369-940

CATALOG NUMBER: S125DIW-S375D1560U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.1	0.8
10°-20°	138.7	2.2
20°-30°	204.9	3.3
30°-40°	239.0	3.9
40°-50°	240.1	3.9
50°-60°	210.7	3.4
60°-70°	157.0	2.5
70°-80°	89.8	1.5
80°-90°	29.9	0.5
90°-100°	115.7	1.9
100°-110°	341.8	5.5
110°-120°	578.9	9.4
120°-130°	761.9	12.3
130°-140°	853.7	13.8
140°-150°	836.7	13.5
150°-160°	702.8	11.4
160°-170°	467.2	7.6
170°-180°	163.5	2.6
0°-30°	392.7	6.4
0°-40°	631.7	10.2
0°-60°	1082.6	17.5
0°-90°	1359.3	22.0
90°-120°	1036.5	16.8
90°-150°	3488.8	56.4
90°-180°	4822.0	78.0
0°-180°	6181.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	521	521	521	521	521	
5°	520	519	515	519	518	49
15°	496	494	490	492	492	140
25°	450	448	443	443	442	207
35°	389	387	381	379	376	243
45°	318	316	312	307	305	245
55°	242	241	235	232	229	216
65°	164	163	158	155	153	162
75°	87	86	84	83	81	93
85°	23	23	23	23	22	25
90°	1	12	22	28	32	6
95°	87	91	104	113	116	93
105°	307	313	322	329	334	327
115°	580	585	588	586	585	573
125°	846	854	855	853	851	757
135°	1100	1108	1110	1109	1104	848
145°	1333	1338	1342	1342	1338	833
155°	1525	1525	1526	1531	1525	702
165°	1658	1656	1657	1661	1654	468
175°	1724	1719	1719	1726	1717	164
180°	1728	1728	1728	1728	1728	



TEST NUMBER: P333369-940

CATALOG NUMBER: S125DIW-S375D1560U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9
2.5°	522.2	522.0	521.8	521.6	521.4	520.8	520.1	519.4	518.7	517.9	518.7
5°	520.0	519.9	519.7	519.5	519.3	518.8	517.9	517.0	516.0	515.1	515.9
7.5°	515.3	515.1	515.0	514.8	514.6	514.0	513.0	511.9	511.0	510.0	510.8
10°	511.0	510.9	510.7	510.5	510.3	509.7	508.7	507.7	506.7	505.7	506.4
12.5°	505.8	505.4	505.1	504.8	504.4	503.8	502.8	501.9	501.0	500.1	500.6
15°	495.8	495.5	495.3	495.0	494.6	494.0	493.0	492.0	491.0	490.0	490.4
17.5°	484.3	483.9	483.5	483.1	482.7	482.0	480.9	479.9	478.8	477.8	478.4
20°	474.7	474.6	474.4	474.2	474.0	473.3	472.2	470.9	469.8	468.6	469.2
22.5°	465.2	464.8	464.5	464.2	463.9	463.2	462.0	460.9	459.8	458.7	459.1
25°	450.0	449.6	449.1	448.6	448.2	447.4	446.2	445.0	443.8	442.6	442.8
27.5°	432.3	432.0	431.8	431.5	431.2	430.4	429.3	428.0	426.8	425.5	425.6
30°	420.8	420.5	420.2	419.9	419.6	418.8	417.5	416.1	414.7	413.3	413.1
32.5°	408.2	407.8	407.4	407.0	406.5	405.7	404.5	403.2	402.1	400.8	400.5
35°	388.6	388.3	387.9	387.5	387.2	386.3	385.0	383.8	382.5	381.2	380.8
37.5°	368.3	367.8	367.4	366.8	366.4	365.6	364.4	363.2	361.9	360.8	360.1
40°	354.5	353.9	353.5	353.0	352.6	351.7	350.4	349.2	347.9	346.6	345.8
42.5°	339.6	339.2	338.9	338.4	338.0	337.2	335.9	334.7	333.3	332.1	331.4
45°	318.2	317.8	317.4	317.1	316.6	315.9	314.9	313.8	312.6	311.6	310.5
47.5°	295.1	295.1	295.1	295.2	295.2	294.5	293.2	291.9	290.5	289.2	288.1
50°	280.3	280.0	279.7	279.4	279.1	278.5	277.3	276.3	275.2	274.0	272.9
52.5°	265.1	264.8	264.7	264.5	264.3	263.6	262.4	261.3	260.0	258.9	257.9
55°	242.3	242.0	241.7	241.5	241.2	240.4	239.2	237.9	236.6	235.3	234.5
57.5°	218.4	218.2	218.0	217.9	217.8	217.1	216.1	215.0	213.9	212.9	211.8
60°	203.1	202.8	202.4	202.1	201.7	201.0	200.0	199.0	198.0	197.0	196.1
62.5°	187.3	187.1	186.7	186.5	186.2	185.6	184.8	183.9	183.0	182.2	181.2
65°	163.6	163.5	163.3	163.1	162.9	162.3	161.3	160.2	159.3	158.3	157.4
67.5°	140.6	140.3	139.8	139.5	139.1	138.5	137.8	137.0	136.3	135.5	134.8
70°	126.1	125.6	125.2	124.8	124.3	123.6	122.8	122.0	121.2	120.4	119.8
72.5°	110.3	109.9	109.7	109.3	109.1	108.6	108.1	107.5	107.0	106.5	105.8
75°	86.9	86.8	86.6	86.4	86.2	85.9	85.4	85.0	84.5	84.1	83.8
77.5°	65.5	65.4	65.3	65.2	65.2	65.0	64.7	64.5	64.2	63.9	63.8
80°	51.9	51.9	51.9	51.9	51.9	51.8	51.6	51.5	51.3	51.1	51.0
82.5°	40.0	39.9	39.8	39.6	39.5	39.4	39.3	39.3	39.2	39.2	39.1
85°	22.6	22.7	22.8	22.9	23.0	23.1	23.1	23.1	23.1	23.1	23.0
87.5°	9.2	9.6	10.2	10.6	11.1	11.5	11.9	12.2	12.6	12.8	13.2
90°	1.3	3.7	6.2	8.6	10.9	13.1	15.2	17.3	19.4	21.5	23.0
92.5°	32.5	34.2	35.9	37.5	39.2	41.4	44.0	46.5	49.0	51.6	53.6
95°	87.4	88.0	88.6	89.2	89.8	91.6	94.6	97.6	100.6	103.5	105.7
97.5°	145.3	145.4	145.7	146.0	146.2	148.4	152.5	156.7	160.8	164.9	166.8
100°	188.2	188.2	188.2	188.2	188.2	190.2	194.1	198.0	201.9	205.7	208.5
102.5°	234.5	235.8	236.9	238.1	239.3	240.9	242.9	244.9	246.8	248.8	251.7
105°	306.7	308.1	309.6	311.1	312.6	314.2	316.0	317.8	319.6	321.5	323.2
107.5°	386.2	387.7	389.2	390.7	392.2	393.7	395.0	396.4	397.8	399.1	400.0
110°	441.1	442.6	444.1	445.6	447.1	448.3	449.2	450.0	450.9	451.8	452.7



TEST NUMBER: P333369-940

CATALOG NUMBER: S125DIW-S375D1560U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	497.0	497.8	498.6	499.4	500.2	501.1	502.2	503.4	504.5	505.7	506.0
115°	579.6	580.9	582.0	583.2	584.4	585.3	585.9	586.5	587.1	587.7	587.4
117.5°	662.5	663.0	663.5	664.1	664.6	665.1	665.7	666.2	666.7	667.4	667.5
120°	714.1	715.6	717.1	718.6	720.1	720.9	721.3	721.6	721.8	722.2	722.2
122.5°	770.1	770.6	771.2	771.7	772.2	772.8	773.6	774.5	775.2	776.0	775.7
125°	845.9	847.7	849.5	851.3	853.1	854.2	854.4	854.7	855.1	855.3	854.7
127.5°	926.6	927.6	928.6	929.6	930.7	931.4	931.7	932.1	932.5	932.8	932.5
130°	975.0	976.5	978.0	979.5	981.0	982.0	982.7	983.2	983.8	984.4	984.1
132.5°	1023.4	1025.9	1028.3	1030.8	1033.2	1034.4	1034.3	1034.1	1034.0	1033.9	1033.6
135°	1100.1	1101.9	1103.7	1105.5	1107.2	1108.3	1108.6	1108.9	1109.2	1109.5	1109.5
137.5°	1172.2	1173.9	1175.6	1177.3	1179.1	1180.3	1181.0	1181.6	1182.2	1182.9	1183.3
140°	1218.4	1219.9	1221.4	1222.9	1224.4	1225.6	1226.5	1227.4	1228.3	1229.2	1229.8
142.5°	1264.7	1266.0	1267.2	1268.5	1269.7	1270.9	1272.0	1273.2	1274.3	1275.4	1275.8
145°	1332.8	1333.9	1335.2	1336.3	1337.6	1338.5	1339.4	1340.3	1341.2	1342.1	1342.1
147.5°	1395.7	1396.3	1397.0	1397.7	1398.3	1399.0	1399.7	1400.4	1401.1	1401.9	1402.6
150°	1437.6	1437.3	1437.1	1436.7	1436.5	1436.9	1438.1	1439.3	1440.5	1441.7	1441.7
152.5°	1472.0	1472.5	1472.9	1473.3	1473.7	1474.2	1474.7	1475.2	1475.6	1476.1	1476.9
155°	1525.1	1525.1	1525.1	1525.1	1525.1	1525.2	1525.5	1525.8	1526.1	1526.4	1527.6
157.5°	1572.4	1571.7	1571.1	1570.4	1569.8	1569.6	1569.9	1570.2	1570.5	1570.7	1572.0
160°	1600.4	1599.5	1598.6	1597.7	1596.8	1596.5	1596.8	1597.1	1597.4	1597.7	1598.8
162.5°	1625.1	1624.4	1623.8	1623.2	1622.5	1622.2	1622.2	1622.3	1622.4	1622.4	1623.9
165°	1658.2	1657.6	1657.0	1656.4	1655.8	1655.6	1656.0	1656.3	1656.5	1656.9	1658.0
167.5°	1686.1	1685.0	1683.8	1682.6	1681.4	1680.8	1680.8	1680.8	1680.8	1680.8	1682.6
170°	1701.2	1700.0	1698.8	1697.6	1696.5	1695.9	1695.9	1695.9	1695.9	1695.9	1697.6
172.5°	1712.0	1710.8	1709.6	1708.4	1707.2	1706.6	1706.6	1706.6	1706.6	1706.6	1708.4
175°	1724.1	1722.9	1721.7	1720.5	1719.3	1718.7	1718.7	1718.7	1718.7	1718.7	1720.5
177.5°	1730.3	1729.3	1728.4	1727.4	1726.4	1725.8	1725.6	1725.4	1725.1	1724.9	1726.4
180°	1728.1	1728.1	1728.1	1728.1	1728.1	1728.1	1728.1	1728.1	1728.1	1728.1	1728.1



TEST NUMBER: P333369-940

CATALOG NUMBER: S125DIW-S375D1560U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9
2.5°	519.4	520.1	520.8	521.2	521.1	521.0	521.0	520.9
5°	516.7	517.6	518.4	518.8	518.7	518.6	518.5	518.4
7.5°	511.6	512.4	513.2	513.5	513.4	513.4	513.3	513.2
10°	507.1	507.8	508.6	508.9	508.8	508.7	508.6	508.5
12.5°	501.2	501.9	502.4	502.7	502.7	502.7	502.7	502.6
15°	490.9	491.3	491.9	492.0	492.0	492.0	492.0	492.0
17.5°	478.9	479.5	480.1	480.1	479.7	479.2	478.8	478.3
20°	469.8	470.5	471.1	471.3	470.7	470.3	469.8	469.4
22.5°	459.5	459.9	460.4	460.4	460.1	459.8	459.5	459.1
25°	443.0	443.2	443.4	443.3	443.0	442.7	442.5	442.2
27.5°	425.6	425.6	425.7	425.6	425.3	425.0	424.7	424.5
30°	413.0	412.8	412.6	412.4	412.1	411.9	411.5	411.3
32.5°	400.2	399.8	399.5	399.1	398.6	398.1	397.6	397.1
35°	380.3	379.9	379.3	378.8	378.1	377.3	376.6	375.9
37.5°	359.4	358.7	358.0	357.5	357.0	356.7	356.2	355.8
40°	344.9	344.1	343.3	342.8	342.5	342.1	341.9	341.6
42.5°	330.6	329.8	329.0	328.5	328.1	327.6	327.3	326.8
45°	309.3	308.3	307.2	306.5	306.2	305.9	305.7	305.4
47.5°	287.0	285.9	284.7	283.8	283.2	282.6	282.0	281.3
50°	271.7	270.5	269.3	268.4	267.7	267.1	266.4	265.8
52.5°	256.8	255.7	254.7	253.9	253.2	252.4	251.7	251.0
55°	233.6	232.8	232.0	231.3	230.7	230.0	229.3	228.7
57.5°	210.7	209.6	208.6	207.9	207.5	207.1	206.8	206.4
60°	195.2	194.2	193.3	192.5	191.9	191.3	190.6	190.0
62.5°	180.2	179.1	178.2	177.5	177.0	176.5	175.9	175.5
65°	156.6	155.8	155.0	154.4	154.0	153.6	153.3	152.9
67.5°	134.1	133.4	132.7	132.2	132.1	131.8	131.6	131.3
70°	119.2	118.7	118.2	117.7	117.3	117.0	116.5	116.2
72.5°	105.2	104.6	104.0	103.5	103.2	102.8	102.4	102.0
75°	83.6	83.3	82.9	82.7	82.3	81.9	81.6	81.1
77.5°	63.7	63.5	63.3	63.1	62.9	62.6	62.3	62.1
80°	50.9	50.8	50.7	50.6	50.4	50.2	50.0	49.8
82.5°	38.9	38.7	38.6	38.4	38.4	38.4	38.3	38.3
85°	22.9	22.8	22.7	22.6	22.4	22.2	22.0	21.8
87.5°	13.5	13.7	14.1	14.3	14.3	14.3	14.4	14.4
90°	24.5	26.0	27.5	28.7	29.6	30.5	31.4	32.3
92.5°	55.6	57.5	59.6	60.8	61.5	62.2	62.8	63.5
95°	107.7	109.9	111.9	113.2	113.9	114.5	115.0	115.7
97.5°	168.8	170.8	172.7	174.0	174.3	174.7	175.0	175.4
100°	211.2	213.8	216.5	218.2	218.7	219.4	220.0	220.5
102.5°	254.7	257.6	260.5	262.4	263.2	264.0	264.9	265.7
105°	325.0	326.8	328.6	329.9	330.8	331.7	332.6	333.5
107.5°	400.9	401.8	402.7	403.1	403.1	403.1	403.0	402.9
110°	453.7	454.6	455.5	455.8	455.5	455.1	454.9	454.6



TEST NUMBER: P333369-940

CATALOG NUMBER: S125DIW-S375D1560U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	506.5	506.9	507.3	507.3	506.8	506.2	505.7	505.2
115°	587.1	586.8	586.5	586.2	585.9	585.6	585.3	585.1
117.5°	667.8	668.1	668.2	667.8	666.6	665.4	664.2	663.0
120°	722.2	722.2	722.2	721.6	720.4	719.2	718.0	716.8
122.5°	775.5	775.3	775.0	774.5	773.5	772.5	771.5	770.6
125°	854.2	853.5	852.9	852.5	852.2	851.9	851.6	851.3
127.5°	932.2	931.9	931.6	931.1	930.5	930.0	929.3	928.7
130°	983.8	983.6	983.2	982.8	982.2	981.6	981.0	980.4
132.5°	1033.3	1033.0	1032.7	1032.2	1031.4	1030.5	1029.7	1028.8
135°	1109.5	1109.5	1109.5	1108.9	1107.7	1106.5	1105.3	1104.1
137.5°	1183.7	1184.0	1184.4	1183.8	1182.3	1180.8	1179.3	1177.8
140°	1230.4	1231.0	1231.5	1231.1	1229.7	1228.2	1226.6	1225.1
142.5°	1276.1	1276.5	1276.9	1276.3	1274.8	1273.4	1271.8	1270.3
145°	1342.1	1342.1	1342.1	1341.7	1340.8	1339.9	1339.0	1338.1
147.5°	1403.3	1404.0	1404.7	1404.1	1402.0	1400.0	1398.0	1396.0
150°	1441.7	1441.7	1441.7	1441.4	1440.7	1440.2	1439.6	1439.0
152.5°	1477.6	1478.3	1479.0	1478.8	1477.7	1476.7	1475.6	1474.5
155°	1528.7	1530.0	1531.2	1531.1	1529.6	1528.0	1526.5	1525.1
157.5°	1573.2	1574.4	1575.6	1575.2	1573.2	1571.2	1569.2	1567.3
160°	1600.1	1601.2	1602.5	1602.3	1600.8	1599.3	1597.9	1596.3
162.5°	1625.3	1626.7	1628.2	1628.0	1626.3	1624.5	1622.8	1621.0
165°	1659.2	1660.5	1661.6	1661.3	1659.6	1657.8	1656.0	1654.1
167.5°	1684.4	1686.1	1687.9	1687.9	1686.0	1684.3	1682.4	1680.5
170°	1699.4	1701.2	1703.0	1702.9	1700.8	1698.7	1696.6	1694.5
172.5°	1710.2	1712.0	1713.8	1713.8	1711.9	1710.0	1708.2	1706.4
175°	1722.3	1724.1	1725.9	1725.7	1723.7	1721.5	1719.5	1717.3
177.5°	1727.8	1729.2	1730.6	1730.5	1728.8	1727.2	1725.5	1723.9
180°	1728.1	1728.1	1728.1	1728.1	1728.1	1728.1	1728.1	1728.1

(END OF REPORT)