

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333344-940

Luminaire Tested: **S125DIW-S375D470U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333344-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S375D470U940-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3027.7 lumens
Efficiency: N/A
Efficacy: 131.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 23
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333344-940

CATALOG NUMBER: S125DIW-S375D470U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

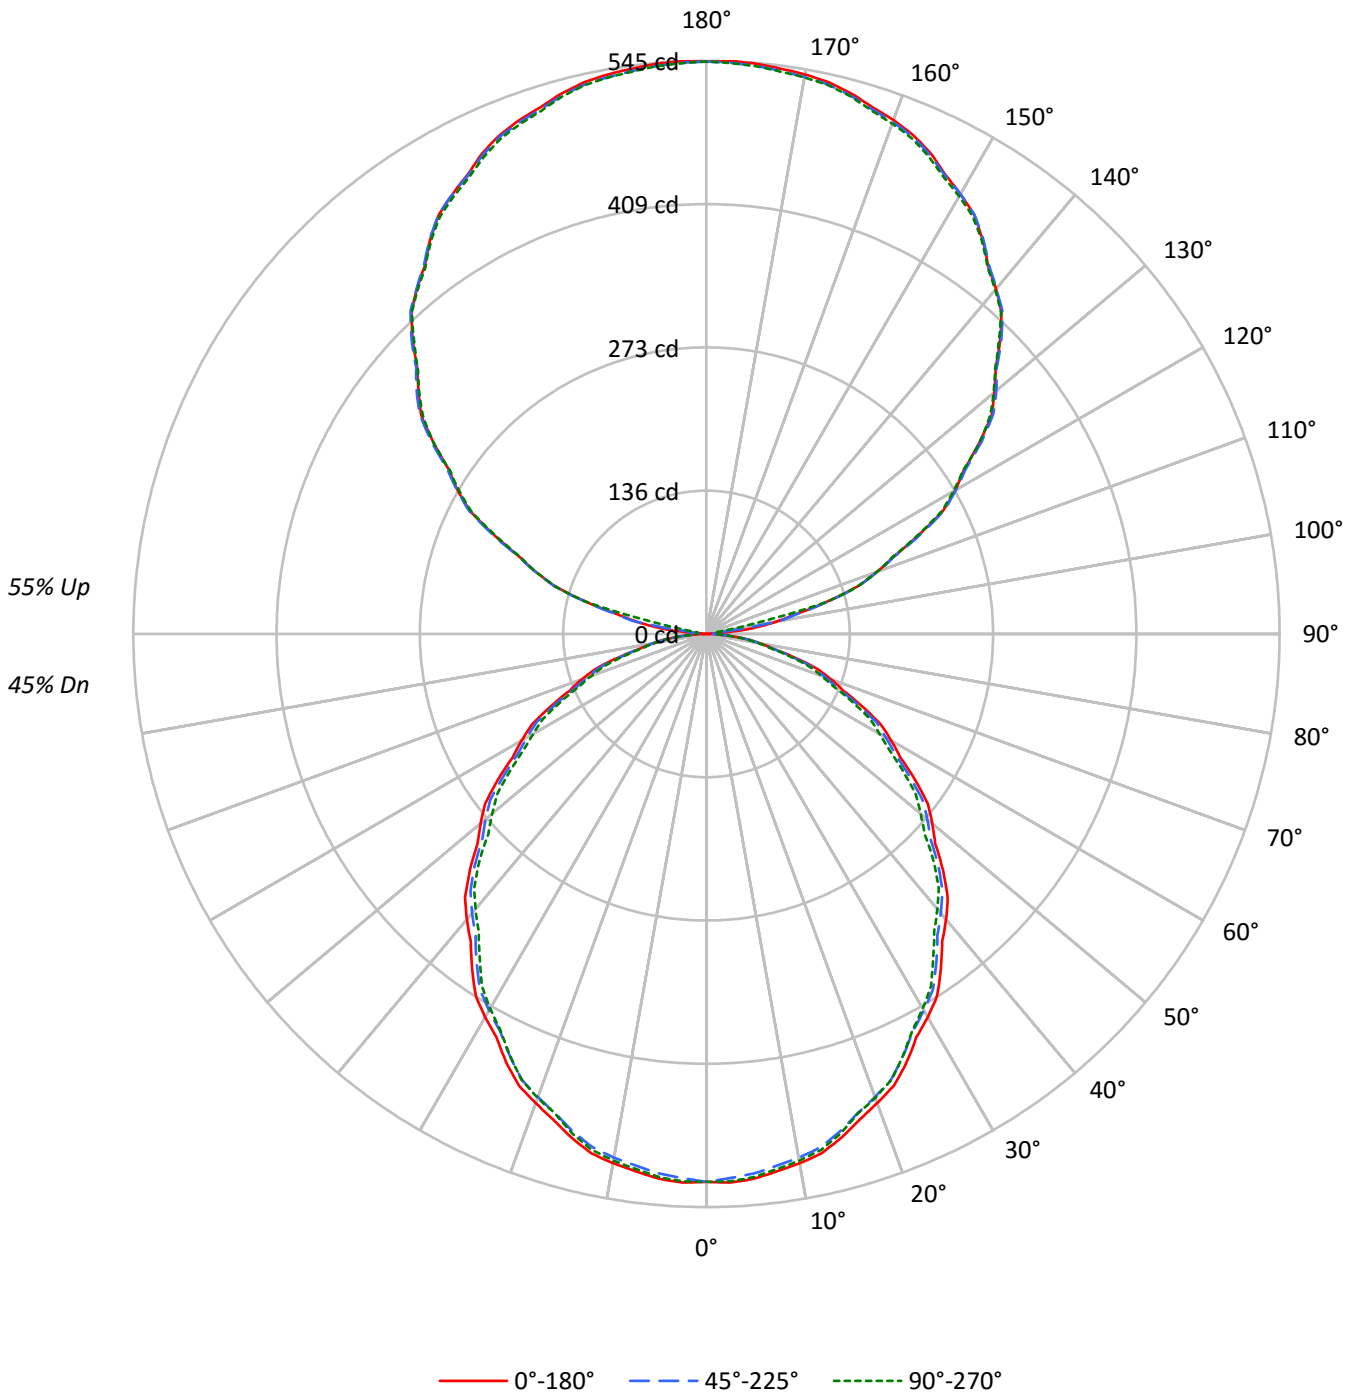



TEST NUMBER: P333344-940

CATALOG NUMBER: S125DIW-S375D470U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	97	92	88	85	88	85	81	78	70	68	66	57	56	54	45	44	43	38
2	88	80	74	69	80	74	69	64	62	58	54	50	48	45	40	38	36	31
3	80	71	63	58	73	65	59	54	54	50	46	44	41	38	35	33	31	27
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	31	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	35	31	28	28	25	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	20	17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15
8	53	41	33	28	49	38	31	26	32	27	23	27	22	19	22	18	16	14
9	49	37	30	25	45	35	28	23	29	24	20	24	20	17	20	17	15	12
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3364	3364	3364
5°	3371	3339	3361
10°	3351	3316	3335
15°	3315	3276	3290
20°	3263	3221	3226
25°	3207	3154	3151
30°	3138	3082	3067
35°	3064	3005	2964
40°	2989	2922	2880
45°	2906	2846	2789
50°	2816	2753	2671
55°	2728	2649	2575
60°	2623	2545	2454
65°	2500	2419	2337
70°	2381	2274	2194
75°	2168	2099	2024
80°	1930	1901	1852
85°	1675	1712	1615



TEST NUMBER: P333344-940

CATALOG NUMBER: S125DIW-S375D470U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	49.1	1.6
10°-20°	138.7	4.6
20°-30°	204.9	6.8
30°-40°	239.0	7.9
40°-50°	240.1	7.9
50°-60°	210.7	7.0
60°-70°	157.0	5.2
70°-80°	89.8	3.0
80°-90°	27.3	0.9
90°-100°	19.8	0.7
100°-110°	121.9	4.0
110°-120°	221.0	7.3
120°-130°	283.7	9.4
130°-140°	305.1	10.1
140°-150°	286.4	9.5
150°-160°	231.7	7.7
160°-170°	149.8	4.9
170°-180°	51.7	1.7
0°-30°	392.7	13.0
0°-40°	631.7	20.9
0°-60°	1082.6	35.8
0°-90°	1356.6	44.8
90°-120°	362.7	12.0
90°-150°	1237.9	40.9
90°-180°	1671.0	55.2
0°-180°	3027.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	521	521	521	521	521	
5°	520	519	515	519	518	49
15°	496	494	490	492	492	140
25°	450	448	443	443	442	207
35°	389	387	381	379	376	243
45°	318	316	312	307	305	245
55°	242	241	235	232	229	216
65°	164	163	158	155	153	162
75°	87	86	84	83	81	93
85°	23	23	23	23	22	25
90°	0	4	6	8	10	2
95°	23	21	6	8	8	29
105°	119	120	120	120	120	126
115°	223	225	225	223	221	221
125°	317	319	320	318	317	283
135°	395	397	396	396	393	304
145°	458	459	459	459	457	286
155°	504	502	503	504	501	232
165°	532	530	530	532	529	150
175°	544	542	542	545	542	52
180°	544	544	544	544	544	



TEST NUMBER: P333344-940

CATALOG NUMBER: S125DIW-S375D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9
2.5°	522.2	522.0	521.8	521.6	521.4	520.8	520.1	519.4	518.7	517.9	518.7
5°	520.0	519.9	519.7	519.5	519.3	518.8	517.9	517.0	516.0	515.1	515.9
7.5°	515.3	515.1	515.0	514.8	514.6	514.0	513.0	511.9	511.0	510.0	510.8
10°	511.0	510.9	510.7	510.5	510.3	509.7	508.7	507.7	506.7	505.7	506.4
12.5°	505.8	505.4	505.1	504.8	504.4	503.8	502.8	501.9	501.0	500.1	500.6
15°	495.8	495.5	495.3	495.0	494.6	494.0	493.0	492.0	491.0	490.0	490.4
17.5°	484.3	483.9	483.5	483.1	482.7	482.0	480.9	479.9	478.8	477.8	478.4
20°	474.7	474.6	474.4	474.2	474.0	473.3	472.2	470.9	469.8	468.6	469.2
22.5°	465.2	464.8	464.5	464.2	463.9	463.2	462.0	460.9	459.8	458.7	459.1
25°	450.0	449.6	449.1	448.6	448.2	447.4	446.2	445.0	443.8	442.6	442.8
27.5°	432.3	432.0	431.8	431.5	431.2	430.4	429.3	428.0	426.8	425.5	425.6
30°	420.8	420.5	420.2	419.9	419.6	418.8	417.5	416.1	414.7	413.3	413.1
32.5°	408.2	407.8	407.4	407.0	406.5	405.7	404.5	403.2	402.1	400.8	400.5
35°	388.6	388.3	387.9	387.5	387.2	386.3	385.0	383.8	382.5	381.2	380.8
37.5°	368.3	367.8	367.4	366.8	366.4	365.6	364.4	363.2	361.9	360.8	360.1
40°	354.5	353.9	353.5	353.0	352.6	351.7	350.4	349.2	347.9	346.6	345.8
42.5°	339.6	339.2	338.9	338.4	338.0	337.2	335.9	334.7	333.3	332.1	331.4
45°	318.2	317.8	317.4	317.1	316.6	315.9	314.9	313.8	312.6	311.6	310.5
47.5°	295.1	295.1	295.1	295.2	295.2	294.5	293.2	291.9	290.5	289.2	288.1
50°	280.3	280.0	279.7	279.4	279.1	278.5	277.3	276.3	275.2	274.0	272.9
52.5°	265.1	264.8	264.7	264.5	264.3	263.6	262.4	261.3	260.0	258.9	257.9
55°	242.3	242.0	241.7	241.5	241.2	240.4	239.2	237.9	236.6	235.3	234.5
57.5°	218.4	218.2	218.0	217.9	217.8	217.1	216.1	215.0	213.9	212.9	211.8
60°	203.1	202.8	202.4	202.1	201.7	201.0	200.0	199.0	198.0	197.0	196.1
62.5°	187.3	187.1	186.7	186.5	186.2	185.6	184.8	183.9	183.0	182.2	181.2
65°	163.6	163.5	163.3	163.1	162.9	162.3	161.3	160.2	159.3	158.3	157.4
67.5°	140.6	140.3	139.8	139.5	139.1	138.5	137.8	137.0	136.3	135.5	134.8
70°	126.1	125.6	125.2	124.8	124.3	123.6	122.8	122.0	121.2	120.4	119.8
72.5°	110.3	109.9	109.7	109.3	109.1	108.6	108.1	107.5	107.0	106.5	105.8
75°	86.9	86.8	86.6	86.4	86.2	85.9	85.4	85.0	84.5	84.1	83.8
77.5°	65.5	65.4	65.3	65.2	65.2	65.0	64.7	64.5	64.2	63.9	63.8
80°	51.9	51.9	51.9	51.9	51.9	51.8	51.6	51.5	51.3	51.1	51.0
82.5°	40.0	39.9	39.8	39.6	39.5	39.4	39.3	39.3	39.2	39.2	39.1
85°	22.6	22.7	22.8	22.9	23.0	23.1	23.1	23.1	23.1	23.1	23.0
87.5°	9.0	9.1	9.3	9.5	9.5	9.6	9.7	9.7	9.8	9.9	10.0
90°	0.4	1.2	1.9	2.6	3.3	3.9	4.5	5.2	5.8	6.4	6.9
92.5°	6.2	5.7	5.2	4.7	4.2	4.2	4.8	5.4	5.9	6.4	6.9
95°	23.0	22.7	22.5	22.2	21.9	20.1	16.7	13.3	9.9	6.4	6.9
97.5°	48.0	48.5	49.0	49.5	49.9	46.8	40.0	33.3	26.6	19.9	17.3
100°	67.3	67.7	67.9	68.2	68.5	68.8	69.1	69.5	69.8	70.2	56.8
102.5°	87.0	87.4	87.7	88.1	88.5	88.7	88.9	89.1	89.3	89.5	87.0
105°	118.6	119.0	119.3	119.7	120.0	120.2	120.2	120.2	120.2	120.2	120.2
107.5°	151.3	151.3	151.3	151.3	151.3	151.4	151.6	151.8	151.9	152.1	152.2
110°	172.6	172.6	172.6	172.6	172.6	172.7	172.9	173.1	173.3	173.4	173.2



TEST NUMBER: P333344-940

CATALOG NUMBER: S125DIW-S375D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	192.7	192.9	193.1	193.3	193.5	193.7	193.8	193.9	194.0	194.1	193.8
115°	222.7	223.1	223.6	224.0	224.4	224.7	224.8	224.9	225.0	225.1	224.7
117.5°	253.8	253.7	253.7	253.7	253.7	253.9	254.1	254.5	254.9	255.2	254.8
120°	273.1	273.0	273.0	272.9	272.8	272.9	273.1	273.4	273.7	273.9	273.8
122.5°	290.3	290.5	290.9	291.2	291.6	291.8	291.9	292.0	292.2	292.3	292.1
125°	316.6	317.3	317.9	318.5	319.1	319.5	319.5	319.5	319.5	319.5	319.1
127.5°	341.9	342.4	342.9	343.3	343.8	343.9	343.8	343.8	343.8	343.7	343.5
130°	357.4	357.8	358.3	358.7	359.2	359.4	359.5	359.6	359.7	359.8	359.5
132.5°	372.9	373.4	374.0	374.4	375.0	375.1	375.0	374.8	374.5	374.3	374.3
135°	394.9	395.5	396.0	396.5	397.1	397.3	397.1	396.9	396.7	396.5	396.4
137.5°	415.2	415.6	416.1	416.6	417.1	417.2	417.1	416.9	416.7	416.5	416.6
140°	428.4	428.6	428.7	428.9	429.1	429.2	429.1	429.0	428.9	428.8	429.0
142.5°	440.3	440.5	440.6	440.7	440.8	440.9	441.0	441.1	441.3	441.4	441.4
145°	457.9	458.1	458.3	458.4	458.6	458.7	458.7	458.7	458.7	458.7	458.8
147.5°	473.2	473.1	473.1	473.1	473.1	473.1	473.2	473.3	473.4	473.5	473.6
150°	482.9	482.7	482.5	482.3	482.1	482.1	482.3	482.5	482.7	482.9	483.0
152.5°	492.2	491.9	491.4	491.1	490.6	490.5	490.7	490.9	491.1	491.2	491.4
155°	504.3	503.7	503.2	502.7	502.1	501.9	502.1	502.3	502.5	502.7	502.9
157.5°	513.5	513.2	512.9	512.6	512.2	512.1	512.1	512.1	512.1	512.2	512.5
160°	520.0	519.4	518.9	518.4	517.8	517.6	517.7	517.8	517.9	518.0	518.4
162.5°	525.1	524.6	524.1	523.5	523.0	522.8	522.9	523.0	523.1	523.2	523.6
165°	532.1	531.5	531.0	530.5	529.9	529.7	529.8	529.9	529.9	530.0	530.6
167.5°	537.3	536.7	536.2	535.6	535.0	534.8	534.8	534.9	535.0	535.1	535.8
170°	540.2	539.6	538.9	538.2	537.6	537.3	537.4	537.5	537.6	537.7	538.4
172.5°	542.1	541.4	540.8	540.2	539.6	539.4	539.5	539.7	539.8	540.0	540.6
175°	544.2	543.7	543.1	542.6	542.1	541.8	541.9	542.0	542.1	542.2	542.9
177.5°	545.2	544.7	544.3	543.9	543.4	543.2	543.3	543.4	543.5	543.6	544.0
180°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2



TEST NUMBER: P333344-940

CATALOG NUMBER: S125DIW-S375D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	520.9	520.9	520.9	520.9	520.9	520.9	520.9	520.9
2.5°	519.4	520.1	520.8	521.2	521.1	521.0	521.0	520.9
5°	516.7	517.6	518.4	518.8	518.7	518.6	518.5	518.4
7.5°	511.6	512.4	513.2	513.5	513.4	513.4	513.3	513.2
10°	507.1	507.8	508.6	508.9	508.8	508.7	508.6	508.5
12.5°	501.2	501.9	502.4	502.7	502.7	502.7	502.7	502.6
15°	490.9	491.3	491.9	492.0	492.0	492.0	492.0	492.0
17.5°	478.9	479.5	480.1	480.1	479.7	479.2	478.8	478.3
20°	469.8	470.5	471.1	471.3	470.7	470.3	469.8	469.4
22.5°	459.5	459.9	460.4	460.4	460.1	459.8	459.5	459.1
25°	443.0	443.2	443.4	443.3	443.0	442.7	442.5	442.2
27.5°	425.6	425.6	425.7	425.6	425.3	425.0	424.7	424.5
30°	413.0	412.8	412.6	412.4	412.1	411.9	411.5	411.3
32.5°	400.2	399.8	399.5	399.1	398.6	398.1	397.6	397.1
35°	380.3	379.9	379.3	378.8	378.1	377.3	376.6	375.9
37.5°	359.4	358.7	358.0	357.5	357.0	356.7	356.2	355.8
40°	344.9	344.1	343.3	342.8	342.5	342.1	341.9	341.6
42.5°	330.6	329.8	329.0	328.5	328.1	327.6	327.3	326.8
45°	309.3	308.3	307.2	306.5	306.2	305.9	305.7	305.4
47.5°	287.0	285.9	284.7	283.8	283.2	282.6	282.0	281.3
50°	271.7	270.5	269.3	268.4	267.7	267.1	266.4	265.8
52.5°	256.8	255.7	254.7	253.9	253.2	252.4	251.7	251.0
55°	233.6	232.8	232.0	231.3	230.7	230.0	229.3	228.7
57.5°	210.7	209.6	208.6	207.9	207.5	207.1	206.8	206.4
60°	195.2	194.2	193.3	192.5	191.9	191.3	190.6	190.0
62.5°	180.2	179.1	178.2	177.5	177.0	176.5	175.9	175.5
65°	156.6	155.8	155.0	154.4	154.0	153.6	153.3	152.9
67.5°	134.1	133.4	132.7	132.2	132.1	131.8	131.6	131.3
70°	119.2	118.7	118.2	117.7	117.3	117.0	116.5	116.2
72.5°	105.2	104.6	104.0	103.5	103.2	102.8	102.4	102.0
75°	83.6	83.3	82.9	82.7	82.3	81.9	81.6	81.1
77.5°	63.7	63.5	63.3	63.1	62.9	62.6	62.3	62.1
80°	50.9	50.8	50.7	50.6	50.4	50.2	50.0	49.8
82.5°	38.9	38.7	38.6	38.4	38.4	38.4	38.3	38.3
85°	22.9	22.8	22.7	22.6	22.4	22.2	22.0	21.8
87.5°	10.1	10.2	10.3	10.3	10.2	10.1	9.9	9.8
90°	7.3	7.8	8.2	8.6	8.9	9.2	9.5	9.7
92.5°	7.3	7.8	8.2	8.6	8.6	8.8	8.9	9.0
95°	7.3	7.8	8.2	8.5	8.5	8.5	8.5	8.5
97.5°	14.8	12.3	9.7	8.5	8.5	8.5	8.5	8.5
100°	43.5	30.1	16.8	9.9	9.5	9.2	8.8	8.5
102.5°	84.5	81.9	79.5	75.2	69.0	63.0	56.8	50.7
105°	120.2	120.2	120.2	120.2	120.1	120.0	119.9	119.8
107.5°	152.2	152.2	152.2	152.1	151.9	151.6	151.3	151.1
110°	172.9	172.6	172.4	172.3	172.4	172.5	172.5	172.6



TEST NUMBER: P333344-940

CATALOG NUMBER: S125DIW-S375D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	193.4	193.1	192.8	192.5	192.4	192.3	192.2	192.0
115°	224.4	224.0	223.6	223.2	222.7	222.1	221.6	221.1
117.5°	254.2	253.8	253.3	253.0	252.7	252.5	252.3	252.1
120°	273.6	273.4	273.2	272.9	272.4	272.0	271.5	271.1
122.5°	291.9	291.8	291.6	291.2	290.7	290.2	289.7	289.2
125°	318.8	318.4	318.1	317.7	317.4	317.2	316.9	316.6
127.5°	343.3	343.1	343.0	342.5	341.8	341.2	340.5	339.8
130°	359.3	359.0	358.7	358.4	357.9	357.5	357.0	356.6
132.5°	374.3	374.2	374.2	373.9	373.4	373.0	372.6	372.1
135°	396.2	396.0	395.8	395.5	394.9	394.4	393.9	393.3
137.5°	416.6	416.7	416.7	416.5	416.0	415.5	415.1	414.6
140°	429.2	429.4	429.5	429.4	428.8	428.3	427.8	427.2
142.5°	441.5	441.5	441.6	441.3	440.8	440.2	439.7	439.2
145°	458.9	459.0	459.1	458.8	458.3	457.7	457.2	456.6
147.5°	473.8	473.9	473.9	473.7	473.1	472.4	471.7	471.1
150°	483.2	483.4	483.6	483.3	482.6	481.9	481.2	480.5
152.5°	491.6	491.8	492.0	491.8	491.1	490.4	489.8	489.2
155°	503.2	503.5	503.7	503.5	502.7	502.0	501.3	500.6
157.5°	512.7	513.0	513.3	513.1	512.4	511.7	511.0	510.2
160°	518.7	519.1	519.4	519.2	518.5	517.8	517.1	516.4
162.5°	524.1	524.7	525.1	525.0	524.2	523.4	522.6	521.8
165°	531.2	531.7	532.3	532.2	531.5	530.7	529.9	529.2
167.5°	536.5	537.1	537.7	537.7	536.8	536.0	535.2	534.4
170°	539.1	539.9	540.6	540.6	539.8	539.0	538.1	537.3
172.5°	541.3	541.9	542.6	542.5	541.7	540.9	540.1	539.3
175°	543.6	544.3	545.0	545.0	544.2	543.4	542.6	541.8
177.5°	544.6	545.0	545.5	545.5	544.9	544.4	543.8	543.2
180°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2

(END OF REPORT)