

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333386-940

Luminaire Tested: **S125DIW-S610D1050U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333386-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIW-S610D1050U940-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1050 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5966.9 lumens  
Efficiency: N/A  
Efficacy: 132.0 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 45.2  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333386-940

CATALOG NUMBER: S125DIW-S610D1050U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

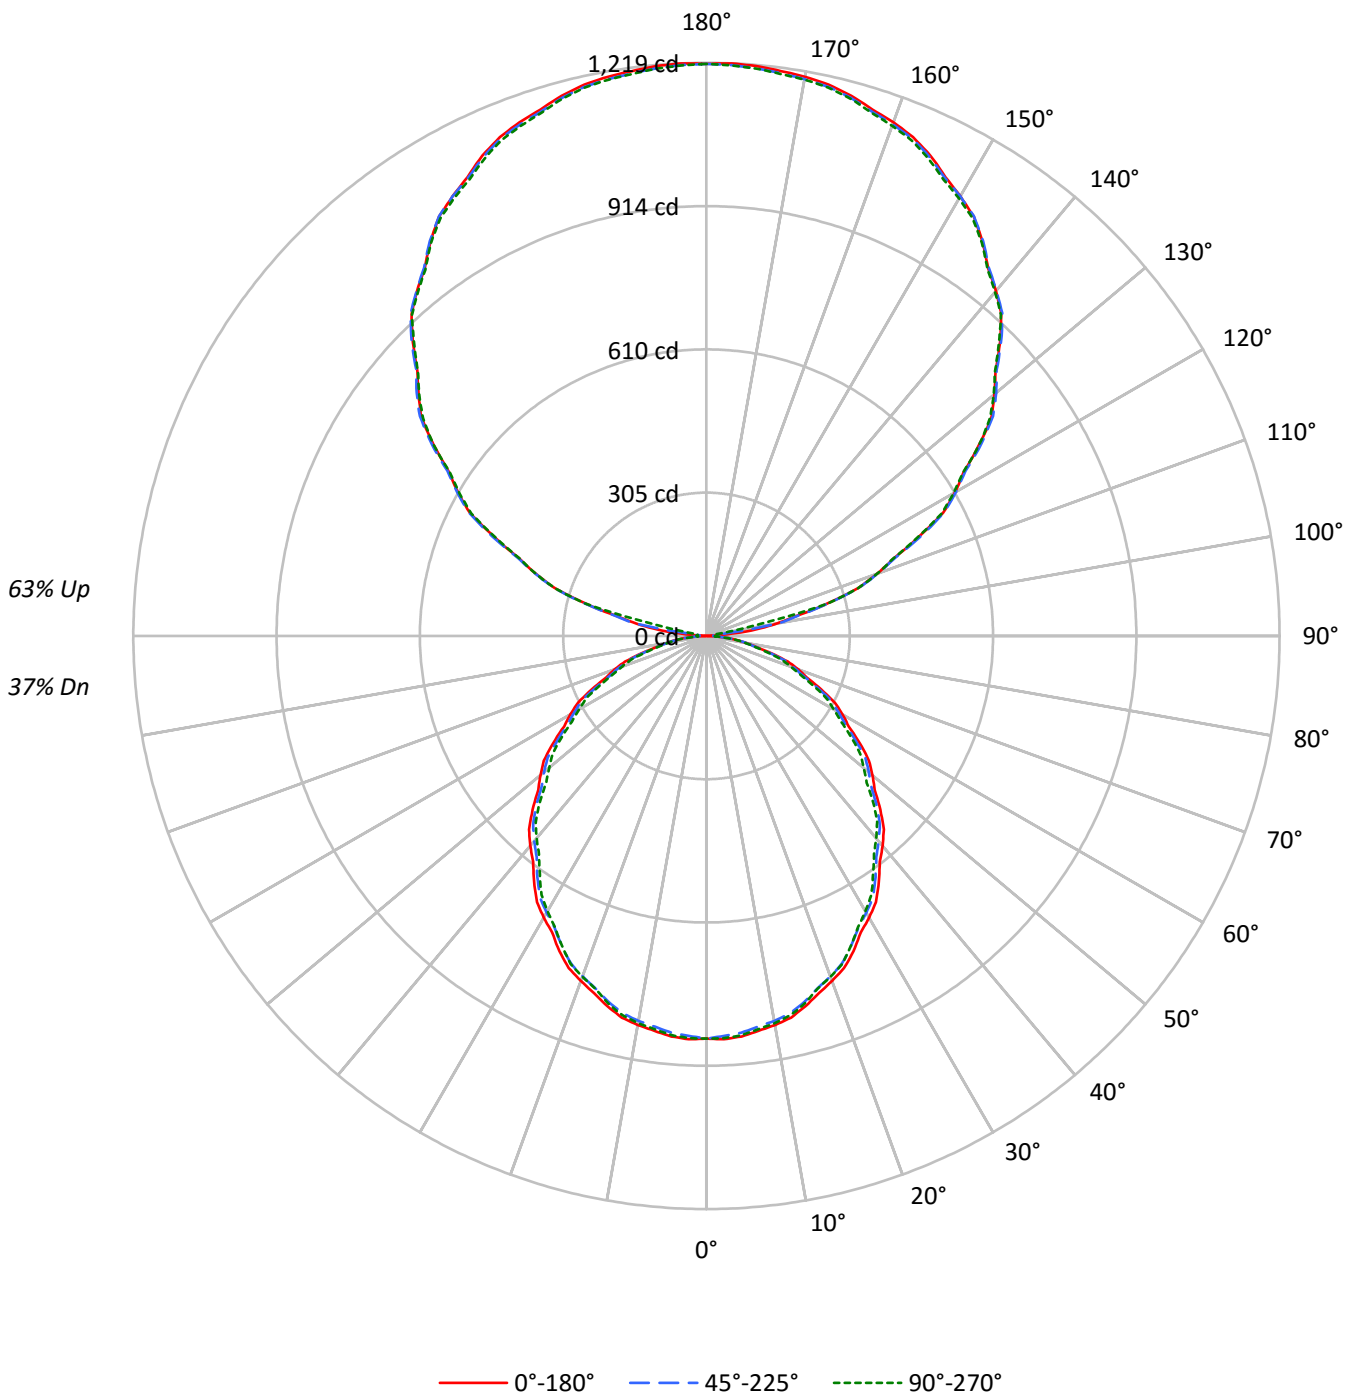



TEST NUMBER: P333386-940

CATALOG NUMBER: S125DIW-S610D1050U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45	37
1	95	91	87	83	86	82	79	76	67	64	62	52	51	50	39	38	37	31
2	86	79	73	68	78	72	67	62	58	55	52	46	44	41	35	33	32	26
3	79	69	62	57	71	63	57	52	51	47	43	41	38	35	31	29	27	22
4	72	61	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	25	22	20	17
6	61	49	41	35	55	45	38	33	37	31	28	29	25	23	22	20	18	15
7	56	44	36	31	51	40	33	29	33	28	24	27	23	20	20	18	16	13
8	52	40	32	27	47	37	30	25	30	25	21	24	20	18	19	16	14	11
9	48	36	29	24	44	33	27	22	28	23	19	22	19	16	17	15	13	10
10	45	33	26	21	41	31	24	20	25	21	17	21	17	14	16	13	11	9

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5531	5531	5531
5°	5544	5490	5525
10°	5509	5452	5483
15°	5449	5386	5409
20°	5364	5294	5304
25°	5273	5185	5181
30°	5158	5068	5043
35°	5037	4941	4872
40°	4912	4804	4736
45°	4778	4678	4585
50°	4629	4527	4391
55°	4486	4355	4234
60°	4314	4184	4035
65°	4109	3976	3842
70°	3914	3737	3609
75°	3566	3449	3331
80°	3172	3124	3046
85°	2764	2808	2660



TEST NUMBER: P333386-940

CATALOG NUMBER: S125DIW-S610D1050U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	80.7	1.4
10°-20°	228.1	3.8
20°-30°	336.8	5.6
30°-40°	393.0	6.6
40°-50°	394.7	6.6
50°-60°	346.5	5.8
60°-70°	258.2	4.3
70°-80°	147.6	2.5
80°-90°	45.5	0.8
90°-100°	44.2	0.7
100°-110°	272.5	4.6
110°-120°	494.2	8.3
120°-130°	634.2	10.6
130°-140°	682.1	11.4
140°-150°	640.3	10.7
150°-160°	517.9	8.7
160°-170°	335.0	5.6
170°-180°	115.5	1.9
0°-30°	645.6	10.8
0°-40°	1038.6	17.4
0°-60°	1779.7	29.8
0°-90°	2230.9	37.4
90°-120°	810.9	13.6
90°-150°	2767.5	46.4
90°-180°	3736.0	62.6
0°-180°	5966.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	856	856	856	856	856	
5°	855	853	847	853	852	81
15°	815	813	806	809	809	230
25°	740	736	728	729	727	340
35°	639	636	627	623	618	399
45°	523	520	512	504	502	403
55°	398	396	387	381	376	356
65°	269	267	260	254	251	267
75°	143	142	138	136	134	152
85°	37	38	38	37	36	42
90°	1	8	14	19	22	4
95°	51	47	14	19	19	66
105°	265	269	269	269	268	281
115°	498	502	503	500	494	493
125°	708	714	714	711	708	632
135°	883	888	886	884	879	680
145°	1024	1025	1025	1026	1021	640
155°	1127	1122	1124	1126	1119	519
165°	1190	1184	1185	1190	1183	336
175°	1217	1212	1212	1218	1211	116
180°	1217	1217	1217	1217	1217	



TEST NUMBER: P333386-940

CATALOG NUMBER: S125DIW-S610D1050U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4
2.5°	858.5	858.2	857.8	857.5	857.1	856.3	855.2	853.9	852.7	851.5	852.7
5°	855.1	854.7	854.4	854.1	853.8	852.9	851.4	849.9	848.4	846.9	848.3
7.5°	847.1	846.9	846.6	846.2	846.0	845.0	843.3	841.7	840.0	838.4	839.6
10°	840.1	839.8	839.5	839.2	838.9	837.9	836.2	834.6	832.9	831.3	832.5
12.5°	831.4	830.9	830.4	829.8	829.3	828.2	826.7	825.2	823.6	822.1	823.0
15°	815.0	814.6	814.1	813.7	813.2	812.2	810.6	808.9	807.2	805.6	806.3
17.5°	796.2	795.6	794.9	794.2	793.5	792.4	790.7	788.9	787.2	785.5	786.4
20°	780.5	780.2	779.9	779.6	779.3	778.2	776.2	774.3	772.3	770.3	771.4
22.5°	764.7	764.2	763.7	763.1	762.6	761.4	759.6	757.8	755.9	754.0	754.7
25°	739.9	739.0	738.3	737.6	736.8	735.5	733.5	731.6	729.6	727.6	728.0
27.5°	710.7	710.2	709.8	709.4	708.9	707.7	705.6	703.6	701.6	699.6	699.6
30°	691.7	691.3	690.8	690.4	689.9	688.6	686.3	684.0	681.8	679.6	679.2
32.5°	671.1	670.5	669.8	669.1	668.3	667.0	665.0	663.0	660.9	659.0	658.4
35°	638.9	638.3	637.7	637.1	636.5	635.2	633.0	630.9	628.8	626.7	626.0
37.5°	605.4	604.7	604.0	603.2	602.4	601.0	599.1	597.1	595.0	593.1	592.0
40°	582.6	581.9	581.1	580.4	579.6	578.2	576.1	574.0	571.9	569.8	568.5
42.5°	558.3	557.7	557.0	556.3	555.7	554.4	552.2	550.2	548.0	545.9	544.7
45°	523.1	522.5	521.8	521.2	520.7	519.4	517.6	515.9	514.0	512.2	510.4
47.5°	485.1	485.1	485.2	485.2	485.2	484.1	482.0	479.8	477.7	475.5	473.7
50°	460.7	460.2	459.8	459.3	458.9	457.8	455.9	454.1	452.4	450.6	448.6
52.5°	435.8	435.4	435.2	434.8	434.4	433.3	431.4	429.4	427.6	425.6	423.9
55°	398.4	397.9	397.4	397.0	396.5	395.3	393.2	391.1	389.0	386.8	385.5
57.5°	358.9	358.7	358.5	358.2	358.0	357.0	355.2	353.4	351.6	349.9	348.1
60°	334.0	333.4	332.8	332.2	331.6	330.5	328.9	327.2	325.5	323.9	322.4
62.5°	308.0	307.6	307.0	306.6	306.0	305.1	303.7	302.3	300.9	299.4	297.8
65°	268.9	268.7	268.4	268.0	267.8	266.8	265.1	263.5	261.8	260.2	258.8
67.5°	231.1	230.5	229.9	229.3	228.6	227.7	226.5	225.2	224.0	222.7	221.6
70°	207.3	206.6	205.8	205.1	204.3	203.2	201.9	200.5	199.2	197.9	196.9
72.5°	181.3	180.7	180.3	179.8	179.2	178.5	177.7	176.8	175.9	175.0	174.1
75°	142.9	142.7	142.3	142.0	141.8	141.2	140.4	139.7	138.9	138.2	137.8
77.5°	107.6	107.5	107.4	107.2	107.1	106.8	106.4	106.0	105.6	105.1	104.9
80°	85.3	85.3	85.3	85.3	85.3	85.2	84.9	84.6	84.4	84.0	83.8
82.5°	65.9	65.6	65.4	65.1	64.9	64.7	64.6	64.6	64.6	64.5	64.2
85°	37.3	37.5	37.5	37.7	37.9	37.9	37.9	37.9	37.9	37.9	37.8
87.5°	14.8	15.2	15.4	15.8	16.1	16.3	16.5	16.7	16.9	16.9	17.2
90°	0.9	2.5	4.1	5.7	7.3	8.8	10.3	11.6	13.0	14.4	15.4
92.5°	13.9	12.8	11.7	10.5	9.4	9.5	10.7	11.9	13.2	14.4	15.4
95°	51.4	50.8	50.2	49.6	49.0	44.9	37.3	29.7	22.0	14.4	15.4
97.5°	107.4	108.4	109.5	110.6	111.6	104.7	89.6	74.5	59.5	44.4	38.7
100°	150.6	151.2	151.8	152.4	153.0	153.7	154.5	155.3	156.1	156.9	127.1
102.5°	194.7	195.4	196.2	196.9	197.7	198.3	198.8	199.2	199.7	200.2	194.6
105°	265.1	265.9	266.7	267.5	268.3	268.8	268.8	268.8	268.8	268.8	268.8
107.5°	338.4	338.4	338.4	338.4	338.4	338.6	338.9	339.4	339.7	340.2	340.2
110°	386.0	386.0	386.0	386.0	386.0	386.2	386.6	387.0	387.4	387.8	387.2



TEST NUMBER: P333386-940

CATALOG NUMBER: S125DIW-S610D1050U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	430.7	431.2	431.7	432.1	432.7	433.0	433.3	433.5	433.7	434.0	433.2
115°	497.8	498.8	499.8	500.8	501.9	502.4	502.7	502.8	503.0	503.2	502.4
117.5°	567.3	567.2	567.2	567.1	567.1	567.5	568.2	569.0	569.7	570.5	569.4
120°	610.6	610.4	610.1	609.9	609.8	609.9	610.6	611.2	611.7	612.3	612.0
122.5°	648.8	649.5	650.3	651.0	651.8	652.4	652.6	652.9	653.2	653.4	653.1
125°	707.9	709.4	710.8	712.1	713.5	714.3	714.3	714.3	714.3	714.3	713.5
127.5°	764.4	765.4	766.4	767.4	768.4	768.8	768.7	768.7	768.5	768.4	767.9
130°	799.1	800.0	801.0	802.0	803.1	803.6	803.9	804.1	804.2	804.4	803.9
132.5°	833.7	834.8	836.0	837.1	838.3	838.7	838.2	837.8	837.3	837.0	836.8
135°	882.9	884.1	885.3	886.5	887.7	888.1	887.7	887.3	886.9	886.5	886.1
137.5°	928.2	929.3	930.2	931.3	932.4	932.7	932.4	932.0	931.6	931.2	931.3
140°	957.8	958.1	958.6	958.9	959.4	959.5	959.3	959.0	958.9	958.7	959.0
142.5°	984.4	984.7	985.0	985.2	985.4	985.7	986.0	986.2	986.5	986.8	986.9
145°	1023.6	1024.0	1024.4	1024.8	1025.2	1025.4	1025.4	1025.4	1025.4	1025.4	1025.6
147.5°	1057.8	1057.8	1057.7	1057.7	1057.6	1057.7	1057.8	1058.1	1058.4	1058.5	1058.8
150°	1079.5	1079.1	1078.7	1078.3	1077.9	1077.9	1078.3	1078.7	1079.1	1079.5	1080.0
152.5°	1100.5	1099.6	1098.7	1097.8	1096.9	1096.7	1097.1	1097.5	1097.9	1098.2	1098.7
155°	1127.3	1126.1	1124.9	1123.7	1122.5	1122.1	1122.5	1122.9	1123.3	1123.7	1124.3
157.5°	1148.1	1147.4	1146.7	1145.9	1145.1	1144.9	1144.9	1144.9	1145.0	1145.0	1145.7
160°	1162.5	1161.3	1160.1	1158.9	1157.7	1157.2	1157.4	1157.6	1157.8	1158.0	1158.8
162.5°	1174.0	1172.9	1171.6	1170.5	1169.2	1168.7	1168.9	1169.1	1169.3	1169.5	1170.6
165°	1189.5	1188.4	1187.1	1186.0	1184.7	1184.2	1184.5	1184.6	1184.8	1185.0	1186.2
167.5°	1201.0	1199.9	1198.6	1197.4	1196.1	1195.6	1195.8	1196.0	1196.2	1196.4	1197.8
170°	1207.6	1206.2	1204.8	1203.4	1201.9	1201.4	1201.6	1201.8	1201.9	1202.2	1203.8
172.5°	1211.9	1210.5	1209.1	1207.7	1206.3	1205.8	1206.1	1206.5	1206.8	1207.2	1208.6
175°	1216.6	1215.4	1214.2	1213.0	1211.7	1211.3	1211.5	1211.7	1211.9	1212.1	1213.7
177.5°	1218.8	1217.8	1216.8	1215.8	1215.0	1214.5	1214.7	1214.9	1215.0	1215.1	1216.3
180°	1216.6	1216.6	1216.6	1216.6	1216.6	1216.6	1216.6	1216.6	1216.6	1216.6	1216.6



TEST NUMBER: P333386-940

CATALOG NUMBER: S125DIW-S610D1050U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4
2.5°	853.9	855.2	856.3	856.8	856.8	856.6	856.5	856.4
5°	849.6	851.0	852.3	852.9	852.7	852.7	852.5	852.3
7.5°	841.0	842.3	843.6	844.3	844.1	843.9	843.8	843.6
10°	833.7	834.9	836.2	836.7	836.5	836.3	836.2	836.1
12.5°	824.0	825.0	825.9	826.4	826.3	826.3	826.3	826.3
15°	807.1	807.8	808.6	809.0	809.0	809.0	809.0	809.0
17.5°	787.4	788.3	789.3	789.3	788.5	787.8	787.1	786.3
20°	772.4	773.5	774.5	774.7	773.9	773.2	772.4	771.7
22.5°	755.5	756.2	756.9	757.0	756.4	755.9	755.4	754.9
25°	728.3	728.5	728.9	728.8	728.3	727.9	727.5	727.0
27.5°	699.7	699.8	699.8	699.6	699.2	698.7	698.3	697.9
30°	678.9	678.7	678.3	678.0	677.5	677.1	676.6	676.2
32.5°	657.9	657.3	656.7	656.1	655.3	654.5	653.6	652.8
35°	625.2	624.5	623.7	622.7	621.5	620.3	619.1	617.9
37.5°	590.8	589.8	588.6	587.7	587.0	586.4	585.7	585.0
40°	567.0	565.7	564.4	563.5	563.0	562.6	562.1	561.7
42.5°	543.5	542.2	541.0	540.0	539.3	538.7	538.0	537.3
45°	508.5	506.8	505.0	503.8	503.4	502.9	502.5	502.0
47.5°	471.8	469.9	468.1	466.7	465.7	464.6	463.5	462.4
50°	446.7	444.7	442.7	441.2	440.1	439.1	438.0	437.0
52.5°	422.1	420.4	418.7	417.3	416.2	414.9	413.8	412.6
55°	384.1	382.8	381.5	380.2	379.2	378.1	377.1	376.0
57.5°	346.3	344.6	342.9	341.7	341.2	340.5	340.0	339.5
60°	320.8	319.3	317.8	316.6	315.5	314.4	313.3	312.4
62.5°	296.2	294.6	292.9	291.8	291.0	290.1	289.3	288.5
65°	257.4	256.1	254.8	253.8	253.2	252.5	252.0	251.4
67.5°	220.5	219.4	218.2	217.4	217.0	216.7	216.3	216.0
70°	196.0	195.1	194.2	193.5	192.9	192.3	191.6	191.1
72.5°	173.0	172.0	170.9	170.1	169.5	169.0	168.4	167.7
75°	137.3	136.9	136.4	135.9	135.3	134.6	134.1	133.5
77.5°	104.6	104.3	104.1	103.7	103.3	102.9	102.5	102.0
80°	83.7	83.6	83.4	83.2	82.8	82.6	82.3	81.9
82.5°	63.9	63.7	63.4	63.2	63.2	63.1	63.0	63.0
85°	37.6	37.5	37.4	37.1	36.8	36.5	36.2	35.9
87.5°	17.4	17.6	17.7	17.8	17.7	17.6	17.5	17.3
90°	16.4	17.5	18.5	19.3	19.9	20.4	21.0	21.7
92.5°	16.4	17.5	18.5	19.1	19.4	19.6	19.9	20.2
95°	16.4	17.5	18.5	18.9	18.9	18.9	18.9	18.9
97.5°	33.1	27.4	21.8	18.9	18.9	18.9	18.9	18.9
100°	97.2	67.3	37.5	22.1	21.3	20.5	19.7	18.9
102.5°	188.9	183.2	177.6	168.0	154.4	140.7	127.1	113.4
105°	268.8	268.8	268.8	268.7	268.5	268.2	268.0	267.9
107.5°	340.3	340.3	340.4	340.1	339.5	338.9	338.2	337.7
110°	386.6	386.0	385.4	385.2	385.4	385.6	385.8	386.0





TEST NUMBER: P333386-940

CATALOG NUMBER: S125DIW-S610D1050U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	432.5	431.7	431.0	430.4	430.2	429.8	429.5	429.3
115°	501.6	500.8	500.0	499.0	497.8	496.6	495.4	494.2
117.5°	568.5	567.4	566.3	565.5	565.1	564.5	564.0	563.5
120°	611.5	611.2	610.7	610.0	609.0	608.1	607.1	606.0
122.5°	652.6	652.3	651.8	651.1	650.0	648.8	647.6	646.5
125°	712.7	711.9	711.1	710.3	709.8	709.2	708.6	707.9
127.5°	767.5	767.0	766.6	765.6	764.2	762.7	761.2	759.7
130°	803.3	802.6	802.0	801.2	800.2	799.2	798.3	797.3
132.5°	836.7	836.5	836.4	835.9	834.9	833.8	832.9	831.9
135°	885.7	885.3	884.9	884.1	882.9	881.7	880.5	879.3
137.5°	931.4	931.5	931.6	931.1	930.1	929.0	928.0	926.9
140°	959.5	959.8	960.3	959.8	958.7	957.4	956.3	955.0
142.5°	986.9	987.0	987.1	986.6	985.3	984.2	982.9	981.8
145°	1025.8	1026.0	1026.2	1025.7	1024.5	1023.3	1022.1	1020.9
147.5°	1059.1	1059.4	1059.5	1059.0	1057.5	1056.1	1054.6	1053.2
150°	1080.3	1080.8	1081.1	1080.5	1078.9	1077.3	1075.7	1074.1
152.5°	1099.0	1099.5	1099.8	1099.4	1097.9	1096.4	1095.0	1093.6
155°	1124.9	1125.5	1126.1	1125.6	1124.0	1122.4	1120.8	1119.2
157.5°	1146.3	1146.9	1147.5	1147.1	1145.5	1143.9	1142.3	1140.7
160°	1159.6	1160.4	1161.2	1160.7	1159.2	1157.6	1156.0	1154.4
162.5°	1171.8	1172.9	1174.0	1173.7	1171.9	1170.2	1168.4	1166.6
165°	1187.4	1188.7	1189.8	1189.6	1188.0	1186.4	1184.8	1183.2
167.5°	1199.3	1200.7	1202.2	1202.0	1200.2	1198.4	1196.6	1194.8
170°	1205.4	1207.0	1208.6	1208.4	1206.7	1204.9	1203.1	1201.2
172.5°	1210.1	1211.6	1213.0	1212.8	1211.0	1209.2	1207.4	1205.6
175°	1215.3	1216.9	1218.5	1218.4	1216.6	1214.8	1213.0	1211.2
177.5°	1217.4	1218.5	1219.7	1219.6	1218.3	1217.0	1215.8	1214.4
180°	1216.6	1216.6	1216.6	1216.6	1216.6	1216.6	1216.6	1216.6

(END OF REPORT)