

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333381-940

Luminaire Tested: **S125DIW-S610D770U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333381-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S610D770U940-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4603.8 lumens
Efficiency: N/A
Efficacy: 122.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 37.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333381-940

CATALOG NUMBER: S125DIW-S610D770U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

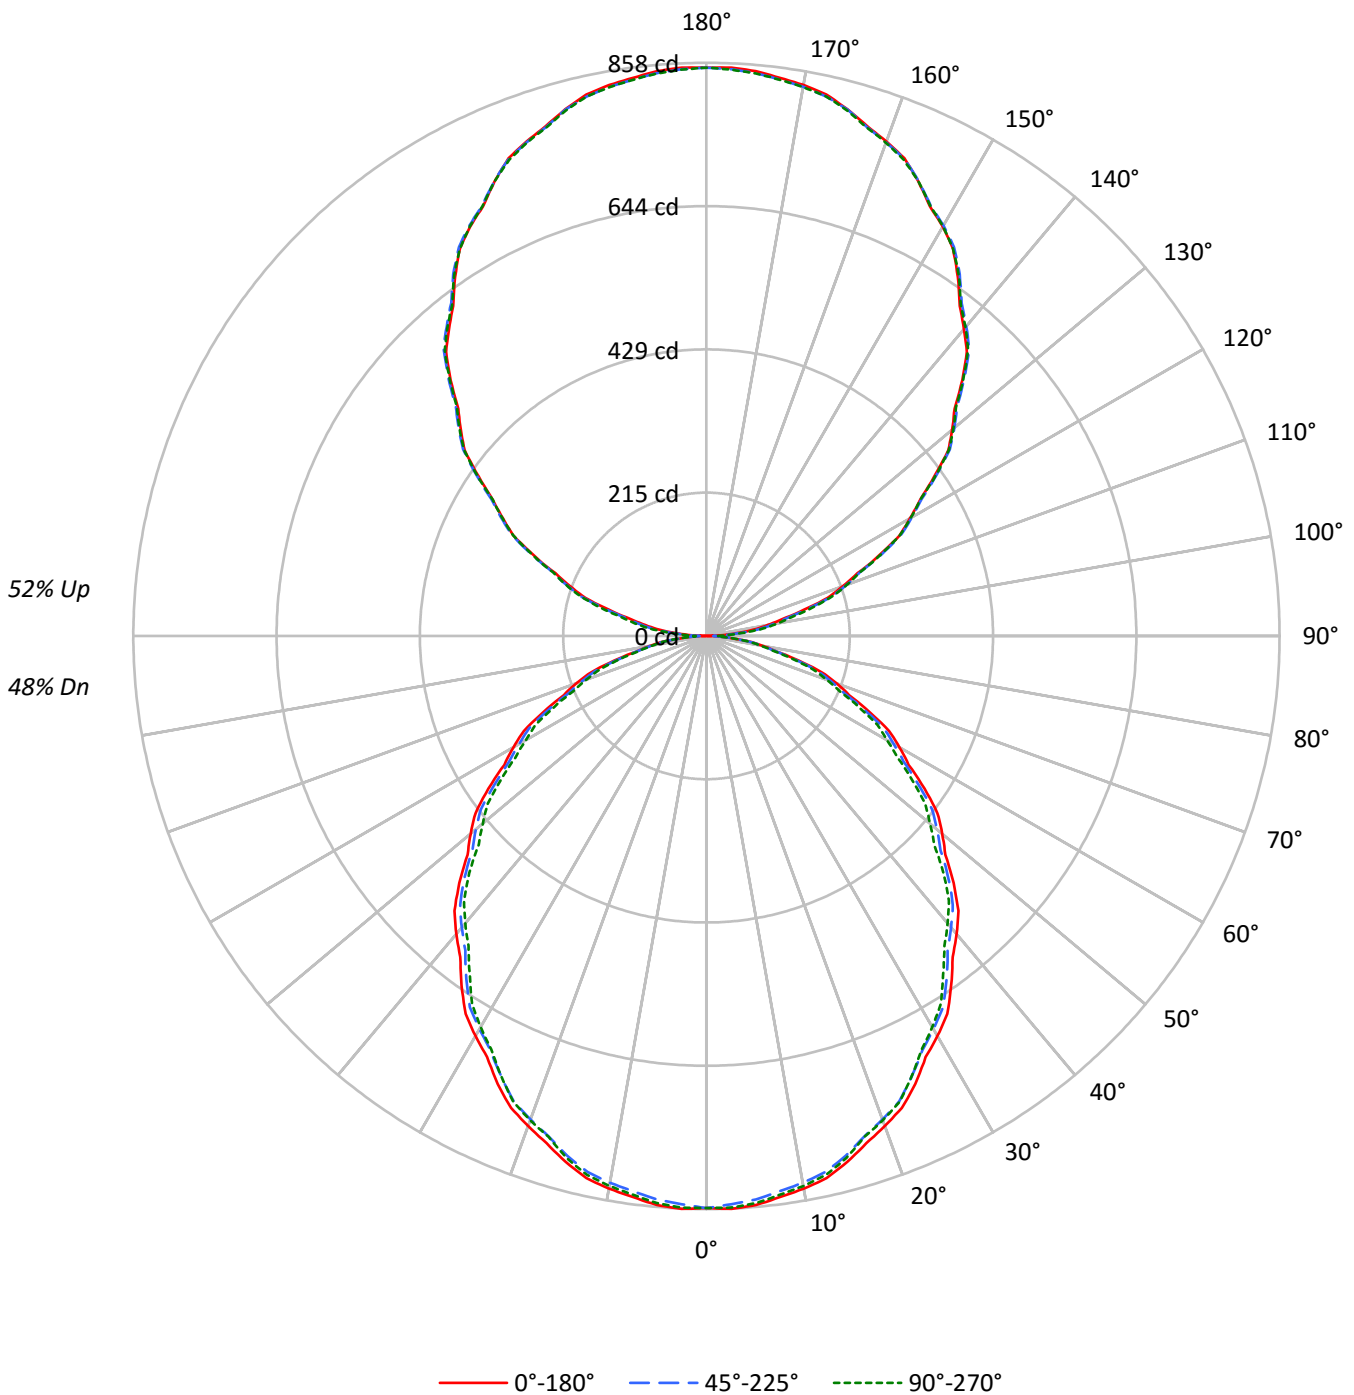



TEST NUMBER: P333381-940

CATALOG NUMBER: S125DIW-S610D770U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	55	55	55	48
1	97	93	89	86	89	86	82	79	72	70	68	60	58	56	48	47	46	41
2	89	81	75	70	81	75	70	65	63	59	56	52	50	47	42	40	39	34
3	81	71	64	58	74	66	60	54	56	51	47	46	43	40	38	35	33	29
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	34	31	28	25
5	68	56	48	42	62	52	45	39	44	39	34	37	33	30	30	27	25	21
6	62	50	42	36	57	47	40	34	40	34	30	33	29	26	27	24	22	19
7	58	45	38	32	53	42	35	30	36	31	26	30	26	23	25	22	19	17
8	54	41	34	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	26	21	18	21	18	16	13
10	47	35	27	23	43	32	26	21	28	23	19	24	19	17	20	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5531	5531	5531
5°	5544	5490	5525
10°	5509	5452	5483
15°	5449	5386	5409
20°	5364	5294	5304
25°	5273	5185	5181
30°	5158	5068	5043
35°	5037	4941	4872
40°	4912	4804	4736
45°	4778	4678	4585
50°	4629	4527	4391
55°	4486	4355	4234
60°	4314	4184	4035
65°	4109	3976	3842
70°	3914	3737	3609
75°	3566	3449	3331
80°	3172	3124	3046
85°	2764	2808	2660



TEST NUMBER: P333381-940

CATALOG NUMBER: S125DIW-S610D770U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.7	1.8
10°-20°	228.1	5.0
20°-30°	336.8	7.3
30°-40°	393.0	8.5
40°-50°	394.7	8.6
50°-60°	346.5	7.5
60°-70°	258.2	5.6
70°-80°	147.6	3.2
80°-90°	44.8	1.0
90°-100°	57.0	1.2
100°-110°	168.2	3.7
110°-120°	285.0	6.2
120°-130°	375.0	8.1
130°-140°	420.2	9.1
140°-150°	411.8	8.9
150°-160°	345.9	7.5
160°-170°	229.9	5.0
170°-180°	80.5	1.7
0°-30°	645.6	14.0
0°-40°	1038.6	22.6
0°-60°	1779.7	38.7
0°-90°	2230.3	48.4
90°-120°	510.2	11.1
90°-150°	1717.2	37.3
90°-180°	2374.0	51.6
0°-180°	4603.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	856	856	856	856	856	
5°	855	853	847	853	852	81
15°	815	813	806	809	809	230
25°	740	736	728	729	727	340
35°	639	636	627	623	618	399
45°	523	520	512	504	502	403
55°	398	396	387	381	376	356
65°	269	267	260	254	251	267
75°	143	142	138	136	134	152
85°	37	38	38	37	36	42
90°	1	6	11	14	16	4
95°	43	45	51	55	57	46
105°	151	154	158	162	164	161
115°	285	288	289	289	288	282
125°	416	420	421	420	419	373
135°	541	545	546	546	544	417
145°	656	659	661	661	659	410
155°	751	751	751	754	751	346
165°	816	815	816	818	814	230
175°	849	846	846	849	845	81
180°	851	851	851	851	851	



TEST NUMBER: P333381-940

CATALOG NUMBER: S125DIW-S610D770U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4
2.5°	858.5	858.2	857.8	857.5	857.1	856.3	855.2	853.9	852.7	851.5	852.7
5°	855.1	854.7	854.4	854.1	853.8	852.9	851.4	849.9	848.4	846.9	848.3
7.5°	847.1	846.9	846.6	846.2	846.0	845.0	843.3	841.7	840.0	838.4	839.6
10°	840.1	839.8	839.5	839.2	838.9	837.9	836.2	834.6	832.9	831.3	832.5
12.5°	831.4	830.9	830.4	829.8	829.3	828.2	826.7	825.2	823.6	822.1	823.0
15°	815.0	814.6	814.1	813.7	813.2	812.2	810.6	808.9	807.2	805.6	806.3
17.5°	796.2	795.6	794.9	794.2	793.5	792.4	790.7	788.9	787.2	785.5	786.4
20°	780.5	780.2	779.9	779.6	779.3	778.2	776.2	774.3	772.3	770.3	771.4
22.5°	764.7	764.2	763.7	763.1	762.6	761.4	759.6	757.8	755.9	754.0	754.7
25°	739.9	739.0	738.3	737.6	736.8	735.5	733.5	731.6	729.6	727.6	728.0
27.5°	710.7	710.2	709.8	709.4	708.9	707.7	705.6	703.6	701.6	699.6	699.6
30°	691.7	691.3	690.8	690.4	689.9	688.6	686.3	684.0	681.8	679.6	679.2
32.5°	671.1	670.5	669.8	669.1	668.3	667.0	665.0	663.0	660.9	659.0	658.4
35°	638.9	638.3	637.7	637.1	636.5	635.2	633.0	630.9	628.8	626.7	626.0
37.5°	605.4	604.7	604.0	603.2	602.4	601.0	599.1	597.1	595.0	593.1	592.0
40°	582.6	581.9	581.1	580.4	579.6	578.2	576.1	574.0	571.9	569.8	568.5
42.5°	558.3	557.7	557.0	556.3	555.7	554.4	552.2	550.2	548.0	545.9	544.7
45°	523.1	522.5	521.8	521.2	520.7	519.4	517.6	515.9	514.0	512.2	510.4
47.5°	485.1	485.1	485.2	485.2	485.2	484.1	482.0	479.8	477.7	475.5	473.7
50°	460.7	460.2	459.8	459.3	458.9	457.8	455.9	454.1	452.4	450.6	448.6
52.5°	435.8	435.4	435.2	434.8	434.4	433.3	431.4	429.4	427.6	425.6	423.9
55°	398.4	397.9	397.4	397.0	396.5	395.3	393.2	391.1	389.0	386.8	385.5
57.5°	358.9	358.7	358.5	358.2	358.0	357.0	355.2	353.4	351.6	349.9	348.1
60°	334.0	333.4	332.8	332.2	331.6	330.5	328.9	327.2	325.5	323.9	322.4
62.5°	308.0	307.6	307.0	306.6	306.0	305.1	303.7	302.3	300.9	299.4	297.8
65°	268.9	268.7	268.4	268.0	267.8	266.8	265.1	263.5	261.8	260.2	258.8
67.5°	231.1	230.5	229.9	229.3	228.6	227.7	226.5	225.2	224.0	222.7	221.6
70°	207.3	206.6	205.8	205.1	204.3	203.2	201.9	200.5	199.2	197.9	196.9
72.5°	181.3	180.7	180.3	179.8	179.2	178.5	177.7	176.8	175.9	175.0	174.1
75°	142.9	142.7	142.3	142.0	141.8	141.2	140.4	139.7	138.9	138.2	137.8
77.5°	107.6	107.5	107.4	107.2	107.1	106.8	106.4	106.0	105.6	105.1	104.9
80°	85.3	85.3	85.3	85.3	85.3	85.2	84.9	84.6	84.4	84.0	83.8
82.5°	65.9	65.6	65.4	65.1	64.9	64.7	64.6	64.6	64.6	64.5	64.2
85°	37.3	37.5	37.5	37.7	37.9	37.9	37.9	37.9	37.9	37.9	37.8
87.5°	14.8	15.0	15.2	15.5	15.7	15.9	16.0	16.1	16.1	16.2	16.3
90°	0.6	1.9	3.0	4.2	5.4	6.5	7.5	8.6	9.5	10.6	11.3
92.5°	16.1	16.9	17.7	18.5	19.4	20.3	21.7	22.9	24.2	25.4	26.4
95°	43.1	43.3	43.6	43.9	44.2	45.1	46.5	48.1	49.5	51.0	52.0
97.5°	71.5	71.6	71.7	71.9	72.0	73.0	75.1	77.1	79.1	81.1	82.1
100°	92.6	92.6	92.6	92.6	92.6	93.6	95.5	97.5	99.3	101.3	102.6
102.5°	115.5	116.0	116.6	117.2	117.8	118.6	119.6	120.6	121.5	122.4	123.9
105°	151.0	151.7	152.4	153.1	153.9	154.7	155.6	156.4	157.3	158.2	159.1
107.5°	190.1	190.8	191.6	192.3	193.1	193.8	194.5	195.1	195.8	196.4	196.9
110°	217.1	217.8	218.6	219.4	220.1	220.6	221.1	221.5	221.9	222.4	222.8



TEST NUMBER: P333381-940

CATALOG NUMBER: S125DIW-S610D770U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	244.7	245.0	245.4	245.8	246.2	246.6	247.2	247.8	248.3	248.9	249.1
115°	285.3	285.9	286.5	287.0	287.7	288.1	288.4	288.6	289.0	289.3	289.1
117.5°	326.1	326.4	326.6	326.9	327.2	327.4	327.7	328.0	328.2	328.5	328.6
120°	351.5	352.2	352.9	353.7	354.5	354.9	355.0	355.2	355.3	355.4	355.4
122.5°	379.1	379.3	379.6	379.9	380.1	380.4	380.8	381.2	381.6	381.9	381.8
125°	416.3	417.2	418.1	419.0	419.9	420.4	420.5	420.7	420.9	421.0	420.7
127.5°	456.1	456.6	457.1	457.6	458.1	458.4	458.6	458.8	459.0	459.1	459.0
130°	479.9	480.6	481.4	482.1	482.9	483.4	483.7	483.9	484.3	484.6	484.4
132.5°	503.7	505.0	506.1	507.4	508.5	509.2	509.1	509.0	509.0	508.9	508.8
135°	541.4	542.3	543.2	544.1	545.0	545.5	545.6	545.8	546.0	546.1	546.1
137.5°	576.9	577.8	578.6	579.5	580.4	580.9	581.3	581.6	581.9	582.3	582.5
140°	599.8	600.5	601.2	601.9	602.7	603.2	603.7	604.1	604.6	605.0	605.3
142.5°	622.5	623.1	623.8	624.4	625.0	625.5	626.2	626.7	627.2	627.8	627.9
145°	656.0	656.6	657.2	657.7	658.4	658.9	659.3	659.8	660.2	660.7	660.7
147.5°	687.0	687.3	687.6	688.0	688.3	688.6	688.9	689.3	689.6	690.0	690.4
150°	707.7	707.5	707.3	707.2	707.0	707.3	707.8	708.5	709.0	709.6	709.6
152.5°	724.6	724.8	725.0	725.2	725.4	725.6	725.9	726.1	726.3	726.6	726.9
155°	750.6	750.6	750.6	750.6	750.6	750.7	750.9	751.0	751.2	751.4	751.9
157.5°	774.0	773.6	773.3	773.0	772.7	772.6	772.8	772.8	773.0	773.2	773.7
160°	787.7	787.3	786.8	786.4	786.0	785.8	786.0	786.1	786.2	786.4	787.0
162.5°	800.0	799.6	799.2	799.0	798.6	798.4	798.5	798.5	798.5	798.6	799.3
165°	816.2	815.9	815.6	815.3	815.0	814.9	815.1	815.2	815.4	815.6	816.1
167.5°	830.0	829.4	828.8	828.2	827.6	827.3	827.3	827.3	827.3	827.3	828.2
170°	837.4	836.8	836.2	835.6	835.0	834.7	834.7	834.7	834.7	834.7	835.6
172.5°	842.7	842.0	841.5	840.9	840.3	840.0	840.0	840.0	840.0	840.0	840.9
175°	848.6	848.0	847.5	846.9	846.2	846.0	846.0	846.0	846.0	846.0	846.9
177.5°	851.7	851.2	850.7	850.2	849.8	849.5	849.4	849.3	849.2	849.0	849.7
180°	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6



TEST NUMBER: P333381-940

CATALOG NUMBER: S125DIW-S610D770U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	856.4	856.4	856.4	856.4	856.4	856.4	856.4	856.4
2.5°	853.9	855.2	856.3	856.8	856.8	856.6	856.5	856.4
5°	849.6	851.0	852.3	852.9	852.7	852.7	852.5	852.3
7.5°	841.0	842.3	843.6	844.3	844.1	843.9	843.8	843.6
10°	833.7	834.9	836.2	836.7	836.5	836.3	836.2	836.1
12.5°	824.0	825.0	825.9	826.4	826.3	826.3	826.3	826.3
15°	807.1	807.8	808.6	809.0	809.0	809.0	809.0	809.0
17.5°	787.4	788.3	789.3	789.3	788.5	787.8	787.1	786.3
20°	772.4	773.5	774.5	774.7	773.9	773.2	772.4	771.7
22.5°	755.5	756.2	756.9	757.0	756.4	755.9	755.4	754.9
25°	728.3	728.5	728.9	728.8	728.3	727.9	727.5	727.0
27.5°	699.7	699.8	699.8	699.6	699.2	698.7	698.3	697.9
30°	678.9	678.7	678.3	678.0	677.5	677.1	676.6	676.2
32.5°	657.9	657.3	656.7	656.1	655.3	654.5	653.6	652.8
35°	625.2	624.5	623.7	622.7	621.5	620.3	619.1	617.9
37.5°	590.8	589.8	588.6	587.7	587.0	586.4	585.7	585.0
40°	567.0	565.7	564.4	563.5	563.0	562.6	562.1	561.7
42.5°	543.5	542.2	541.0	540.0	539.3	538.7	538.0	537.3
45°	508.5	506.8	505.0	503.8	503.4	502.9	502.5	502.0
47.5°	471.8	469.9	468.1	466.7	465.7	464.6	463.5	462.4
50°	446.7	444.7	442.7	441.2	440.1	439.1	438.0	437.0
52.5°	422.1	420.4	418.7	417.3	416.2	414.9	413.8	412.6
55°	384.1	382.8	381.5	380.2	379.2	378.1	377.1	376.0
57.5°	346.3	344.6	342.9	341.7	341.2	340.5	340.0	339.5
60°	320.8	319.3	317.8	316.6	315.5	314.4	313.3	312.4
62.5°	296.2	294.6	292.9	291.8	291.0	290.1	289.3	288.5
65°	257.4	256.1	254.8	253.8	253.2	252.5	252.0	251.4
67.5°	220.5	219.4	218.2	217.4	217.0	216.7	216.3	216.0
70°	196.0	195.1	194.2	193.5	192.9	192.3	191.6	191.1
72.5°	173.0	172.0	170.9	170.1	169.5	169.0	168.4	167.7
75°	137.3	136.9	136.4	135.9	135.3	134.6	134.1	133.5
77.5°	104.6	104.3	104.1	103.7	103.3	102.9	102.5	102.0
80°	83.7	83.6	83.4	83.2	82.8	82.6	82.3	81.9
82.5°	63.9	63.7	63.4	63.2	63.2	63.1	63.0	63.0
85°	37.6	37.5	37.4	37.1	36.8	36.5	36.2	35.9
87.5°	16.5	16.7	16.8	16.8	16.7	16.5	16.3	16.2
90°	12.0	12.8	13.6	14.1	14.5	15.0	15.4	15.9
92.5°	27.4	28.4	29.3	30.0	30.3	30.6	30.9	31.2
95°	53.1	54.0	55.1	55.7	56.1	56.4	56.6	56.9
97.5°	83.1	84.1	85.1	85.6	85.8	86.0	86.1	86.3
100°	103.9	105.2	106.6	107.4	107.7	108.0	108.3	108.5
102.5°	125.4	126.8	128.2	129.1	129.6	130.0	130.4	130.8
105°	160.0	160.9	161.8	162.4	162.8	163.3	163.7	164.2
107.5°	197.3	197.8	198.2	198.4	198.4	198.4	198.3	198.3
110°	223.3	223.7	224.2	224.4	224.2	224.0	223.9	223.7



TEST NUMBER: P333381-940

CATALOG NUMBER: S125DIW-S610D770U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	249.3	249.5	249.7	249.7	249.4	249.1	248.9	248.6
115°	289.0	288.8	288.6	288.6	288.4	288.3	288.1	287.9
117.5°	328.7	328.8	329.0	328.7	328.1	327.5	326.9	326.4
120°	355.4	355.4	355.4	355.2	354.6	354.0	353.4	352.8
122.5°	381.7	381.6	381.5	381.2	380.7	380.2	379.8	379.3
125°	420.4	420.1	419.8	419.6	419.5	419.3	419.2	419.0
127.5°	458.9	458.7	458.5	458.3	458.1	457.7	457.4	457.2
130°	484.3	484.1	483.9	483.8	483.5	483.1	482.9	482.6
132.5°	508.6	508.5	508.4	508.0	507.7	507.2	506.8	506.4
135°	546.1	546.1	546.1	545.8	545.2	544.7	544.0	543.5
137.5°	582.6	582.8	583.0	582.6	581.9	581.2	580.5	579.7
140°	605.6	605.9	606.2	606.0	605.3	604.5	603.8	603.1
142.5°	628.1	628.3	628.5	628.2	627.5	626.8	626.0	625.3
145°	660.7	660.7	660.7	660.4	660.0	659.5	659.1	658.6
147.5°	690.7	691.1	691.4	691.1	690.1	689.1	688.1	687.2
150°	709.6	709.6	709.6	709.4	709.2	708.9	708.6	708.3
152.5°	727.3	727.6	728.0	727.9	727.4	726.8	726.3	725.8
155°	752.5	753.0	753.7	753.6	752.9	752.2	751.4	750.6
157.5°	774.4	774.9	775.5	775.3	774.4	773.4	772.4	771.4
160°	787.6	788.2	788.7	788.7	787.9	787.2	786.5	785.8
162.5°	800.0	800.7	801.4	801.4	800.5	799.6	798.8	797.9
165°	816.7	817.3	817.9	817.7	816.9	816.0	815.1	814.2
167.5°	829.1	830.0	830.8	830.8	829.9	829.0	828.1	827.2
170°	836.5	837.4	838.3	838.2	837.1	836.2	835.1	834.1
172.5°	841.8	842.7	843.6	843.6	842.7	841.7	840.8	839.9
175°	847.7	848.6	849.5	849.4	848.4	847.4	846.3	845.3
177.5°	850.4	851.1	851.9	851.8	851.0	850.2	849.4	848.5
180°	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6

(END OF REPORT)