

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333404-940

Luminaire Tested: **S125DIW-S850D470U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333404-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIW-S850D470U940-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 470 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4718.3 lumens
Efficiency: N/A
Efficacy: 125.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 37.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333404-940

CATALOG NUMBER: S125DIW-S850D470U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

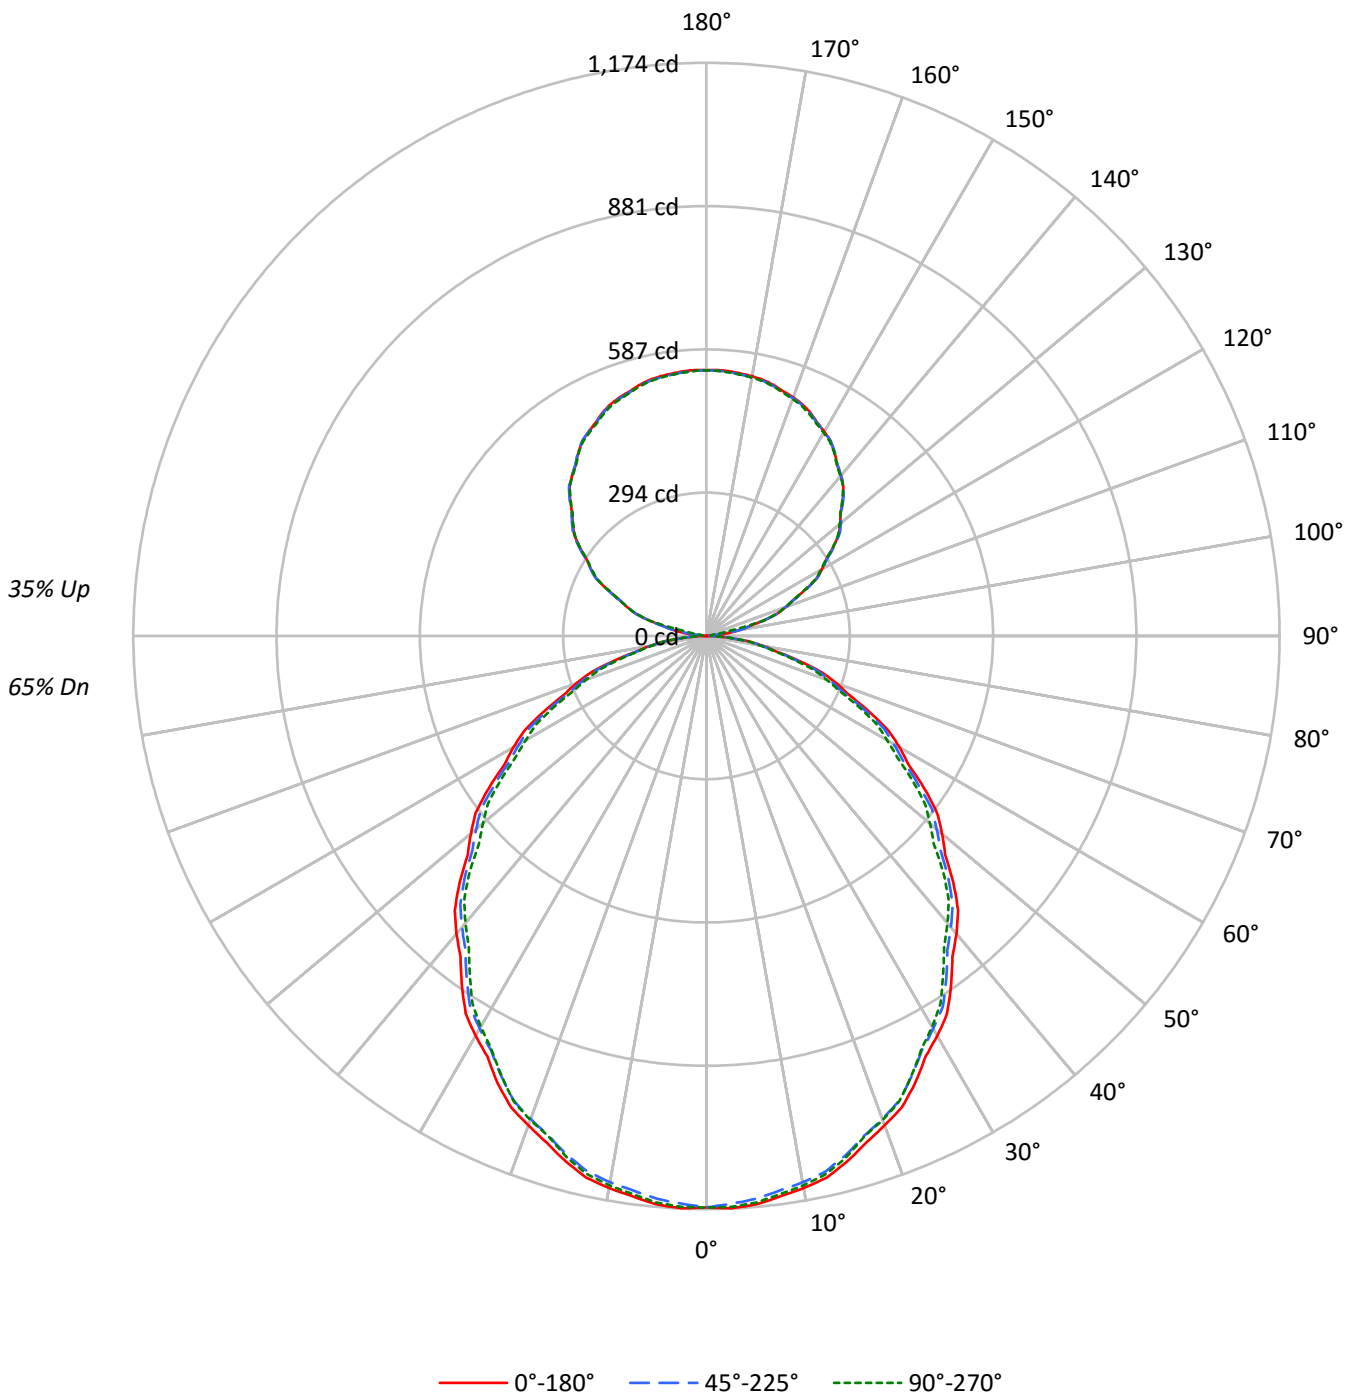



TEST NUMBER: P333404-940

CATALOG NUMBER: S125DIW-S850D470U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	70	70	70	65
1	101	97	92	89	95	91	87	84	80	78	75	70	68	67	61	60	59	54
2	92	84	78	73	86	79	74	69	70	66	62	62	58	56	54	51	49	45
3	84	74	67	60	78	70	63	58	62	57	52	55	50	47	48	45	42	38
4	77	66	57	51	72	62	55	49	55	49	45	49	44	40	43	39	36	33
5	71	59	50	44	66	55	48	42	49	43	38	44	39	35	38	35	31	29
6	65	53	44	38	61	50	42	37	44	38	34	40	35	31	35	31	28	25
7	60	48	39	34	56	45	38	32	40	34	30	36	31	27	32	28	25	22
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	27	23	20	18
10	49	36	29	24	46	35	28	23	31	25	21	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7559	7559	7559
5°	7577	7505	7553
10°	7531	7452	7494
15°	7449	7362	7393
20°	7332	7236	7249
25°	7207	7088	7081
30°	7052	6927	6893
35°	6885	6754	6659
40°	6715	6566	6473
45°	6530	6395	6268
50°	6327	6187	6002
55°	6132	5954	5788
60°	5898	5717	5515
65°	5619	5434	5251
70°	5351	5108	4932
75°	4876	4716	4551
80°	4340	4273	4169
85°	3772	3846	3631



TEST NUMBER: P333404-940

CATALOG NUMBER: S125DIW-S850D470U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	110.4	2.3
10°-20°	311.8	6.6
20°-30°	460.3	9.8
30°-40°	537.2	11.4
40°-50°	539.5	11.4
50°-60°	473.6	10.0
60°-70°	352.9	7.5
70°-80°	201.8	4.3
80°-90°	59.8	1.3
90°-100°	19.8	0.4
100°-110°	121.9	2.6
110°-120°	221.0	4.7
120°-130°	283.7	6.0
130°-140°	305.1	6.5
140°-150°	286.4	6.1
150°-160°	231.7	4.9
160°-170°	149.8	3.2
170°-180°	51.7	1.1
0°-30°	882.5	18.7
0°-40°	1419.6	30.1
0°-60°	2432.7	51.6
0°-90°	3047.2	64.6
90°-120°	362.7	7.7
90°-150°	1237.9	26.2
90°-180°	1671.0	35.4
0°-180°	4718.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1170	1170	1170	1170	1170	
5°	1169	1166	1158	1165	1165	111
15°	1114	1111	1101	1106	1106	314
25°	1011	1006	995	996	994	465
35°	873	869	857	852	845	546
45°	715	711	700	690	686	551
55°	545	541	529	521	514	486
65°	368	365	356	348	344	365
75°	195	193	189	186	182	208
85°	51	52	52	51	49	57
90°	0	4	6	8	10	4
95°	23	21	6	8	8	29
105°	119	120	120	120	120	126
115°	223	225	225	223	221	221
125°	317	319	320	318	317	283
135°	395	397	396	396	393	304
145°	458	459	459	459	457	286
155°	504	502	503	504	501	232
165°	532	530	530	532	529	150
175°	544	542	542	545	542	52
180°	544	544	544	544	544	



TEST NUMBER: P333404-940

CATALOG NUMBER: S125DIW-S850D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5
2.5°	1173.6	1173.0	1172.6	1172.1	1171.5	1170.5	1168.9	1167.2	1165.6	1164.0	1165.6
5°	1168.8	1168.3	1167.9	1167.5	1167.1	1165.8	1163.8	1161.7	1159.7	1157.6	1159.5
7.5°	1158.0	1157.6	1157.2	1156.7	1156.4	1155.0	1152.7	1150.5	1148.3	1145.9	1147.7
10°	1148.3	1148.0	1147.5	1147.1	1146.7	1145.4	1143.1	1140.9	1138.6	1136.3	1138.0
12.5°	1136.5	1135.8	1135.1	1134.3	1133.5	1132.1	1130.1	1127.9	1125.8	1123.7	1125.1
15°	1114.1	1113.5	1112.9	1112.2	1111.6	1110.2	1108.0	1105.6	1103.4	1101.1	1102.2
17.5°	1088.3	1087.4	1086.5	1085.7	1084.8	1083.1	1080.8	1078.4	1076.0	1073.7	1075.0
20°	1066.8	1066.5	1066.0	1065.6	1065.2	1063.6	1061.0	1058.3	1055.6	1052.9	1054.4
22.5°	1045.4	1044.6	1043.9	1043.1	1042.4	1040.8	1038.3	1035.7	1033.2	1030.7	1031.7
25°	1011.3	1010.3	1009.2	1008.2	1007.2	1005.3	1002.6	1000.0	997.3	994.6	995.1
27.5°	971.4	970.9	970.3	969.6	969.0	967.3	964.6	961.8	959.0	956.3	956.4
30°	945.6	944.9	944.3	943.7	943.1	941.2	938.2	935.0	931.9	928.9	928.4
32.5°	917.4	916.4	915.5	914.5	913.6	911.8	909.0	906.2	903.5	900.7	900.0
35°	873.3	872.4	871.6	870.8	870.0	868.2	865.3	862.4	859.5	856.7	855.6
37.5°	827.6	826.5	825.5	824.5	823.4	821.5	818.9	816.1	813.4	810.7	809.1
40°	796.5	795.4	794.4	793.4	792.3	790.4	787.5	784.6	781.8	778.8	777.0
42.5°	763.1	762.2	761.3	760.5	759.6	757.8	754.9	752.0	749.1	746.3	744.6
45°	715.0	714.1	713.3	712.5	711.7	710.0	707.6	705.1	702.6	700.2	697.7
47.5°	663.1	663.2	663.2	663.2	663.3	661.8	658.8	655.9	652.9	650.0	647.4
50°	629.7	629.1	628.5	627.9	627.3	625.7	623.3	620.8	618.3	615.8	613.1
52.5°	595.7	595.2	594.8	594.3	593.9	592.3	589.7	587.0	584.4	581.8	579.4
55°	544.6	543.9	543.3	542.7	542.1	540.3	537.4	534.6	531.6	528.8	526.9
57.5°	490.6	490.4	490.0	489.6	489.4	487.9	485.5	483.1	480.6	478.2	475.8
60°	456.6	455.8	455.0	454.1	453.3	451.7	449.4	447.2	445.0	442.6	440.6
62.5°	421.0	420.4	419.7	419.0	418.4	417.1	415.2	413.2	411.3	409.3	407.2
65°	367.7	367.2	366.8	366.4	366.0	364.7	362.4	360.2	357.8	355.6	353.7
67.5°	316.0	315.1	314.2	313.3	312.5	311.2	309.6	307.9	306.2	304.5	302.9
70°	283.4	282.3	281.3	280.3	279.3	277.9	276.0	274.1	272.2	270.5	269.2
72.5°	247.8	247.1	246.4	245.8	245.0	244.1	242.9	241.7	240.5	239.3	237.9
75°	195.4	195.0	194.6	194.2	193.8	193.1	192.0	191.0	189.9	189.0	188.3
77.5°	147.0	146.9	146.8	146.6	146.4	146.1	145.4	144.9	144.3	143.7	143.4
80°	116.7	116.7	116.7	116.7	116.7	116.5	116.1	115.7	115.2	114.9	114.7
82.5°	90.0	89.7	89.3	89.0	88.7	88.5	88.4	88.4	88.3	88.2	87.8
85°	50.9	51.2	51.4	51.5	51.7	51.9	51.9	51.9	51.9	51.9	51.6
87.5°	20.1	20.2	20.3	20.5	20.7	20.7	20.7	20.6	20.6	20.5	20.7
90°	0.4	1.2	1.9	2.6	3.3	3.9	4.5	5.2	5.8	6.4	6.9
92.5°	6.2	5.7	5.2	4.7	4.2	4.2	4.8	5.4	5.9	6.4	6.9
95°	23.0	22.7	22.5	22.2	21.9	20.1	16.7	13.3	9.9	6.4	6.9
97.5°	48.0	48.5	49.0	49.5	49.9	46.8	40.0	33.3	26.6	19.9	17.3
100°	67.3	67.7	67.9	68.2	68.5	68.8	69.1	69.5	69.8	70.2	56.8
102.5°	87.0	87.4	87.7	88.1	88.5	88.7	88.9	89.1	89.3	89.5	87.0
105°	118.6	119.0	119.3	119.7	120.0	120.2	120.2	120.2	120.2	120.2	120.2
107.5°	151.3	151.3	151.3	151.3	151.3	151.4	151.6	151.8	151.9	152.1	152.2
110°	172.6	172.6	172.6	172.6	172.6	172.7	172.9	173.1	173.3	173.4	173.2



TEST NUMBER: P333404-940

CATALOG NUMBER: S125DIW-S850D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	192.7	192.9	193.1	193.3	193.5	193.7	193.8	193.9	194.0	194.1	193.8
115°	222.7	223.1	223.6	224.0	224.4	224.7	224.8	224.9	225.0	225.1	224.7
117.5°	253.8	253.7	253.7	253.7	253.7	253.9	254.1	254.5	254.9	255.2	254.8
120°	273.1	273.0	273.0	272.9	272.8	272.9	273.1	273.4	273.7	273.9	273.8
122.5°	290.3	290.5	290.9	291.2	291.6	291.8	291.9	292.0	292.2	292.3	292.1
125°	316.6	317.3	317.9	318.5	319.1	319.5	319.5	319.5	319.5	319.5	319.1
127.5°	341.9	342.4	342.9	343.3	343.8	343.9	343.8	343.8	343.8	343.7	343.5
130°	357.4	357.8	358.3	358.7	359.2	359.4	359.5	359.6	359.7	359.8	359.5
132.5°	372.9	373.4	374.0	374.4	375.0	375.1	375.0	374.8	374.5	374.3	374.3
135°	394.9	395.5	396.0	396.5	397.1	397.3	397.1	396.9	396.7	396.5	396.4
137.5°	415.2	415.6	416.1	416.6	417.1	417.2	417.1	416.9	416.7	416.5	416.6
140°	428.4	428.6	428.7	428.9	429.1	429.2	429.1	429.0	428.9	428.8	429.0
142.5°	440.3	440.5	440.6	440.7	440.8	440.9	441.0	441.1	441.3	441.4	441.4
145°	457.9	458.1	458.3	458.4	458.6	458.7	458.7	458.7	458.7	458.7	458.8
147.5°	473.2	473.1	473.1	473.1	473.1	473.1	473.2	473.3	473.4	473.5	473.6
150°	482.9	482.7	482.5	482.3	482.1	482.1	482.3	482.5	482.7	482.9	483.0
152.5°	492.2	491.9	491.4	491.1	490.6	490.5	490.7	490.9	491.1	491.2	491.4
155°	504.3	503.7	503.2	502.7	502.1	501.9	502.1	502.3	502.5	502.7	502.9
157.5°	513.5	513.2	512.9	512.6	512.2	512.1	512.1	512.1	512.1	512.2	512.5
160°	520.0	519.4	518.9	518.4	517.8	517.6	517.7	517.8	517.9	518.0	518.4
162.5°	525.1	524.6	524.1	523.5	523.0	522.8	522.9	523.0	523.1	523.2	523.6
165°	532.1	531.5	531.0	530.5	529.9	529.7	529.8	529.9	529.9	530.0	530.6
167.5°	537.3	536.7	536.2	535.6	535.0	534.8	534.8	534.9	535.0	535.1	535.8
170°	540.2	539.6	538.9	538.2	537.6	537.3	537.4	537.5	537.6	537.7	538.4
172.5°	542.1	541.4	540.8	540.2	539.6	539.4	539.5	539.7	539.8	540.0	540.6
175°	544.2	543.7	543.1	542.6	542.1	541.8	541.9	542.0	542.1	542.2	542.9
177.5°	545.2	544.7	544.3	543.9	543.4	543.2	543.3	543.4	543.5	543.6	544.0
180°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2



TEST NUMBER: P333404-940

CATALOG NUMBER: S125DIW-S850D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5	1170.5
2.5°	1167.2	1168.9	1170.5	1171.3	1171.1	1170.9	1170.7	1170.5
5°	1161.4	1163.1	1165.0	1165.8	1165.6	1165.5	1165.2	1165.0
7.5°	1149.6	1151.4	1153.2	1154.0	1153.8	1153.6	1153.3	1153.2
10°	1139.6	1141.3	1142.9	1143.6	1143.4	1143.2	1143.0	1142.8
12.5°	1126.3	1127.7	1129.0	1129.6	1129.6	1129.5	1129.5	1129.4
15°	1103.2	1104.2	1105.3	1105.7	1105.7	1105.7	1105.7	1105.7
17.5°	1076.3	1077.5	1078.8	1079.0	1077.9	1076.9	1075.8	1074.9
20°	1055.9	1057.3	1058.7	1058.9	1057.9	1056.9	1055.9	1054.8
22.5°	1032.6	1033.6	1034.6	1034.7	1033.9	1033.2	1032.5	1031.9
25°	995.4	995.9	996.3	996.1	995.6	995.0	994.3	993.7
27.5°	956.4	956.5	956.6	956.4	955.7	955.1	954.5	953.9
30°	928.1	927.6	927.2	926.8	926.1	925.5	924.9	924.3
32.5°	899.2	898.5	897.8	896.8	895.7	894.6	893.5	892.4
35°	854.6	853.5	852.6	851.2	849.5	847.9	846.2	844.6
37.5°	807.6	806.1	804.6	803.3	802.5	801.5	800.6	799.6
40°	775.2	773.3	771.4	770.2	769.5	769.0	768.4	767.8
42.5°	742.9	741.2	739.5	738.2	737.3	736.3	735.3	734.4
45°	695.2	692.7	690.3	688.7	688.1	687.5	686.9	686.3
47.5°	644.9	642.4	639.9	637.9	636.5	635.1	633.6	632.1
50°	610.5	607.8	605.1	603.1	601.6	600.2	598.8	597.4
52.5°	577.1	574.7	572.4	570.4	568.8	567.2	565.6	564.0
55°	525.1	523.3	521.4	519.8	518.3	516.8	515.4	514.0
57.5°	473.5	471.1	468.7	467.1	466.3	465.6	464.8	464.0
60°	438.5	436.5	434.4	432.7	431.2	429.8	428.4	427.0
62.5°	404.9	402.7	400.5	398.8	397.7	396.5	395.5	394.3
65°	352.0	350.1	348.2	346.9	346.1	345.3	344.4	343.6
67.5°	301.4	299.8	298.3	297.2	296.8	296.2	295.7	295.2
70°	268.0	266.7	265.5	264.5	263.6	262.8	262.0	261.2
72.5°	236.5	235.1	233.7	232.6	231.8	231.0	230.2	229.3
75°	187.7	187.1	186.5	185.7	184.9	184.0	183.2	182.4
77.5°	143.0	142.6	142.2	141.8	141.2	140.6	140.1	139.5
80°	114.4	114.2	114.0	113.7	113.3	112.9	112.4	112.1
82.5°	87.4	87.0	86.7	86.5	86.4	86.3	86.2	86.1
85°	51.5	51.3	51.0	50.7	50.3	49.9	49.5	49.0
87.5°	20.8	20.9	21.0	20.8	20.5	20.2	20.0	19.7
90°	7.3	7.8	8.2	8.6	8.9	9.2	9.5	9.7
92.5°	7.3	7.8	8.2	8.6	8.6	8.8	8.9	9.0
95°	7.3	7.8	8.2	8.5	8.5	8.5	8.5	8.5
97.5°	14.8	12.3	9.7	8.5	8.5	8.5	8.5	8.5
100°	43.5	30.1	16.8	9.9	9.5	9.2	8.8	8.5
102.5°	84.5	81.9	79.5	75.2	69.0	63.0	56.8	50.7
105°	120.2	120.2	120.2	120.2	120.1	120.0	119.9	119.8
107.5°	152.2	152.2	152.2	152.1	151.9	151.6	151.3	151.1
110°	172.9	172.6	172.4	172.3	172.4	172.5	172.5	172.6



TEST NUMBER: P333404-940

CATALOG NUMBER: S125DIW-S850D470U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	193.4	193.1	192.8	192.5	192.4	192.3	192.2	192.0
115°	224.4	224.0	223.6	223.2	222.7	222.1	221.6	221.1
117.5°	254.2	253.8	253.3	253.0	252.7	252.5	252.3	252.1
120°	273.6	273.4	273.2	272.9	272.4	272.0	271.5	271.1
122.5°	291.9	291.8	291.6	291.2	290.7	290.2	289.7	289.2
125°	318.8	318.4	318.1	317.7	317.4	317.2	316.9	316.6
127.5°	343.3	343.1	343.0	342.5	341.8	341.2	340.5	339.8
130°	359.3	359.0	358.7	358.4	357.9	357.5	357.0	356.6
132.5°	374.3	374.2	374.2	373.9	373.4	373.0	372.6	372.1
135°	396.2	396.0	395.8	395.5	394.9	394.4	393.9	393.3
137.5°	416.6	416.7	416.7	416.5	416.0	415.5	415.1	414.6
140°	429.2	429.4	429.5	429.4	428.8	428.3	427.8	427.2
142.5°	441.5	441.5	441.6	441.3	440.8	440.2	439.7	439.2
145°	458.9	459.0	459.1	458.8	458.3	457.7	457.2	456.6
147.5°	473.8	473.9	473.9	473.7	473.1	472.4	471.7	471.1
150°	483.2	483.4	483.6	483.3	482.6	481.9	481.2	480.5
152.5°	491.6	491.8	492.0	491.8	491.1	490.4	489.8	489.2
155°	503.2	503.5	503.7	503.5	502.7	502.0	501.3	500.6
157.5°	512.7	513.0	513.3	513.1	512.4	511.7	511.0	510.2
160°	518.7	519.1	519.4	519.2	518.5	517.8	517.1	516.4
162.5°	524.1	524.7	525.1	525.0	524.2	523.4	522.6	521.8
165°	531.2	531.7	532.3	532.2	531.5	530.7	529.9	529.2
167.5°	536.5	537.1	537.7	537.7	536.8	536.0	535.2	534.4
170°	539.1	539.9	540.6	540.6	539.8	539.0	538.1	537.3
172.5°	541.3	541.9	542.6	542.5	541.7	540.9	540.1	539.3
175°	543.6	544.3	545.0	545.0	544.2	543.4	542.6	541.8
177.5°	544.6	545.0	545.5	545.5	544.9	544.4	543.8	543.2
180°	544.2	544.2	544.2	544.2	544.2	544.2	544.2	544.2

(END OF REPORT)