

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333407-940

Luminaire Tested: **S125DIW-S850D770U940-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333407-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIW-S850D770U940-4F0-1E-UDD-A1  
Description: DEFINE 5 DIRECT-INDIRECT WALL MOUNT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 770 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5453.7 lumens  
Efficiency: N/A  
Efficacy: 121.2 lumens/watt  
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52  
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 45  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

### Luminous Intensity Polar Plot

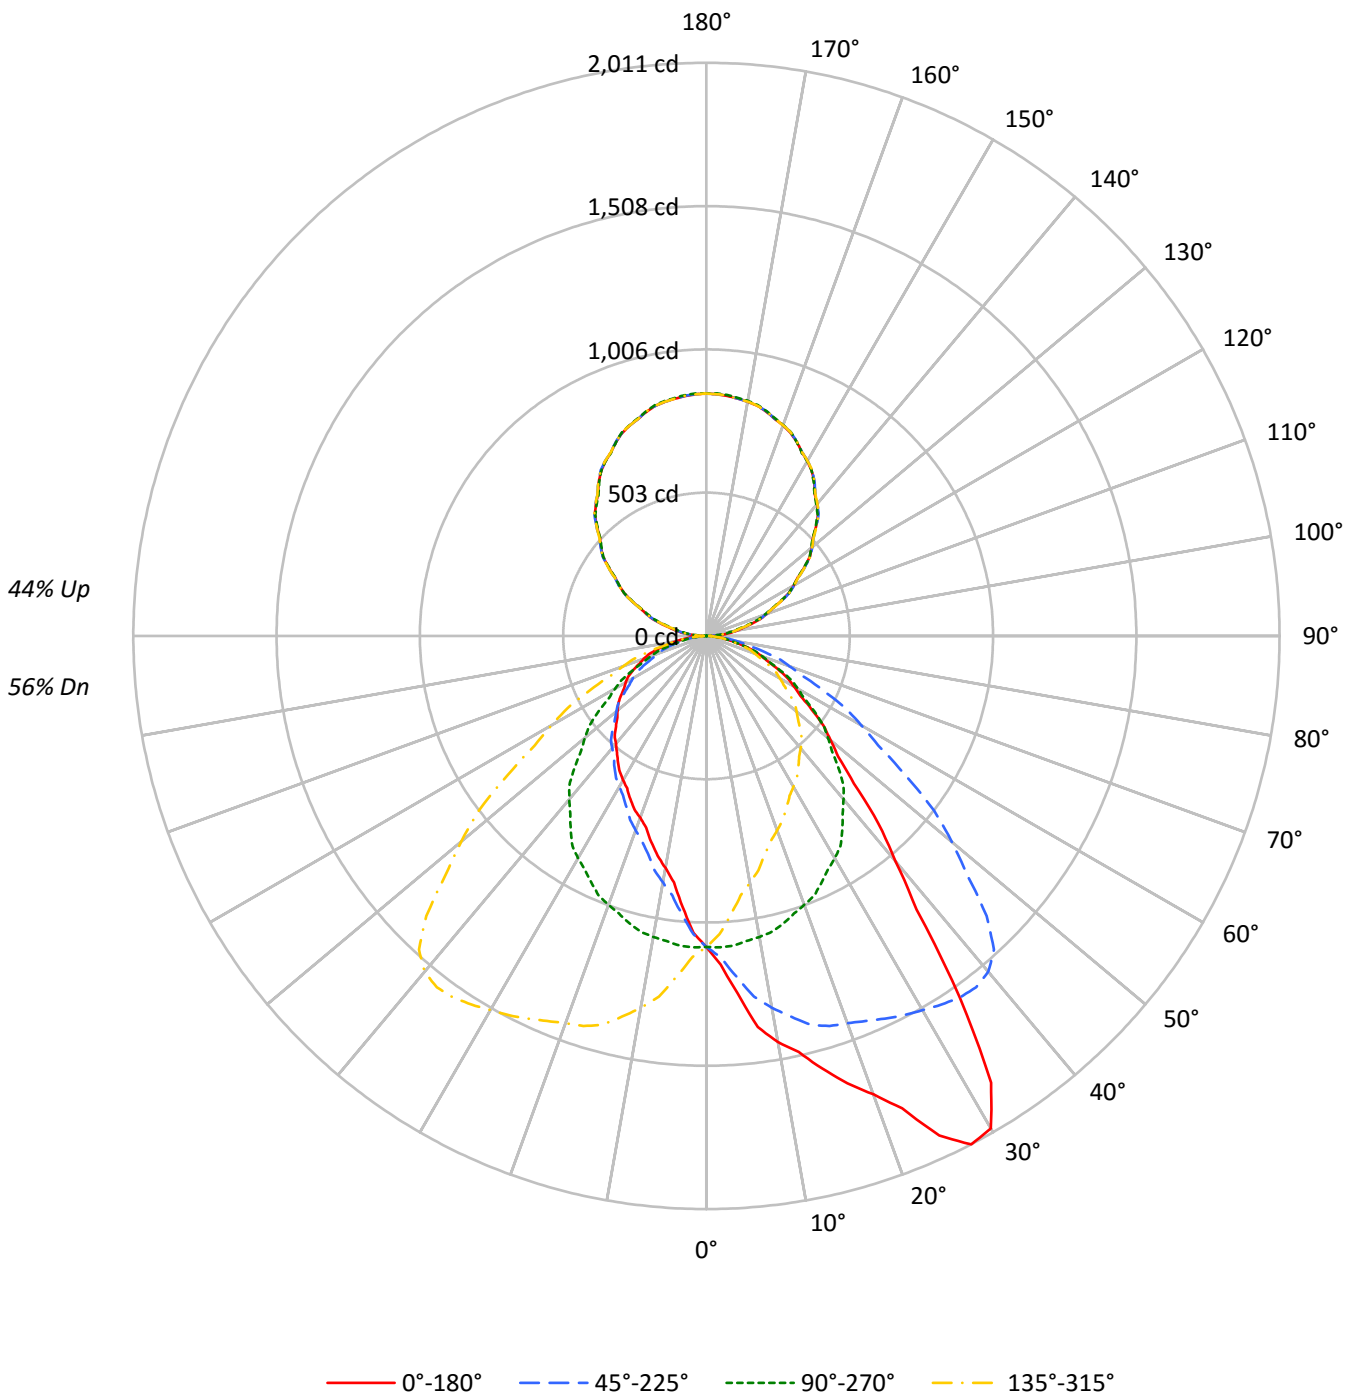



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56
1	100	95	91	88	92	89	85	82	77	74	72	66	64	62	55	54	53	48
2	91	83	77	72	84	78	73	68	67	63	60	58	55	52	49	47	45	41
3	83	74	66	60	77	69	62	57	60	55	51	51	48	44	44	41	38	35
4	76	65	57	51	70	61	54	49	53	48	43	46	42	38	39	36	33	30
5	70	58	50	44	65	55	47	42	48	42	38	41	37	33	35	32	29	26
6	64	52	44	38	60	49	42	36	43	37	33	37	33	29	32	28	26	23
7	60	47	39	34	55	44	37	32	39	33	29	34	29	26	29	26	23	20
8	55	43	35	30	51	40	33	28	36	30	26	31	26	23	27	23	20	18
9	51	39	32	27	48	37	30	25	33	27	23	29	24	21	25	21	18	16
10	48	36	29	24	45	34	27	23	30	25	21	26	22	19	23	19	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	7045	7045	7045	7045
5°	8159	7069	6190	7069
10°	9492	7033	5423	7033
15°	10508	6981	5003	6981
20°	11762	6899	4665	6899
25°	13779	6807	4501	6807
30°	14882	6716	4357	6716
35°	12236	6545	4264	6545
40°	8697	6308	4161	6308
45°	6682	5989	4103	5989
50°	5704	5591	4093	5591
55°	5078	5203	4130	5203
60°	4580	4779	4234	4779
65°	4232	4351	4345	4351
70°	3848	3909	4407	3909
75°	3399	3441	4367	3441
80°	2860	2804	3998	2804
85°	2267	2023	3223	2023



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	105.0	1.9
10°-20°	312.7	5.7
20°-30°	507.7	9.3
30°-40°	619.3	11.4
40°-50°	563.4	10.3
50°-60°	448.8	8.2
60°-70°	312.6	5.7
70°-80°	166.7	3.1
80°-90°	43.9	0.8
90°-100°	57.0	1.0
100°-110°	168.2	3.1
110°-120°	285.0	5.2
120°-130°	375.0	6.9
130°-140°	420.2	7.7
140°-150°	411.8	7.6
150°-160°	345.9	6.3
160°-170°	229.9	4.2
170°-180°	80.5	1.5
0°-30°	925.4	17.0
0°-40°	1544.8	28.3
0°-60°	2556.9	46.9
0°-90°	3080.1	56.5
90°-120°	510.2	9.4
90°-150°	1717.2	31.5
90°-180°	2374.0	43.5
0°-180°	5453.7	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1091	1091	1091	1091	1091	
5°	1258	1090	955	1090	1258	127
15°	1572	1044	748	1044	1572	450
25°	1934	955	632	955	1934	883
35°	1552	830	541	830	1552	950
45°	732	656	449	656	732	586
55°	451	462	367	462	451	406
65°	277	285	284	285	277	275
75°	136	138	175	138	136	147
85°	31	27	44	27	31	36
90°	16	1	16	1	16	10
95°	57	43	57	43	57	58
105°	164	151	164	151	164	174
115°	288	285	288	285	288	285
125°	419	416	419	416	419	374
135°	544	541	544	541	544	419
145°	659	656	659	656	659	411
155°	751	751	751	751	751	345
165°	814	816	814	816	814	230
175°	845	849	845	849	845	80
180°	851	851	851	851	851	



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9
2.5°	1153.9	1152.4	1150.9	1147.9	1150.1	1143.9	1140.9	1135.7	1129.4	1127.2	1124.6
5°	1258.5	1260.8	1263.1	1253.4	1254.4	1247.9	1233.1	1221.0	1211.3	1198.8	1190.0
7.5°	1384.5	1378.9	1378.5	1372.3	1361.4	1352.7	1337.1	1317.3	1298.2	1276.3	1258.2
10°	1447.4	1447.9	1443.7	1436.3	1424.8	1416.4	1396.1	1376.5	1353.0	1325.2	1305.3
12.5°	1494.9	1496.7	1491.5	1481.5	1475.9	1457.1	1441.2	1418.1	1390.0	1367.8	1337.5
15°	1571.6	1566.4	1562.7	1550.2	1540.5	1521.1	1495.6	1471.5	1440.9	1412.6	1384.5
17.5°	1645.4	1649.5	1642.5	1631.1	1601.0	1578.2	1544.1	1511.1	1473.1	1435.2	1401.5
20°	1711.4	1715.0	1704.4	1684.5	1648.4	1625.7	1580.7	1538.2	1494.2	1445.6	1408.5
22.5°	1793.6	1790.6	1776.3	1746.0	1714.7	1672.8	1624.1	1572.3	1517.2	1462.2	1413.0
25°	1933.6	1914.1	1905.3	1867.9	1826.7	1765.1	1698.4	1622.5	1553.9	1481.2	1418.3
27.5°	2011.2	2005.1	1995.3	1969.2	1925.8	1860.0	1781.4	1688.8	1592.1	1500.4	1418.0
30°	1995.6	1996.5	1997.5	1989.1	1961.4	1911.8	1833.6	1734.0	1619.2	1515.9	1420.6
32.5°	1857.9	1874.7	1890.8	1909.9	1917.6	1908.2	1859.1	1769.2	1651.1	1533.7	1419.1
35°	1552.0	1557.2	1609.4	1661.3	1731.7	1786.4	1822.9	1783.2	1683.6	1548.8	1417.3
37.5°	1210.1	1235.2	1271.4	1330.0	1431.6	1522.5	1639.5	1693.3	1661.2	1553.7	1414.1
40°	1031.6	1054.8	1078.3	1138.1	1223.8	1334.0	1466.9	1580.3	1606.7	1538.2	1402.9
42.5°	893.9	912.1	938.3	983.3	1054.9	1152.4	1279.4	1427.7	1518.9	1493.0	1379.7
45°	731.6	743.2	763.6	799.2	851.0	927.5	1039.5	1201.6	1342.7	1389.6	1324.3
47.5°	626.2	626.1	641.9	666.6	704.0	768.9	851.8	978.7	1129.6	1241.2	1236.0
50°	567.7	565.3	577.8	599.1	628.7	671.8	751.0	852.4	997.4	1123.7	1159.0
52.5°	517.3	517.5	525.2	541.0	565.8	602.6	661.7	753.1	877.0	1006.7	1073.0
55°	451.0	449.2	457.9	468.6	486.6	510.7	553.3	623.2	723.7	851.5	937.6
57.5°	390.2	395.3	398.9	406.3	421.2	437.4	473.3	524.6	604.3	714.0	805.0
60°	354.6	359.8	362.6	370.0	382.0	395.9	423.7	465.4	532.4	627.0	717.2
62.5°	322.8	326.8	327.7	334.4	344.2	357.8	379.6	414.6	467.6	550.3	638.7
65°	276.9	276.9	278.7	285.7	290.3	302.4	319.1	344.5	387.1	451.5	526.9
67.5°	232.6	234.9	234.3	237.5	241.7	251.0	263.0	284.0	315.6	362.6	422.9
70°	203.8	205.5	205.1	207.4	212.0	218.1	227.8	247.7	270.4	310.7	362.6
72.5°	177.8	178.5	177.4	180.4	183.2	188.4	199.3	209.9	231.1	265.1	307.7
75°	136.2	137.1	137.9	139.8	142.6	145.3	151.0	161.6	175.5	201.0	228.3
77.5°	102.0	100.3	102.5	102.3	103.8	105.9	110.8	116.5	127.9	144.0	165.1
80°	76.9	77.3	77.3	77.8	80.1	81.5	85.7	89.8	98.6	110.7	125.5
82.5°	56.1	57.3	56.6	57.4	59.4	60.4	62.7	66.1	71.2	80.7	91.4
85°	30.6	28.3	29.2	30.1	30.1	30.6	32.4	33.8	36.6	40.3	44.4
87.5°	12.0	12.8	13.0	12.9	13.2	13.1	14.4	14.3	15.2	16.2	17.5
90°	15.9	15.4	15.0	14.5	14.1	13.6	12.8	12.0	11.3	10.6	9.5
92.5°	31.2	30.9	30.6	30.3	30.0	29.3	28.4	27.4	26.4	25.4	24.2
95°	56.9	56.6	56.4	56.1	55.7	55.1	54.0	53.1	52.0	51.0	49.5
97.5°	86.3	86.1	86.0	85.8	85.6	85.1	84.1	83.1	82.1	81.1	79.1
100°	108.5	108.3	108.0	107.7	107.4	106.6	105.2	103.9	102.6	101.3	99.3
102.5°	130.8	130.4	130.0	129.6	129.1	128.2	126.8	125.4	123.9	122.4	121.5
105°	164.2	163.7	163.3	162.8	162.4	161.8	160.9	160.0	159.1	158.2	157.3
107.5°	198.3	198.3	198.4	198.4	198.4	198.2	197.8	197.3	196.9	196.4	195.8
110°	223.7	223.9	224.0	224.2	224.4	224.2	223.7	223.3	222.8	222.4	221.9



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	248.6	248.9	249.1	249.4	249.7	249.7	249.5	249.3	249.1	248.9	248.3
115°	287.9	288.1	288.3	288.4	288.6	288.6	288.8	289.0	289.1	289.3	289.0
117.5°	326.4	326.9	327.5	328.1	328.7	329.0	328.8	328.7	328.6	328.5	328.2
120°	352.8	353.4	354.0	354.6	355.2	355.4	355.4	355.4	355.4	355.4	355.3
122.5°	379.3	379.8	380.2	380.7	381.2	381.5	381.6	381.7	381.8	381.9	381.6
125°	419.0	419.2	419.3	419.5	419.6	419.8	420.1	420.4	420.7	421.0	420.9
127.5°	457.2	457.4	457.7	458.1	458.3	458.5	458.7	458.9	459.0	459.1	459.0
130°	482.6	482.9	483.1	483.5	483.8	483.9	484.1	484.3	484.4	484.6	484.3
132.5°	506.4	506.8	507.2	507.7	508.0	508.4	508.5	508.6	508.8	508.9	509.0
135°	543.5	544.0	544.7	545.2	545.8	546.1	546.1	546.1	546.1	546.1	546.0
137.5°	579.7	580.5	581.2	581.9	582.6	583.0	582.8	582.6	582.5	582.3	581.9
140°	603.1	603.8	604.5	605.3	606.0	606.2	605.9	605.6	605.3	605.0	604.6
142.5°	625.3	626.0	626.8	627.5	628.2	628.5	628.3	628.1	627.9	627.8	627.2
145°	658.6	659.1	659.5	660.0	660.4	660.7	660.7	660.7	660.7	660.7	660.2
147.5°	687.2	688.1	689.1	690.1	691.1	691.4	691.1	690.7	690.4	690.0	689.6
150°	708.3	708.6	708.9	709.2	709.4	709.6	709.6	709.6	709.6	709.6	709.0
152.5°	725.8	726.3	726.8	727.4	727.9	728.0	727.6	727.3	726.9	726.6	726.3
155°	750.6	751.4	752.2	752.9	753.6	753.7	753.0	752.5	751.9	751.4	751.2
157.5°	771.4	772.4	773.4	774.4	775.3	775.5	774.9	774.4	773.7	773.2	773.0
160°	785.8	786.5	787.2	787.9	788.7	788.7	788.2	787.6	787.0	786.4	786.2
162.5°	797.9	798.8	799.6	800.5	801.4	801.4	800.7	800.0	799.3	798.6	798.5
165°	814.2	815.1	816.0	816.9	817.7	817.9	817.3	816.7	816.1	815.6	815.4
167.5°	827.2	828.1	829.0	829.9	830.8	830.8	830.0	829.1	828.2	827.3	827.3
170°	834.1	835.1	836.2	837.1	838.2	838.3	837.4	836.5	835.6	834.7	834.7
172.5°	839.9	840.8	841.7	842.7	843.6	843.6	842.7	841.8	840.9	840.0	840.0
175°	845.3	846.3	847.4	848.4	849.4	849.5	848.6	847.7	846.9	846.0	846.0
177.5°	848.5	849.4	850.2	851.0	851.8	851.9	851.1	850.4	849.7	849.0	849.2
180°	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9
2.5°	1122.4	1119.8	1116.8	1111.6	1105.4	1102.0	1096.8	1093.5	1086.8	1081.3	1075.3
5°	1179.3	1167.2	1156.2	1141.8	1126.1	1115.9	1103.8	1090.4	1076.6	1062.2	1046.4
7.5°	1238.3	1217.0	1193.8	1168.9	1144.6	1122.2	1100.8	1079.8	1060.2	1036.4	1016.4
10°	1277.9	1251.1	1222.4	1188.6	1155.7	1127.0	1097.9	1072.4	1046.4	1018.7	994.1
12.5°	1317.6	1281.8	1241.3	1204.2	1164.6	1130.0	1095.6	1063.1	1030.6	999.8	971.2
15°	1345.6	1314.0	1276.6	1223.8	1179.3	1131.7	1086.3	1044.1	1004.8	970.5	934.4
17.5°	1364.0	1323.4	1283.2	1232.5	1174.2	1120.9	1069.5	1021.3	976.9	933.4	898.7
20°	1367.3	1325.6	1283.5	1233.9	1174.2	1113.1	1061.8	1003.8	956.2	911.2	868.6
22.5°	1366.2	1319.0	1273.1	1222.1	1163.9	1107.6	1045.4	986.4	934.7	890.5	846.1
25°	1355.8	1305.3	1247.9	1196.5	1139.1	1079.3	1016.4	955.2	902.4	851.9	808.0
27.5°	1347.0	1281.6	1216.6	1156.6	1101.2	1046.4	986.1	923.5	865.0	813.9	772.4
30°	1336.3	1264.5	1191.3	1128.8	1071.9	1018.7	961.7	900.6	839.5	789.4	745.0
32.5°	1326.7	1243.0	1165.8	1097.8	1037.4	985.7	933.2	875.0	815.0	764.3	719.8
35°	1308.1	1211.3	1122.8	1046.0	981.6	928.4	884.4	830.2	775.1	726.0	683.4
37.5°	1284.4	1169.6	1074.7	994.1	923.5	867.5	826.5	784.9	732.0	684.7	646.2
40°	1265.9	1140.0	1039.5	957.1	884.0	825.5	787.6	748.2	704.3	660.3	619.6
42.5°	1242.6	1113.3	1004.0	915.3	842.8	786.0	746.1	712.7	673.9	632.8	595.0
45°	1199.7	1065.0	946.5	851.0	777.8	721.8	680.6	655.7	626.5	587.5	555.6
47.5°	1136.7	1006.9	884.3	785.9	710.3	658.4	619.8	595.8	575.2	546.4	517.4
50°	1080.7	963.6	839.5	741.7	666.3	613.9	578.4	556.5	539.0	516.7	492.2
52.5°	1018.1	909.1	795.4	698.8	624.1	572.5	537.6	518.4	503.8	487.9	463.7
55°	918.6	826.1	720.5	628.7	559.8	509.3	478.8	462.1	450.0	438.0	423.2
57.5°	809.0	736.6	643.1	559.4	495.8	449.9	421.3	405.1	395.8	389.6	380.8
60°	732.0	670.0	589.4	513.0	451.0	410.3	382.5	370.0	362.1	357.0	350.5
62.5°	660.6	609.7	534.9	465.2	411.0	372.5	347.7	335.6	328.0	325.5	320.1
65°	555.2	515.9	454.2	396.4	350.1	317.2	296.3	284.7	280.1	277.3	277.9
67.5°	451.4	427.4	377.9	328.6	291.6	264.0	247.4	238.4	236.1	232.5	232.4
70°	388.0	370.0	328.3	285.3	252.4	231.0	216.2	207.0	204.6	202.8	202.3
72.5°	332.1	316.3	280.1	245.6	216.1	197.3	185.1	179.6	175.8	174.7	174.6
75°	249.6	240.8	212.0	184.8	164.3	151.4	143.1	137.9	135.2	134.7	135.2
77.5°	177.5	169.8	151.5	132.2	119.3	109.5	102.5	100.7	97.6	97.6	97.1
80°	133.3	128.2	116.7	101.4	90.8	82.4	78.7	75.4	74.5	73.1	74.5
82.5°	96.7	91.2	83.4	73.7	64.8	59.8	56.1	55.1	54.6	53.9	54.2
85°	47.7	48.2	43.5	36.1	32.4	29.6	27.3	27.3	26.8	26.4	26.8
87.5°	18.0	17.0	15.3	14.0	11.9	10.6	10.0	10.2	9.3	9.1	9.7
90°	8.6	7.5	6.5	5.4	4.2	3.0	1.9	0.6	1.9	3.0	4.2
92.5°	22.9	21.7	20.3	19.4	18.5	17.7	16.9	16.1	16.9	17.7	18.5
95°	48.1	46.5	45.1	44.2	43.9	43.6	43.3	43.1	43.3	43.6	43.9
97.5°	77.1	75.1	73.0	72.0	71.9	71.7	71.6	71.5	71.6	71.7	71.9
100°	97.5	95.5	93.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6	92.6
102.5°	120.6	119.6	118.6	117.8	117.2	116.6	116.0	115.5	116.0	116.6	117.2
105°	156.4	155.6	154.7	153.9	153.1	152.4	151.7	151.0	151.7	152.4	153.1
107.5°	195.1	194.5	193.8	193.1	192.3	191.6	190.8	190.1	190.8	191.6	192.3
110°	221.5	221.1	220.6	220.1	219.4	218.6	217.8	217.1	217.8	218.6	219.4





TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	247.8	247.2	246.6	246.2	245.8	245.4	245.0	244.7	245.0	245.4	245.8
115°	288.6	288.4	288.1	287.7	287.0	286.5	285.9	285.3	285.9	286.5	287.0
117.5°	328.0	327.7	327.4	327.2	326.9	326.6	326.4	326.1	326.4	326.6	326.9
120°	355.2	355.0	354.9	354.5	353.7	352.9	352.2	351.5	352.2	352.9	353.7
122.5°	381.2	380.8	380.4	380.1	379.9	379.6	379.3	379.1	379.3	379.6	379.9
125°	420.7	420.5	420.4	419.9	419.0	418.1	417.2	416.3	417.2	418.1	419.0
127.5°	458.8	458.6	458.4	458.1	457.6	457.1	456.6	456.1	456.6	457.1	457.6
130°	483.9	483.7	483.4	482.9	482.1	481.4	480.6	479.9	480.6	481.4	482.1
132.5°	509.0	509.1	509.2	508.5	507.4	506.1	505.0	503.7	505.0	506.1	507.4
135°	545.8	545.6	545.5	545.0	544.1	543.2	542.3	541.4	542.3	543.2	544.1
137.5°	581.6	581.3	580.9	580.4	579.5	578.6	577.8	576.9	577.8	578.6	579.5
140°	604.1	603.7	603.2	602.7	601.9	601.2	600.5	599.8	600.5	601.2	601.9
142.5°	626.7	626.2	625.5	625.0	624.4	623.8	623.1	622.5	623.1	623.8	624.4
145°	659.8	659.3	658.9	658.4	657.7	657.2	656.6	656.0	656.6	657.2	657.7
147.5°	689.3	688.9	688.6	688.3	688.0	687.6	687.3	687.0	687.3	687.6	688.0
150°	708.5	707.8	707.3	707.0	707.2	707.3	707.5	707.7	707.5	707.3	707.2
152.5°	726.1	725.9	725.6	725.4	725.2	725.0	724.8	724.6	724.8	725.0	725.2
155°	751.0	750.9	750.7	750.6	750.6	750.6	750.6	750.6	750.6	750.6	750.6
157.5°	772.8	772.8	772.6	772.7	773.0	773.3	773.6	774.0	773.6	773.3	773.0
160°	786.1	786.0	785.8	786.0	786.4	786.8	787.3	787.7	787.3	786.8	786.4
162.5°	798.5	798.5	798.4	798.6	799.0	799.2	799.6	800.0	799.6	799.2	799.0
165°	815.2	815.1	814.9	815.0	815.3	815.6	815.9	816.2	815.9	815.6	815.3
167.5°	827.3	827.3	827.3	827.6	828.2	828.8	829.4	830.0	829.4	828.8	828.2
170°	834.7	834.7	834.7	835.0	835.6	836.2	836.8	837.4	836.8	836.2	835.6
172.5°	840.0	840.0	840.0	840.3	840.9	841.5	842.0	842.7	842.0	841.5	840.9
175°	846.0	846.0	846.0	846.2	846.9	847.5	848.0	848.6	848.0	847.5	846.9
177.5°	849.3	849.4	849.5	849.8	850.2	850.7	851.2	851.7	851.2	850.7	850.2
180°	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9
2.5°	1072.0	1067.9	1064.6	1057.2	1053.1	1047.6	1043.1	1047.9	1042.8	1045.0	1041.6
5°	1038.6	1025.6	1016.4	1002.9	991.3	980.7	972.9	971.4	967.7	965.9	960.3
7.5°	998.4	982.1	966.3	948.7	933.8	918.7	909.1	901.2	895.9	888.9	884.2
10°	974.6	952.9	934.4	913.1	894.6	878.3	865.4	858.9	852.9	844.1	840.9
12.5°	945.4	922.9	900.3	877.5	859.8	841.7	830.5	820.7	816.6	806.6	805.7
15°	910.3	876.6	854.3	831.2	806.6	791.8	782.5	771.9	767.2	760.3	755.2
17.5°	868.4	838.3	810.5	786.5	765.4	753.0	741.5	734.1	726.2	721.7	713.4
20°	838.1	809.4	781.6	756.1	739.9	725.6	716.3	709.4	701.1	698.7	690.4
22.5°	812.5	780.9	754.2	732.8	715.1	698.9	688.8	684.2	678.4	671.3	669.6
25°	771.0	738.1	715.4	694.1	678.3	663.5	656.6	650.6	645.0	639.9	638.0
27.5°	735.0	705.6	678.7	659.4	645.8	632.2	626.1	618.8	614.7	610.6	605.6
30°	709.8	679.8	656.1	637.6	622.8	610.7	604.2	599.1	595.5	591.7	589.0
32.5°	683.9	656.0	633.1	615.0	600.2	591.1	585.3	581.8	577.7	573.2	569.7
35°	649.6	619.0	596.8	581.1	569.5	562.6	556.1	552.9	548.2	548.2	544.5
37.5°	611.0	584.6	565.0	550.6	540.3	534.0	527.0	524.8	521.8	519.9	518.6
40°	588.1	563.5	545.0	530.7	519.5	514.4	508.9	505.2	503.3	501.0	500.1
42.5°	564.4	540.9	523.2	509.9	500.2	495.9	490.7	488.1	484.4	481.3	480.8
45°	528.3	505.6	489.5	478.8	470.5	465.4	462.1	456.6	454.7	451.0	450.5
47.5°	494.1	472.3	456.5	447.7	440.4	436.2	431.1	425.6	423.5	421.6	421.4
50°	468.6	448.7	433.8	425.5	418.6	412.6	407.4	403.8	402.3	402.3	403.3
52.5°	442.6	425.7	413.1	403.0	396.4	389.9	385.2	383.0	380.8	383.1	384.8
55°	404.7	387.5	378.3	368.5	362.1	354.6	352.4	351.4	350.1	353.7	355.6
57.5°	364.5	352.5	341.6	332.0	326.2	321.9	318.8	318.2	320.7	322.5	328.6
60°	338.9	325.0	315.3	307.9	301.0	298.2	297.3	296.3	298.2	303.3	311.1
62.5°	310.8	299.5	289.0	283.5	278.4	273.8	273.6	274.1	277.9	283.7	291.5
65°	269.5	259.8	252.8	246.3	242.2	239.4	240.3	242.2	246.3	254.2	263.0
67.5°	227.6	220.9	214.6	209.4	205.4	205.4	206.3	209.1	214.0	223.1	231.1
70°	200.5	193.1	188.0	185.7	182.4	180.6	183.3	188.0	192.2	200.5	207.4
72.5°	173.4	167.2	163.2	161.6	160.2	158.7	159.6	164.6	170.3	178.6	186.7
75°	133.3	131.0	128.2	126.4	125.0	125.9	126.9	131.5	136.2	144.9	154.2
77.5°	97.3	94.9	93.3	92.8	92.0	92.5	95.1	98.5	103.1	109.5	116.5
80°	73.7	72.7	71.8	71.3	71.3	71.8	75.4	77.8	81.9	88.0	93.5
82.5°	53.6	53.1	52.9	52.8	53.1	53.2	55.5	58.5	62.0	66.5	71.3
85°	28.3	27.3	28.7	29.2	28.3	29.6	30.6	32.4	33.8	36.1	38.4
87.5°	10.3	11.3	11.1	11.7	11.9	12.8	12.7	14.3	15.2	16.1	15.8
90°	5.4	6.5	7.5	8.6	9.5	10.6	11.3	12.0	12.8	13.6	14.1
92.5°	19.4	20.3	21.7	22.9	24.2	25.4	26.4	27.4	28.4	29.3	30.0
95°	44.2	45.1	46.5	48.1	49.5	51.0	52.0	53.1	54.0	55.1	55.7
97.5°	72.0	73.0	75.1	77.1	79.1	81.1	82.1	83.1	84.1	85.1	85.6
100°	92.6	93.6	95.5	97.5	99.3	101.3	102.6	103.9	105.2	106.6	107.4
102.5°	117.8	118.6	119.6	120.6	121.5	122.4	123.9	125.4	126.8	128.2	129.1
105°	153.9	154.7	155.6	156.4	157.3	158.2	159.1	160.0	160.9	161.8	162.4
107.5°	193.1	193.8	194.5	195.1	195.8	196.4	196.9	197.3	197.8	198.2	198.4
110°	220.1	220.6	221.1	221.5	221.9	222.4	222.8	223.3	223.7	224.2	224.4



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	246.2	246.6	247.2	247.8	248.3	248.9	249.1	249.3	249.5	249.7	249.7
115°	287.7	288.1	288.4	288.6	289.0	289.3	289.1	289.0	288.8	288.6	288.6
117.5°	327.2	327.4	327.7	328.0	328.2	328.5	328.6	328.7	328.8	329.0	328.7
120°	354.5	354.9	355.0	355.2	355.3	355.4	355.4	355.4	355.4	355.4	355.2
122.5°	380.1	380.4	380.8	381.2	381.6	381.9	381.8	381.7	381.6	381.5	381.2
125°	419.9	420.4	420.5	420.7	420.9	421.0	420.7	420.4	420.1	419.8	419.6
127.5°	458.1	458.4	458.6	458.8	459.0	459.1	459.0	458.9	458.7	458.5	458.3
130°	482.9	483.4	483.7	483.9	484.3	484.6	484.4	484.3	484.1	483.9	483.8
132.5°	508.5	509.2	509.1	509.0	509.0	508.9	508.8	508.6	508.5	508.4	508.0
135°	545.0	545.5	545.6	545.8	546.0	546.1	546.1	546.1	546.1	546.1	545.8
137.5°	580.4	580.9	581.3	581.6	581.9	582.3	582.5	582.6	582.8	583.0	582.6
140°	602.7	603.2	603.7	604.1	604.6	605.0	605.3	605.6	605.9	606.2	606.0
142.5°	625.0	625.5	626.2	626.7	627.2	627.8	627.9	628.1	628.3	628.5	628.2
145°	658.4	658.9	659.3	659.8	660.2	660.7	660.7	660.7	660.7	660.7	660.4
147.5°	688.3	688.6	688.9	689.3	689.6	690.0	690.4	690.7	691.1	691.4	691.1
150°	707.0	707.3	707.8	708.5	709.0	709.6	709.6	709.6	709.6	709.6	709.4
152.5°	725.4	725.6	725.9	726.1	726.3	726.6	726.9	727.3	727.6	728.0	727.9
155°	750.6	750.7	750.9	751.0	751.2	751.4	751.9	752.5	753.0	753.7	753.6
157.5°	772.7	772.6	772.8	772.8	773.0	773.2	773.7	774.4	774.9	775.5	775.3
160°	786.0	785.8	786.0	786.1	786.2	786.4	787.0	787.6	788.2	788.7	788.7
162.5°	798.6	798.4	798.5	798.5	798.5	798.6	799.3	800.0	800.7	801.4	801.4
165°	815.0	814.9	815.1	815.2	815.4	815.6	816.1	816.7	817.3	817.9	817.7
167.5°	827.6	827.3	827.3	827.3	827.3	827.3	828.2	829.1	830.0	830.8	830.8
170°	835.0	834.7	834.7	834.7	834.7	834.7	835.6	836.5	837.4	838.3	838.2
172.5°	840.3	840.0	840.0	840.0	840.0	840.0	840.9	841.8	842.7	843.6	843.6
175°	846.2	846.0	846.0	846.0	846.0	846.0	846.9	847.7	848.6	849.5	849.4
177.5°	849.8	849.5	849.4	849.3	849.2	849.0	849.7	850.4	851.1	851.9	851.8
180°	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9
2.5°	1039.4	1042.0	1039.7	1042.8	1039.7	1042.0	1039.4	1041.6	1045.0	1042.8	1047.9
5°	958.0	953.9	956.6	954.8	956.6	953.9	958.0	960.3	965.9	967.7	971.4
7.5°	882.8	878.8	874.3	872.2	874.3	878.8	882.8	884.2	888.9	895.9	901.2
10°	835.8	830.6	830.2	827.0	830.2	830.6	835.8	840.9	844.1	852.9	858.9
12.5°	801.3	796.6	791.3	790.0	791.3	796.6	801.3	805.7	806.6	816.6	820.7
15°	752.4	748.7	745.5	748.2	745.5	748.7	752.4	755.2	760.3	767.2	771.9
17.5°	711.8	708.7	708.1	704.7	708.1	708.7	711.8	713.4	721.7	726.2	734.1
20°	686.2	683.9	684.8	678.8	684.8	683.9	686.2	690.4	698.7	701.1	709.4
22.5°	665.8	661.3	660.8	659.5	660.8	661.3	665.8	669.6	671.3	678.4	684.2
25°	633.9	631.6	629.3	631.6	629.3	631.6	633.9	638.0	639.9	645.0	650.6
27.5°	606.0	603.2	602.6	602.9	602.6	603.2	606.0	605.6	610.6	614.7	618.8
30°	589.0	584.3	584.8	584.3	584.8	584.3	589.0	589.0	591.7	595.5	599.1
32.5°	570.4	567.3	566.7	565.8	566.7	567.3	570.4	569.7	573.2	577.7	581.8
35°	543.1	543.1	540.8	540.8	540.8	543.1	543.1	544.5	548.2	548.2	552.9
37.5°	517.5	517.0	515.6	515.9	515.6	517.0	517.5	518.6	519.9	521.8	524.8
40°	498.2	497.8	496.3	493.6	496.3	497.8	498.2	500.1	501.0	503.3	505.2
42.5°	479.7	478.1	477.5	476.5	477.5	478.1	479.7	480.8	481.3	484.4	488.1
45°	450.5	450.5	449.6	449.2	449.6	450.5	450.5	450.5	451.0	454.7	456.6
47.5°	422.2	423.0	424.8	424.5	424.8	423.0	422.2	421.4	421.6	423.5	425.6
50°	405.1	405.6	407.0	407.4	407.0	405.6	405.1	403.3	402.3	402.3	403.8
52.5°	386.3	389.0	390.7	390.4	390.7	389.0	386.3	384.8	383.1	380.8	383.0
55°	359.8	363.0	366.2	366.8	366.2	363.0	359.8	355.6	353.7	350.1	351.4
57.5°	333.6	338.1	341.5	342.6	341.5	338.1	333.6	328.6	322.5	320.7	318.2
60°	315.8	321.8	326.0	327.8	326.0	321.8	315.8	311.1	303.3	298.2	296.3
62.5°	298.7	305.5	309.7	310.0	309.7	305.5	298.7	291.5	283.7	277.9	274.1
65°	270.9	277.9	281.5	284.3	281.5	277.9	270.9	263.0	254.2	246.3	242.2
67.5°	240.9	247.8	251.9	254.1	251.9	247.8	240.9	231.1	223.1	214.0	209.1
70°	219.0	226.0	231.5	233.4	231.5	226.0	219.0	207.4	200.5	192.2	188.0
72.5°	197.5	203.8	208.2	210.4	208.2	203.8	197.5	186.7	178.6	170.3	164.6
75°	160.2	168.5	172.7	175.0	172.7	168.5	160.2	154.2	144.9	136.2	131.5
77.5°	123.5	131.2	133.7	134.8	133.7	131.2	123.5	116.5	109.5	103.1	98.5
80°	99.1	103.7	106.9	107.5	106.9	103.7	99.1	93.5	88.0	81.9	77.8
82.5°	76.2	80.0	81.1	82.2	81.1	80.0	76.2	71.3	66.5	62.0	58.5
85°	41.6	43.5	44.0	43.5	44.0	43.5	41.6	38.4	36.1	33.8	32.4
87.5°	16.6	16.3	16.4	17.2	16.4	16.3	16.6	15.8	16.1	15.2	14.3
90°	14.5	15.0	15.4	15.9	15.4	15.0	14.5	14.1	13.6	12.8	12.0
92.5°	30.3	30.6	30.9	31.2	30.9	30.6	30.3	30.0	29.3	28.4	27.4
95°	56.1	56.4	56.6	56.9	56.6	56.4	56.1	55.7	55.1	54.0	53.1
97.5°	85.8	86.0	86.1	86.3	86.1	86.0	85.8	85.6	85.1	84.1	83.1
100°	107.7	108.0	108.3	108.5	108.3	108.0	107.7	107.4	106.6	105.2	103.9
102.5°	129.6	130.0	130.4	130.8	130.4	130.0	129.6	129.1	128.2	126.8	125.4
105°	162.8	163.3	163.7	164.2	163.7	163.3	162.8	162.4	161.8	160.9	160.0
107.5°	198.4	198.4	198.3	198.3	198.3	198.4	198.4	198.4	198.2	197.8	197.3
110°	224.2	224.0	223.9	223.7	223.9	224.0	224.2	224.4	224.2	223.7	223.3



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	249.4	249.1	248.9	248.6	248.9	249.1	249.4	249.7	249.7	249.5	249.3
115°	288.4	288.3	288.1	287.9	288.1	288.3	288.4	288.6	288.6	288.8	289.0
117.5°	328.1	327.5	326.9	326.4	326.9	327.5	328.1	328.7	329.0	328.8	328.7
120°	354.6	354.0	353.4	352.8	353.4	354.0	354.6	355.2	355.4	355.4	355.4
122.5°	380.7	380.2	379.8	379.3	379.8	380.2	380.7	381.2	381.5	381.6	381.7
125°	419.5	419.3	419.2	419.0	419.2	419.3	419.5	419.6	419.8	420.1	420.4
127.5°	458.1	457.7	457.4	457.2	457.4	457.7	458.1	458.3	458.5	458.7	458.9
130°	483.5	483.1	482.9	482.6	482.9	483.1	483.5	483.8	483.9	484.1	484.3
132.5°	507.7	507.2	506.8	506.4	506.8	507.2	507.7	508.0	508.4	508.5	508.6
135°	545.2	544.7	544.0	543.5	544.0	544.7	545.2	545.8	546.1	546.1	546.1
137.5°	581.9	581.2	580.5	579.7	580.5	581.2	581.9	582.6	583.0	582.8	582.6
140°	605.3	604.5	603.8	603.1	603.8	604.5	605.3	606.0	606.2	605.9	605.6
142.5°	627.5	626.8	626.0	625.3	626.0	626.8	627.5	628.2	628.5	628.3	628.1
145°	660.0	659.5	659.1	658.6	659.1	659.5	660.0	660.4	660.7	660.7	660.7
147.5°	690.1	689.1	688.1	687.2	688.1	689.1	690.1	691.1	691.4	691.1	690.7
150°	709.2	708.9	708.6	708.3	708.6	708.9	709.2	709.4	709.6	709.6	709.6
152.5°	727.4	726.8	726.3	725.8	726.3	726.8	727.4	727.9	728.0	727.6	727.3
155°	752.9	752.2	751.4	750.6	751.4	752.2	752.9	753.6	753.7	753.0	752.5
157.5°	774.4	773.4	772.4	771.4	772.4	773.4	774.4	775.3	775.5	774.9	774.4
160°	787.9	787.2	786.5	785.8	786.5	787.2	787.9	788.7	788.7	788.2	787.6
162.5°	800.5	799.6	798.8	797.9	798.8	799.6	800.5	801.4	801.4	800.7	800.0
165°	816.9	816.0	815.1	814.2	815.1	816.0	816.9	817.7	817.9	817.3	816.7
167.5°	829.9	829.0	828.1	827.2	828.1	829.0	829.9	830.8	830.8	830.0	829.1
170°	837.1	836.2	835.1	834.1	835.1	836.2	837.1	838.2	838.3	837.4	836.5
172.5°	842.7	841.7	840.8	839.9	840.8	841.7	842.7	843.6	843.6	842.7	841.8
175°	848.4	847.4	846.3	845.3	846.3	847.4	848.4	849.4	849.5	848.6	847.7
177.5°	851.0	850.2	849.4	848.5	849.4	850.2	851.0	851.8	851.9	851.1	850.4
180°	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9
2.5°	1043.1	1047.6	1053.1	1057.2	1064.6	1067.9	1072.0	1075.3	1081.3	1086.8	1093.5
5°	972.9	980.7	991.3	1002.9	1016.4	1025.6	1038.6	1046.4	1062.2	1076.6	1090.4
7.5°	909.1	918.7	933.8	948.7	966.3	982.1	998.4	1016.4	1036.4	1060.2	1079.8
10°	865.4	878.3	894.6	913.1	934.4	952.9	974.6	994.1	1018.7	1046.4	1072.4
12.5°	830.5	841.7	859.8	877.5	900.3	922.9	945.4	971.2	999.8	1030.6	1063.1
15°	782.5	791.8	806.6	831.2	854.3	876.6	910.3	934.4	970.5	1004.8	1044.1
17.5°	741.5	753.0	765.4	786.5	810.5	838.3	868.4	898.7	933.4	976.9	1021.3
20°	716.3	725.6	739.9	756.1	781.6	809.4	838.1	868.6	911.2	956.2	1003.8
22.5°	688.8	698.9	715.1	732.8	754.2	780.9	812.5	846.1	890.5	934.7	986.4
25°	656.6	663.5	678.3	694.1	715.4	738.1	771.0	808.0	851.9	902.4	955.2
27.5°	626.1	632.2	645.8	659.4	678.7	705.6	735.0	772.4	813.9	865.0	923.5
30°	604.2	610.7	622.8	637.6	656.1	679.8	709.8	745.0	789.4	839.5	900.6
32.5°	585.3	591.1	600.2	615.0	633.1	656.0	683.9	719.8	764.3	815.0	875.0
35°	556.1	562.6	569.5	581.1	596.8	619.0	649.6	683.4	726.0	775.1	830.2
37.5°	527.0	534.0	540.3	550.6	565.0	584.6	611.0	646.2	684.7	732.0	784.9
40°	508.9	514.4	519.5	530.7	545.0	563.5	588.1	619.6	660.3	704.3	748.2
42.5°	490.7	495.9	500.2	509.9	523.2	540.9	564.4	595.0	632.8	673.9	712.7
45°	462.1	465.4	470.5	478.8	489.5	505.6	528.3	555.6	587.5	626.5	655.7
47.5°	431.1	436.2	440.4	447.7	456.5	472.3	494.1	517.4	546.4	575.2	595.8
50°	407.4	412.6	418.6	425.5	433.8	448.7	468.6	492.2	516.7	539.0	556.5
52.5°	385.2	389.9	396.4	403.0	413.1	425.7	442.6	463.7	487.9	503.8	518.4
55°	352.4	354.6	362.1	368.5	378.3	387.5	404.7	423.2	438.0	450.0	462.1
57.5°	318.8	321.9	326.2	332.0	341.6	352.5	364.5	380.8	389.6	395.8	405.1
60°	297.3	298.2	301.0	307.9	315.3	325.0	338.9	350.5	357.0	362.1	370.0
62.5°	273.6	273.8	278.4	283.5	289.0	299.5	310.8	320.1	325.5	328.0	335.6
65°	240.3	239.4	242.2	246.3	252.8	259.8	269.5	277.9	277.3	280.1	284.7
67.5°	206.3	205.4	205.4	209.4	214.6	220.9	227.6	232.4	232.5	236.1	238.4
70°	183.3	180.6	182.4	185.7	188.0	193.1	200.5	202.3	202.8	204.6	207.0
72.5°	159.6	158.7	160.2	161.6	163.2	167.2	173.4	174.6	174.7	175.8	179.6
75°	126.9	125.9	125.0	126.4	128.2	131.0	133.3	135.2	134.7	135.2	137.9
77.5°	95.1	92.5	92.0	92.8	93.3	94.9	97.3	97.1	97.6	97.6	100.7
80°	75.4	71.8	71.3	71.3	71.8	72.7	73.7	74.5	73.1	74.5	75.4
82.5°	55.5	53.2	53.1	52.8	52.9	53.1	53.6	54.2	53.9	54.6	55.1
85°	30.6	29.6	28.3	29.2	28.7	27.3	28.3	26.8	26.4	26.8	27.3
87.5°	12.7	12.8	11.9	11.7	11.1	11.3	10.3	9.7	9.1	9.3	10.2
90°	11.3	10.6	9.5	8.6	7.5	6.5	5.4	4.2	3.0	1.9	0.6
92.5°	26.4	25.4	24.2	22.9	21.7	20.3	19.4	18.5	17.7	16.9	16.1
95°	52.0	51.0	49.5	48.1	46.5	45.1	44.2	43.9	43.6	43.3	43.1
97.5°	82.1	81.1	79.1	77.1	75.1	73.0	72.0	71.9	71.7	71.6	71.5
100°	102.6	101.3	99.3	97.5	95.5	93.6	92.6	92.6	92.6	92.6	92.6
102.5°	123.9	122.4	121.5	120.6	119.6	118.6	117.8	117.2	116.6	116.0	115.5
105°	159.1	158.2	157.3	156.4	155.6	154.7	153.9	153.1	152.4	151.7	151.0
107.5°	196.9	196.4	195.8	195.1	194.5	193.8	193.1	192.3	191.6	190.8	190.1
110°	222.8	222.4	221.9	221.5	221.1	220.6	220.1	219.4	218.6	217.8	217.1



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	249.1	248.9	248.3	247.8	247.2	246.6	246.2	245.8	245.4	245.0	244.7
115°	289.1	289.3	289.0	288.6	288.4	288.1	287.7	287.0	286.5	285.9	285.3
117.5°	328.6	328.5	328.2	328.0	327.7	327.4	327.2	326.9	326.6	326.4	326.1
120°	355.4	355.4	355.3	355.2	355.0	354.9	354.5	353.7	352.9	352.2	351.5
122.5°	381.8	381.9	381.6	381.2	380.8	380.4	380.1	379.9	379.6	379.3	379.1
125°	420.7	421.0	420.9	420.7	420.5	420.4	419.9	419.0	418.1	417.2	416.3
127.5°	459.0	459.1	459.0	458.8	458.6	458.4	458.1	457.6	457.1	456.6	456.1
130°	484.4	484.6	484.3	483.9	483.7	483.4	482.9	482.1	481.4	480.6	479.9
132.5°	508.8	508.9	509.0	509.0	509.1	509.2	508.5	507.4	506.1	505.0	503.7
135°	546.1	546.1	546.0	545.8	545.6	545.5	545.0	544.1	543.2	542.3	541.4
137.5°	582.5	582.3	581.9	581.6	581.3	580.9	580.4	579.5	578.6	577.8	576.9
140°	605.3	605.0	604.6	604.1	603.7	603.2	602.7	601.9	601.2	600.5	599.8
142.5°	627.9	627.8	627.2	626.7	626.2	625.5	625.0	624.4	623.8	623.1	622.5
145°	660.7	660.7	660.2	659.8	659.3	658.9	658.4	657.7	657.2	656.6	656.0
147.5°	690.4	690.0	689.6	689.3	688.9	688.6	688.3	688.0	687.6	687.3	687.0
150°	709.6	709.6	709.0	708.5	707.8	707.3	707.0	707.2	707.3	707.5	707.7
152.5°	726.9	726.6	726.3	726.1	725.9	725.6	725.4	725.2	725.0	724.8	724.6
155°	751.9	751.4	751.2	751.0	750.9	750.7	750.6	750.6	750.6	750.6	750.6
157.5°	773.7	773.2	773.0	772.8	772.8	772.6	772.7	773.0	773.3	773.6	774.0
160°	787.0	786.4	786.2	786.1	786.0	785.8	786.0	786.4	786.8	787.3	787.7
162.5°	799.3	798.6	798.5	798.5	798.5	798.4	798.6	799.0	799.2	799.6	800.0
165°	816.1	815.6	815.4	815.2	815.1	814.9	815.0	815.3	815.6	815.9	816.2
167.5°	828.2	827.3	827.3	827.3	827.3	827.3	827.6	828.2	828.8	829.4	830.0
170°	835.6	834.7	834.7	834.7	834.7	834.7	835.0	835.6	836.2	836.8	837.4
172.5°	840.9	840.0	840.0	840.0	840.0	840.0	840.3	840.9	841.5	842.0	842.7
175°	846.9	846.0	846.0	846.0	846.0	846.0	846.2	846.9	847.5	848.0	848.6
177.5°	849.7	849.0	849.2	849.3	849.4	849.5	849.8	850.2	850.7	851.2	851.7
180°	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9
2.5°	1096.8	1102.0	1105.4	1111.6	1116.8	1119.8	1122.4	1124.6	1127.2	1129.4	1135.7
5°	1103.8	1115.9	1126.1	1141.8	1156.2	1167.2	1179.3	1190.0	1198.8	1211.3	1221.0
7.5°	1100.8	1122.2	1144.6	1168.9	1193.8	1217.0	1238.3	1258.2	1276.3	1298.2	1317.3
10°	1097.9	1127.0	1155.7	1188.6	1222.4	1251.1	1277.9	1305.3	1325.2	1353.0	1376.5
12.5°	1095.6	1130.0	1164.6	1204.2	1241.3	1281.8	1317.6	1337.5	1367.8	1390.0	1418.1
15°	1086.3	1131.7	1179.3	1223.8	1276.6	1314.0	1345.6	1384.5	1412.6	1440.9	1471.5
17.5°	1069.5	1120.9	1174.2	1232.5	1283.2	1323.4	1364.0	1401.5	1435.2	1473.1	1511.1
20°	1061.8	1113.1	1174.2	1233.9	1283.5	1325.6	1367.3	1408.5	1445.6	1494.2	1538.2
22.5°	1045.4	1107.6	1163.9	1222.1	1273.1	1319.0	1366.2	1413.0	1462.2	1517.2	1572.3
25°	1016.4	1079.3	1139.1	1196.5	1247.9	1305.3	1355.8	1418.3	1481.2	1553.9	1622.5
27.5°	986.1	1046.4	1101.2	1156.6	1216.6	1281.6	1347.0	1418.0	1500.4	1592.1	1688.8
30°	961.7	1018.7	1071.9	1128.8	1191.3	1264.5	1336.3	1420.6	1515.9	1619.2	1734.0
32.5°	933.2	985.7	1037.4	1097.8	1165.8	1243.0	1326.7	1419.1	1533.7	1651.1	1769.2
35°	884.4	928.4	981.6	1046.0	1122.8	1211.3	1308.1	1417.3	1548.8	1683.6	1783.2
37.5°	826.5	867.5	923.5	994.1	1074.7	1169.6	1284.4	1414.1	1553.7	1661.2	1693.3
40°	787.6	825.5	884.0	957.1	1039.5	1140.0	1265.9	1402.9	1538.2	1606.7	1580.3
42.5°	746.1	786.0	842.8	915.3	1004.0	1113.3	1242.6	1379.7	1493.0	1518.9	1427.7
45°	680.6	721.8	777.8	851.0	946.5	1065.0	1199.7	1324.3	1389.6	1342.7	1201.6
47.5°	619.8	658.4	710.3	785.9	884.3	1006.9	1136.7	1236.0	1241.2	1129.6	978.7
50°	578.4	613.9	666.3	741.7	839.5	963.6	1080.7	1159.0	1123.7	997.4	852.4
52.5°	537.6	572.5	624.1	698.8	795.4	909.1	1018.1	1073.0	1006.7	877.0	753.1
55°	478.8	509.3	559.8	628.7	720.5	826.1	918.6	937.6	851.5	723.7	623.2
57.5°	421.3	449.9	495.8	559.4	643.1	736.6	809.0	805.0	714.0	604.3	524.6
60°	382.5	410.3	451.0	513.0	589.4	670.0	732.0	717.2	627.0	532.4	465.4
62.5°	347.7	372.5	411.0	465.2	534.9	609.7	660.6	638.7	550.3	467.6	414.6
65°	296.3	317.2	350.1	396.4	454.2	515.9	555.2	526.9	451.5	387.1	344.5
67.5°	247.4	264.0	291.6	328.6	377.9	427.4	451.4	422.9	362.6	315.6	284.0
70°	216.2	231.0	252.4	285.3	328.3	370.0	388.0	362.6	310.7	270.4	247.7
72.5°	185.1	197.3	216.1	245.6	280.1	316.3	332.1	307.7	265.1	231.1	209.9
75°	143.1	151.4	164.3	184.8	212.0	240.8	249.6	228.3	201.0	175.5	161.6
77.5°	102.5	109.5	119.3	132.2	151.5	169.8	177.5	165.1	144.0	127.9	116.5
80°	78.7	82.4	90.8	101.4	116.7	128.2	133.3	125.5	110.7	98.6	89.8
82.5°	56.1	59.8	64.8	73.7	83.4	91.2	96.7	91.4	80.7	71.2	66.1
85°	27.3	29.6	32.4	36.1	43.5	48.2	47.7	44.4	40.3	36.6	33.8
87.5°	10.0	10.6	11.9	14.0	15.3	17.0	18.0	17.5	16.2	15.2	14.3
90°	1.9	3.0	4.2	5.4	6.5	7.5	8.6	9.5	10.6	11.3	12.0
92.5°	16.9	17.7	18.5	19.4	20.3	21.7	22.9	24.2	25.4	26.4	27.4
95°	43.3	43.6	43.9	44.2	45.1	46.5	48.1	49.5	51.0	52.0	53.1
97.5°	71.6	71.7	71.9	72.0	73.0	75.1	77.1	79.1	81.1	82.1	83.1
100°	92.6	92.6	92.6	92.6	93.6	95.5	97.5	99.3	101.3	102.6	103.9
102.5°	116.0	116.6	117.2	117.8	118.6	119.6	120.6	121.5	122.4	123.9	125.4
105°	151.7	152.4	153.1	153.9	154.7	155.6	156.4	157.3	158.2	159.1	160.0
107.5°	190.8	191.6	192.3	193.1	193.8	194.5	195.1	195.8	196.4	196.9	197.3
110°	217.8	218.6	219.4	220.1	220.6	221.1	221.5	221.9	222.4	222.8	223.3





TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	245.0	245.4	245.8	246.2	246.6	247.2	247.8	248.3	248.9	249.1	249.3
115°	285.9	286.5	287.0	287.7	288.1	288.4	288.6	289.0	289.3	289.1	289.0
117.5°	326.4	326.6	326.9	327.2	327.4	327.7	328.0	328.2	328.5	328.6	328.7
120°	352.2	352.9	353.7	354.5	354.9	355.0	355.2	355.3	355.4	355.4	355.4
122.5°	379.3	379.6	379.9	380.1	380.4	380.8	381.2	381.6	381.9	381.8	381.7
125°	417.2	418.1	419.0	419.9	420.4	420.5	420.7	420.9	421.0	420.7	420.4
127.5°	456.6	457.1	457.6	458.1	458.4	458.6	458.8	459.0	459.1	459.0	458.9
130°	480.6	481.4	482.1	482.9	483.4	483.7	483.9	484.3	484.6	484.4	484.3
132.5°	505.0	506.1	507.4	508.5	509.2	509.1	509.0	509.0	508.9	508.8	508.6
135°	542.3	543.2	544.1	545.0	545.5	545.6	545.8	546.0	546.1	546.1	546.1
137.5°	577.8	578.6	579.5	580.4	580.9	581.3	581.6	581.9	582.3	582.5	582.6
140°	600.5	601.2	601.9	602.7	603.2	603.7	604.1	604.6	605.0	605.3	605.6
142.5°	623.1	623.8	624.4	625.0	625.5	626.2	626.7	627.2	627.8	627.9	628.1
145°	656.6	657.2	657.7	658.4	658.9	659.3	659.8	660.2	660.7	660.7	660.7
147.5°	687.3	687.6	688.0	688.3	688.6	688.9	689.3	689.6	690.0	690.4	690.7
150°	707.5	707.3	707.2	707.0	707.3	707.8	708.5	709.0	709.6	709.6	709.6
152.5°	724.8	725.0	725.2	725.4	725.6	725.9	726.1	726.3	726.6	726.9	727.3
155°	750.6	750.6	750.6	750.6	750.7	750.9	751.0	751.2	751.4	751.9	752.5
157.5°	773.6	773.3	773.0	772.7	772.6	772.8	772.8	773.0	773.2	773.7	774.4
160°	787.3	786.8	786.4	786.0	785.8	786.0	786.1	786.2	786.4	787.0	787.6
162.5°	799.6	799.2	799.0	798.6	798.4	798.5	798.5	798.5	798.6	799.3	800.0
165°	815.9	815.6	815.3	815.0	814.9	815.1	815.2	815.4	815.6	816.1	816.7
167.5°	829.4	828.8	828.2	827.6	827.3	827.3	827.3	827.3	827.3	828.2	829.1
170°	836.8	836.2	835.6	835.0	834.7	834.7	834.7	834.7	834.7	835.6	836.5
172.5°	842.0	841.5	840.9	840.3	840.0	840.0	840.0	840.0	840.0	840.9	841.8
175°	848.0	847.5	846.9	846.2	846.0	846.0	846.0	846.0	846.0	846.9	847.7
177.5°	851.2	850.7	850.2	849.8	849.5	849.4	849.3	849.2	849.0	849.7	850.4
180°	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6	850.6



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9	1090.9
2.5°	1140.9	1143.9	1150.1	1147.9	1150.9	1152.4	1153.9
5°	1233.1	1247.9	1254.4	1253.4	1263.1	1260.8	1258.5
7.5°	1337.1	1352.7	1361.4	1372.3	1378.5	1378.9	1384.5
10°	1396.1	1416.4	1424.8	1436.3	1443.7	1447.9	1447.4
12.5°	1441.2	1457.1	1475.9	1481.5	1491.5	1496.7	1494.9
15°	1495.6	1521.1	1540.5	1550.2	1562.7	1566.4	1571.6
17.5°	1544.1	1578.2	1601.0	1631.1	1642.5	1649.5	1645.4
20°	1580.7	1625.7	1648.4	1684.5	1704.4	1715.0	1711.4
22.5°	1624.1	1672.8	1714.7	1746.0	1776.3	1790.6	1793.6
25°	1698.4	1765.1	1826.7	1867.9	1905.3	1914.1	1933.6
27.5°	1781.4	1860.0	1925.8	1969.2	1995.3	2005.1	2011.2
30°	1833.6	1911.8	1961.4	1989.1	1997.5	1996.5	1995.6
32.5°	1859.1	1908.2	1917.6	1909.9	1890.8	1874.7	1857.9
35°	1822.9	1786.4	1731.7	1661.3	1609.4	1557.2	1552.0
37.5°	1639.5	1522.5	1431.6	1330.0	1271.4	1235.2	1210.1
40°	1466.9	1334.0	1223.8	1138.1	1078.3	1054.8	1031.6
42.5°	1279.4	1152.4	1054.9	983.3	938.3	912.1	893.9
45°	1039.5	927.5	851.0	799.2	763.6	743.2	731.6
47.5°	851.8	768.9	704.0	666.6	641.9	626.1	626.2
50°	751.0	671.8	628.7	599.1	577.8	565.3	567.7
52.5°	661.7	602.6	565.8	541.0	525.2	517.5	517.3
55°	553.3	510.7	486.6	468.6	457.9	449.2	451.0
57.5°	473.3	437.4	421.2	406.3	398.9	395.3	390.2
60°	423.7	395.9	382.0	370.0	362.6	359.8	354.6
62.5°	379.6	357.8	344.2	334.4	327.7	326.8	322.8
65°	319.1	302.4	290.3	285.7	278.7	276.9	276.9
67.5°	263.0	251.0	241.7	237.5	234.3	234.9	232.6
70°	227.8	218.1	212.0	207.4	205.1	205.5	203.8
72.5°	199.3	188.4	183.2	180.4	177.4	178.5	177.8
75°	151.0	145.3	142.6	139.8	137.9	137.1	136.2
77.5°	110.8	105.9	103.8	102.3	102.5	100.3	102.0
80°	85.7	81.5	80.1	77.8	77.3	77.3	76.9
82.5°	62.7	60.4	59.4	57.4	56.6	57.3	56.1
85°	32.4	30.6	30.1	30.1	29.2	28.3	30.6
87.5°	14.4	13.1	13.2	12.9	13.0	12.8	12.0
90°	12.8	13.6	14.1	14.5	15.0	15.4	15.9
92.5°	28.4	29.3	30.0	30.3	30.6	30.9	31.2
95°	54.0	55.1	55.7	56.1	56.4	56.6	56.9
97.5°	84.1	85.1	85.6	85.8	86.0	86.1	86.3
100°	105.2	106.6	107.4	107.7	108.0	108.3	108.5
102.5°	126.8	128.2	129.1	129.6	130.0	130.4	130.8
105°	160.9	161.8	162.4	162.8	163.3	163.7	164.2
107.5°	197.8	198.2	198.4	198.4	198.4	198.3	198.3
110°	223.7	224.2	224.4	224.2	224.0	223.9	223.7



TEST NUMBER: P333407-940

CATALOG NUMBER: S125DIW-S850D770U940-4F0-1E-UDD-A1

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	249.5	249.7	249.7	249.4	249.1	248.9	248.6
115°	288.8	288.6	288.6	288.4	288.3	288.1	287.9
117.5°	328.8	329.0	328.7	328.1	327.5	326.9	326.4
120°	355.4	355.4	355.2	354.6	354.0	353.4	352.8
122.5°	381.6	381.5	381.2	380.7	380.2	379.8	379.3
125°	420.1	419.8	419.6	419.5	419.3	419.2	419.0
127.5°	458.7	458.5	458.3	458.1	457.7	457.4	457.2
130°	484.1	483.9	483.8	483.5	483.1	482.9	482.6
132.5°	508.5	508.4	508.0	507.7	507.2	506.8	506.4
135°	546.1	546.1	545.8	545.2	544.7	544.0	543.5
137.5°	582.8	583.0	582.6	581.9	581.2	580.5	579.7
140°	605.9	606.2	606.0	605.3	604.5	603.8	603.1
142.5°	628.3	628.5	628.2	627.5	626.8	626.0	625.3
145°	660.7	660.7	660.4	660.0	659.5	659.1	658.6
147.5°	691.1	691.4	691.1	690.1	689.1	688.1	687.2
150°	709.6	709.6	709.4	709.2	708.9	708.6	708.3
152.5°	727.6	728.0	727.9	727.4	726.8	726.3	725.8
155°	753.0	753.7	753.6	752.9	752.2	751.4	750.6
157.5°	774.9	775.5	775.3	774.4	773.4	772.4	771.4
160°	788.2	788.7	788.7	787.9	787.2	786.5	785.8
162.5°	800.7	801.4	801.4	800.5	799.6	798.8	797.9
165°	817.3	817.9	817.7	816.9	816.0	815.1	814.2
167.5°	830.0	830.8	830.8	829.9	829.0	828.1	827.2
170°	837.4	838.3	838.2	837.1	836.2	835.1	834.1
172.5°	842.7	843.6	843.6	842.7	841.7	840.8	839.9
175°	848.6	849.5	849.4	848.4	847.4	846.3	845.3
177.5°	851.1	851.9	851.8	851.0	850.2	849.4	848.5
180°	850.6	850.6	850.6	850.6	850.6	850.6	850.6

(END OF REPORT)